

(19)



(11)

EP 1 520 144 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
26.03.2008 Bulletin 2008/13

(51) Int Cl.:
F28D 1/03 ^(2006.01) **F28F 13/06** ^(2006.01)
F28F 3/04 ^(2006.01)

(21) Application number: **03727100.4**

(86) International application number:
PCT/CA2003/000839

(22) Date of filing: **03.06.2003**

(87) International publication number:
WO 2003/102482 (11.12.2003 Gazette 2003/50)

(54) **STACKED PLATE HEAT EXCHANGER**

PLATTENWÄRMETAUSCHER

CHANGEUR THERMIQUE LAMELLES SUPERPOSES

(84) Designated Contracting States:
CZ DE FR GB

(30) Priority: **04.06.2002 CA 2389119**

(43) Date of publication of application:
06.04.2005 Bulletin 2005/14

(73) Proprietor: **Dana Canada Corporation**
Oakville,
Ontario L6K 3E4 (CA)

(72) Inventors:

- **BURGERS, Johny, G.**
Oakville, Ontario L6M 1B7 (CA)
- **DAVIES, Michael, E.**
Stoney Creek, Ontario L8G 4K1 (CA)

- **SHORE, Christopher, R.**
Hamilton, Ontario L8T 4J2 (CA)
- **BEECH, Stephen, A.**
Mississauga, Ontario L5C 1C2 (CA)
- **BROWN, Casey, C.**
Calgary, Alberta T2Z 2L6 (CA)

(74) Representative: **Games, Robert Harland**
HASELTINE LAKE
Redcliff Quay
120 Redcliff Street
Bristol BS1 6HU (GB)

(56) References cited:
EP-A- 0 384 316 **US-A- 5 369 883**
US-A- 5 692 559

EP 1 520 144 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to heat exchangers, and in particular to heat exchangers made up of stacked plate pairs defining flow passages therebetween.

[0002] As well known in the art, vehicle fuel systems, for example those used in diesel passenger vehicles, often require a fuel to air cooler to cool excess fuel that is returned to the fuel tank from the fuel system. Due to limited space and high ambient temperatures, it is generally not practical to locate a fuel cooler in the engine compartment of a vehicle. Instead, it is often possible to locate the fuel cooler in an external location under the body of the vehicle. For example in a passenger vehicle, the fuel cooler may be located under the floor pan.

[0003] Generally, there is very limited space to put an underbody mounted cooler in. For example, in a passenger vehicle, the entire available space for an under-the-floor-pan cooler may be a height of about 35 mm, a length of 1-2 meters and a width of about 120mm. Thus, it is important for an underbody cooler to be compact and have high heat exchange efficiency. Additionally, as an underbody cooler is exposed to debris and other objects, it must be very durable.

[0004] Current under-body fuel coolers generally fall into two categories, namely serpentine tube on plate coolers and extrusion type coolers. Serpentine tube on plate coolers consist of a serpentine tube bonded (brazed) to an aluminum plate. The plate may have lanced louvers, which serve to interrupt the air flow boundary layer. Extrusion type coolers include an aluminum finned-portion that is co-extruded with an adjacent flow channel portion. After extrusion, the flow channel portion is closed off at opposite ends and inlet and outlet fittings provided. Underbody mounted fuel coolers typically have low fuel mass flow velocities and speed dependent air mass flows, and are - in terms of heat transfer - typically "airside limited". Extrusion-type coolers typically suffer from limited air flow mixing (i.e. disrupting the airside heat transfer boundary layer). Serpentine tube on plate coolers typically suffer from limited air flow mixing and a relatively low airside heat transfer area.

[0005] In addition to extrusion-type and serpentine tube on plate coolers, an alternative form of heat exchanger is the stacked plate-pair heat exchanger as is shown, for example, in U.S. patent No. 5,692,559 issued December 2, 1997, and assigned to the assignee of the present invention. Stacked plate pair heat exchangers are typically cost efficient to manufacture and have been widely adopted for applications such as oil coolers. However, existing stacked-plate pair heat exchangers have generally not been configured for use as under-body heat exchangers. EP 0 384 316 shows a stacked plate heat exchanger according to the preamble of claim 1.

[0006] It is therefore desirable to provide a stacked plate pair heat exchanger that is configured for use as an underbody cooler and which provides improved air-flow mixing and heat transfer area.

SUMMARY OF THE INVENTION

[0007] According to one aspect of the invention there is provided a stacked plate heat exchanger including a plurality of stacked plate pairs, each plate pair including first and second plates having elongate central portions surrounded by sealably joined edge portions with an elongate fluid passage defined between the central portions. Each plate pair has spaced apart inlet and outlet openings in flow communication with the fluid passage, at least some of the plate pairs having a substantially planar fin plate extending peripherally outward from the joined edge portions, the fin plates of the stacked plate pairs being spaced apart and substantially parallel to each other.

[0008] According to another aspect of the invention, there is provided a stacked plate heat exchanger comprising a stack of aligned plate pairs, each plate pair including two plates having elongated central portions defining an elongate fluid passage having spaced apart inlet and outlet openings, each plate pair including an elongate fin plate extending peripherally from the fluid passage. The fin plate has elongate, parallel spaced apart first and second edges, the fluid passage longitudinally located between the spaced apart first and second edges and extending at an angle relative to the first and second edges.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Example embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings throughout which like reference numerals are used to refer to similar elements and features, in which:

Figure 1 is a side elevation of a stacked plate heat exchanger according to one embodiment of the invention;

Figure 2 is a top plan view of the heat exchanger of Figure 1;

Figure 3 is a diagrammatic view of a passenger vehicle with the heat exchanger of Figure 1 mounted thereto;

Figure 4 is a side elevation of a first plate of each plate pair according to one embodiment of the invention and Figure 4a is a partial sectional view taken along the lines IVa-IVa of Figure 4;

Figure 5 is a side elevation of a second plate of each plate pair;

Figure 6 is an enlarged sectional side view of a portion of a plate pair showing the crossing of ribs on mating plates, taken along the lines VI-VI of Figure 2;

Figure 7 is a sectional view of a plate pair taken along the lines VII-VII of Figure 6 and Figure 7A is an enlarged portion of a circled part of Figure 7;

Figure 8 shows a simplified top plan view of two adjacent plate pairs;

Figures 9 and 10 shows simplified side views of each of the plates of Figure 8 demonstrating two alternative embodiments of the invention;

Figure 11 is a further diagrammatic view of the heat exchanger located under the body of a vehicle.

Figure 12 is a simplified side view of a plate pair in accordance with a further embodiment of the invention.

Figure 13 is a side view of a further plate pair configuration in accordance with another embodiment of the invention.

Figure 14 shows two of the plate pairs of Figure 13 joined together;

Figure 15 is a sectional view taken along the lines XV-XV of Figure 13;

Figure 16 is a sectional view taken along the lines XVI-XVI of Figure 13;

Figure 17 is a sectional view of a further possible plate pair configuration;

Figure 18 is a side view of still a further plate pair configuration in accordance with embodiments of the present invention;

Figure 19 is a sectional view taken along the lines XIX-XIX of Figure 18;

Figure 20 is a sectional view taken along lines XX-XX of Figure 20;

Figure 21 is a perspective view of a further plate pair configuration according to embodiments of the invention;

Figure 22 is a partial side view of the plate pair of Figure 21;

Figure 23 is an enlarged partial perspective view of the plate pair of Figure 21;

Figure 24 is a top plan view of a heat exchanger according to yet another embodiment of the invention; and

Figure 25 is a side view of a plate pair of the heat exchanger of Figure 24.

DESCRIPTION OF THE EXAMPLE EMBODIMENTS

[0010] Referring firstly to Figures 1 and 2, an example embodiment of a heat exchanger according to the present invention is indicated generally by reference numeral 10. Heat exchanger 10 is formed from a plurality of stacked plate pairs 12, that are sandwiched between first and second end support plates 14, 16. The first and second end support plates 14, 16 each have front and back horizontal mounting flanges 18, 20, each of which has one or more mounting holes 22 formed there through for mounting heat exchanger 10 in a desired location. First and second end support plates are not essential to heat exchanger 10 and may be eliminated, altered or replaced with other suitable arrangements for mounting the heat exchanger 10.

[0011] In an automotive application, the heat exchanger 10 will typically be used as an underbody cooler. In one application, the heat exchanger may be used to cool excess fuel that is returning from the fuel system to the fuel tank, however, it could also be used in other applications to cool other types of fluids. Figure 3 shows a diagrammatic view of heat exchanger 10 mounted under the floor pan of an automobile 24. When the heat exchanger 10 is mounted in place, inlet fitting 26 and outlet fitting 28 (see Figures 1 and 2) are connected to a fuel return line (not shown) in the fuel system such that the returning fuel passes through the heat exchanger 10.

[0012] Referring now to Figures 1, 2 and 4 to 7 the construction of plate pairs 12 will now be described in greater detail. Figures 4 and 5 show, respectively, example embodiments of the first and second plates that make up each plate pair 12. The first plate 30 includes an elongate central planar portion 34 that is surrounded by a planar edge portion 36, which in turn is surrounded by a peripherally extending, substantially planar fin plate portion 38. A series of ribs 40 are formed along central planar portion 34. In the presently described embodiment, the ribs 40 closer the front end 37 of the first plate 30 are parallel and obliquely orientated in a first direction, and the ribs 40 closer the back end 39 of the plate 30 are parallel and obliquely orientated in a second, opposite direction, with a central triangular boss 42 being formed between the two sets of oppositely orientated ribs 40.

[0013] The second plate 32 has a configuration similar to that of first plate 30 in that it includes an elongate central planar portion 44 that is surrounded by a peripheral planar edge portion 46, with series of ribs 48 formed along central planar portion 44, however, in the presently described embodiment, the second plate 32 does not include a fin plate portion. As with first plate 30, the ribs 48 closer the front end 50 of the second plate 32 are parallel and obliquely orientated in one direction and the ribs 48 closer the back end 52 of the plate 32 are parallel and obliquely orientated in an opposite direction, with a cen-

tral triangular boss 50 being formed between the two sets of oppositely orientated ribs 48.

[0014] In Figure 4, the first plate 30 is viewed showing its outer surface, so that ribs 40 and triangular boss 42 are coming out of the page. In Figure 5, the second plate 32 is viewed showing its inside surface, so that the ribs 48 and boss 50 are actually going into the page. First and second plates 30 and 32 are placed together and sealably connected about edge portions 36, 46 to form a plate pair 12 (As best seen in Figures 6 and 7), in which a fluid passage 62 is defined between planar central portions 34, 44 of the plates 30, 32. More particularly, and as will be described in greater detail below, in the presently described embodiment overlapping ribs 40, 48 provides fluid passage 62 that extends from an inlet end to an outlet end of the plate pair 12.

[0015] In an example embodiment the plates 30,32 are stamped from braze-clad aluminum or aluminum alloy, however other suitable metallic and non-metallic materials formed using various methods such as stamping, roll-forming, etc. could be used as desired for specific heat exchanger applications.

[0016] In one example embodiment, the second plate 32 is nested within a pocket formed in first plate 30, which provides a novel self-locating and self-aligning function during assembly of each plate pair 12. As best seen in Figures 7 and 7A, the planar edge portions 36 and 46 each include facing planar surfaces 66,68 that abut. The planar edge portion 36 of the first plate 30 is slightly larger than the edge portion 46 of the second plate, and terminates in a peripheral locating wall 64 that extends laterally from the planar edge portion 36. The planar fin 38 extends outward from the locating wall 64 in a plane that is parallel to the plane of edge portion 36, such that the locating wall 64 provides a step between the edge portion 36 and the planar fin 38. The locating wall 64 and edge portion 36 thus define a pocket, indicated generally by reference numeral 65 in Figure 7A, within which the edge 46 of the second plate 32 is nested. As noted above, preferably, the first plate edge portion 36 is slightly larger than the second plate edge portion 46, with the result that locating wall 64 will be spaced slightly apart from second plate edge 46, allowing brazing material to provide a secure joint in the space 70. Additionally, space 70 permits the second plate 32 to be compressed somewhat against first plate 30 during assembly of the heat exchanger plate pair stack such that the plate 32 acts as a leaf spring with the result that improved sealing reliability is possible during brazing of the plate pair stack. As a result of the nesting plate pair structure, the force of compression on the plate pairs by the assembly fixture is transmitted equally through the entire plate stack, providing a self-fixturing mechanism that holds the plates in place during brazing. Pocket 65 facilitates relative positioning of the plates 30,32 during heat exchanger assembly and maintains the relative positions of the first and second plates during heat exchanger assembly and brazing, providing the self-locating and self-aligning features noted above.

[0017] Referring again to Figures 4 and 5, first and second plates 30, 32 are also formed with end bosses 54, 56 which define respective inlet openings 58 and outlet openings 60. When plate pairs 12 are stacked, all of the inlet openings 58 are in registration and communicate with inlet fitting 26, and all of the outlet openings 60 are in registration and communicate with outlet fitting 28. In this way, all of the end bosses 54 form an inlet manifold and all of the end bosses 56 form an outlet manifold so that fluid flows in parallel through all of the plate pairs 12. However, it will be appreciated that some of the inlet openings 58 and some of the outlet openings 60 could be selectively closed or omitted, as will be appreciated by those skilled in the art, so that fluid could be made to flow in series through each of the plate pairs 12, or in some series/parallel multi-pass combination. In a multi-pass configuration, inlet and outlet fittings may be connected to the same manifold.

[0018] As shown in Figure 5, the opposite ends 50, 52 of the second plate 32 may conveniently be shaped differently (end 50 having square corners and end 52 having rounded corners). The ends of the pocket of first plate 30 in which the second plate is received have corresponding shapes, such that the edge of the second plate can only be received within the pocket when properly orientated, in order to prevent incorrect assembly of the plate pairs.

[0019] Figure 6 shows a portion of a plate pair 12, with the second plate 32 being located behind the first plate 30 and thus hidden from view. The ribs 48 of the second plate 32 are shown in phantom with dashed lines. The second plate ribs 48 cooperate with the first plate ribs 40 to define fluid passage 62 having a zigzag pattern, indicated by phantom arrows 72, along the length of the plate pair 12. With reference to Figure 1, the fluid passage 62 of a plate pair 12 is generally indicated, along with the zigzag path 72 that defines the fluid path. The use of cooperating ribs formed on the plates of a plate pair to provide fuel mixing along a fluid passage is well known, as is apparent from previously mentioned U.S. Patent no. 5,692,559, and a number of different criss-cross rib configurations are possible other than that shown in Figures 4 to 6 of the present application. By way of example, each rib could communicate with three ribs on the opposing plate instead of just two as illustrated. Further, in some embodiments, the orientation of the ribs may not change at the plate pair mid point, but rather all ribs the entire length of the plate may be parallel. Thus, the exact criss-cross rib pattern used in the plate pairs of the heat exchanger 10 need not be as illustrated, and suitable alternative arrangements could be used.

[0020] When the plate pairs 12 are arranged in parallel in a stack, the ribs from adjacent plate pairs are brazed in contact with each other, providing strength and rigidity to the stack of plate pairs 12. Abutting ribs 40, 48 between adjacent plate pairs 12 are shown on the first two plate pairs 12 at the top of Figure 2. Although not shown in detail in Figure 2, it will be appreciated that the abutting

ribs between adjacent plate pairs continues throughout the entire stack of plate pairs. Air ducts or passages 74 are formed between the abutting ribs 40, 48 of adjacent plate pairs such that air can flow between adjacent plate pairs thus facilitating heat exchange between the air and with the fluid flowing in the fluid passages 62 defined within each plate pair 12. If identical plate pairs 12 are used throughout the plate pair stack, then the contacts between abutting ribs of adjacent plate pairs will be non-continuous, and, in the illustrated example each rib will contact two ribs on an adjacent plate. Alternatively, in a further example embodiment of the invention, the pattern on adjacent plate pairs is reversed such that each rib contacts the rib of an adjacent plate along the entire length of the rib. In one example embodiment, this alternative embodiment is achieved by rotating alternative plate pairs end for end one hundred and eighty degrees. **[0021]** By way of further explanation, reference is made to Figures 8 to 10. Figure 8 shows a simplified top plan view of two adjacent plate pairs 12A and 12B, formed from plates 32A, 30A and 32B, 30B, respectively. Although not shown in Figure 8, contacting ribs 48, 40 and air passages 74 are located between plate pairs 12A and 12B. Figure 9 shows simplified side views of each of the plates taken from a viewing direction indicated by arrow 76 showing the orientation of ribs 40 and 48 in an embodiment of the invention in which each of the plate pairs are identically orientated. Figure 10 is similar to Figure 9, except that it shows an embodiment in which the plates in adjacent pairs are rotated 180 degrees such that rib orientation is reversed between the adjacent plate pairs. In the embodiment of Figure 9, the ribs 40 of plate 30A (such ribs 40 extend outward from the page as illustrated) abut against the ribs 48 of plate 32B (such ribs 48 extend inward into the page as illustrated). The ribs abut in a non-continuous manner, defining a series of air passages between the plate pairs 12A and 12B. In the embodiment of Figure 10, the ribs 40 of plate 30A also abut against the ribs 48 of plate 32B. However, unlike in Figure 9, the abutting ribs of the adjacent plate pairs are similarly orientated such that each rib 40 abuts continuously along its length with a corresponding rib 48. The embodiment of Figure 10 provides larger direct air-flow passages between the plate pairs than the embodiment of Figure 9. **[0022]** The peripherally extending fin plate portion 38 of each plate pair 12 provides an increased heat exchange surface area over previous plate pair heat exchangers not having such a fin 38. The fin 38 extends "air-side" from the opposed central plate portions 34, 44 of the plates between which the fluid passage 62 is defined. With reference to Figure 1, in an example embodiment when the heat exchanger is moving in a direction indicated by arrow 80, air flows into and through the parallel fins 38 and through the air passages 74 between the ribbed plate portions, as indicated by air flow arrows 78, drawing heat away from the fluid passing through fluid passages 62. In the presently described embodiment, the heat exchanger plate pairs 12 are configured

such the ribbed portions there of are angled relative to the direction of travel. In particular, as can be appreciated from Figure 1, the plate pairs 12 are arranged such that the fluid passages 62 have a leading end that is lower than a trailing end thereof. As can be seen in Figure 4, in an example embodiment, the rectangular fin plate portion 38 is sized to take advantage of the angled configuration, the fin plate portion 38 extending a greater height H1 from a forward end of the ribbed central portion 34 of the first plate 30 and a lesser height H2 from a rearward end of central portion 34. In other words, as can be appreciated from Figure 4, the fin plate portion 38 has longitudinal upper and lower peripheral edges 134, 136 that extend length-wise between ends 37, 39. The portion of the plate pair (in particular the elongate central portions 34,44) that define the fluid passage 62 extends the majority of the distance between ends 37,39, but at an angle relative to the edges of the fin plate, rather than parallel to the fin plate edges.

[0023] With reference again to Figure 4, protrusions or dimples 84 and 86 may conveniently be formed in the fin plate portion 38 of the first plate 30 for the purpose of strengthening the extending fin portions and also to disrupt the boundary layer of air passing between the fins. In the illustrated embodiment, a first pair of dimples 84, 86 are provided near the lower back end 39 of the plate 30. As can be seen in Figure 4A, the dimples 84 and 86 extend in opposite directions. A second pair of dimples 84, 86 are provided near the upper front end 37 of the plate 30. The dimples 84, 86 at the front end 37 extend in directions that are opposite of their counterparts at back end 39 such that when the plate 30 is rotated by 180 degrees in alternating plate pairs 12, the dimples 84, 86 of one plate pair 12 will abut against and be brazed to the dimples 84, 86, respectively, of an adjacent plate pair, as can be seen in Figure 2.

[0024] With reference to Figure 11, the angled orientation of the plate pairs will be discussed in greater detail. Figure 11 shows a diagrammatic view of heat exchanger 10 located under the body of vehicle 24. The height H represents the distance from ground 82 to the underside of vehicle 24, and the height a is a specified clearance between the underbody and the heat exchanger 10. The height H-b is the clearance required between ground and any part of the vehicle, with b-a being the available height for heat exchanger 10. As indicated in Figure 11, the air velocity profile is approximately linear in the y direction from the underbody to the ground. For optimum air-side heat transfer, it is desired to place the cooler in the fastest flowing air. The inclination angle α refers to the angle between the general direction of fluid passages 62 relative to the horizontal. For maximum air flow through the cooler, $\alpha=90$ degrees, however such angle is not possible for any heat exchanger in which the length $L>b-a$. The inclination angle α can be greater or less than 0, with a positive angle occurring when the leading edge of the flow passages of the heat exchanger is higher than the trailing edge, and a negative angle occurring when the

trailing edge of the flow passages of the heat exchanger is higher than the leading edge (as is shown in Figure 11). A negative α can create a high pressure air zone between the heat exchanger and the car underbody due to the narrowing passage there between, forcing air through the trailing half of the heat exchanger as indicated by arrow 78 in Figure 11. In some applications, the heat exchanger could be orientated leading edge up with a positive α . The angle α is preferably selected to maximize air flow through the heat exchanger dependent on the dimensional restraints that are placed on the heat exchanger by its intended use. The use of plate pairs having fin plates that are angled relative to the fluid passages therethrough allows the size of the fin plates to be relatively large relative to the space permitted for the heat exchanger package.

[0025] Figure 12 shows a further plate pair 92 for use in an alternative embodiment of heat exchanger 10. The plate pair 92 is substantially identical to plate pair 12, except that ribs 40 in first plate 30 are all parallel along the entire length of plate 30, without a change in orientation at the mid-point of the plate. Similarly, ribs 48 (shown in phantom) of second plate 32 are all parallel. The angle A of ribs 40 relative to the horizontal is relatively small so that the ribs 40 are close to being parallel with the incoming air flow direction 78. Such configuration may provide improved heat transfer in some applications. The plate pair 92 may also include a trailing fin plate portion 90 on which is formed a plurality of dimples 88. In the view of Figure 12, some dimples 88 may extend into the page, and some may protrude from the page. The dimples 88 serve to further break up the air flow boundary layer of air passing through the heat exchanger.

[0026] Figures 13 to 16 illustrate a further plate pair 94 for use in yet another embodiment of heat exchanger 10. The plate pair 94 is similar to plate pair 12, with the exception of differences that will be appreciated from the following description. The plate pair 94 is conveniently formed from two similar opposed plates 96A and 96B that may be mirror images of each other. Each plate 96A and 96B has peripheral edge portions 100, the edge portions 100 of two plates joined together to form plate pair 94. Each plate 96A and 96B also has a central planar portion 102, the central portions of the joined plates in each plate pair 94 being spaced apart to define a fluid passage 104 between the plates. The central planar portions 102 are not ribbed as in plate pair 12, but rather an elongate turbulizer 106 is located in the fluid passage 104 for augmenting fluid flow therethrough (in some applications, the channel 104 could be clear with no turbulizer located therein). The peripheral edge portions 100 extend a relatively large distance from the central planar portions 102, thus providing an integrally formed air-side fin surface portion for plate pair 94. As with plates of plate pair 12, the plates 96 are formed with end bosses 54, 56 that define respective inlet and outlet openings 58, 60. Figure 14 shows two plate pairs 94 arranged side-by-

side as part of a plate pair stack of a heat exchanger, with an air passage 108 defined between the plate pairs 94.

[0027] in order to facilitate assembly of the plate pairs 94, locating protrusions or half dimples 110, 112 may be provided along the perimeter edge of the plates 96A, 96B to assist in lining up the plates in a plate pair. As shown in Figure 13, at air-flow downstream end 78, the half dimple 112 projects outward from the page, and the half dimple 110 projects into the page, and conversely at air-flow upstream end 116, the half dimple 112 projects into the page, and the half dimple 110 projects out of the page. Plates 96A, 96B are mated together as shown in Figure 15 with locating dimples aligned and nested as shown in Figure 16.

[0028] Figure 17 shows yet another possible plate pair configuration for plate pair 94. In the embodiment of Figure 17, the upper fin plate portion 100 extends only from one plate 96A of the plate pair, and the lower fin plate portion 100 extends only from the other plate 96B of the plate pair 94. In the embodiment of Figure 17, the edge portions 128 and 130 of opposed plates 96A, 96B are joined to form plate pair 128. In each plate 96A, 96B, the fin plate portion 100 extends peripherally from the edge portion 130, and in particular is joined to the edge portion 130 by a locating wall 132 that is perpendicular to the edge portion 130 and fin plate portion 100. The locating wall 132 and edge portion 130 of one plate 96A, 96B form a notch for receiving the edge portion 128 of the other plate of the plate pair 128, and vice versa.

[0029] In some embodiments, ribs (not shown) that extend only partially into fluid passage 104 may be provided on central portions 102 in order to augment fluid flow through fluid passage 104.

[0030] Figures 18, 19 and 20 show another possible plate pair configuration, indicated generally by reference 130, for use in heat exchanger 10. The plate pair 130 is substantially similar to plate pair 12, with one notable difference being that dimples 132, 134 (rather than ribs) are formed in the spaced apart central planar portions 34, 44 of plates 30, 32 to augment flow through fluid passage 62. In the illustrated embodiment a central row of dimples 132 extend inward into the fluid passage 62, with the inner ends of opposing dimples 132 joining together. Two parallel rows of outwardly (i.e. air-side) extending dimples 134 are provided along the fluid passage 62. Preferably, the extending dimples 134 from one plate pair 130 will contact the extending dimples 134 from an adjacent plate pair, thus providing rigidity to the core stack as well as providing flow augmentation means for breaking the boundary layer of air flowing between the plate pairs. As with plate pair 12, the plate pair 130 is configured such that the fluid passage defined between central planar portions 34, 44 is angled relative to the rectangular fin portion 38 of the plate pair.

[0031] Figures 21 to 23 show another possible plate pair configuration, indicated generally by 150, for use in heat exchanger 10. The plate pair 150 is substantially

similar in construction to plate pairs 12 and 130, but for differences that will be apparent from the Figures and the present description. In plate pair 150, delta shaped winglets 152 are formed along leading upper and trailing lower parts of the air side fin plate portion 38 of the plate 30 to provide enhanced air-side heat transfer by inducing swirl and boundary layer separation and recreation along the length of the fin plate portion. In some embodiments, winglets 152 are selectively located only near the leading end of the heat exchanger; and in some embodiments winglets 152 are selectively located only near the trailing end of the heat exchanger, depending on the desired heat exchanger performance. The presence of winglets 152 causes air swirl to be induced in the air flow downstream therefrom, resulting in downwash air flow impacting on the fin plate portion that can improve local air side heat transfer. In one example winglet configuration as shown in Figure 22, a leading winglet 152 (relative to the direction of air flow as indicated by arrow 154 in Figure 22) located on an upper portion of fin plate portion 38 is followed by two spaced apart pairs of trailing winglets 152. In each winglet pair, the trailing winglet is closely placed to the leading winglet and at a relative angle to the leading winglet, such that the two winglets act in complimentary fashion for inducing air-side swirl. The delta (triangular) shaped winglets 152 are, in the example embodiment, lanced along two side edges from the fin plate portion 38 and folded out from the plate. In an example embodiment, as best seen in Figure 23, each winglet 152 has an aspect ratio of $l/h=2$; an angle of attack of $\alpha=45^\circ$ to oncoming air flow (in the X-Y plane as shown in Figures 21-23); and is folded out from the fin plate portion 38 at $X^\circ=90^\circ$ (in the x-z plane) to project a maximum surface area into the oncoming air flow. Within each winglet pair, the winglet spacing is equal to h. Other winglet configurations and shapes are used in various embodiments.

[0032] In the illustrated embodiment of Figures 21-23, the central planar portions of the plates of heat exchanger plate pair 150 have dimples 156, 158 formed therein. Dimples 156 protrude outward from the plates, such that the dimples 156 from back-to-back plates of adjacent plate pairs contact each other on the air-side passages between adjacent plate pairs. The dimples 158 extend inward into the internal flow channels 62 defined within the plate pair, turbulizing fluid flow therein and providing structural strength. In plate pair 150, the flow channel 62 is wider near the inlet and outlet openings 58, 60, and narrower in the region between the openings, to increase the relative velocity of fluid through the flow channel 62.

[0033] Figure 24 shows a further heat exchanger 160 according to yet another example embodiment, and Figure 25 shows a plate pair of heat exchanger 160. Heat exchanger 160 is substantially similar in construction to heat exchanger 10, but for the differences that will be apparent from the Figures and the present description. In heat exchanger 160, external fin plates 166, which in the illustrated embodiment are corrugated fin plates, are located in the air passages 168 between back-to-back

plates 30, 32 of adjacent plate pairs 162. In plate pairs 162, the central planar portions 34, 44 of plates 30, 32, respectively, are formed with spaced apart dimples 158 that extend inward into the fluid passage 62. The fin plates 166 are secured between the central planar portions 34, 44 of the plates 30, 32 of adjacent plate pairs 162 and the central planar portion 44. Dashed line 166 in Figure 25 illustrates the location of a fin plate 166 relative to the flow passage 62. In an example embodiment, the fin plate 166 is sized to correspond in height and length substantially to the size of central planar portions 34, 44 (and hence flow passage 62). Fin plate 166 can provide air-side heat exchanger surface area and structural rigidity to the heat exchanger 160. The extended fin plate portion 38 provides protection for the fin plate 166 from debris. Fin plate 166 can be replaced with other turbulizing structures, including, for example, an expanded metal turbulizer plate.

[0034] In heat exchanger 160, a flow circuiting insert 164 is provided to divide the manifold at the leading end of the heat exchanger 160 into two halves, with inlet and outlet fittings 26, 28, both being located at a leading end of the heat exchanger. Brackets 16 and 18 seal off the openings 60 at the trailing end in the plates 30 and 32 at the outer sides of the heat exchanger 160.

[0035] It will be apparent to those skilled in the art that in light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention without departing from the scope thereof. Accordingly, the scope of the invention is to be construed in accordance with the substance defined in the following claims.

Claims

1. A stacked plate heat exchanger with a plurality of stacked plate pairs (12, 92, 94, 130, 150, 160), each plate pair including first (30, 96A) and second (32, 96B) plates having elongate central portions (34, 44, 102) surrounded by sealably joined edge portions (36, 46) with an elongate fluid passage (62, 104) defined between the central portions; each plate pair having spaced apart inlet (58) and outlet (60) openings in flow communication with the fluid passage, **characterized by** at least some of the plate pairs having a substantially planar fin plate (38, 90) extending peripherally outward from the joined edge portions, the fin plates of the stacked plate pairs being spaced apart and substantially parallel to each other.
2. The stacked plate heat exchanger of claim 1 **characterized in that** for each of the at least some plate pairs, the planar fin plate has a first fin end (37) and a second fin end (39) and first and second spaced apart elongate edges (134, 136) extending there between, the fluid passage (62) being located between the spaced apart edges and having a first fluid passage end located closer to the first fin end (37) than

- the second fin end (39) and a second fluid passage end located closer to the second fin end than the first fin end, the fluid passage (62) being orientated at an angle relative to the first elongate edge (134) of the fin plate with one of said first and second fluid passage ends being located closer to the first elongate edge than the other of said first and second fluid passage ends, the fluid passages of the plate pairs all being orientated in a common direction.
3. The heat exchanger of claim 2 **characterized in that** the heat exchanger (10) is adapted to be mounted under the body of a vehicle (24), the first fin edge of the fin plate being an upper edge thereof.
 4. The heat exchanger of any one of claims 1 to 3 **characterized in that** external passages (74,108) are defined between back-to-back central portions (102) of the plates of adjacent plate pairs (94), and the fin plates define external passages therebetween that communicate with respective external passages between the central portions.
 5. The heat exchanger of claim 4, **characterized in that** a fluid turbulizing structure is located in the external passages between the central portions.
 6. The heat exchanger of any one of claims 1 to 3 **characterized in that** for the at least some plate pairs having fin plates (38), the fin plate of each plate pair is formed integrally with only one of the first (30) and second (32) plates thereof.
 7. The heat exchanger of any one of claims 1 to 3 **characterized in that** for each of the at least some plate pairs (94) having fin plates, the fin plate is formed from a first fin plate portion (100) formed integrally with the first plate (96A) and a second fin plate portion (100) formed integrally with the second plate (96B), the first and second fin plates being laminated together.
 8. The heat exchanger of claim 7 **characterized in that** cooperating locating protrusions (110,112) are provided on the first and second plates (96A,96B) for aligning the plates during assembly.
 9. The heat exchanger of any one of claims 1 to 3 **characterized in that** for the at least some plate pairs having fin plates, the first plate (30) includes a laterally extending flange (64) around an outer edge of the edge portion (36) thereof, the edge portion (46) of the second plate (32) being nested within the laterally extending flange, the fin plate (38) extending outward from an edge of the laterally extending flange.
 10. The heat exchanger of any one of claims 1 to 3 **characterized in that** spaced apart external protrusions (84,86) are formed on the fin plates for augmenting flow of an external fluid thereacross.
 - 5 11. The heat exchanger of claim 10 **characterized in that** the protrusions (84,86) are located only on a downstream half of the fin plates or only on an upstream half of the fin plates.
 - 10 12. The heat exchanger of claim 10 or 11 **characterized in that** the protrusions are winglets (152) formed on a length of the fin plates for inducing downwash air flow onto the fin plates.
 - 15 13. The heat exchanger of claim 12 **characterized in that** the winglets (152) have a protruding substantially triangular shape.
 - 20 14. The heat exchanger of claim 13 **characterized in that** at least some of the winglets (152) are arranged in complimentary pairs.
 - 25 15. The heat exchanger of any one of claims 1 to 3 **characterized in that** the central portions (34,44) are substantially planar and have a first plurality of obliquely orientated, parallel ribs (40,48) formed thereon, the ribs of the first and second plates in each plate pair cooperating to form at least a portion of the fluid passage (62).
 - 30 16. The heat exchanger of claim 15 **characterized in that** for each plate pair (92) having a fin plate, the plate pair has elongate, parallel spaced apart first and second edges (134,136), the fluid passage (62) being located between the spaced apart first and second edges and extending at an angle relative to the first and second edges (134,136), and the ribs (140) on at least one of the first and second plates are orientated to be close to parallel to an air flow direction (78) through the heat exchanger (10).
 - 35 40 17. The heat exchanger of claim 1 **characterized in that** each of the plate pairs has a fin plate extending peripherally from the fluid passage (62), each fin plate having elongate, parallel spaced apart first and second edges (134,136), the fluid passage (62) of the plate pair being longitudinally located between the spaced apart first and second edges (134,136) and extending at an angle relative to the first and second edges.
 - 45 50 18. The heat exchanger of claim 17 **characterized in that** for each plate pair, the edge portion of the first plate (30) includes a laterally extending peripheral locating wall (64) surrounding an outer circumference of the edge portion (46) of the second plate.
 - 55

Patentansprüche




1. Plattenwärmetauscher mit einer Mehrzahl von stapelförmig angeordneten Plattenpaaren (12, 92, 94, 130, 130, 150, 160), wobei jedes Plattenpaar erste (30, 96A) und zweite (32, 96B) Platten umfasst, welche längliche Mittelabschnitte (34, 44, 102) haben, die von abdichtenden Verbindungsrandabschnitten (36, 46) mit einem länglichen Fluiddurchgang (62, 104) umgeben sind, welcher zwischen den Mittelabschnitten gebildet wird; wobei jedes Plattenpaar eine beabstandete Einlassöffnung (58) und eine beabstandete Auslassöffnung (60) hat, welche in kommunizierender Fluidverbindung mit dem Fluiddurchgang sind, **dadurch gekennzeichnet, dass** wenigstens einige der Plattenpaare eine im wesentlichen planare Rippenplatte (30,90) haben, welche in Umfangsrichtung von den Verbindungsrandabschnitten nach außen verläuft, wobei die Rippenplatten der Plattenwärmetauscherpaare zueinander beabstandet und im wesentlichen parallel zueinander angeordnet sind. 5
2. Plattenwärmetauscher nach Anspruch 1, **dadurch gekennzeichnet, dass** für jede der wenigstens einige Plattenpaare die planare Rippenplatte ein erstes Rippenende (37) und ein zweites Rippenende (39) hat, sowie erste und zweite beabstandete längliche Ränder (134, 136) hat, die zwischen denselben verlaufen, der Fluiddurchgang (62) zwischen den beabstandeten Rändern liegt und wenigstens ein erstes Fluiddurchgangsende hat, welches näher zu dem ersten Rippenende (37) als zu dem zweiten Rippenende (39) liegt, und ein zweites Fluiddurchgangsende hat, welches zu dem zweiten Rippenende näher als zu dem ersten Rippenende liegt, der Fluiddurchgang (62) unter einem Winkel relativ zu dem ersten länglichen Rand (134) der Rippenplatte ausgerichtet ist, wobei eines der ersten und der zweiten Fluiddurchgangsenden dem ersten länglichen Rand näher als die jeweils anderen ersten und zweiten Fluiddurchgangsenden liegen, und dass alle Fluiddurchgänge der Plattenpaare in eine gemeinsame Richtung ausgerichtet sind. 10
3. Wärmetauscher nach Anspruch 2, **dadurch gekennzeichnet, dass** der Wärmetauscher (10) derart beschaffen und ausgelegt ist, dass er unter der Karosserie eines Fahrzeugs (24) angebracht werden kann, wobei der erste Rippenrand der Rippenplatte ein oberer Rand hiervon ist. 15
4. Wärmetauscher nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die externen Durchgänge (74, 108) zwischen Rücken an Rücken aneinander liegenden Mittelabschnitten (102) der Platten von benachbarten Plattenpaaren (94) gebildet werden, und dass die Rippenplatten externe 20
- Durchgänge zwischen denselben bilden, welche in kommunizierender Verbindung mit den zugeordneten externen Durchgängen zwischen den Mittelabschnitten sind. 25
5. Wärmetauscher nach Anspruch 4, **dadurch gekennzeichnet, dass** eine Fluidturbulenz erzeugungseinrichtung in den externen Durchgängen zwischen den Mittelabschnitten angeordnet ist. 30
6. Wärmetauscher nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** bei den wenigstens einigen Plattenpaaren, welche die Rippenplatten (38) haben, die Rippenplatte jedes Plattenpaars integral mit nur einer der ersten (30) und der zweiten (32) Platte ausgebildet ist. 35
7. Wärmetauscher nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** bei jedem der wenigstens einigen Plattenpaaren (94), welche Rippenplatten haben, die Rippenplatte von einem ersten Rippenplattenabschnitt (100) gebildet wird, welcher integral mit der ersten Platte (96A) ausgebildet ist, und einem zweiten Rippenplattenabschnitt (100) gebildet wird, welcher integral mit der zweiten Platte (96B) ausgebildet ist, wobei die ersten und die zweiten Rippenplatten zusammen ein Laminat bilden. 40
8. Wärmetauscher nach Anspruch 7, **dadurch gekennzeichnet, dass** zusammenarbeitende Positioniervorsprünge (110, 112) an der ersten und der zweiten Platte (96A, 98B) zur Ausrichtung der Platten während der Montage vorgesehen sind. 45
9. Wärmetauscher nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** für die wenigstens einigen Plattenpaare, welche Rippenplatten haben, die erste Platte (30) einen seitlich verlaufenden Flansch (64) um einen äußeren Rand des Randabschnitts (36) umfasst, dass der Randabschnitt (46) der zweiten Platte (32) in dem in Querrichtung verlaufenden Flansch eingebunden ist, und dass die Rippenplatte (38) von einem Rand des in Querrichtung verlaufenden Flansches nach außen verläuft. 50
10. Wärmetauscher nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die beabstandeten, externen Vorsprünge (84, 86) auf den Rippenplatten zur Vergrößerung des externen Fluidstroms ausgebildet sind. 55
11. Wärmetauscher nach Anspruch 10, **dadurch gekennzeichnet, dass** die Vorsprünge (84, 86) nur auf einer stromabwärtigen Hälfte der Rippenplatten oder nur auf einer stromaufwärtigen Hälfte der Rippenplatten angeordnet sind.
12. Wärmetauscher nach Anspruch 10 oder 11, **da-**

- durch gekennzeichnet, dass** die Vorsprünge Flügelabschnitte (152) sind, welche auf einem Längsstück der Rippenplatten ausgebildet sind, um eine nach unten gerichteten Luftstrom auf die Rippenplatten zu induzieren.
13. Wärmetauscher nach Anspruch 12, **dadurch gekennzeichnet, dass** die Flügelabschnitte (152) eine vorspringende, im wesentlichen dreieckförmige Gestalt haben.
14. Wärmetauscher nach Anspruch 13, **dadurch gekennzeichnet, dass** wenigstens einige der Flügelabschnitte (152) in komplementären Paaren angeordnet sind.
15. Wärmetauscher nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die Mittelabschnitte (34, 44) im wesentlichen planar sind und eine erste Mehrzahl von schräg ausgerichteten, parallelen Rippen (40, 48) hat, die in diesen ausgebildet sind, wobei die Rippen der ersten und der zweiten Platten jedes Plattenpaars zusammen arbeiten, um wenigstens einen Abschnitt eines Fluiddurchganges (62) zu bilden.
16. Wärmetauscher nach Anspruch 15, **dadurch gekennzeichnet, dass** bei jedem Plattenpaar (92), welches eine Rippenplatte hat, das Plattenpaar längliche, parallele und beabstandete erste und zweite Ränder (134, 136) besitzt, der Fluiddurchgang (62) zwischen den beabstandeten ersten und zweiten Rändern liegt und unter einem Winkel relativ zu den ersten und zweiten Rändern (134, 136) verläuft, und dass die Rippen (140) auf wenigstens einer der ersten und der zweiten Platten derart ausgerichtet sind, dass sie nahezu parallel zu einer Luftstromrichtung (78) durch den Wärmetauscher (10) sind.
17. Wärmetauscher nach Anspruch 1, **dadurch gekennzeichnet, dass** jedes der Plattenpaare eine Rippenplatte hat, welche von dem Fluiddurchgang (62) in Umfangsrichtung verläuft, jede Rippenplatte längliche, parallele und beabstandete erste und zweite Ränder (134, 136) hat, der Fluiddurchgang (62) des Plattenpaars im wesentlichen in Längsrichtung zwischen den beabstandeten ersten und zweiten Rändern (134, 136) und unter einem Winkel relativ zu den ersten und den zweiten Rändern verläuft.
18. Wärmetauscher nach Anspruch 17, **dadurch gekennzeichnet, dass** bei jedem Plattenpaar der Randabschnitt der ersten Platte (30) eine in Querrichtung verlaufende Umfangspositionierwand (64) umfasst, welche einen äußeren Umfang des Randabschnitts (46) der zweiten Platte umgibt.

Revendications

1. Echangeur de chaleur à plaques empilées avec une pluralité de paires de plaques empilées (12, 92, 94, 130, 150, 160), chaque paire de plaques incluant des premières (30, 96A) et deuxièmes (32, 96B) plaques ayant des portions centrales oblongues (34, 44, 102) entourées par des portions de bord reliées d'une manière étanche (36, 46) avec un passage de fluide oblong (62, 104) défini entre les portions centrales ; chaque paire de plaques ayant des ouvertures d'entrée (58) et de sortie (60) espacées en communication fluïdique avec le passage de fluide, **caractérisé en ce qu'**au moins certaines des paires de plaques possèdent une plaque-ailette sensiblement plane (38, 90) s'étendant périphériquement vers l'extérieur depuis les portions de bord jointes, les plaques-ailettes des paires de plaques empilées étant espacées et sensiblement parallèles les unes aux autres.
2. Echangeur de chaleur à plaques empilées selon la revendication 1, **caractérisé en ce que** pour chacune d'au moins quelques paires de plaques, la plaque-ailette plane présente une première extrémité d'ailette (37) et une seconde extrémité d'ailette (39) et des premier et second bords oblongs espacés (134, 136) s'étendant entre elles, le passage de fluide (62) se trouvant entre les bords espacés et ayant une première extrémité de passage de fluide située plus près de la première extrémité d'ailette (37) que la seconde extrémité d'ailette (39) et une seconde extrémité de passage de fluide située plus près de la seconde extrémité d'ailette que la première extrémité d'ailette, le passage de fluide (62) étant orienté selon un angle relativement au premier bord oblong (134) de la plaque-ailette, une desdites première et seconde extrémités de passage de fluide étant plus proche du premier bord oblong que l'autre desdites première et seconde extrémités de passage de fluide, les passages de fluide des paires de plaques étant tous orientés dans une direction commune.
3. Echangeur de chaleur selon la revendication 2, **caractérisé en ce que** l'échangeur de chaleur (10) est apte à être monté sous la caisse d'un véhicule (24), le premier bord d'ailette de la plaque-ailette se trouvant à un bord supérieur de celle-ci.
4. Echangeur de chaleur selon l'une des revendications 1 à 3, **caractérisé en ce que** des passages externes (74, 108) sont définis entre des portions centrales dos à dos (102) des plaques de paires de plaques adjacentes (94), et les plaques-ailettes définissent des passages externes entre elles qui communiquent avec des passages externes respectifs entre les portions centrales.

5. Echangeur de chaleur selon la revendication 4, **caractérisé en ce qu'**une structure pour conférer une turbulence au fluide est située dans les passages externes entre les portions centrales.
6. Echangeur de chaleur selon l'une des revendications 1 à 3, **caractérisé en ce que** pour au moins certaines paires de plaques ayant des plaques-ailettes (38), la plaque-ailette de chaque paire de plaques est réalisée intégralement avec seulement une des première (30) et seconde (32) plaques de celles-ci.
7. Echangeur de chaleur selon l'une des revendications 1 à 3, **caractérisé en ce que** pour chacune d'au moins quelques-unes de paires de plaques (94) ayant des plaques-ailettes, la plaque-ailette est formée par une première portion de plaque-ailette (100) réalisée intégralement avec la première plaque (96A) et une seconde portion de plaque-ailette (100) formée intégralement avec la seconde plaque (96B), les première et seconde plaques-ailettes étant laminées ensemble.
8. Echangeur de chaleur selon la revendication 7, **caractérisé en ce que** des saillies de localisation coopérantes (110, 112) sont réalisées sur les première et seconde plaques (96A, 96B) pour aligner les plaques pendant l'assemblage.
9. Echangeur de chaleur selon l'une des revendications 1 à 3, **caractérisé en ce que** pour au moins quelques-unes des paires de plaques ayant des plaques-ailettes, la première plaque (30) comprend une bride s'étendant latéralement (64) autour d'un bord extérieur de la portion de bord (36) de celle-ci, la portion de bord (46) de la seconde plaque (32) étant emboîtée dans la bride s'étendant latéralement, la plaque-ailette (38) s'étendant vers l'extérieur depuis un bord de la bride s'étendant latéralement.
10. Echangeur de chaleur selon l'une des revendications 1 à 3, **caractérisé en ce que** des saillies externes espacées (84, 86) sont formées sur les plaques-ailettes pour augmenter l'écoulement d'un fluide externe sur celles-ci.
11. Echangeur de chaleur selon la revendication 10, **caractérisé en ce que** les saillies (84, 86) sont situées seulement sur une moitié aval des plaques-ailettes ou seulement sur une moitié amont des plaques-ailettes.
12. Echangeur de chaleur selon la revendication 10 ou 11, **caractérisé en ce que** les saillies sont des ailettes (152) formées sur une longueur des plaques-ailettes pour induire un écoulement d'air de lavage sur les plaques-ailettes.
13. Echangeur de chaleur selon la revendication 12, **caractérisé en ce que** les ailettes (152) ont une forme saillante essentiellement triangulaire.
14. Echangeur de chaleur selon la revendication 13, **caractérisé en ce qu'**au moins quelques-unes des ailettes (152) sont agencées selon des paires complémentaires.
15. Echangeur de chaleur selon l'une des revendications 1 à 3, **caractérisé en ce que** les portions centrales (34, 44) sont sensiblement planes et comportent une première pluralité de nervures parallèles, orientées en biais (40, 48) formées sur celles-ci, les nervures des première et seconde plaques dans chaque paires de plaques coopérant pour former au moins une portion du passage de fluide (62).
16. Echangeur de chaleur selon la revendication 15, **caractérisé en ce que** pour chaque paire de plaques (92) ayant une plaque-ailette, la paire de plaques présente des premier et second bords oblongs parallèles espacés (134, 136), le passage de fluide (62) se situant entre les premier et second bords espacés et s'étendant selon un angle relativement aux premier et second bords (134, 136), et les nervures (140) sur au moins une des première et seconde plaques sont orientées pour être sensiblement parallèles à une direction d'écoulement d'air (79) à travers l'échangeur de chaleur (10).
17. Echangeur de chaleur selon la revendication 1, **caractérisé en ce que** chacune des paires de plaques présente une plaque-ailette s'étendant périphériquement du passage de fluide (62), chaque plaque-ailette ayant des premier et second bords oblongs, parallèles espacés (134, 136), le passage de fluide (62) de la paire de plaques étant situé longitudinalement entre les premier et second bords espacés (134, 136) et s'étendant selon un angle relativement aux premier et second bords.
18. Echangeur de chaleur selon la revendication 17, **caractérisé en ce que** pour chaque paire de plaques, la portion de bord de la première plaque (30) comprend une paroi de localisation périphérique s'étendant latéralement (64) entourant une circonférence extérieure de la portion de bord (46) de la seconde plaque.

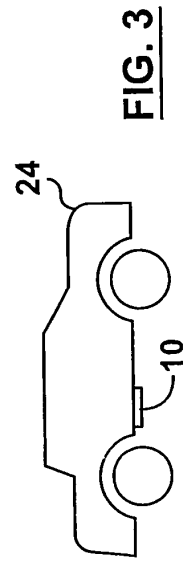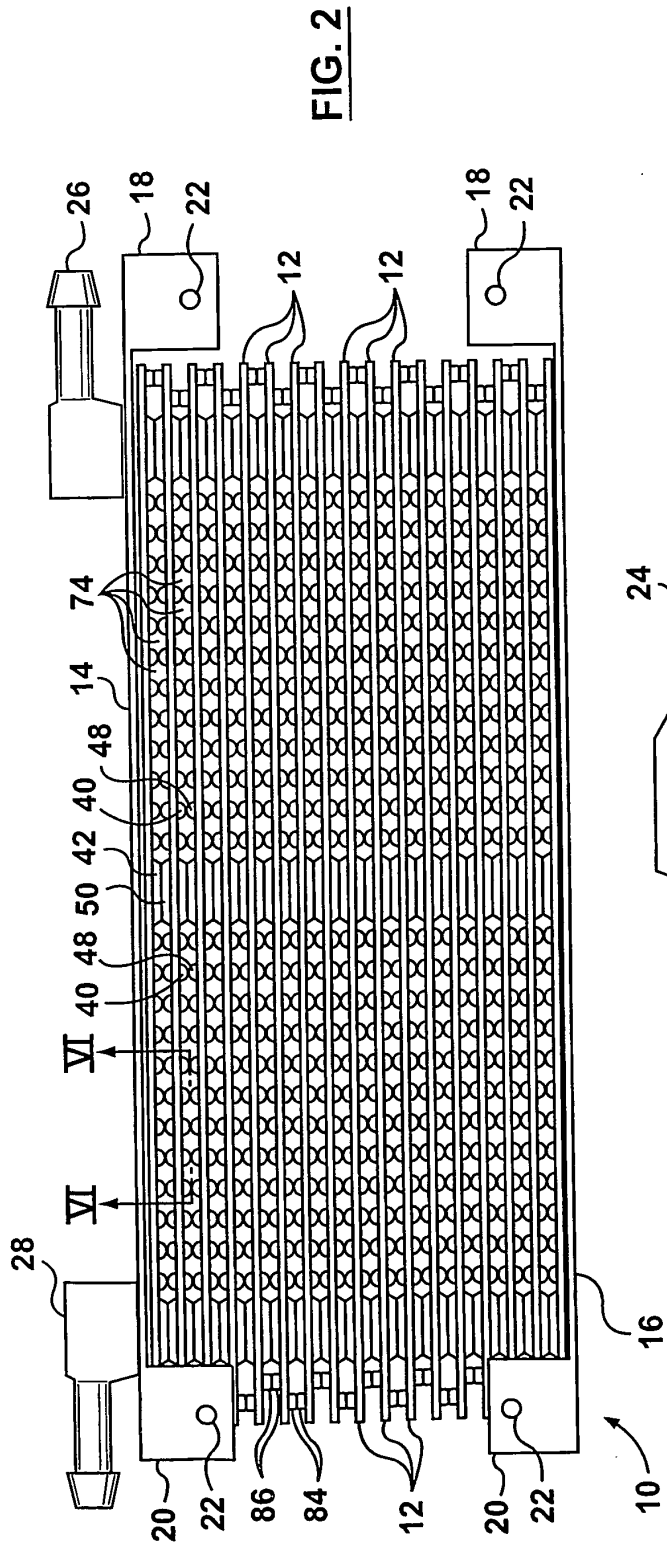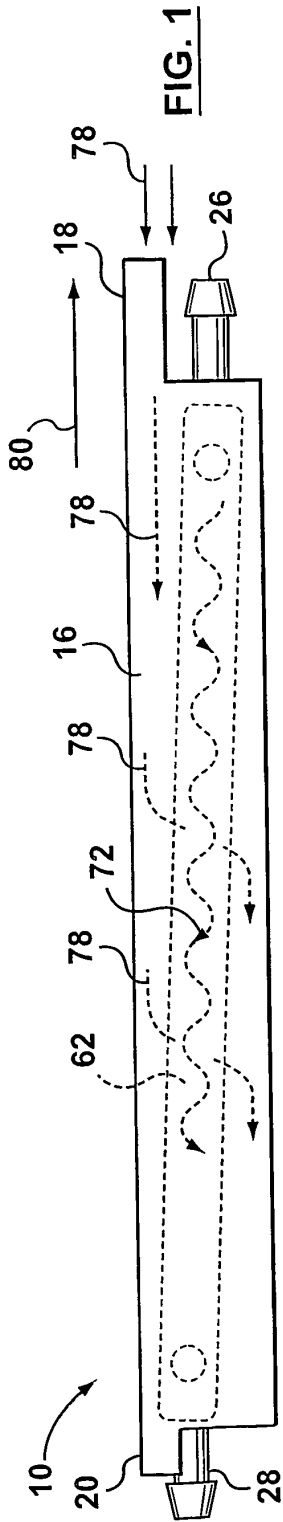

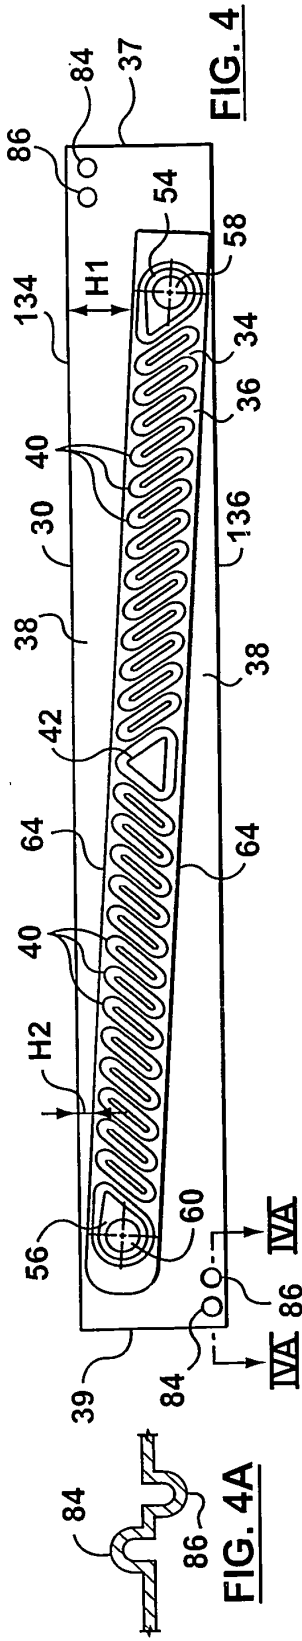


FIG. 4

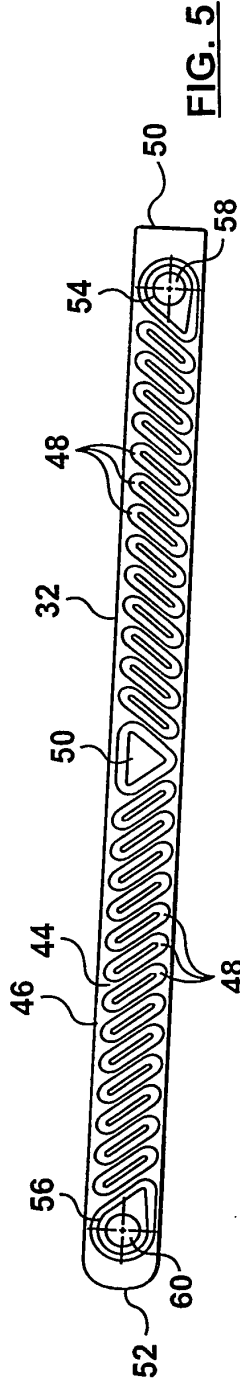


FIG. 5

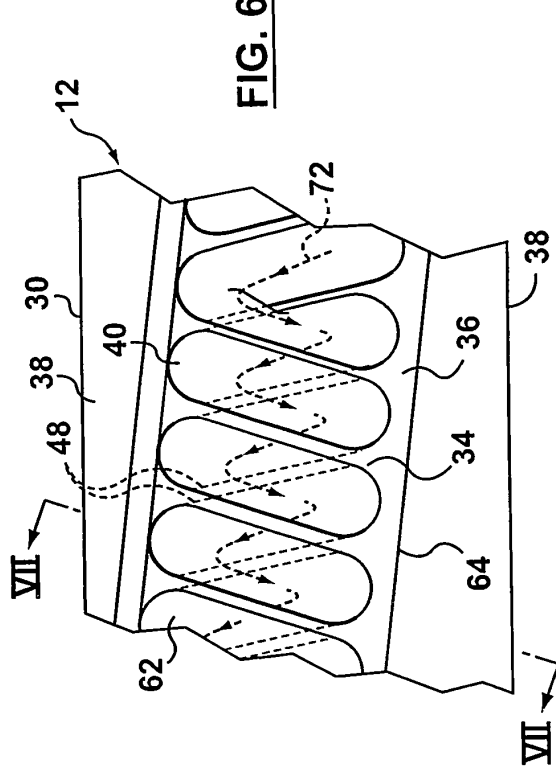


FIG. 6

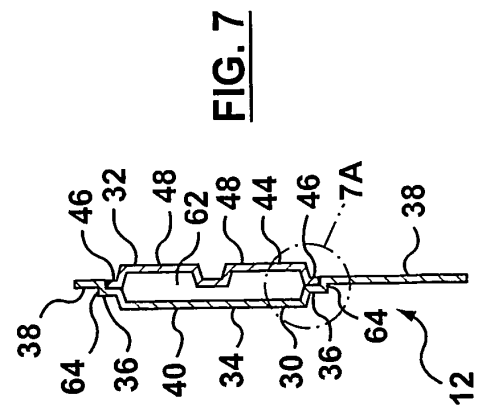



FIG. 7



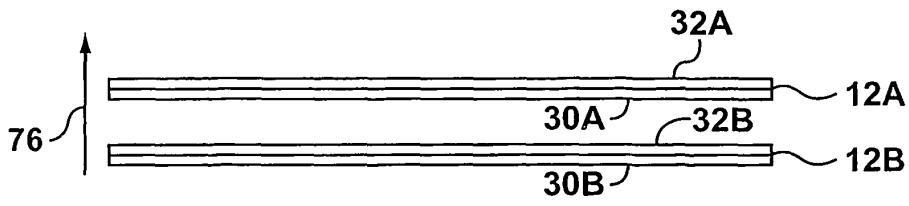


FIG. 8

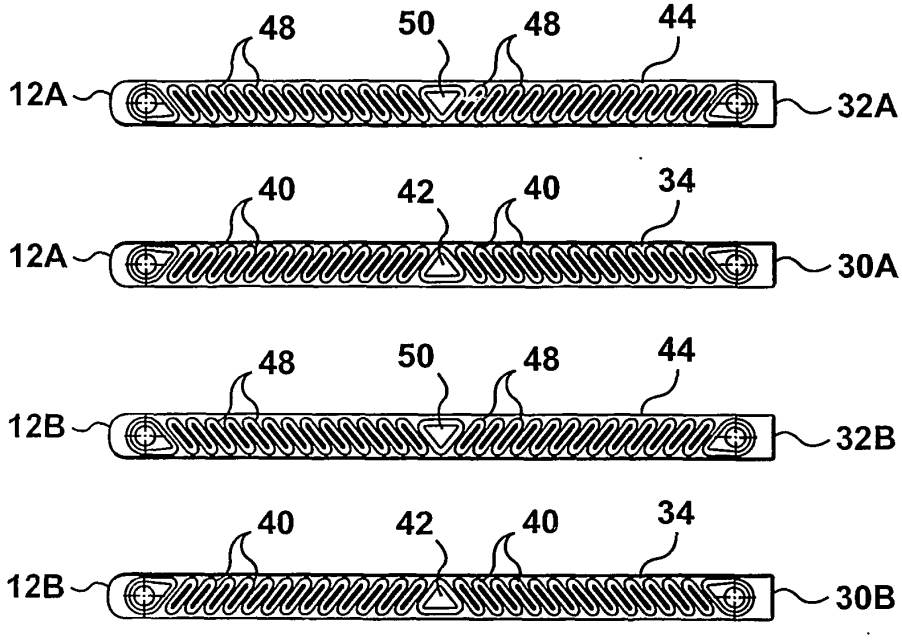


FIG. 9

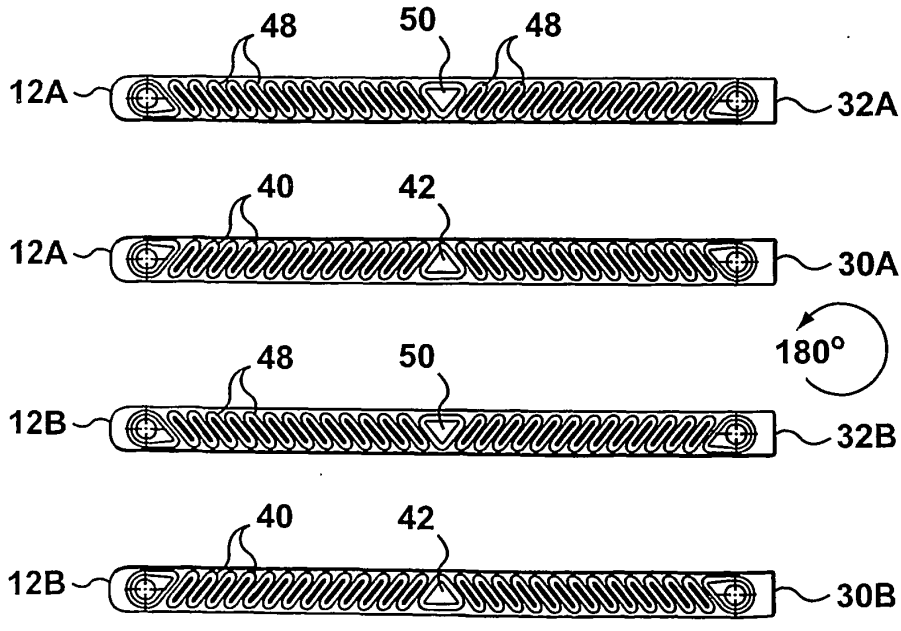


FIG. 10

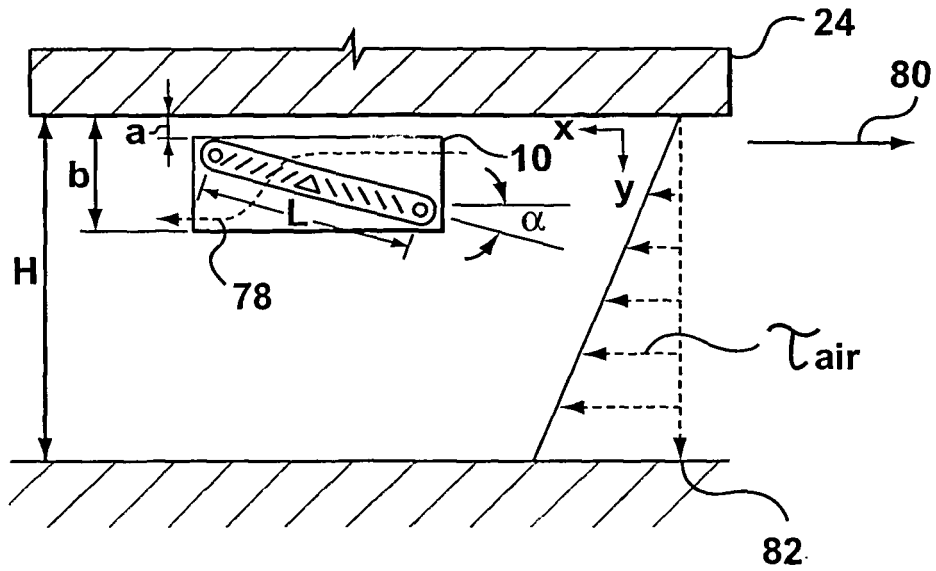


FIG. 11

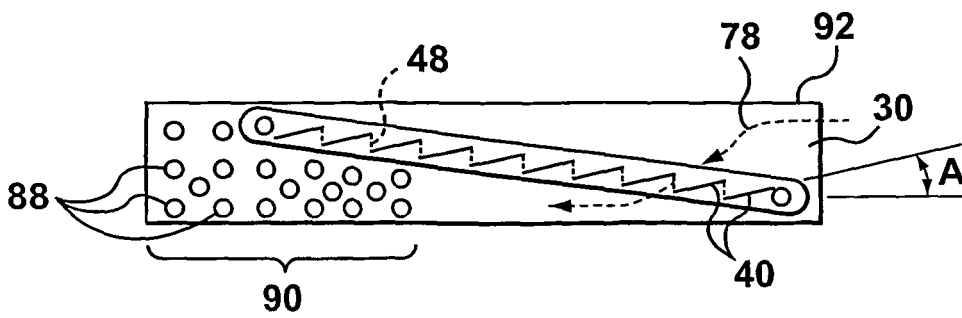


FIG. 12

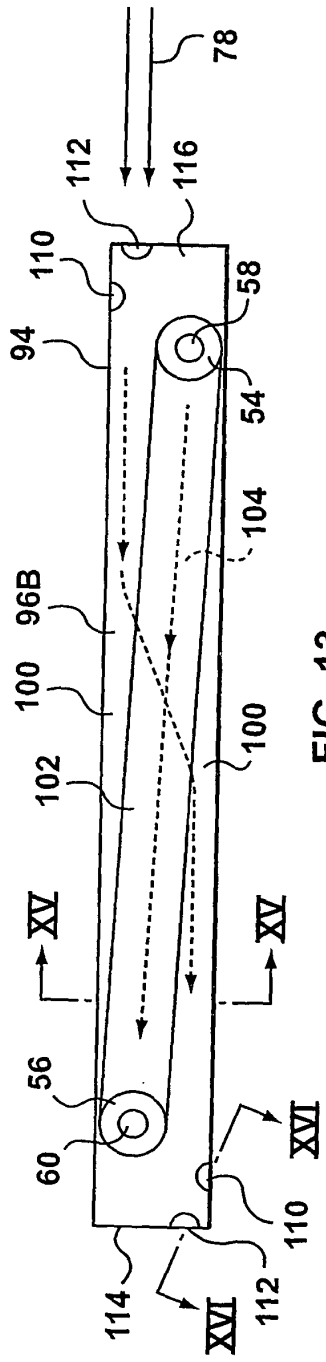


FIG. 13

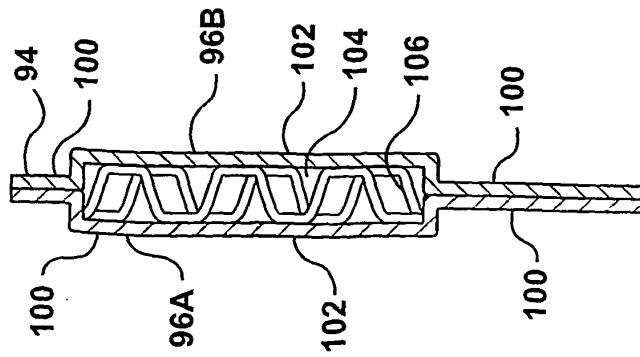


FIG. 15

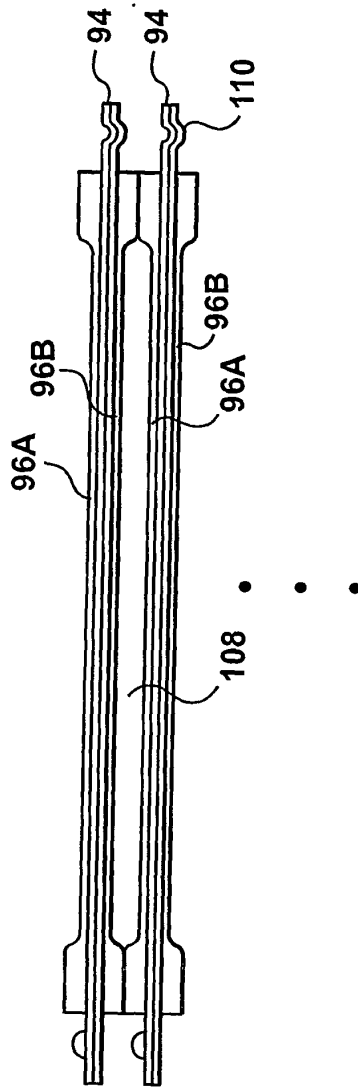


FIG. 14

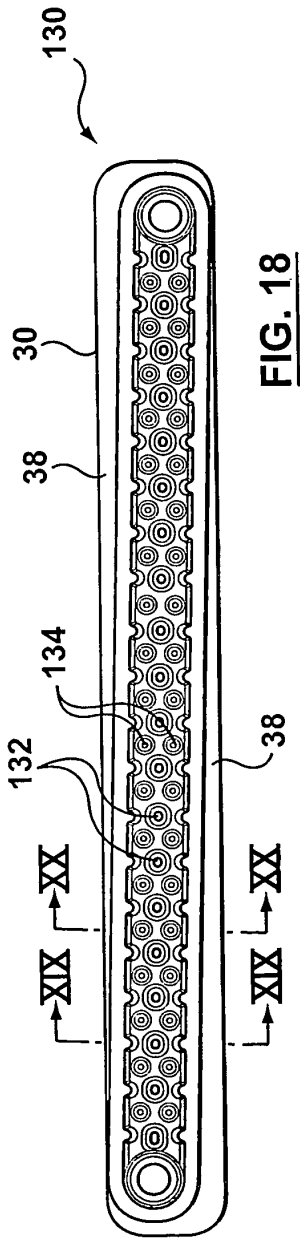


FIG. 18

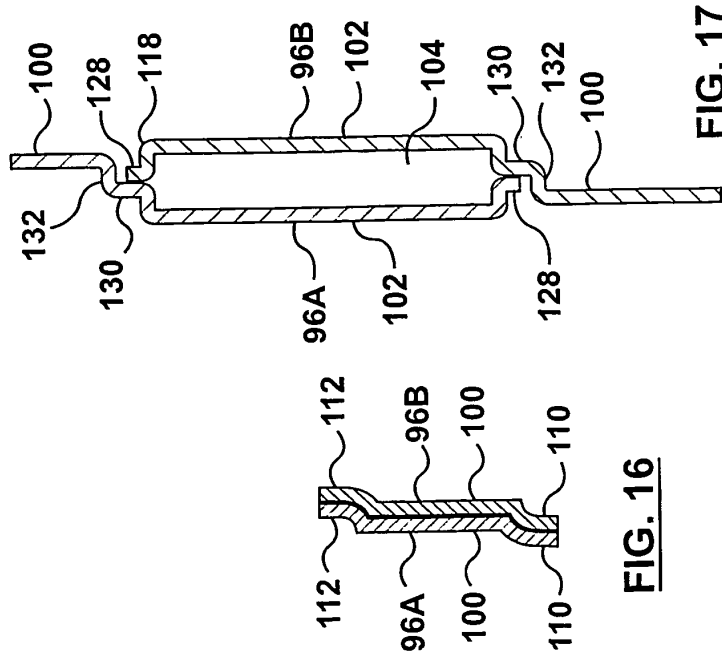


FIG. 16

FIG. 17

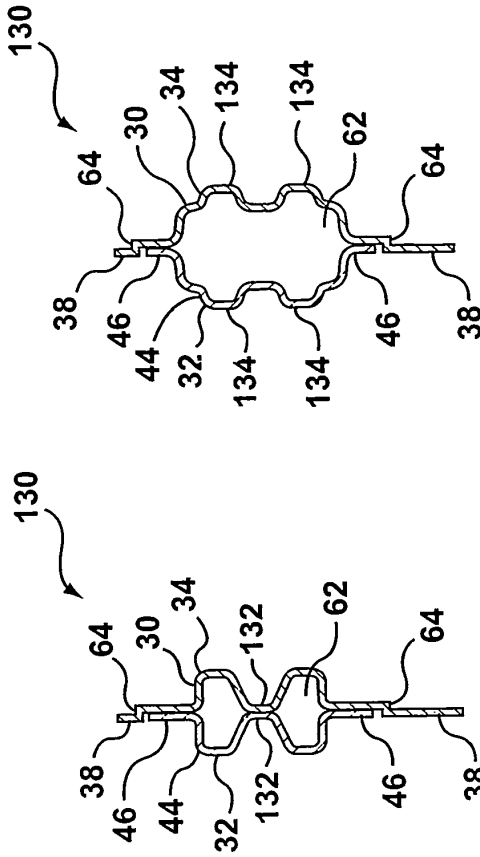
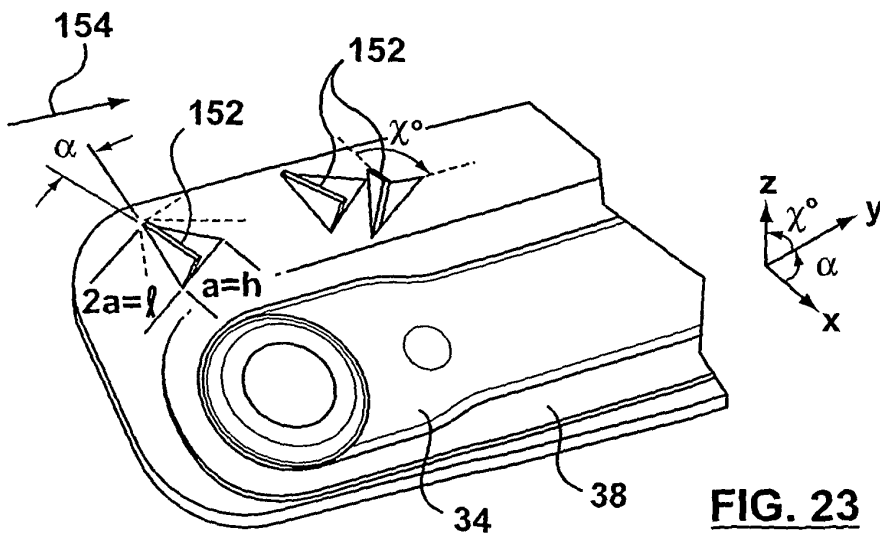
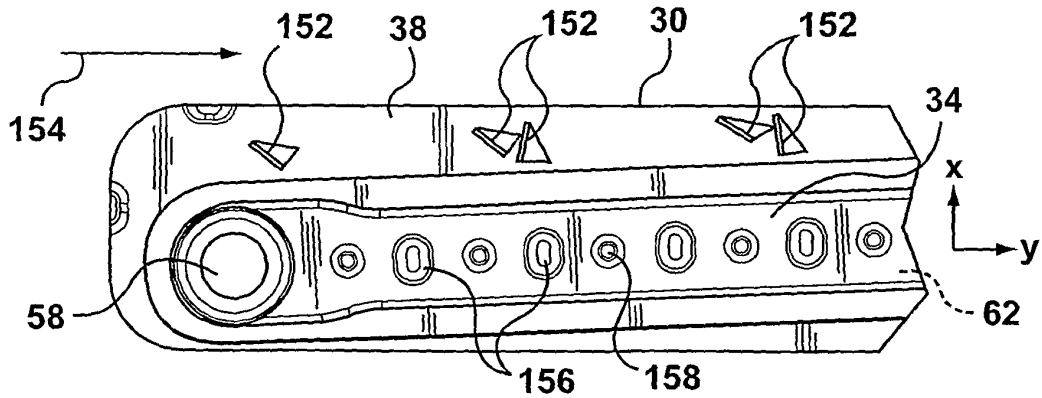
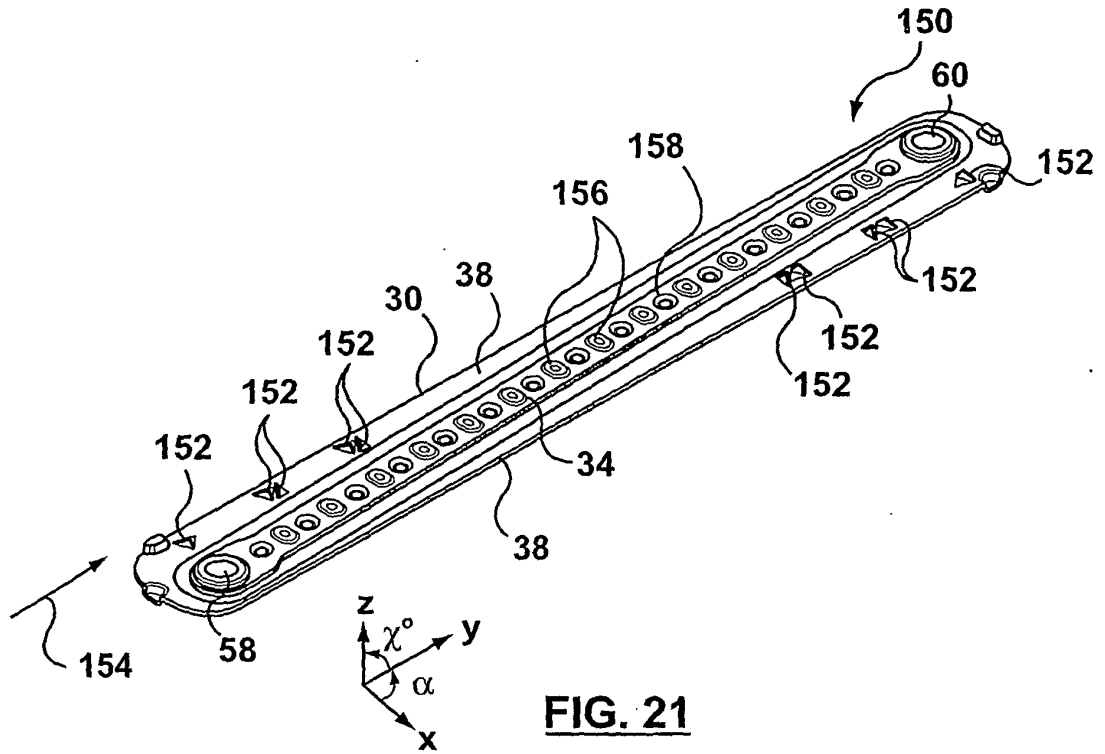


FIG. 19

FIG. 20



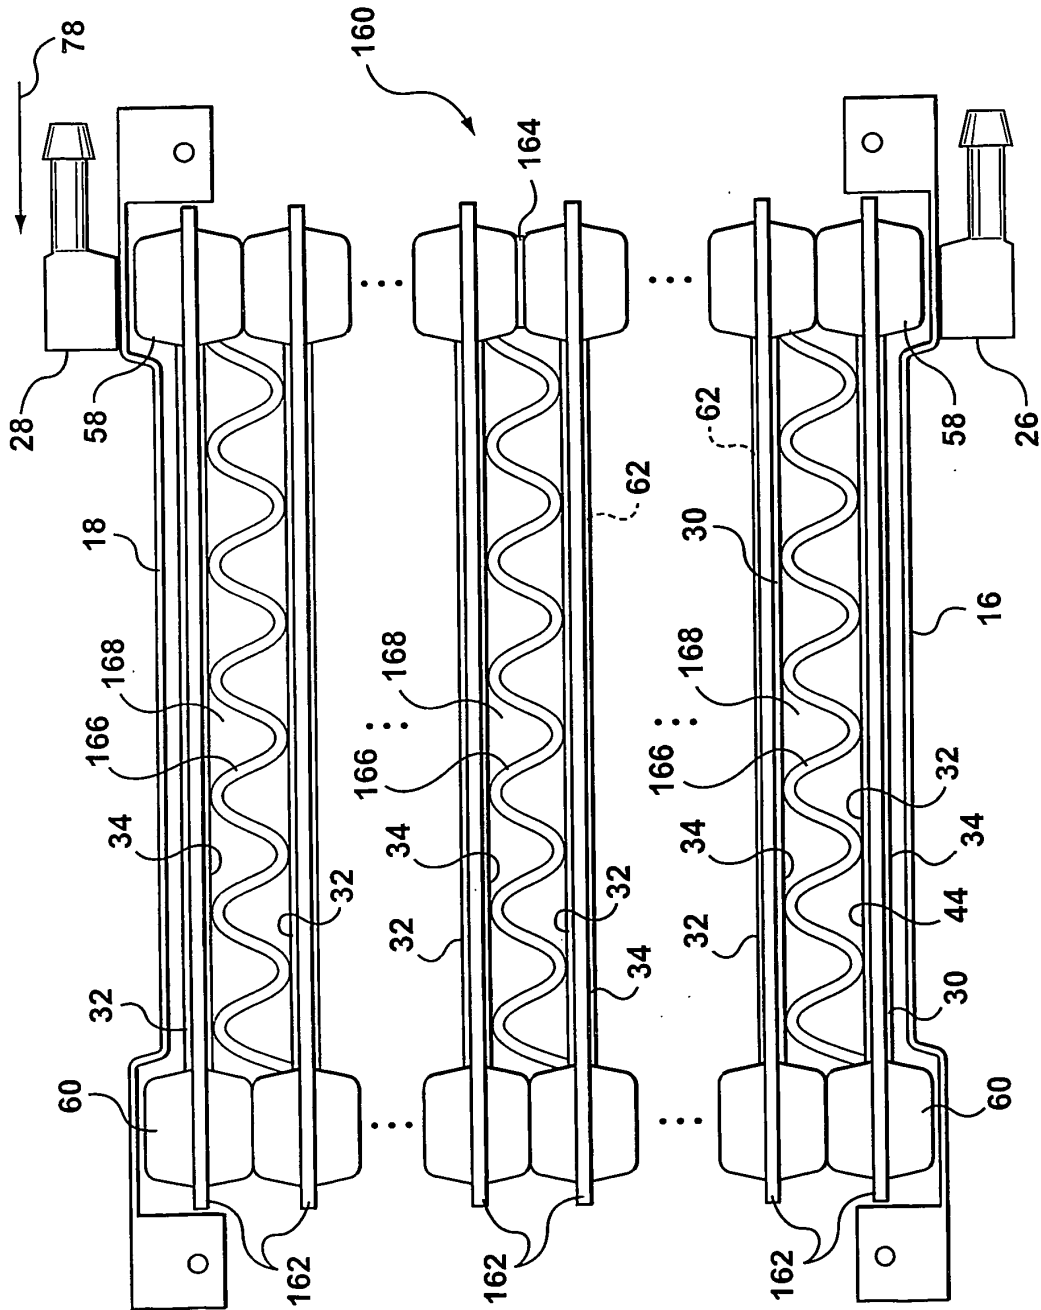


FIG. 24

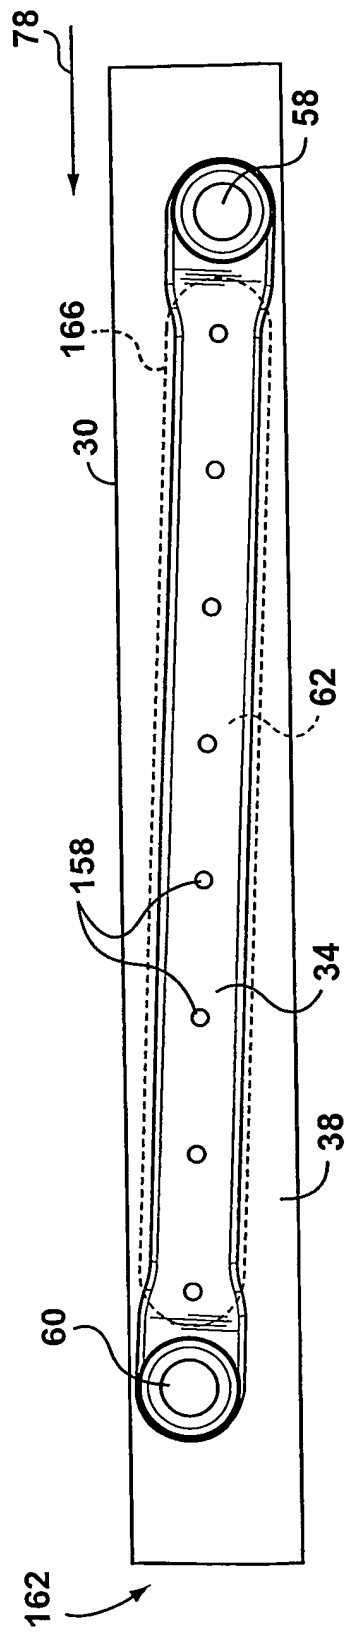


FIG. 25

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5692559 A [0005] [0019]
- EP 0384316 A [0005]