




(22) Date de dépôt/Filing Date: 2000/05/09
(41) Mise à la disp. pub./Open to Public Insp.: 2000/11/13
(45) Date de délivrance/Issue Date: 2008/06/17
(30) Priorité/Priority: 1999/05/13 (US09/311,349)

(51) Cl.Int./Int.Cl. *H01R 4/66* (2006.01),
H01R 12/16 (2006.01), *H05K 7/10* (2006.01)
(72) Inventeurs/Inventors:
BERTONCINI, DANIEL B., US;
STONER, STUART C., US;
DOUTRICH, RAY C., US
(73) Propriétaire/Owner:
FCI AMERICAS TECHNOLOGY, INC., US
(74) Agent: BKP GP

(54) Titre : COLLECTEUR BLINDE
(54) Title: SHIELDED HEADER

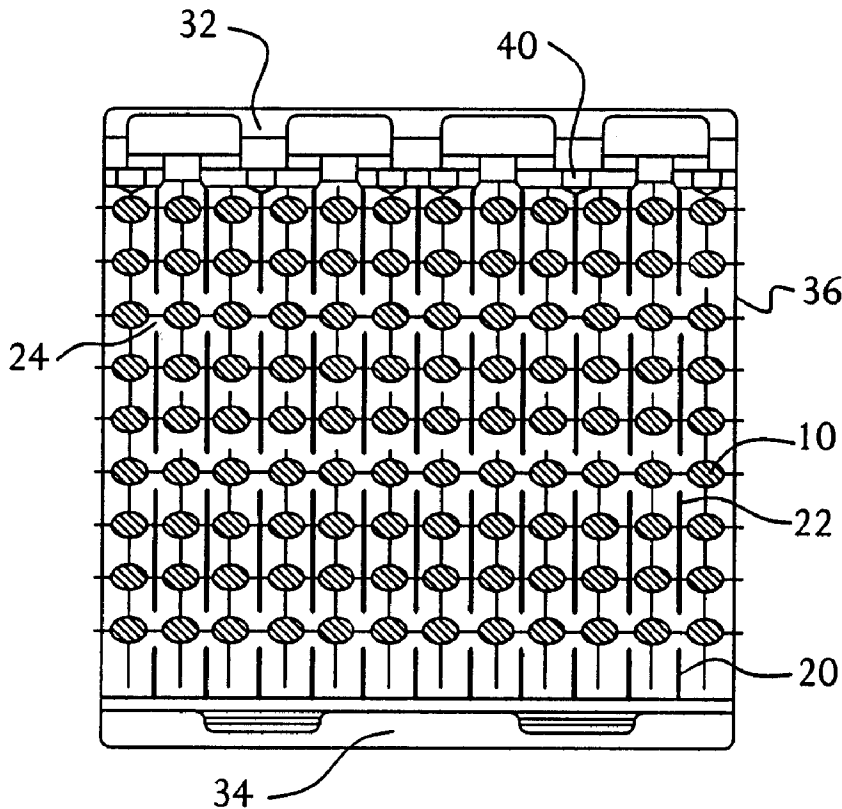

(57) Abrégé/Abstract:

A header for interconnecting electrical components comprises at least one column of conductors interposed between ground planes, wherein the column of conductors comprises at least a first, second and third conductor. The first conductor is a ground line, the second and third conductors are signal lines, and the first conductor is electrically connected to one of the ground planes, wherein the second conductor is positioned in the column in interposed relation between said first and third conductor.

ABSTRACT

A header for interconnecting electrical components comprises at least one column of conductors interposed between ground planes, wherein the column of conductors comprises at least a first, second and third conductor. The first
5 conductor is a ground line, the second and third conductors are signal lines, and the first conductor is electrically connected to one of the ground planes, wherein the second conductor is positioned in the column in interposed relation
10 between said first and third conductor.

SHIELDED HEADER**Field of the Invention**

The present invention relates to electrical connectors and, more particularly but not exclusively, to modular connectors for
5 connecting daughter printed wiring boards to mother printed wiring boards.

Background of the Invention

10 In the manufacture of computers and other electronic apparatus, daughter printed wiring boards (PWBs) are commonly connected to mother PWBs by means of modular electrical connectors, typically comprising a receptacle and a header. A daughter card (or PWB) electrically and mechanically connects to a receptacle, which in turn electrically and
15 mechanically connects to a mother card (or backplane).

Modular electrical connectors of the type mentioned above are used, for example, to connect a large number of signal wires to a PWB. Consequently, a connector is provided with a number of columns of contact holes with contact pins-disposed therein. An exemplary connector
20 is an 8 x 12 connector which has 12 columns of 8 contact holes with contact pins disposed therein.

As miniaturization becomes more prevalent, the number of signal wires to be connected to a connector increases, but the dimensions of the connector itself must not increase and preferably should even
25 decrease. This results in an increasing number of signal and ground connections in the limited space of the connector. In high-frequency applications, this results in the risk of cross talk in the signal connections.

Accordingly, to combat the risk of cross talk due to mutual EMI of
30 the signal connections, electrical connectors are equipped with shielding to attempt to shield each signal from EMI from neighboring and nearby signals. This shielding can be a conventional mechanical shield or an electrical shield in the form of a ground line. With today's electrical connectors, however, the current state of shielding still
35 leaves great risk for cross talk. It is, therefore, desirable to provide an electrical connector that has enhanced shielding capabilities, yet does not significantly reduce signal density.

Stripline configurations, i.e., arrangements in which conductors in parallel in a dielectric are interposed between ground planes, are known in the art. A need exists for a way to use such configurations to reduce cross.

5

Summary of the Invention

More specifically, according to the present invention, there is provided a header for interconnecting electrical components comprising at least one column of conductors interposed between ground planes, wherein the column of conductors comprises at least a first, second and third conductor, wherein the first conductor is a ground line, the second and third conductors are signal lines, the first conductor is electrically connected to one of the ground planes, and the second conductor is positioned in the column in interposed relation between the first and third conductors, wherein the column includes a fourth conductor and a fifth conductor which are signal lines and the fourth conductor is positioned adjacent the first conductor in opposed relation to the second conductor and the fifth conductor is positioned in outward adjacent relation to the fourth conductor.

The present invention also relates to a ground plane for providing at least one ground line throughout a header for interconnecting electrical components, the header having rows and columns of parallel lines. The ground plane comprises: at least one metal shield section for separating the lines; and at least one ground shield through which a ground line that carries a ground current passes, the at least one ground shield being substantially transverse to the lines and wherein the at least one ground shield engages the ground line.

The present invention is further concerned with a header for interconnecting electrical components, comprising: a plurality of rows and columns of signal lines, wherein at least one column comprises at least one ground line situated between two signal lines in the at least one column so that the at least one ground line is coplanar with the signal lines; and at least one ground plane for providing grounding throughout the header situated between adjacent columns of signal lines, wherein the at least one

ground plane engages the at least one ground line.

The present invention still further relates to header for interconnecting electrical components comprising at least one column of conductors interposed between ground planes, wherein the column of conductors comprises at least a first, second and third conductor, wherein the first conductor is a ground line, the second and third conductors are signal lines, the first conductor is electrically connected to one of the ground planes, and the second conductor is positioned in the column in interposed relation between the first and third conductors.

The foregoing and other objects, advantages and features of the present invention will become more apparent upon reading of the following non restrictive description of preferred embodiments thereof, given by way of example only with reference to the accompanying drawings.

Brief Description of the Drawings

In the appended drawings:

Figure 1 is a top view of a preferred embodiment of a header of the present invention.

Figure 2 is a schematic of a conventional column of eight signal lines from an 8 x 12 header.

Figure 3 is a schematic of a column of signal lines of the present invention for an 8 x 12 header.

Figure 4 is a cross-sectional side view of the header of Figure 1.

Figure 5 is an inverted rear view of the header of Figure 1.

Figures 6 and 7 are the two side isometric views of the ground plane of the present invention.

Detailed Description of the Preferred Embodiments

A header for connecting a receptacle to a mother printed wiring board (PWB) and having an improved shielding design is provided. A top view of a preferred embodiment of a header of the present invention is shown in Figure 1. This preferred header is an 8 x 12 header, having twelve columns of eight contact holes, in which are disposed contact pins, each of which can carry a signal. It will be understood that the

terminology 8 x 12 is used even though the drawings show 9 rows of contacts since only 8 rows of contacts on the header mate with contacts on the receptacle while one row of contacts on the header is grounded to a metallic shield on the receptacle. Alternatively, the 8 rows may be any number of rows of preferably at least 5 rows. Also, the 12 columns may alternatively be any number of columns which is a multiple 3.

A schematic of a conventional column of signal lines from an 8 x 12 header is shown in Figure 2. The conventional column of Figure 2 has signal lines 14, and a vertically-oriented shield 16 separating the columns of signals from each other. This conventional design provides limited protection against cross talk between signal connections.

A schematic of a column of signal lines of the present invention is shown in Figure 3. From ground line 12, there are two signal lines generally A and B (generally at 14), followed by a ground line C, two more signal lines D and E, followed by a ground line F, and then two more signal lines G and H. In addition, there are substantially, vertically-oriented metal shields 18 adjacent the signal lines 14 and substantially horizontally-oriented metal shields surrounding the ground lines 12, C and F. This new design provides enhanced protection against cross talk between signal connections. Preferably, these differential pairs of signal lines 14 are used with high speed signals and are offset 180 degrees. As is known in the art, when differential pair signals are offset by 180 degrees, noise in one signal tends to be cancelled by the noise in the other signal. A further explanation of differential pairs is found at pages 267-268 and 319-320 of "High-Speed Digital Design," by Howard W. Johnson et al. (Prentice Hall, 1993).

Still referring to Figure 3, parallel shield sections 22 and 42 are positioned to opposed sides of the ground and signal line conductors. A tab 21 is also used to contact the shield 22 to ground spring 40 which is also in contact with shield section 42. It will be appreciated that the ground shield sections 22 and 42 will affect the electromagnetic field around each signal line 14 so as to reduce cross talk between adjacent signal lines 14. It will also be seen that the ground lines as at lines 12, C, F and 28 are electrically connected to the shield 22 which will have the effect of further affecting the electromagnetic fields surrounding the

signal lines 14 so as to still further enhance cross talk reduction. The tab 44 further enhances grounding and cross talk reduction by allowing ground current from shield section 22 to be further distributed to ground spring 40 and thus
5 other shield sections such as shield section 42.

Figure 4 shows a cross-sectional side view of the header of Figure 1. Shown in Figure 4, there is a column comprised of a ground line 12, which mates with a grounding shield (not shown) on the receptacle, signal lines A, B, D, E, G and H
10 (generally at 14), and ground lines C and F, which mate with contacts on the receptacle. Figure 4 also shows the metal shield 20, which comprises shields sections 22 situated between the columns of signal contact pins 10 at the location of the signal lines 14. Slots 24 also are present between the
15 metal shield sections 22 where the ground lines 12, C and F are located. Figure 4 also shows the plastic housing 30, comprising the three walls 32, 34 and 36. Figure 5 shows an inverted rear view of the header of Figure 1.

The metal shield 20 of the present invention, referred to
20 as a ground plane 20, is shown in Figures 6 and 7 in the two side isometric views. Figures 6 and 7 depict the metal shield sections 22, the slots 24 between the shield sections 22, and ground shields 28, through which the signal contact pins 10 (or signal lines 10) that carry the ground lines 12, C and F
25 pass. Preferably, a ground plane 20 is one member. For example, the ground plane 20 alternatively may be described as a metal shield plate having slots 24 and ground shields 28 perpendicularly attached to the plate just above the location of the slots 24.

30 The metal shield sections 22 are substantially rectangularly-shaped and are substantially vertically-oriented. The ground shields 28 are substantially rectangularly-shaped and are substantially horizontally-oriented. Preferably, the ground shields 28 are oriented at
35 approximately 90 degrees to the metal shield sections 22. Each ground shield 28 has four rectangularly-shaped corner

tabs 29 that are bent (or curved) upward so that the ground planes 20 can be situated around the signal contact pins 10 without causing damage to the pins 10. Preferably, the ground shields 28 attach to the pins 10.

5 The header of the present invention is also equipped with springs 40 which are situated on housing wall 32, as depicted in Figures 1, 4 and 5. These springs 40 have a mechanical function and a grounding function. The springs 40 mechanically receive the connecting receptacle, to which the
10 daughter card connects. The springs 40 also provide an electrical link to the grounding signals 12 of each ground plane 20 by abutting each ground plane 20. As shown in Figure 6 and 7, each ground plane 20 has a connecting tab 21 which, by way of each tab's distal end 41, electrically connects each
15 ground plane 20 to the series of springs 40. In the embodiment of Figure 1, this 8 x 12 header preferably has 6 springs, as shown in Figures 1 and 5.

 The header design of the present invention reduces cross talk between signal lines 14 by providing a 2:1 signal line 14
20 to ground line 12, C and F ratio. The header of the present invention also has a conventional footprint that allows it to be used as a header for conventional connectors. The slotted design of the ground shields also allows for more plastic to be present than otherwise be present without the slots 24, as
25 depicted in Figure 1. This strengthens the existing electrical insulation provided by the plastic, thereby further reducing the risk of cross talk. It will also be appreciated that the header of the present invention, by making use of ground planes, allows for the use of fewer ground connections
30 to the printed circuit board. Because fewer pins need to be used for grounding, more pins can be used as signal pins, thereby allowing for more signal density.

 It is to be understood that even though numerous characteristics and advantages of the present invention have
35 been set forth in the foregoing description, together with details of the structure and function of the invention, the

BERG-2473/C2383

- 7 -

PATENT

disclosure is illustrative only. Accordingly, changes may be made in detail, especially in matters of shape, size and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

5

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A header for interconnecting electrical components
5 comprising at least one column of conductors interposed
between ground planes, wherein said column of conductors
comprises at least a first, second and third conductor,
wherein the first conductor is a ground line, the second and
third conductors are signal lines, the first conductor is
10 electrically connected to one of said ground planes, and the
second conductor is positioned in said column in interposed
relation between said first and third conductors, wherein
the column includes a fourth conductor and a fifth conductor
which are signal lines and said fourth conductor is
15 positioned adjacent the first conductor in opposed relation
to the second conductor and said fifth conductor is
positioned in outward adjacent relation to the fourth
conductor.

20 2. The header of claim 1, wherein the second and third
conductors are differential pairs, the fourth and fifth
conductors are differential pairs, the first conductor is
interposed between said differential pairs, and the first
conductor passes through a ground shield of one of said
25 ground planes.

3. A ground plane for providing at least one ground
line throughout a header for interconnecting electrical
components, the header having rows and columns of parallel
30 lines, the ground plane comprising:

at least one metal shield section for separating the
lines; and

at least one ground shield through which a ground line that carries a ground current passes, said at least one ground shield being substantially transverse to the lines and wherein the at least one ground shield engages said
5 ground line.

4. The ground plane of claim 3 comprising:
a plurality of metal shield sections;
a plurality of open slots situated between the shield
10 sections; and
a plurality of ground shields, the ground shields being situated substantially between the shield sections.

5. The ground plane of claim 4, wherein:
15 each shield section is substantially rectangularly-shaped; and
each ground shield is substantially rectangularly-shaped.

20 6. The ground plane of claim 4, further comprising a connecting tab extending from an end of the ground plane and having a distal end for electrically connecting the ground plane to a series of springs.

25 7. The ground plane of claim 4, wherein each ground shield has shield tabs that project upward so that ground planes can be situated around the ground lines without causing damage to the lines.

30 8. The ground plane of claim 7, wherein there are four tabs that are rectangular-shaped, each shield tab being situated at approximately each corner of the ground shield.

- 10 -

9. A header for interconnecting electrical components, the header comprising:

a plurality of rows and columns of signal lines, wherein at least one column comprises at least one ground line situated between two signal lines in the at least one column so that the at least one ground line is coplanar with the signal lines; and

at least one ground plane for providing grounding throughout the header situated between adjacent columns of signal lines, wherein the at least one ground plane engages the at least one ground line.

10. The header of claim 9, wherein there are at least two ground lines in the at least one column and there are two signal lines situated between the ground lines.

11. The header of claim 9 having a number of rows which is at least 5 and a number of columns which is a multiple of 3, the header having signal lines and ground lines, wherein in each column, is a repeating pattern of two signal lines followed by a ground line.

12. The header of claim 11, wherein the signal lines are parallel and the header comprises 12 ground planes for providing grounding throughout the header, each ground plane situated adjacent a column of signal lines and comprising:

metal shield sections for separating lines of adjacent columns, said metal shield sections being substantially coplanar with the signal lines; and
ground shields, through which each ground line passes, said ground shields being substantially transverse to the signal lines.

- 11 -

13. The header of claim 9, wherein the signal lines are parallel and the at least one ground plane comprises:

at least one metal shield section for separating lines of adjacent columns, said at least one metal shield section
5 being substantially coplanar with the signal lines; and

at least one ground shield, through which a ground line passes, said at least one ground shield being substantially transverse to the signal lines.

10 14. The header of claim 13 further comprising at least one housing wall, in which is situated at least one spring for mechanically connecting the header to an electrical connector and for providing an electrical link to the at least one ground line of each ground plane whereby the at
15 least one spring abuts the at least one ground plane.

15. The header of claim 14, wherein the at least one ground plane further comprises a connecting tab having a distal end so that the at least one spring abuts the distal
20 end of the connecting tab.

16. A header for interconnecting electrical components comprising at least one column of conductors interposed between ground planes, wherein said column of conductors
25 comprises at least a first, second and third conductor, wherein the first conductor is a ground line, the second and third conductors are signal lines, the first conductor is electrically connected to one of said ground planes, and the second conductor is positioned in said column in interposed
30 relation between said first and third conductors.

17. The header of claim 16, wherein the conductors are situated in parallel.

18. The header of claim 16, wherein the conductors are in a dielectric.

5 19. The header of claim 18, wherein the dielectric is plastic and air.

20. The header of claim 16, wherein the second and third conductors are a differential pair.

10

21. The header of claim 16, wherein the column includes fourth, fifth and sixth conductors arranged in ascending order after the third conductor and the fourth conductor is a ground line electrically connected to one of said ground
15 planes and the fifth and sixth conductors are signal lines.

22. The header of claim 21, wherein the fifth and sixth conductors are a differential pair.

+

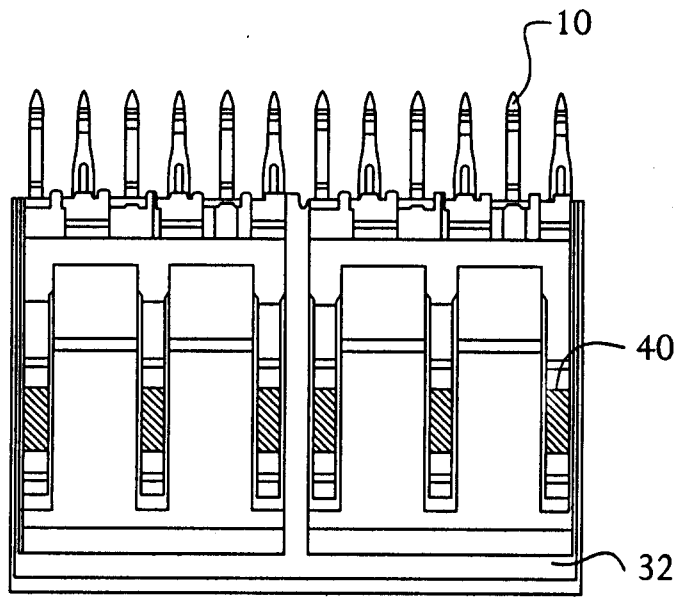


FIG. 5

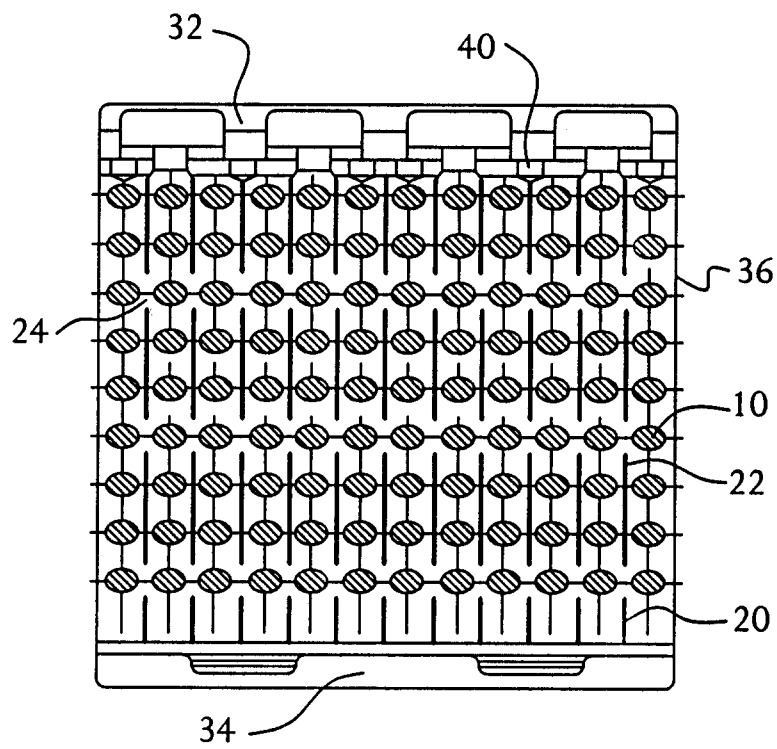


FIG. 1

+

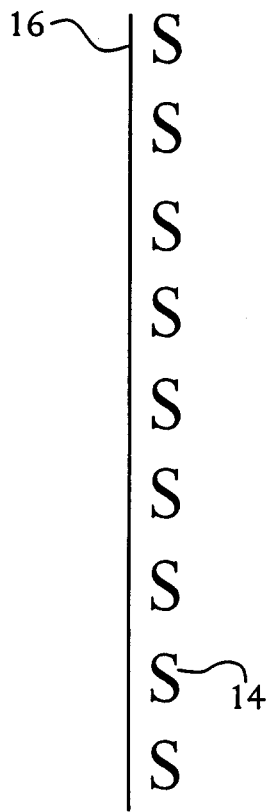


FIG. 2
(PRIOR ART)

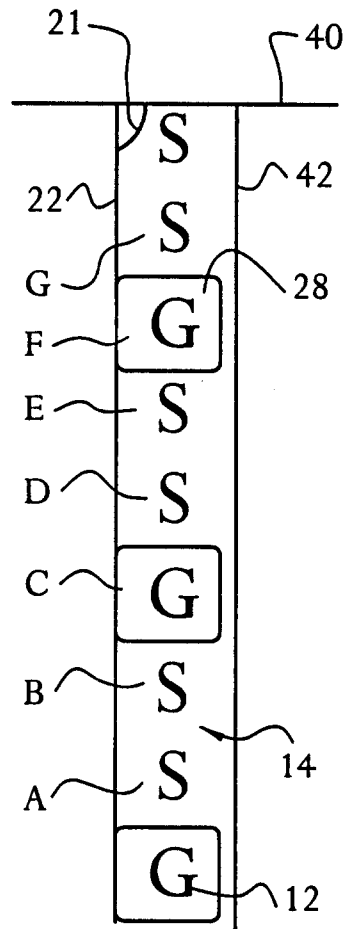


FIG. 3

+

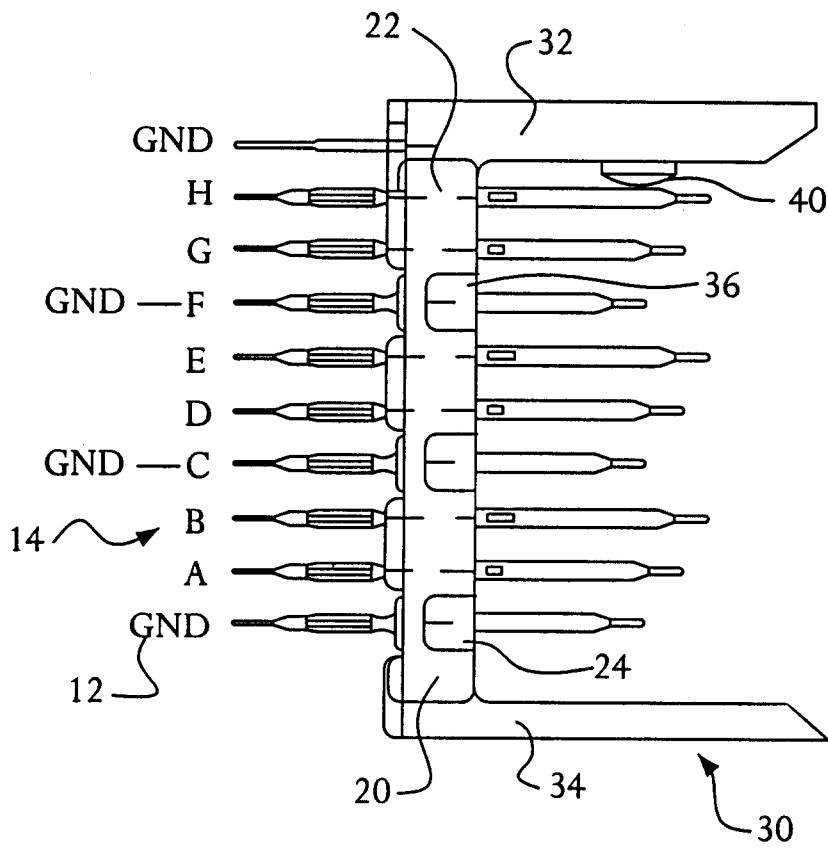


FIG. 4

+

+

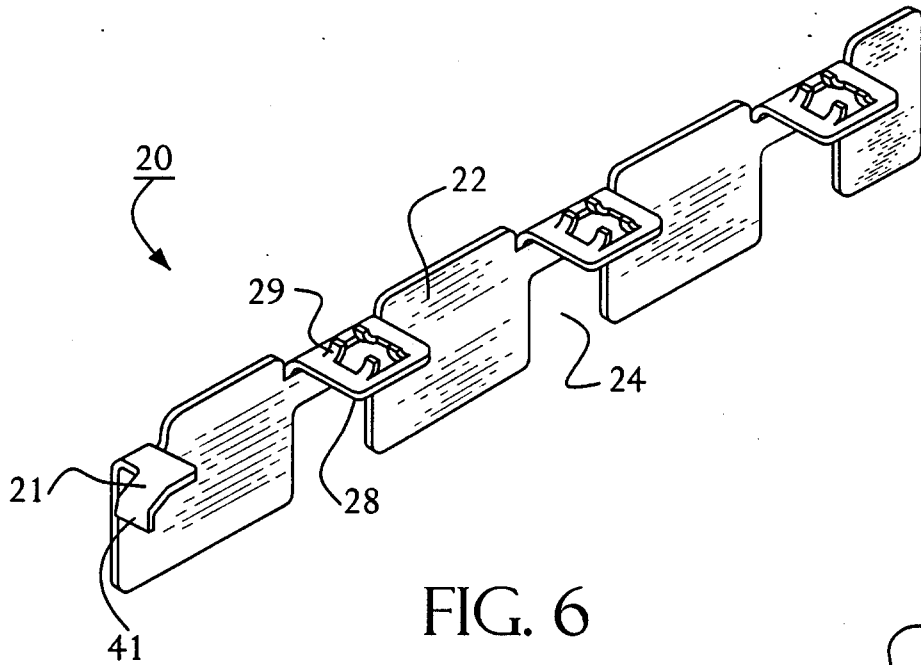


FIG. 6

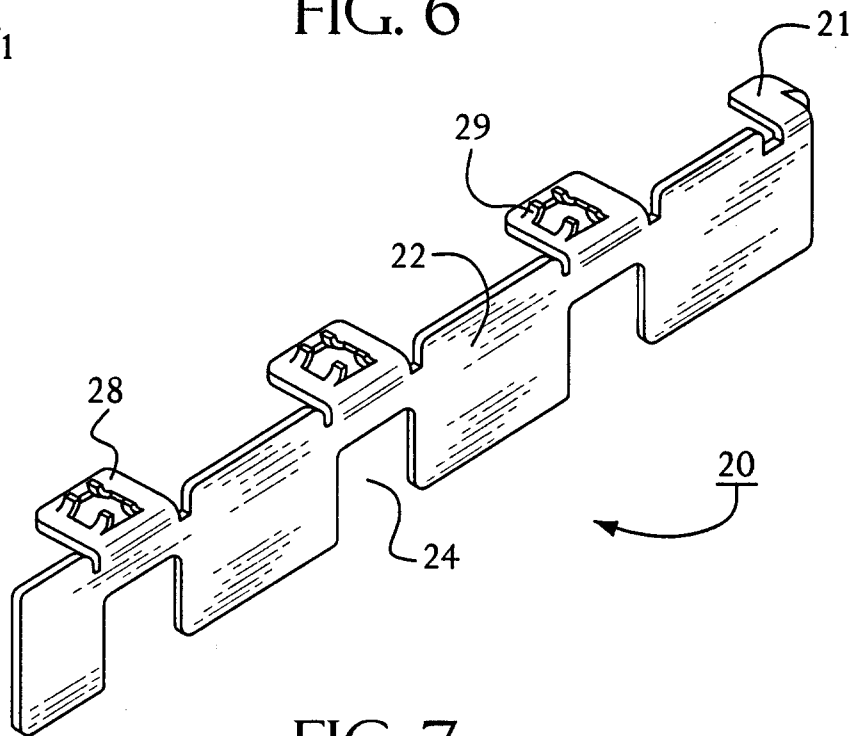


FIG. 7

+

