

(12) **UK Patent Application** (19) **GB** (11) **2 285 015** (13) **A**

(43) Date of A Publication 28.06.1995

(21) Application No **9419920.5**

(22) Date of Filing **04.10.1994**

(30) Priority Data

(31) **05294107** (32) **29.10.1993** (33) **JP**
05294108 **29.10.1993**
05294109 **29.10.1993**

(71) Applicant(s)

Seiko Epson Corporation

(Incorporated in Japan)

4-1 Nishi-shinjuku 2-chome, Shinjuku-ku, Tokyo,
Japan

(72) Inventor(s)

Hiroshi Ishida
Shigeki Mizuno
Kenjiro Murakami
Toshikazu Kotaka
Tatsumi Tsuboki
Motoyuki Niimura

(51) INT CL⁶

B41J 29/10 // B41J 13/03 13/10 29/02

(52) UK CL (Edition N)

B6F FKD FKV FMD

(56) Documents Cited

GB 2213106 A EP 0454412 A US 5244295 A
US 4943173 A

(58) Field of Search

UK CL (Edition N) B6F FMD

INT CL⁶ B41J 29/10

ONLINE DATABASES:EDOC,WPI

(72) cont

Norio Horaguchi

Yoshiaki Nakayama

(74) Agent and/or Address for Service

J Miller & Co


34 Bedford Row, Holborn, LONDON, WC1R 4JH,
United Kingdom

(54) **Selective printer.**

(57) Noise from a selective print head 17 is reduced by so arranging an edge 18a of the paper exit slot of the machine housing (with respect to both the paper discharge rollers 31, 32 and an external paper tray 19) that the paper bears against said edge, thereby utilizing the paper itself to acoustically isolate the print head from the exterior of the casing.

To ensure satisfactory transport of the paper while preventing "set-off" of ink from the printed paper, the drive roller (31) of said pair of discharge rollers (31, 32) is made of high friction material (rubber) and the idler roller (32) of the pair is made of ink resistant material (synthetic resin), and the leading end of a sheet (P) is guided so as to be abutted against the drive roller (31) earlier than the driven roller (32).

The upper discharge roller 31 is resiliently mounted to an openable part of the machine housing, and the lower roller 32 is mounted on a resiliently pivotable carrier 34 which is biased to engage a drive wheel 33 against the platen.

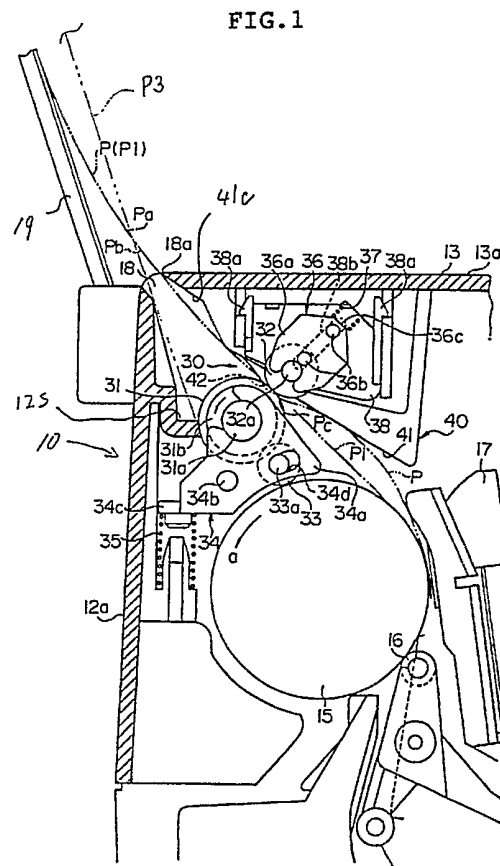

GB 2 285 015 A

FIG. 1

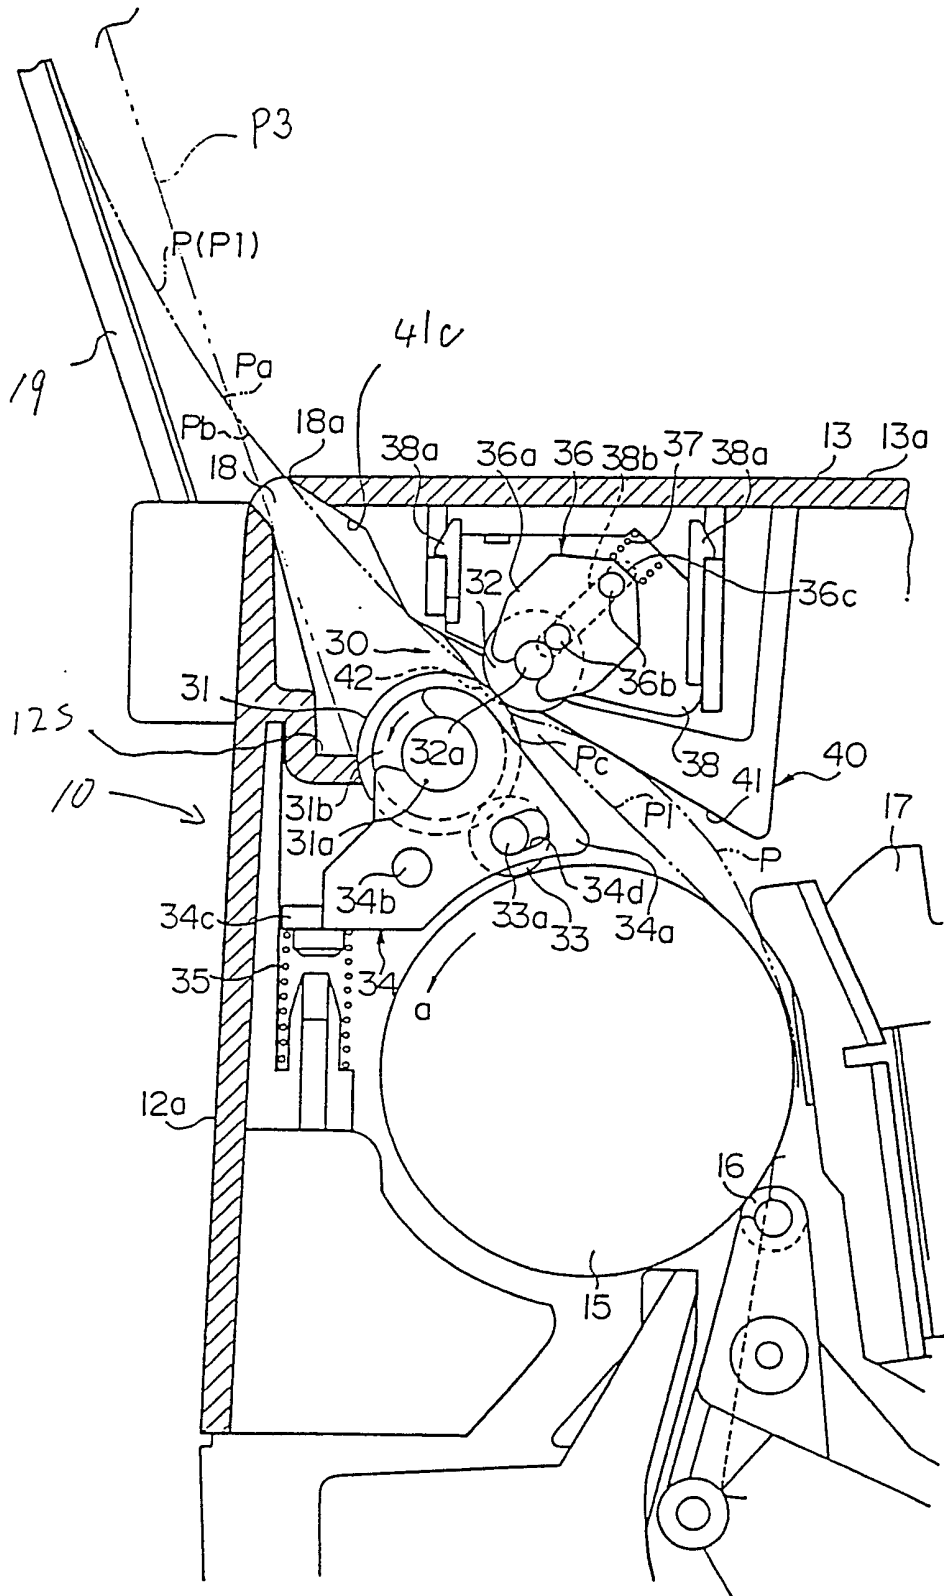


FIG. 2

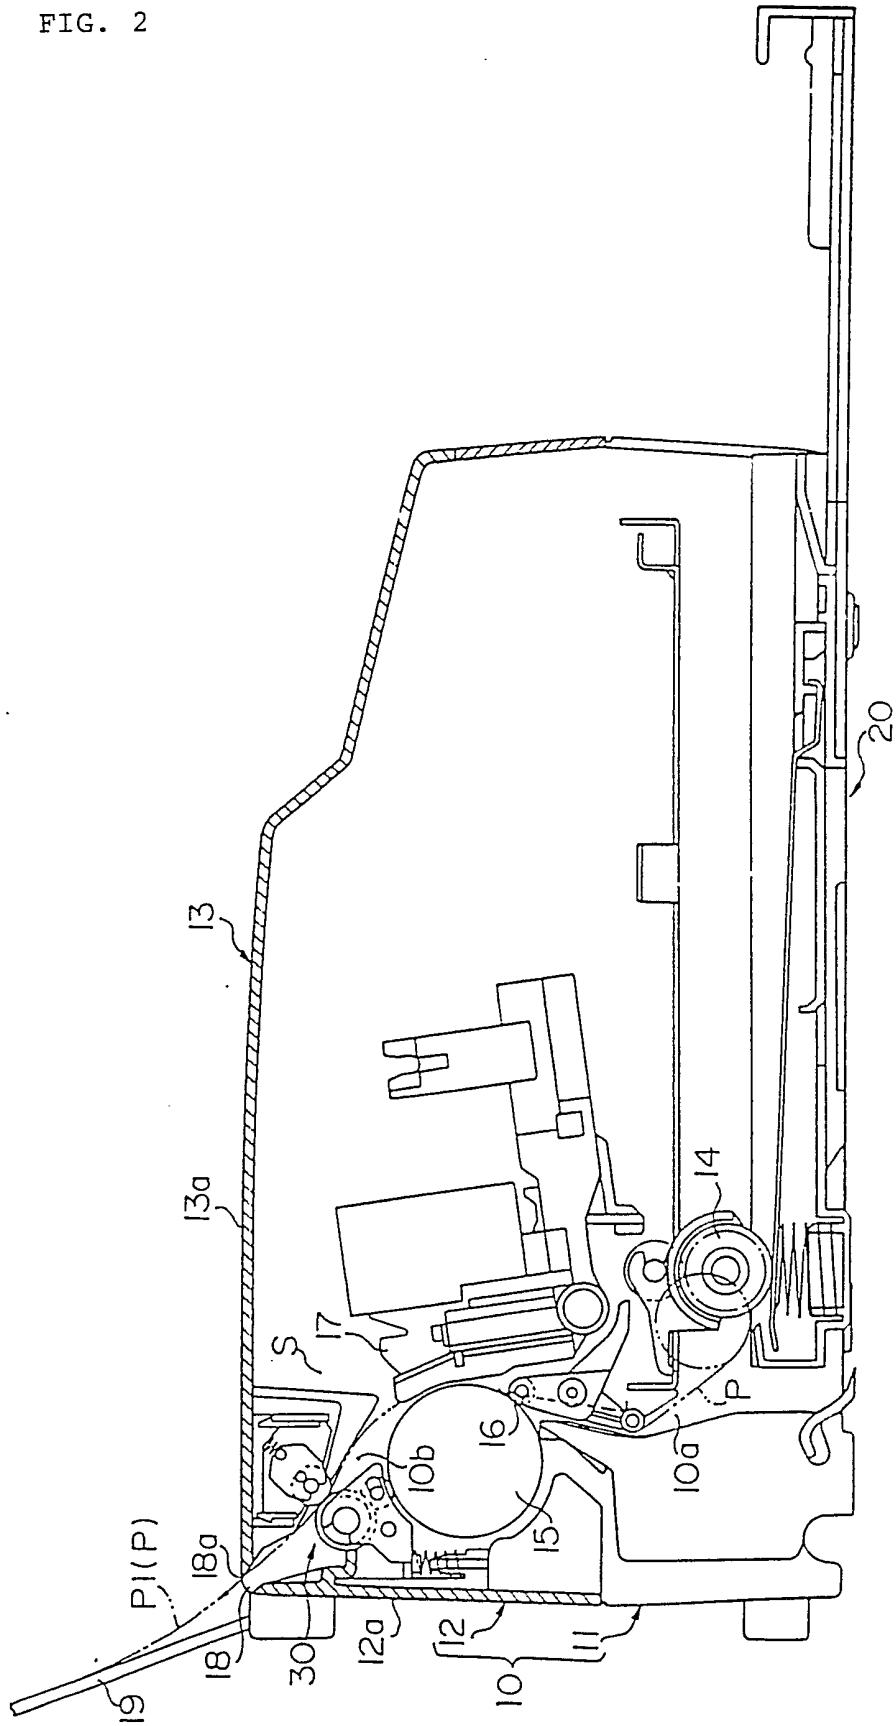
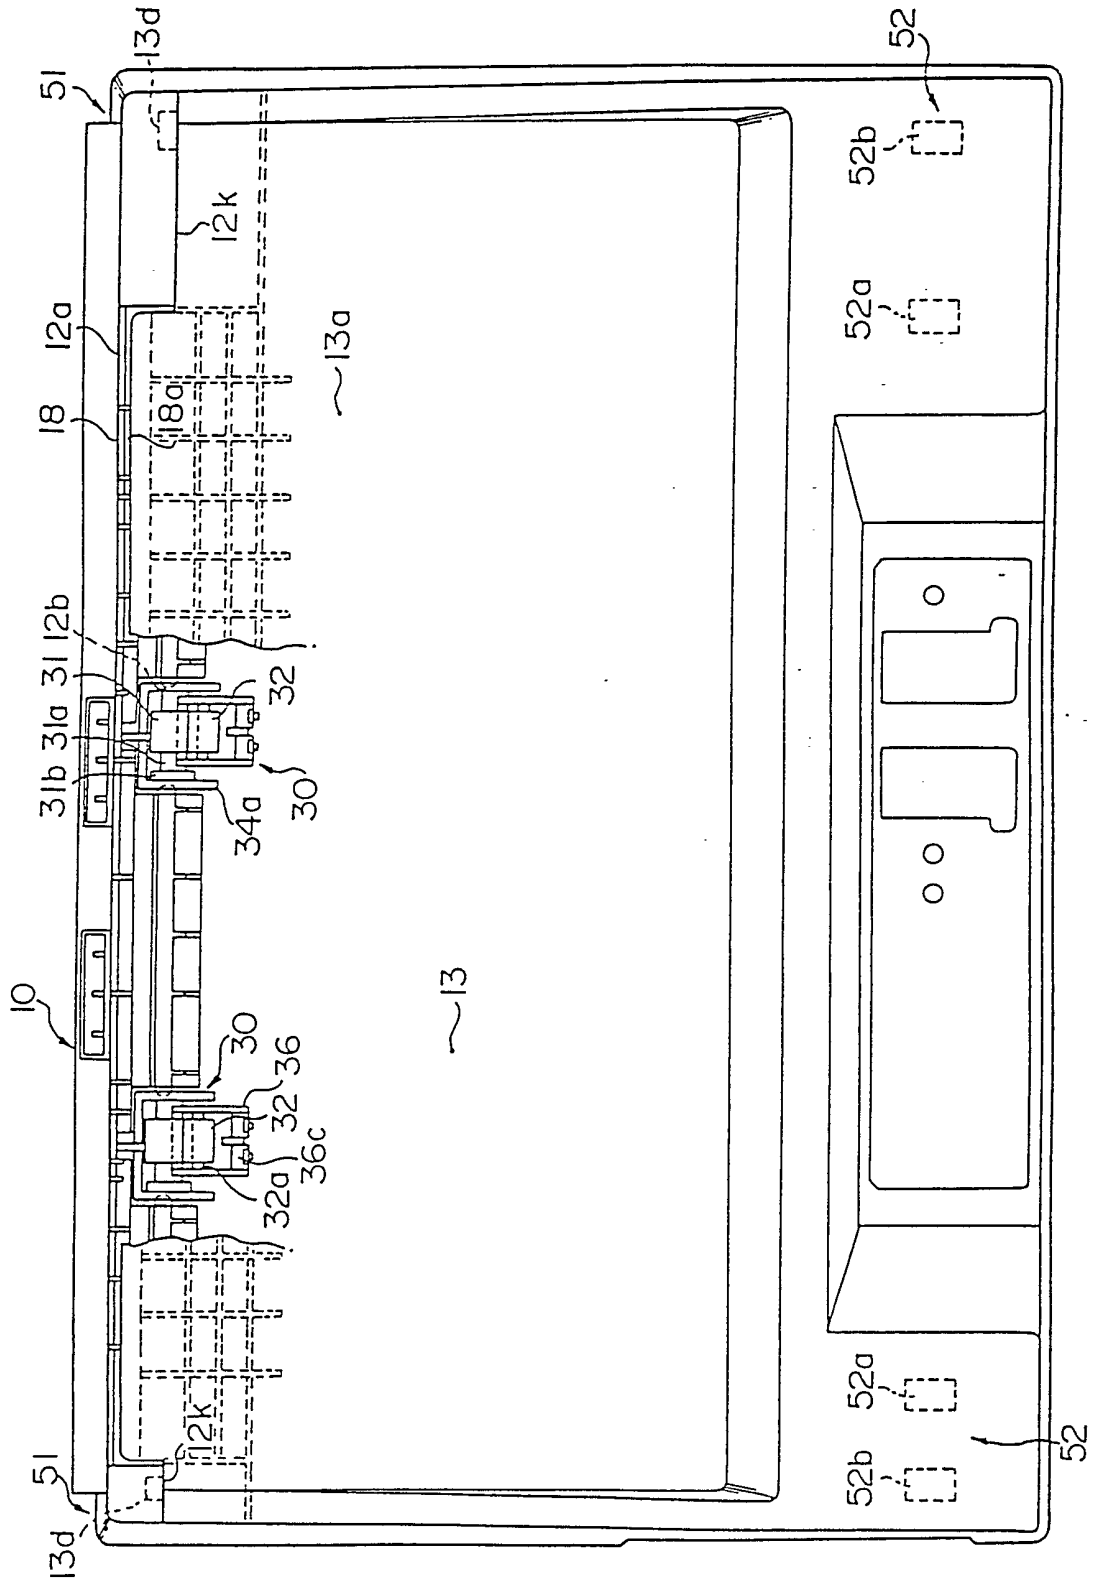


FIG. 3






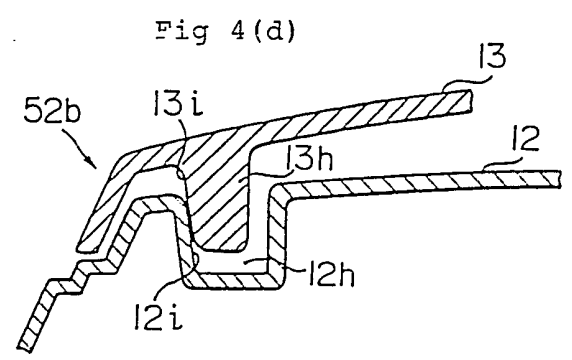


FIG. 5

PRIOR ART

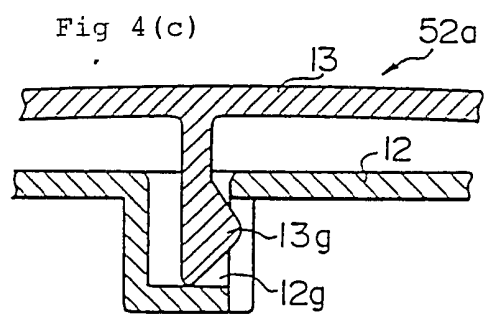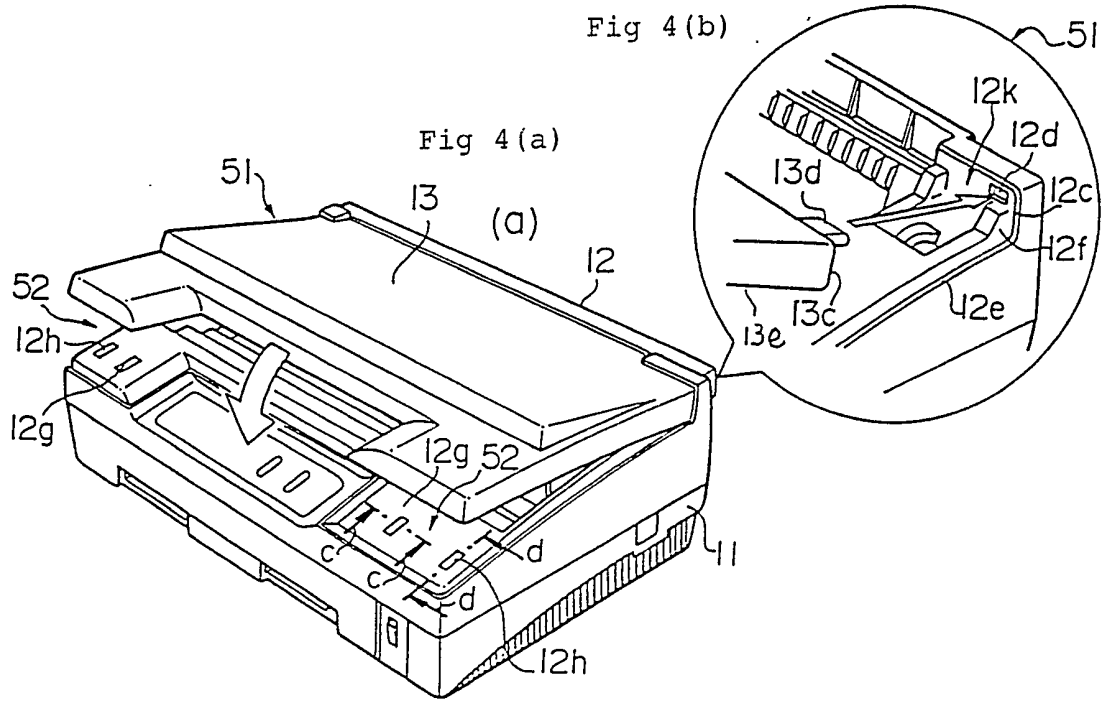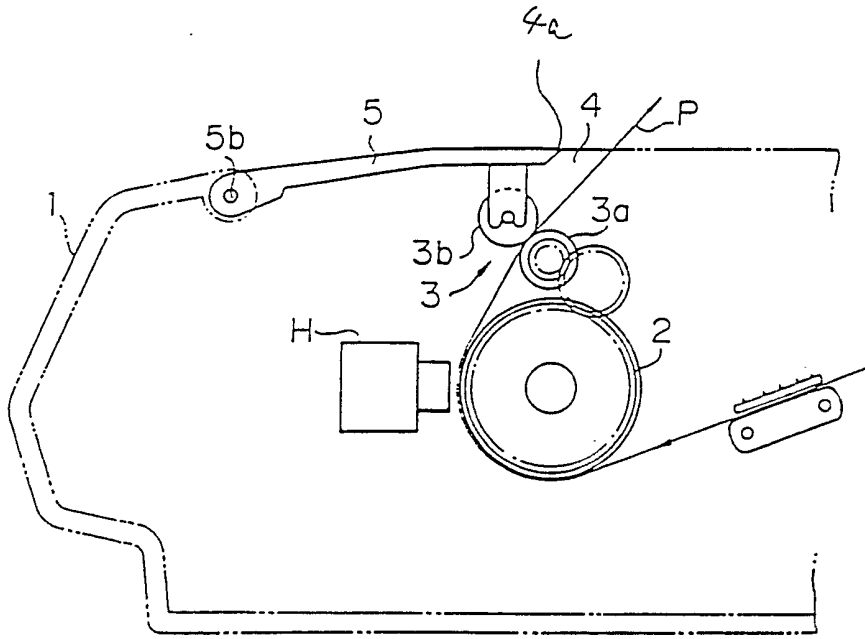

PRINTER

The invention pertains to printers. More particularly, the invention is directed to a printer that can not only provide satisfactory printing conditions as quickly as possible but also reduce noise by improving the sheet discharge structure. The invention is further directed to a printer that can provide stable sheet discharge operation with a simple structure for a type of printer in which one of a pair of sheet discharge rollers is mounted on the printer cover.

Figure 5 is a schematic side view showing a printer disclosed as related art in Japanese Unexamined Patent
15 Publication No. 3-53961.

In Figure 5 reference numeral 1 denotes a case of a printer. Within the case 1 are a platen 2 with a sheet P wrapped therearound, a print head H disposed so as to confront the platen 2, and a pair of sheet discharge rollers 3 that discharges the sheet P printed by the print head H.

The pair of sheet discharge rollers 3 include: a drive roller 3a, which is a first sheet discharge roller; and a driven roller 3b, which is a second sheet discharge roller.

The drive roller 3a is mounted on the case main body 1. The driven roller 3b is mounted on a cover 5.

The drive roller 3a receives motive power from the platen 2 and is driven at an increased circumferential speed with respect to the circumferential speed of the platen 2. The driven roller 3b rotates while abutted against the drive roller 3a.

The case 1 has a sheet discharge opening 4. The cover 5 is fixed so as to be turned around a shaft 5b.

According to the thus constructed printer, the sheet P wrapped around the platen 2 and printed by the print head H is forwarded by the pair of sheet discharge rollers 3 and discharged outside the case 1 from the sheet discharge opening 4.

Since the sheet discharge roller 3b, which is one of the pair of sheet discharge rollers 3, is mounted on the cover 5 that can be opened and closed, when the sheet P is jammed at the sheet discharge roller section, the jammed sheet can be removed with ease by opening the cover 5.

However, the above-mentioned printer addresses at least the following three problems.

Problem 1

In the above-mentioned printer generally the printing sound produced by the print head H is the major source of noise. Particularly, if the print head is of a wire dot type, the sound of the wire ends impacting the sheet aggravates the noise. On the platen 2 side, such noise is absorbed by the

platen 2 itself, so the problem of this noise exists mainly on the print head H side.

In addition to the noise directly produced by the print head H, a noise caused by vibrations of the sheet itself that is vibrated by the print head H must also be taken care of.

In the above-mentioned conventional printer, there is a gap between the sheet P that is in the course of being discharged and an edge portion 4a on the print head H side of the sheet discharge opening 4. A noise leaking from this gap has been the problem.

To overcome this problem, printers have been disclosed in USP4943173, and Japanese Unexamined Patent Publications Nos. 1-97674 and 60-17186. These printers are characterized as arranging a sound absorbing material at the sheet discharge opening and thereby causing a sheet to be abutted against the sound absorbing material.

However, such structure characterizing these printers requires additional sound absorbing members arranged at the sheet discharge opening of the printer case, which not only increases the number of parts but also makes the sheet discharge opening structure complicated.

On the other hand, a drawing in which a sheet is abutted against the edge portion of a case at the sheet discharge section is disclosed in Japanese Unexamined Patent Publication No. 2-14172.

However, this printer does not have a guide that allows the sheet to come in slidable contact with the edge portion of the case. As a result, it is not likely that the sheet will come in slidable contact with the edge portion of the case with a desired degree of certainty, thus not ensuring noise reduction.

Problem 2

To ensure satisfactory sheet discharge operation by the pair of sheet discharge rollers 3 in a printer such as shown in Figure 5, it is preferable that both the drive roller 3a and the driven roller 3b be made of a material whose friction coefficient with respect to paper is larger, e.g., of rubber.

However, if the driven roller 3b is made of rubber to which ink is easy to adhere, the ink on a print surface Pa of the sheet P adheres to the driven roller. Then, the ink on the driven roller is further transferred to the print surface Pa of the sheet P, thereby contaminating the print surface, which is a problem.

This problem can be overcome by making the driven roller 3b of a material to which ink is hard to adhere, e.g., of synthetic resin.

However, if the driven roller 3b is made of synthetic resin, the friction coefficient of the synthetic resin with respect to paper is smaller than that of rubber, which imposes another problem.

That is, when the leading end of the sheet printed by the print head H is guided so as to be abutted against the driven roller made of synthetic resin, it takes time for the leading end of the sheet to be guided to the drive roller 3a and nipped between the pair of sheet discharge rollers 3 so as to have a forwarding force imparted thereto because the friction coefficient of the surface of the driven roller with respect to the sheet is small.

The sheet P is not wrapped around the platen 2 in contact with the platen 2, but floats up from the platen 2 surface until the forwarding force is given upon the leading end of the sheet having been nipped between the pair of sheet discharge rollers 3. As a result, satisfactory printing conditions are not always ensured. Particularly, if the print head is of the wire dot type, vibrations of the sheet caused by the wire ends colliding with the sheet are increased, which in turn causes noise.

Problem 3

Since the second sheet discharge roller (driven roller) 3b is disposed at a position remote from the cover 5 fixing section 5b of the cover 5 in a printer such as shown in Figure 5, positioning accuracy of the second sheet discharge roller (driven roller) 3b to the first sheet discharge roller (drive roller) 3a is not satisfactory, thereby not ensuring stable sheet discharge operation, which is still another problem.

To overcome this problem, a structure characterized as arranging a member on the case main body side for positioning the shaft of the driven roller is disclosed in Japanese Unexamined Utility Model Publication No. 4-560.

However, this structure is problematical in that a positioning member other than the cover is required and this makes the structure complicated.

A first object of the invention is to provide a printer that can reduce noise by minimizing noise leaking from the sheet discharge opening with a small number of parts and a simple structure.

A second object of the invention is to provide a printer that can prepare satisfactory printing conditions as quickly as possible and reduce noise.

A third object of the invention is to provide a printer that can ensure stable sheet discharge operation with a simple structure.

A printer of the invention includes: a print head disposed within a case; a sheet discharge opening disposed in the case, for discharging a sheet printed by the print head; and a sheet discharge tray for guiding the sheet in the course _____

of being discharged from the sheet discharge opening to an edge portion located on the print head side of the sheet discharge opening so as to come in slidable contact with the edge portion and supporting the sheet discharged from the sheet discharge opening. The sheet discharge opening is preferably arranged at an intersection between an upper surface and a back surface of the case.

Further, a printer of the invention includes: a platen for wrapping a sheet therearound; a print head disposed so as to confront the platen; a pair of sheet discharge rollers for discharging a sheet printed by the print head, one of the pair of sheet discharge rollers being made of a material whose friction coefficient with respect to the sheet is large and being disposed on a nonprinting side of the sheet, the other of the pair of sheet discharge rollers being made of a material to which an ink is hard to adhere and being disposed on a printing side of the sheet; and a sheet guide for guiding the sheet so that a leading end of the sheet gets abutted against said one of the pair of sheet discharge rollers earlier than said other of the pair of sheet discharge rollers. It is preferable that said one of the pair of sheet discharge rollers be a drive roller and that said other of the pair of sheet discharge rollers be a driven roller rotating while abutted against the drive roller. It is also preferable that the sheet guide be arranged inward with respect to the circumferential surface of the drive roller at the lateral sides of the drive roller.

Further, a printer of the invention includes: a case main body; a first sheet discharge roller mounted on the case main body; a cover fixed on the case main body so as to be opened and closed; a second sheet discharge roller, mounted on the cover, for discharging a sheet in cooperation with the first sheet discharge roller; and a cover fixing section, disposed close to the second discharge roller, for fixing the cover to the case main body.

Still further, a printer of the invention includes: a case main body; a first sheet discharge roller mounted on the case main body; a cover fixed on the case main body so as to be opened and closed; a second sheet discharge roller, mounted on the cover, for discharging a sheet in cooperation with the first sheet discharge roller. In such printer, a cover fixing section for fixing the cover to the case main body is formed by a first fixing section and a second fixing section; the case main body in the first fixing section has a regulating section for regulating a position at which the cover is fixed; the second fixing section has a biasing section for biasing the cover onto the regulating section; and the first fixing section is disposed close to the second sheet discharge roller. It is preferable that the second sheet discharge roller be biased onto the first sheet discharge roller by a biasing means disposed between the second discharge roller and the cover.

Embodiments of the present invention will now be described with reference to the accompanying drawings, of which:

Figure 1 is a segmentary side view of a printer, which is an embodiment of the invention;

Figure 2 is a diagram showing the internal structure of the embodiment shown in Figure 1;

Figure 3 is a schematic plan view of the embodiment shown in Figure 1 with a part thereof omitted;

Figure 4(a) is a general perspective view of a structure in which a cover is going to be fixed to a case main body;

Figure 4(b) is a partially enlarged perspective view of Figure 4(a);

Figure 4(c) is a sectional view taken along a line c-c in (a);

Figure 4(d) is a sectional view taken along a line d-d in (a); and

Figure 5 is a diagram illustrative of a conventional example.

Figure 1 is a segmentary side view of a printer, which is an embodiment of the invention; Figure 2 is a diagram showing the internal structure of the printer as a whole; Figure 3 is a plan view of the printer with a part thereof

omitted; and Figure 4 is a diagram illustrating the structure for fixing a cover to a case main body.

In Figure 2 reference numeral 10 denotes a case main body of the printer. The case main body 10 includes a lower case 11 and an upper case 12.

Reference numeral 13 denotes a cover, which is fixed to the upper case 12 so as to be opened and closed. The case main body 10 and the cover 13 are made of synthetic resin.

Reference numeral 20 denotes a sheet feed cassette attached to the bottom of the case main body 10.

Reference numeral 14 denotes a sheet feed roller, which feeds sheets P (not shown in Figure 2) placed in the sheet feed cassette 20 on a single sheet basis.

The fed sheet P is not only wrapped around a platen 15 via a sheet feed path 10a but also further fed while nipped between a sheet feed roller 16 and the platen 15 and printed through an ink ribbon (not shown) by a print head 17 of a wire dot type.

The printed sheet is discharged to a sheet discharge tray 19 from a sheet discharge opening 18 via a sheet discharge path 10b and a pair of sheet discharge rollers 30. As shown by a three-dot chain line in Figure 1, a discharged sheet P3 is piled up in the sheet discharge tray 19 with the trailing end thereof supported by a support section 12s formed on the inner surface of the upper case.

As shown in Figure 2, the sheet discharge opening 18 is arranged in the form of a slit (see Figure 3) that extends in the sheet width direction at an intersection between an upper surface 13a of the cover and a back surface 12a of the upper case. An edge portion 18a located on the print head 17 side is linear.

The sheet discharge tray 19 constitutes a sheet guide. The sheet discharge tray 19 guides a sheet P1 that is in the course of being discharged so as to come in slidable contact with the edge portion 18a on the print head side of the sheet discharge opening 18.

As shown in Figure 1, the pair of sheet discharge rollers 30 include a first sheet discharge roller 31 mounted on the case main body 10 side and a second sheet discharge roller 32 mounted on the cover 13 for discharging the sheet in cooperation with the first sheet discharge roller 31. In this embodiment the first sheet discharge roller 31 is a drive roller, and the second sheet discharge roller 32 is a driven roller that rotates while abutted against the drive roller.

The drive roller 31 is made of a material whose friction coefficient with respect to the sheet P is large, e.g., of rubber, and disposed on the side of a nonprinting surface Pb of the sheet P.

As shown in Figure 3, this drive roller 31 has a gear 31b on one end of a shaft 31a and is driven with the gear 31b meshed with an intermediate gear 33 that rotates while abutted

against the platen 15. The shaft 31a and the gear 31b of the drive roller 31 are made of synthetic resin. The drive roller is formed by firmly fixing a cylindrical body made of rubber to the shaft 31a.

Reference numeral 34 denotes a holder that is C-shaped when viewed from top. The holder 34 supports the shaft 31a of the drive roller 31 and a shaft 33a of the intermediate gear 33 rotatably. The holder 34 is pivotably supported by fitting holes 34b, 34b with projections 12b, 12b, the holes 34b, 34b being arranged on lateral plates 34a, 34a of the holder 34 and the projections 12b, 12b being disposed on the upper case 12. A compression spring 35 disposed between a bottom plate 34c of the holder 34 and the upper case urges the intermediate gear 33 in such a direction as to be abutted against the platen 15 at all times.

The intermediate gear 33 operates as a one-way clutch with the shaft 33a thereof being supported by a long hole 34d formed on the holder 34. The intermediate gear 33 transmits motive power to the drive roller 31 only when the platen 15 rotates in a direction indicated by the arrow a in Figure 1. Therefore, the drive roller 31 does not rotate reversely, and the trailing end of the once discharged sheet P3 will no longer be nipped back into the pair of sheet discharge rollers 30.

The driven roller 32 is made of a material to which ink is hard to adhere, e.g., of synthetic resin, and is disposed on the side of the printing surface Pa of the sheet P.

A shaft 32a of the driven roller 32 is rotatably supported by a holder 36 that is C-shaped when viewed from top. The holder 36 is movable in and out with respect to the drive roller 31 with projections 36b, 36b slidably fitted into a long hole 38b of a support plate 38, the projections 36b, 36b being respectively disposed on lateral plates thereof 36a, 36a and the support plate 38 being attached to the cover 13 with engaging pawls 38a, 38a. A compression spring 37 serving as an urging means disposed between an upper plate 36c of the holder 36 and the cover 13 urges the driven roller 32 in such a direction as to be abutted against the drive roller 31 at all times.

As shown in Figure 3, two pairs of sheet discharge rollers 30 are arranged in the sheet width direction.

Reference numeral 40 denotes a guide piece disposed integrally on the lower surface of the cover 13. A guide surface 41 has such an angle as to guide the sheet P that has been sent from the platen 15 while slightly bent so that the leading end Pc of the sheet P will be abutted against the drive roller 31 earlier than the driven roller 32.

A portion 42 of the guide piece 40 that is on a lateral side of the drive roller 31 is located inward with respect to the circumferential surface of the drive roller (i.e., toward the shaft 31a).

Further, the guide surface 41 of the guide piece 40 is not only designed to guide the sheet so that the leading end of

the sheet does not touch the support plate 38 and the like, but also formed into a recess 41c in the vicinity of the sheet discharge opening 18 so that the slidable contact of the edge portion 18a with the sheet will not be disturbed.

As shown in Figures 3 and 4, the section at which the cover 13 having the above-mentioned driven roller 32 and guide piece 40 is fixed to the case main body 10 includes a first fixing section 51 and a second fixing section 52. A pair of first fixing sections 51 are disposed at a position close to the driven rollers 32, i.e., in the rear of the printer. A pair of second fixing sections 52 are disposed in the front of the printer.

In each first fixing section 51, a regulating section 12k that regulates the cover 13 fixing position is formed on the upper case 12.

The regulating section 12k has a regulating surface 12c and an opening 12d. The regulating surface 12c is substantially L-shaped when viewed from the front and is abutted against an end 13c of the rear end corner of the cover 13. The opening 12d receives therein an engaging piece 13d that projects rearward at a position slightly inward from the lateral surface of the rear end corner of the cover 13. Reference character 12e denotes a guide surface continuing from the regulating surface 12c; and 12f, a guide surface continuing from the regulating surface 12c and the guide surface 12e. These guide surfaces 12e, 12f are designed to guide the lower

surface 13e and inner surface of the lateral plate of the cover 13.

Each second fixing section 52 has an engaging section 52a as shown in Figure 4 (c) and a biasing section 52b shown in Figure 4 (d).

The engaging section 52a includes an elastic pawl 13g formed integrally with the lower surface of the cover 13 and an engaging hole 12g formed on the upper case 12, so that when the cover 13 is attached to the upper case 12, the elastic pawl 13g clicks the engaging hole 12g.

The biasing section 52b includes: a recess 12h formed on the upper surface of the upper case 12; and a slightly bent projection 13h formed integrally on the lower surface of the cover 13. When the cover 13 is attached to the upper case 12, a front surface 13i of the projection 13h gets abutted against the inner surface 12i that is on the front side of the recess 12h strongly as the projection 13h enters the recess 12h. This force biases the cover 13 toward the above-mentioned regulating section 12k.

With respect to the engaging sections 52a and the biasing sections 52b, only those on the right side are shown in the drawing in enlarged form. It goes without saying that those on the left side are formed similarly (so as to be symmetrical) (see Figure 3).

The following steps will be taken to attach the thus constructed cover 13 to the case main body 10. First, as shown

in Figure 4 (b), the engaging pieces 13d on the rear end of the cover are inserted into the openings 12d of the upper case 12. Then, as shown in Figure 4 (a), the cover 13 is turned downward. As a result, the elastic pawls 13g of the cover 13 get fitted into the engaging holes 12g of the upper case 12; the projections 13h of the cover 13 enter into the recesses 12h of the upper case 12; and the cover 13 is attached and, at the same time, fixed to the upper case 12 while biased toward the regulating sections 12k. With the cover fixed in this way, the rear end corner of the cover 13 gets abutted against the regulating section 12k so strongly that positioning accuracy of the cover 13 with respect to the case main body 10 (the upper case 12) in the first fixing section 51 becomes quite high.

According to the thus constructed printer, the following advantages can be obtained.

(i) Since the sheet P1 that is in the course of being discharged is guided by the sheet discharge tray 19 so as to come in slidable contact with the edge portion 18a on the print head side of the sheet discharge opening 18, the gap between the sheet and the edge portion on the print head side of the sheet discharge opening, which is present in the case of the printer shown in Figure 5, is closed by the sheet. In other words, a space S (see Figure 2) into which a noise is scattered by the head 17 is closed by the upper case 12, the cover 13, and the sheet P1 that is in the course of being discharged.

At the same time, since the sheet P1 that is in the course of being discharged is guided by the sheet discharge tray 19 so as to come in slidable contact with the edge portion 18a on the print head side of the sheet discharge opening 18, vibrations of the sheet are disturbed at the portion of the sheet which is in slidable contact with the edge portion 18a, which in turn changes the mode of vibration to decay the vibration of the sheet itself.

Therefore, the amount of the noise produced by the head 17 leaking outside the case can be reduced remarkably.

In addition, since the structure in which the sheet is caused to come in slidable contact with the edge portion 18a of the sheet discharge opening 18 by the sheet discharge tray 19 that supports the discharged sheet P1 is adopted, no other sheet guides and sound absorbing members are required. Hence, the above-mentioned advantage can be obtained by a simple structure with the sheet discharge tray supporting the discharged sheet P1.

(ii) Since the sheet discharge opening 18 is disposed at an intersection between the upper surface 13a and the back surface 12a of the case, the noise produced by the print head is sent to the rear side of the printer. Therefore, the noise in the front of the printer where the user usually stays can be reduced more effectively together with the advantage (i).

(iii) Since the drive roller 31 is made of rubber and is disposed on the nonprinting surface Pb side of the sheet P and

the driven roller 32 is made of synthetic resin and is disposed on the printing surface Pa side of the sheet P, not only satisfactory sheet P forwarding conditions can be ensured, but also the ink that has adhered to the printing surface Pa of the sheet will not be transferred onto the printing surface Pa again through the driven roller 32 any more.

(iv) Since the leading end Pc of the sheet is guided by the guide surface 41 of the sheet guide 40 so as to be abutted against the drive roller 31 earlier than the driven roller 32 and the drive roller 31 is made of rubber, the leading end Pc of the sheet can be guided and nipped into the pair of sheet discharge rollers 30 quickly.

Therefore, the force for forwarding the sheet P after printing can be given quickly, and the sheet P can be wrapped around the platen 15 quickly while in intimate contact therewith. The state in which the sheet P is wrapped around the platen in intimate contact is indicated by a two-dot chain line P1 in Figure 1.

Hence, according to this printer, conditions for satisfactory printing by the head 17 can be prepared quickly.

Further, as a result of the sheet P having been wrapped around the platen 15 in intimate contact therewith quickly, vibrations of the sheet caused by the wires projected from the head 17 colliding against the sheet P can be reduced quickly.

(v) Since the portion 42 positioned on the lateral side of the drive roller 31 in the sheet guide 40 is disposed inward

with respect to the circumferential surface of the drive roller 31, the sheet P can be guided so as to be biased onto the drive roller 31, so that further satisfactory sheet forwarding conditions can be ensured.

(vi) Since the section for fixing the cover 13 to the case main body 10 includes the first and second fixing sections 51, 52, stable conditions for fixing the cover 13 to the case main body 10 can be ensured.

(vii) The upper case 12 in the first fixing section 51 has the regulating sections 12k for regulating the cover 13 fixing position and the second fixing section 52 has the biasing sections 52b for biasing the cover 13 toward the regulating sections 12k. Therefore, when the case main body 10 and the cover 13 are fixed together by the first and second fixing sections 51, 52, positioning accuracy of the case main body 10 and the cover 13 in the first fixing section 51 becomes improved. Since the first fixing section 51 is disposed close to the driven roller 32, positioning accuracy of the drive roller 31 and the driven roller 32 can in turn be improved.

As a result, positioning accuracy of the driven roller 32 with respect to the drive roller 31 can be improved without requiring any other positioning member than the cover 13, which in turn ensures stable sheet discharge operation.

(viii) High positioning accuracy of the driven roller 32 with respect to the drive roller 31 can be obtained despite the fact that the driven roller 32 is mounted on the cover 13 as

described above. As a result, inconsistencies in contact pressure of the compression spring 37 with respect to the drive roller 31 are reduced, thereby ensuring stable sheet discharge operation.

If the driven roller 32 were positioned with respect to the drive roller 31 with low accuracy, then the contact pressure by the compression spring 37 would become inconsistent, thereby not ensuring stable sheet discharge operation.

On the other hand, according to the printer, which is the embodiment of the invention, high positioning accuracy can be obtained despite the fact that the driven roller 32 is mounted on the cover 13 as described above. Therefore, inconsistencies in the contact pressure of the compression spring 37 can be reduced, thereby ensuring stable sheet discharge operation.

That is, the fixing structure of this type is particularly effective when the second sheet discharge roller disposed on the cover is urged toward the first sheet discharge roller by an urging means disposed between the second sheet discharge roller and the cover.

(ix) Since the cover 13 is fixed stably with respect to the upper case 12 and the edge portion 18a of the sheet discharge opening 18 is formed at the edge portion of the cover located close to the first fixing section 51 whose positioning accuracy is high as described above, the sheet P comes in slidable

contact with the edge portion 18a stably, which in turn contributes to further stable noise reduction.

(x) Since the cover 13 is fixed stably with respect to the upper case 12 and the guide piece 40 is formed close to the first fixing section 51 whose positioning accuracy is high as described above, the leading end Pc of the sheet can be guided toward the pair of sheet discharge rollers 30 certainly as well as stably, which in turn contributes to further stable noise reduction.

The embodiment of the invention has been described in the foregoing. How the invention is embodied is not limited to the above-mentioned embodiment, but may be modified as appropriate within the scope of the invention.

For example, while the case where the first and second fixing sections constitute the fixing section has been described in the above embodiment, the number of fixing sections may be one as long as the fixing section is disposed close to the second sheet discharge roller in order to obtain the above-mentioned advantages.

CLAIMS

1. A printer comprising:
 - a print head disposed within a case;
 - a sheet discharge opening, disposed in the case, for discharging a sheet printed by the print head; and
 - a sheet discharge tray for guiding the sheet in the course of being discharged from the sheet discharge opening to an edge portion located on the print head side of the sheet discharge opening so as to come in slidable contact with the edge portion and supporting the sheet discharged from the sheet discharge opening.

2. A printer according to claim 1, wherein the sheet discharge opening is arranged at an intersection between an upper surface and a back surface of the case.

3. A printer comprising:
 - a platen for wrapping a sheet therearound;
 - a print head disposed so as to confront the platen;
 - a pair of sheet discharge rollers for discharging a sheet printed by the print head, one of the pair of sheet discharge rollers being made of a material whose friction coefficient with respect to the sheet is large and being disposed on a nonprinting side of the sheet, the other of the pair of sheet discharge rollers being made of a material to

which an ink is hard to adhere and being disposed on a printing side of the sheet; and

a sheet guide for guiding the sheet so that a leading end of the sheet is abutted against said one of the pair of sheet discharge rollers earlier than said other of the pair of sheet discharge rollers.

4. A printer according to claim 3, wherein said one of the pair of sheet discharge rollers is a drive roller and said other of the pair of sheet discharge rollers is a driven roller rotating while abutted against the drive roller.

5. A printer according to claim 4, wherein the sheet guides are arranged inward with respect to a circumferential surface of the drive roller.

6. A printer comprising:

a case main body;

a first sheet discharge roller mounted on the case main body;

a cover fixed on the case main body so as to be opened and closed;

a second sheet discharge roller, mounted on the cover, for discharging a sheet in cooperation with the first sheet discharge roller; and

a cover fixing section, disposed close to the second discharge roller, for fixing the cover to the case main body.

7. A printer comprising:

a case main body;

a first sheet discharge roller mounted on the case main body;

a cover fixed on the case main body so as to be opened and closed;

a second sheet discharge roller, mounted on the cover, for discharging a sheet in cooperation with the first sheet discharge roller;

a cover fixing section for fixing the cover to the case main body, the cover fixing section formed by a first fixing section and a second fixing section;

a regulating section for regulating a fixing position of the cover, the regulating section provided with the case main body in the first fixing section; and

a biasing section for biasing the cover onto the regulating section, the biasing section provided with the second fixing section,

wherein the first fixing section is disposed close to the second sheet discharge roller.

8. A printer according to claim 6, wherein the second sheet discharge roller is biased onto the first sheet discharge

roller by a biasing means disposed between the second discharge roller and the cover.

9. A printer according to claim 7, wherein the second sheet discharge roller is biased onto the first sheet discharge roller by a biasing means disposed between the second discharge roller and the cover.

10. A printer substantially as hereinbefore described with reference to any of Figures 1 to 5 of the accompanying drawings.

Relevant Technical Fields

- (i) UK Cl (Ed.N) B6F: FMD
- (ii) Int Cl (Ed.6) B41J - 029/10

Search Examiner
MR F G MILES

Date of completion of Search
9 JANUARY 1995

Databases (see below)

(i) UK Patent Office collections of GB, EP, WO and US patent specifications.

(ii) ONLINE DATABASES: EDOC, WPI

Documents considered relevant following a search in respect of Claims :-
1

Categories of documents

- X:** Document indicating lack of novelty or of inventive step.
- Y:** Document indicating lack of inventive step if combined with one or more other documents of the same category.
- A:** Document indicating technological background and/or state of the art.
- P:** Document published on or after the declared priority date but before the filing date of the present application.
- E:** Patent document published on or after, but with priority date earlier than, the filing date of the present application.
- &:** Member of the same patent family; corresponding document.

Category	Identity of document and relevant passages	Relevant to claim.(s)
A	GB 2213106 A (CITIZEN) Figure 9	1 at least
X	EP 0454412 A (MATSUSHITA) Figure 2	1 at least
X	US 5244295 A (TERASHIMA) Figure 2	1 at least
X	US 4943173 A (OKAZAKI) acknowledged prior art (Figures 1 and 3)	1 at least

Databases:The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).