

⑫

EUROPEAN PATENT SPECIFICATION

⑬ Date of publication of patent specification: **20.12.89**

⑮ Int. Cl.⁴: **B 05 B 17/06, F 02 M 27/08,**
F 23 D 11/34

⑰ Application number: **85307524.0**

⑱ Date of filing: **17.10.85**

⑳ **Ultrasonic vibration method and apparatus for atomizing liquid material.**

㉑ Priority: **13.05.85 JP 100935/85**

㉒ Date of publication of application:
26.11.86 Bulletin 86/48

㉓ Publication of the grant of the patent:
20.12.89 Bulletin 89/51

㉔ Designated Contracting States:
IT SE

㉕ References cited:
EP-A-0 159 189
DE-C- 852 275
FR-A-1 271 341
FR-A-2 180 753
US-A-3 756 575
US-A-4 048 963

㉖ Proprietor: **TOA NENRYO KOGYO KABUSHIKI**
KAISHA
1-1 Hitotsubashi, 1-Chome Chiyoda-Ku
Tokyo 100 (JP)

㉗ Inventor: **Hirabayashi, Hideo**
4-30 Katsuta
Yachiyo-shi Chiba-ken (JP)
Inventor: **Endo, Masami**
1902-5, Oaza-Kamekubo Oi-machi
Iruma-gun Saitama-ken (JP)
Inventor: **Kokubo, Kakuro**
3-13-8 Moridai
Atsugi-shi Kanagawa-ken (JP)

㉘ Representative: **Slight, Geoffrey Charles et al**
Graham Watt & Co. Riverhead
Sevenoaks Kent TN13 2BN (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

EP 0 202 381 B1

Description

Technical field

This invention relates generally to the art of atomizing liquid material by ultrasonic vibration, and particularly to an ultrasonic injecting method and injection nozzle suitable for use on a fuel injecting valve for internal combustion engines such as diesel engines, gasoline engines and gas turbine engines, and external combustion engines such as burners for boilers, heating furnaces, heating apparatus and the like, and also for a spray head for drying and producing powdered medicines. While this invention is useful as an injection nozzle or as an apparatus for atomizing liquid material in various applications such as described above the invention will be more particularly described hereinafter with respect to a fuel injecting nozzle particularly for use with internal combustion engines such as diesel and gasoline engines. This invention is not, however, to be regarded as so limited. It is also to be noted that the term "liquid material" is intended to mean not only a liquid such as liquid fuel but also various solutions or suspensions such as liquid for producing medicines as well as water or other liquid for use with a humidifying or spraying apparatus.

Background art

Various attempts have heretofore been made to supply liquid fuel in atomized form into a combustion or precombustion chamber of an internal combustion engine such as diesel or gasoline engine in order to reduce soot and enhance fuel economy. One of the most common methods is to inject liquid fuel under pressure through the outlet port of an injection nozzle. In such injection it is known that atomization of liquid fuel is promoted by imparting ultrasonic vibrations to the liquid fuel.

There have heretofore been developed two mechanisms for atomizing liquid by ultrasonic waves—(1) the cavitation mechanism and (2) the wave mechanism. The cavitation mechanism is unsuitable for application to an injection valve because of difficulty in controlling the degree of atomizing. The wave mechanism includes the capillary system and the liquid film system. In the capillary system an ultrasonic vibrating element has a capillary aperture formed therethrough. Liquid fuel is introduced through the inlet port of the capillary aperture while the ultrasonic vibrating element is subjected to vibration, whereby the liquid fuel is spread through the outlet of the capillary aperture in a film form over the bottom surface of the vibrating element and then injected in an atomized state. In the liquid film system, an ultrasonic vibrating element is formed on its forward end with a portion flared as in the form of a poppet valve. Liquid fuel is delivered to and spread over the face portion in a film form and then injected in an atomized state.

As is understood from the foregoing, it has been heretofore considered that the mechanism

by which liquid is atomized by means of an ultrasonic vibrating element is based on either cavitation or wave motions caused after the liquid is transformed into a film, and particularly that wave motions in film are indispensably required to effect atomization of liquid in a large quantity. Accordingly, the arrangements as described above have been hitherto proposed.

However, in actuality the injection nozzles hitherto proposed have so small capacity for spraying that they are unsuitable for use as an injection nozzle for internal combustion engines such as diesel or gasoline engines which require a large amount of atomized fuel.

FR—A—2,180,753 describes an injection nozzle for atomizing fuel in a fuel injection system for an engine. The ultrasonic injection method involves vibrating a vibrating element by means of ultrasonic vibration generating means, the vibrating element being formed at its forward end with an edged portion, and delivering fuel to and along said edged portion to atomize the fuel.

Summary of the invention

According to this invention, an ultrasonic vibration method of atomizing a liquid material by vibrating a vibrating element by means of ultrasonic vibration generating means comprises forming an edged portion at the forward end of said vibrating element and delivering a liquid material to and along said edged portion to atomize the liquid material and is characterized in that said liquid material is delivered to and along a single surface of said edged portion which is formed with at least two successive steps, in that the flow of liquid material along said edged portion is dammed at two or more of the step edges across which the liquid material is delivered in succession, and in that the liquid material is delivered across each of said step edges in the form of a film.

Using the method of this invention, liquid fuel may be atomized in a large quantity for injection into an internal combustion engine.

The vibrating element may be continuously vibrated and the delivery of the liquid material to the edged portion of the vibrating element may be either intermittently or continuously effected, thereby eliminating the time lag involved in initiating vibration of the vibrating element which is a defect of conventional ultrasonic injection nozzles for internal combustion engines where the vibrating element is vibrated only when it is required to inject liquid fuel.

The present invention is applicable to the continuous burning of fuel in a fuel burner and also to spraying for spray drying to produce powdered medicines for example, and for humidifying.

Thus the present invention is useful not only in relation to internal combustion engines such as a diesel engine, gasoline engine, gas turbine engine and the like, but also in relation to external combustion engines such as burners for boilers, heating furnaces, heating apparatus and the like for atomizing liquid fuel in a uniform manner and

in a large quantity to thereby provide for attaining complete combustion in a short time, resulting in preventing or reducing emission of soot as well as improving fuel economy.

The method of the present invention is capable of not only atomizing liquid in a large amount but also atomizing liquid even at a low flow rate at which the prior art is unable to effect atomizing, to thereby enhance fuel efficiency.

The present invention includes an ultrasonic injection nozzle for performing the method of the invention as hereinbefore defined comprising an ultrasonic vibration generating means, an elongated vibrating element connected at one end to said ultrasonic vibration generating means and having an edged portion at its other end, and valve means defining a supply passage for delivering liquid material to an along said edged portion characterized in that said edged portion is formed with a succession of at least two steps along a single surface to which the liquid material is delivered from said supply passage, and in that said valve means comprises a needle valve slidably mounted on said vibrating element adjacent its edged portion, a needle valve holder adapted to hold said needle valve for slidable movement, said needle valve holder co-operating with said needle valve to define a supply passage for the liquid material, and spring means normally urging said needle valve toward said holder to close said liquid material supply passage.

Specific embodiments of the present invention will now be described by way of example and not by way of limitation with reference to the accompanying drawings.

Brief description of the drawings

Fig. 1 is an elevation in part in cross-section of an ultrasonic injection nozzle according to the present invention;

Figs. 2 and 3 are front views of alternative forms of the edged portion at the forward end of the vibrating element;

Fig. 4 is an enlarged view illustrating the operation of the edged portion; and

Fig. 5 is a front view of a hollow needle valve of the nozzle shown in Fig. 1.

Referring to the accompanying drawings and first to Fig. 1, the ultrasonic injection nozzle 1 according to this invention includes a generally cylindrical elongated housing 4 having a central bore 2 extending centrally therethrough. Threaded to an external thread 6 on the upper portion of the housing 4 is the lower mounting portion of a vibrator holder 8 which has a through bore 12 extending centrally therethrough coaxially with and in longitudinal alignment with the central bore of the housing 4.

A vibrating element or vibrator 14 is mounted in the through bore 12 of the vibrator holder 8 and the central bore 2 of the housing 4. The vibrating element 14 comprises an upper body portion 16, an elongated cylindrical vibrator shank 18 having a diameter smaller than that of the body portion 16, and a transition portion 20 connecting the

body portion 16 and shank 18. The body portion 16 has an enlarged diameter collar 22 therearound which is clamped to the vibrator holder 8 by a shoulder 24 formed on the inner periphery of the vibrator 8 adjacent its upper end and an annular vibrator retainer 30 fastened to the upper end face of the vibrator holder 8.

The shank 18 of the vibrating element 14 extends downwardly or outwardly beyond the housing 4. The forward end of the vibrating element 14, that is, the forward end of the shank portion 18 is formed with an edged portion 32 as will be described in more detail hereinafter. A sleeve-like needle valve 34 is slidably mounted on that portion of the vibrating element 14 extending beyond the housing 4.

The needle valve 34 is generally of hollow cylindrical shape, and comprises an upper reduced-diameter portion 36 adjacent its upper end, a central large-diameter portion 38, a tapered portion 40 sloping from the large-diameter portion 38, a small-diameter portion 42 connected to the tapered portion 40, and a tapered forward end portion 44 sloping from the small-diameter portion 42. The extreme end of the tapered forward end portion 44 is disposed adjacent the edged portion 32 of the vibrating element 14. On the other hand, the upper reduced-diameter portion 36 of the hollow needle valve 34 extends upwardly beyond an annular shoulder 46 extending radially inwardly from the lower end portion of the housing 4.

The hollow needle valve 34 is housed in a needle valve holder 50 which is detachably secured to the housing 4 by means of a holder sheath 52 which is affixed to the outer periphery of the holder 50. The inner configuration of the needle valve holder 50 comprises a large-diameter bore portion 54 in which the central large-diameter portion 38 of the hollow needle valve 34 is adapted to slidably move, a sloped portion 56 complementary to the tapered portion 40 of the needle valve 34, a small-diameter bore portion 58, and a sloped forward end portion. The small-diameter bore portion 58 and sloped forward end portion 60 cooperate with the small-diameter portion 42 and sloped forward end portion 44 of the hollow needle valve 34 to define a liquid fuel supply passage 62.

The needle valve holder 50 is formed around its sloped portion 56 with an annular fuel reservoir 64 opening radially inwardly which is in communication with a fuel supply passage 66 extending through the wall of the needle valve holder 50. Said fuel supply passage 66 is in communication with a fuel inlet passage 68 extending through the wall of the housing 4, which inlet passage 68 is in turn connected with a fuel inlet port 70 of the housing 4.

The needle valve holder 50 is formed around the upper part of the large-diameter bore portion 54 of the needle valve holder 50 with an annular radially inwardly opening return fuel sump 72 which is connected with a fuel outlet port 78 via a fuel return passage 74 and a fuel outlet passage

76 formed through the walls of the needle valve holder 50 and the housing 4, respectively.

A compression spring 80 is disposed in an annular space defined between the peripheral wall of the central bore 2 in the housing 4 and the outer periphery of the vibrator shank 18. The lower end of the compression spring 80 acts against the top end face of the upper reduced-diameter portion 36 of the hollow needle valve 34 via an annular spring retainer 82 while the upper end of the spring abuts against the bottom surface of an injection pressure regulating member 84 which is a cylindrical member disposed in the space between the peripheral wall of the central bore 2 in the housing 4 and the outer periphery of the vibrator shank 18 and screw threadedly connected to the inner periphery of the housing 4. Thus, the spring pressure on the needle valve 34 may be adjusted by rotating the injection pressure regulating member 84 relative to the housing 4.

The operation of the ultrasonic injection nozzle 1 will now be described below.

In operation, liquid fuel is introduced through the fuel inlet port 70 and supplied through the fuel inlet passage 68 and the fuel supply passage 66 into the fuel reservoir 64 which is closed by the tapered portion of the hollow needle valve 34 urged downwardly by the spring 80. Consequently, the pressure in the reservoir 64 is built up as it is continuously supplied with liquid fuel. When the pressure in the fuel reservoir 64 reaches a certain level, the hollow needle valve 34 is caused to move upward against the biasing force of the spring 80.

The upward movement of the hollow needle valve 34 causes the fuel reservoir 64 to be opened to the fuel supply passage 62, which is thus supplied with the liquid fuel. From the fuel supply passage 62, the fuel is delivered to the edged portion 32 formed on the forward end of the vibrating element 14.

The edged portion 32 of the vibrating element 14 may be in the form of a staircase including three concentric steps having progressively reduced diameters as shown in Fig. 1, or it may comprise two or five steps as shown in Figs. 2 and 3. Thus the edged portion 32 is formed around or along its outer periphery with an edge or edges. While the edged portion 32 as shown in Figs. 1 to 3 is of a stepped configuration having progressively reduced diameters, the steps of the edged portion 32 may have progressively increased diameters or steps of progressively reduced and then progressively increased diameters. Further, as shown in Fig. 4, the geometry such as the width (W) and height (h) of each step is such that the edge of the step may act to render the liquid fuel filmy and to dam the liquid flow.

According to the researches and experiments of the inventors, in the case of atomizing liquid in a large quantity it has been found that the height (h) and width (W) of each step of the edged portion must be kept at a specific range, that is, under the condition as follows:

$$0.2 \text{ mm} \leq h \leq \lambda/4 \quad (1)$$

$$0.2 \text{ mm} \leq W \leq \lambda/4 \quad (2)$$

5 wherein λ is the length of the ultrasonic waves.

In a preferred embodiment of this invention the height (h) and width (W) of each step are $1 \leq h/W \leq 10$. Particularly in the vibrating element having the configuration as shown in Fig. 3 the height (h) is preferably less than 4 mm. The wave length (λ) of the ultrasonic waves varies with the materials used for the vibrating element such as Inconel, titanium, etc. and is usually in the range of 5 to 50 cm.

10 Further, the output of the ultrasonic oscillator for vibrating the vibrating element is substantially 10 W and the amplitude and frequency of the vibrating element are 30 to 70 mm and 20 to 50 kHz, respectively. In addition the diameter (D) of the vibrating element is preferably in the range of $\lambda/10$ to $\lambda/4$. The flow rate of the liquid to be processed increases as the amplitude and diameter (D) are larger.

15 The vibrating element 14 is continuously vibrated by ultrasonic vibration generating means 100 operatively connected to the body portion 16, so that the liquid fuel is atomized and injected outwardly as it is delivered to the edged portion 32. To ensure uniform injection around the injection nozzle, the small-diameter portion 42 of the hollow needle valve 34 is formed with a plurality of, say, two diametrically opposed angularly extending grooves 43 (see Fig. 5). It has been found that such arrangement causes turbulence to be produced in the fuel supply passage as well as imparting a swirl to the fuel being injected to thereby eliminate uneven injection. In addition, such an arrangement may also serve to promote separation of the spray of fuel off the edges of the edged portion 32 as well as to enhance the atomization.

20 An example of various parameters and dimensions applicable to the ultrasonic injection nozzle as described hereinabove with reference to the accompanying drawings is as follows:

25 Output of ultrasonic vibration generating means: 10 watts.

Amplitude of vibration of vibrating element: 34 μm .

Frequency of vibration of vibrating element: 38 KHz.

Geometry of edged portion 32 of vibrating element:—

Width (W) of edged portion: 0.5 mm.

First step: 7 mm in diameter.

Second step: 6 mm in diameter.

Third step: 5 mm in diameter.

Fourth step: 4 mm in diameter.

Fifth step: 3 mm in diameter.

Height (h) of each step: 2 mm

Type of fuel: Gas oil.

Flow rate of fuel: 1~0.06 cm³ per injection.

Injection pressure of fuel: 1~70 kg/cm².

Temperature of fuel: Normal temperature.

Material for vibrating element: Titanium (or iron).

Notes:

(1) It is advantageous to make the amplitude of vibration of the vibrating element as great as possible.

(2) The vibrating element should have a frequency of vibration higher than 20 Khz.

(3) The injection pressure of fuel should be made to approach the pressure in the engine chamber.

A portion (surplus) of the fuel supplied to the fuel reservoir 64 flows through a narrow clearance space measured in microns (μm) between the hollow needle valve 34 and the needle valve holder 50 to be collected into the return fuel sump 72, and is then returned to the fuel outlet 78 through the fuel return passages 74 and 76.

The fuel outlet 78 is connected *via* a suitable conduit (not shown) with the fuel tank so that the excess fuel is recirculated to the tank.

As the pressure in the fuel reservoir 64 drops, the hollow needle valve 34 is moved downward under the action of the spring 80 to close the fuel reservoir 64, so that the delivery of fuel to the edged portion 32 of the vibrating element 14 is interrupted, and the fuel injection from the nozzle 1 is discontinued.

Mistiming in fuel injection due to a time lag in initiation of vibration is avoided since the vibrating element 14 may be kept in operation irrespective of the fuel supply.

As indicated above, the injection nozzle being described with reference to the accompanying drawings is capable of providing a large amount of injection at 0.06 cm^3 per injection which makes it possible to put the nozzle to practical use as an injection nozzle for an internal combustion engine. This is 500 to 1,000 times as high as the flow rate as was reported to be possible with the prior art ultrasonic injection nozzle. The vibration element 14 having the edged portion 32 is so arranged adjacent the outlet port of the injection nozzle whereby a very compact ultrasonic injection nozzle is provided.

The present invention is also applicable to a burner for continuous combustion in which the flow rate may be in the order of 100 l/hr.

This invention may also be used as a spray drying apparatus for producing powdered medicines.

In addition to the provision for atomization of liquid in a large quantity as described above, this invention is also characterized in that it is capable of providing generally uniform distribution in atomized particles with an average particle radius in the order of 10 to 30 μm .

Industrial applications

As is understood from the foregoing, the present invention provides an ultrasonic injecting method and injecting nozzle capable of not only atomizing a liquid material in a uniform manner and in a large quantity but also atomizing a liquid material even at a low flow rate, on either an intermittent or a continuous basis.

Accordingly the ultrasonic injecting method and injection nozzle according to this invention is

suitable for use on internal combustion engines such as a diesel engine, gasoline engine, gas turbine engine and the like, for use on external combustion engines such as burners for boilers, heating furnaces, heating apparatus and the like, or for use on a spraying or humidifying apparatus.

Claims

1. Ultrasonic vibration method of atomizing a liquid material by vibrating a vibrating element (14) by means of ultrasonic vibration generating means (100), comprising forming an edged portion (32) at the forward end of said vibrating element, and delivering a liquid material to and along said edged portion to atomize the liquid material characterized in that said liquid material is delivered to and along a single surface of said edged portion which is formed with at least two successive steps, in that the flow of liquid material along said edged portion is dammed at two or more of the step edges across which the liquid material is delivered in succession, and in that the liquid material is delivered across each of said step edges in the form of a film.

2. A method according to claim 1, wherein said vibrating element is continuously vibrated, and the delivery of the liquid material to the edged portion of the vibrating element is either intermittently or continuously effected.

3. A method according to claim 1 or 2, wherein said liquid material is liquid fuel for use in an internal combustion engine such as a diesel engine, gasoline engine or the like, or an external combustion engine such as a burner or the like.

4. A method according to claim 1 or 2, wherein said liquid material is a suspension from which powdered medicine is to be produced.

5. An ultrasonic injection nozzle for performing the method of any preceding claim comprising an ultrasonic vibration generating means (100), an elongated vibrating element (14) connected at one end to said ultrasonic vibration generating means and having an edged portion (32) at its other end, and valve means (34) defining a supply passage (62) for delivering liquid material to and along said edged portion (32) characterized in that said edged portion (32) is formed with a succession of at least two steps along a single surface to which the liquid material is delivered from said supply passage (62) and in that said valve means comprises a needle valve (34) slidably mounted on said vibrating element (14) adjacent its edged portion (32), a needle valve holder (50) adapted to hold said needle valve (34) for slidable movement, said needle valve holder (50) co-operating with said needle valve (34) to define a supply passage (62) for the liquid material, and spring means (80) normally urging said needle valve (34) toward said holder (50) to close said liquid material supply passage (62).

6. An injection nozzle according to claim 5 wherein said at least two steps are formed around the outer periphery of said vibrating element.

7. An injection nozzle according to claim 6,

wherein the height (h) and width (W) of each step are as follows:

$$0.2 \text{ mm} \leq h \leq \lambda/4$$

$$0.2 \text{ mm} \leq W \leq \lambda/4$$

where λ is the wave length of the ultrasonic waves.

8. An injection nozzle according to claim 7, wherein the relation between the height (h) and the width (W) is as follows:

$$1 \leq h/W \leq 10$$

9. A vibrating element for use in an ultrasonic injection nozzle as claimed in claims 5, 6, 7 or 8 said element being formed, at one end, around its outer periphery with a multisteped edged portion (32) consisting of a succession of at least two steps in the form of a staircase.

10. A vibrating element according to claim 9, wherein the steps of said multisteped, edged portion (32) have a progressively decreasing diameter towards said one end of the element.

11. A vibrating element according to claim 9 or 10 wherein the height (h) and width (W) of each step are as follows:

$$0.2 \text{ mm} \leq h \leq \lambda/4$$

$$0.2 \text{ mm} \leq W \leq \lambda/4$$

where λ is the wave length of the ultrasonic waves.

12. A vibrating element according to claim 11, wherein the relation between the height (h) and the width (W) is as follows:

$$1 \leq h/W \leq 10$$

Patentansprüche

1. Ultraschallschwingungsverfahren zum Zerstäuben eines Flüssigmaterials, indem ein Schwingungselement (14) mittels einer Ultraschallschwingungen erzeugenden Einrichtung (100) in Schwingungen versetzt wird, wobei ein Kantenbereich (32) am vorderen Ende des Schwingungselements gebildet und ein Flüssigmaterial zu und entlang dem Kantenbereich zur Zerstäubung des Flüssigmaterials gefördert wird, dadurch gekennzeichnet, daß das Flüssigmaterial zu und entlang einer einzigen Oberfläche des Kantenbereichs gefördert wird, die mit zumindest zwei aufeinanderfolgenden Stufen ausgebildet ist, daß der Strom des Flüssigmaterials entlang dem Kantenbereich an zwei oder mehreren der Stufenkanten, über die das Flüssigmaterial nacheinander gefördert wird, gestaut wird und daß das Flüssigmaterial über jede der Stufenkanten in der Form eines Films gefördert wird.

2. Verfahren nach Anspruch 1, bei dem das Schwingungselement kontinuierlich in Schwingungen versetzt und die Förderung des Flüssig-

materials zu dem Kantenbereich des Schwingungselements entweder intermittierend oder kontinuierlich durchgeführt wird.

3. Verfahren nach Anspruch 1 oder 2, bei dem das Flüssigmaterial ein flüssiger Kraftstoff zur Verwendung in einem Verbrennungsmotor, wie einem Dieselmotor, einem Benzinmotor oder dgl., oder einer Kraftmaschine mit äußerer Verbrennung, wie einem Brenner oder dgl., ist.

4. Verfahren nach Anspruch 1 oder 2, bei dem das Flüssigmaterial eine Suspension ist, aus der pulverige Arzneimittel hergestellt werden sollen.

5. Ultraschalleinspritzdüse zur Durchführung des Verfahrens nach einem der vorhergehenden Ansprüche, bestehend aus einer Einrichtung (100) zum Erzeugen von Ultraschallschwingungen, einem langgestreckten Schwingungselement (14), das an einem Ende mit der Einrichtung zum Erzeugen der Ultraschallschwingungen verbunden ist und einen Kantenbereich (32) an seinem anderen Ende aufweist, und aus einer Ventileinrichtung (34), die einen Zuführkanal (62) zur Förderung von Flüssigmaterial zum und entlang dem Kantenbereich (32) bildet, dadurch gekennzeichnet, daß der Kantenbereich (32) mit einer Folge von zumindest zwei Stufen entlang einer einzigen Oberfläche ausgebildet ist, der das Flüssigmaterial vom Zuführkanal (62) zugeführt wird, und daß die Ventileinrichtung ein gleitbar am Schwingungselement (14) nahe dessen Kantenbereich (32) angebrachtes Nadelventil (34) umfaßt, ein Nadelventilhalter (50) zur Abstützung des Nadelventils (34) für eine Gleitbewegung geeignet ist, der Nadelventilhalter (50) mit dem Nadelventil (34) zur Bildung eines Zuführkanals (62) für das Flüssigmaterial zusammenwirkt und eine Feder-einrichtung (80) normalerweise das Nadelventil (34) zum Halter (50) hin für ein Schließen des Flüssigmaterialzuführkanals (62) drückt.

6. Einspritzdüse nach Anspruch 5, bei der zumindest zwei Stufen um den Außenumfang des Schwingungselements gebildet sind.

7. Einspritzdüse nach Anspruch 6, bei der die Höhe (h) und die Breite (W) jeder Stufe wie folgt bemessen sind:

$$0,2 \text{ mm} \leq h \leq \lambda/4$$

$$0,2 \text{ mm} \leq W \leq \lambda/4$$

wobei λ die Wellenlänge der Ultraschallwellen ist.

8. Einspritzdüse nach Anspruch 7, bei der das Verhältnis zwischen der Höhe (h) und der Breite (W) wie folgt ist:

$$1 \leq h/W \leq 10$$

9. Schwingungselement zur Verwendung in einer Ultraschalleinspritzdüse nach Anspruch 5, 6, 7 oder 8, wobei das Element an einem Ende auf seinem Außenumfang mit einem mehrstufigen Kantenbereich (32) ausgebildet ist, der aus einer Folge von zumindest zwei Stufen in Form einer Treppe besteht.

10. Schwingungselement nach Anspruch 9, bei

dem die Stufen des mehrstufigen Kanenbereichs (32) einen zu dem einen Ende des Elements hin fortschreitend kleiner werdenden Durchmesser aufweisen.

11. Schwingungselement nach Anspruch 9 oder 10, bei dem die Höhe (h) und die Breite (W) jeder Stufe wie folgt bemessen sind:

$$0,2 \text{ mm} \leq h \leq \lambda/4$$

$$0,2 \text{ mm} \leq W \leq \lambda/4$$

wobei λ die Wellenlänge der Ultraschallwellen ist.

12. Schwingungselement nach Anspruch 11, bei dem das Verhältnis zwischen der Höhe (h) und der Breite (W) wie folgt ist:

$$1 \leq h/W \leq 10$$

Revendications

1. Procédé de pulvérisation d'un liquide par vibrations ultrasonores en faisant vibrer un élément vibrant (14) au moyen d'un générateur de vibrations ultrasonores (100), consistant à former une portion à arêtes (32) à l'extrémité antérieure de l'élément vibrant et à fournir un liquide vers et le long de cette portion à arêtes, afin de pulvériser ce liquide, caractérisé en ce que le liquide est fourni vers et le long d'une surface unique de cette portion à arêtes qui est formée avec au moins deux gradins successifs, en ce que l'écoulement du liquide le long de cette portion à arêtes est endigué à l'endroit d'au moins deux arêtes des gradins entre travers desquelles le liquide est fourni successivement, et en ce que le liquide est fourni sous la forme d'un film en travers de chacune des arêtes des gradins.

2. Procédé suivant la revendication 1 caractérisé en ce qu'on fait vibrer continuellement l'élément vibrant et on effectue la fourniture du liquide vers la portion à arêtes de l'élément vibrant soit d'une manière intermittente soit d'une manière continue.

3. Procédé suivant l'une quelconque des revendications 1 ou 2 caractérisé en ce que le liquide est un combustible liquide destiné à être utilisé dans un moteur à combustion interne, tel qu'un moteur diesel, un moteur à essence ou un moteur similaire, ou bien dans un appareil à combustion externe tel qu'un brûleur ou similaire.

4. Procédé suivant l'une quelconque des revendications 1 ou 2 caractérisé en ce que le liquide est une suspension à partir de laquelle doit être produit un médicament pulvérulent.

5. Injecteur ultrasonore pour la mise en oeuvre du procédé suivant l'une quelconque des revendications précédentes, comprenant un générateur de vibrations ultrasonores (100), un élément vibrant allongé (14) relié, à l'une de ses extrémités, à ce générateur de vibrations ultrasonores et comportant une portion à arêtes (32) à son autre extrémité, et une vanne (34) définissant un passage d'alimentation (62) pour fournir un liquide vers et le long de la portion à arêtes (32),

caractérisé en ce que la portion à arêtes (32) est formée avec une succession d'au moins deux gradins le long d'une surface unique vers laquelle est fourni le liquide à partir du passage d'alimentation (62) et en ce que la vanne comprend un clapet en forme d'aiguille (34) monté à coulissement sur l'élément vibrant (14), au voisinage de sa portion à arêtes (32), un support (50) pour le clapet à aiguille lequel est adapté de manière à maintenir le clapet à aiguille (34) tout en permettant son mouvement de coulissement, ce support (50) du clapet à aiguille coopérant avec le clapet à aiguille (34) pour définir un passage d'alimentation (62) pour le liquide, et des moyens élastiques (80) sollicitant normalement le clapet à aiguille (34) en direction du support (50) afin de fermer le passage d'alimentation du liquide (62).

6. Injecteur suivant la revendication 5 caractérisé en ce qu'au moins deux gradins sont formés autour de la périphérie externe de l'élément vibrant.

7. Injecteur suivant la revendication 6 caractérisé en ce que la hauteur (h) et la largeur (W) de chaque gradin sont définis comme suit:

$$0,2 \text{ mm} \leq h \leq \lambda/4$$

$$0,2 \text{ mm} \leq W \leq \lambda/4$$

où λ est la longueur d'onde des ondes ultrasonores.

8. Injecteur suivant la revendication 7 caractérisé en ce que la relation entre la hauteur (h) et la largeur (W) est la suivante:

$$1 \leq h/W \leq 10$$

9. Élément vibrant destiné à être utilisé dans un injecteur ultrasonore tel que revendiqué dans la revendication 5, 6, 7, ou 8, cet élément étant formé, à une extrémité, autour de sa périphérie externe, avec une portion à arêtes (32) à plusieurs gradins, constituée par une succession d'au moins deux gradins réalisés sous la forme d'un escalier.

10. Élément vibrant suivant la revendication 9 caractérisé en ce que les gradins de la portion à arêtes (32), à plusieurs gradins, ont un diamètre allant en diminuant progressivement en direction de l'extrémité de l'élément.

11. Élément vibrant suivant la revendication 9 ou 10 caractérisé en ce que la hauteur (h) et la largeur (W) de chaque gradin sont définis comme suit:

$$0,2 \text{ mm} \leq h \leq \lambda/4$$

$$0,2 \text{ mm} \leq W \leq \lambda/4$$

où λ est la longueur d'onde des ondes ultrasonores.

12. Élément vibrant suivant la revendication 11 caractérisé en ce que la relation entre la hauteur (h) et la largeur (W) est la suivante:

$$1 \leq h/W \leq 10$$

FIG. 1

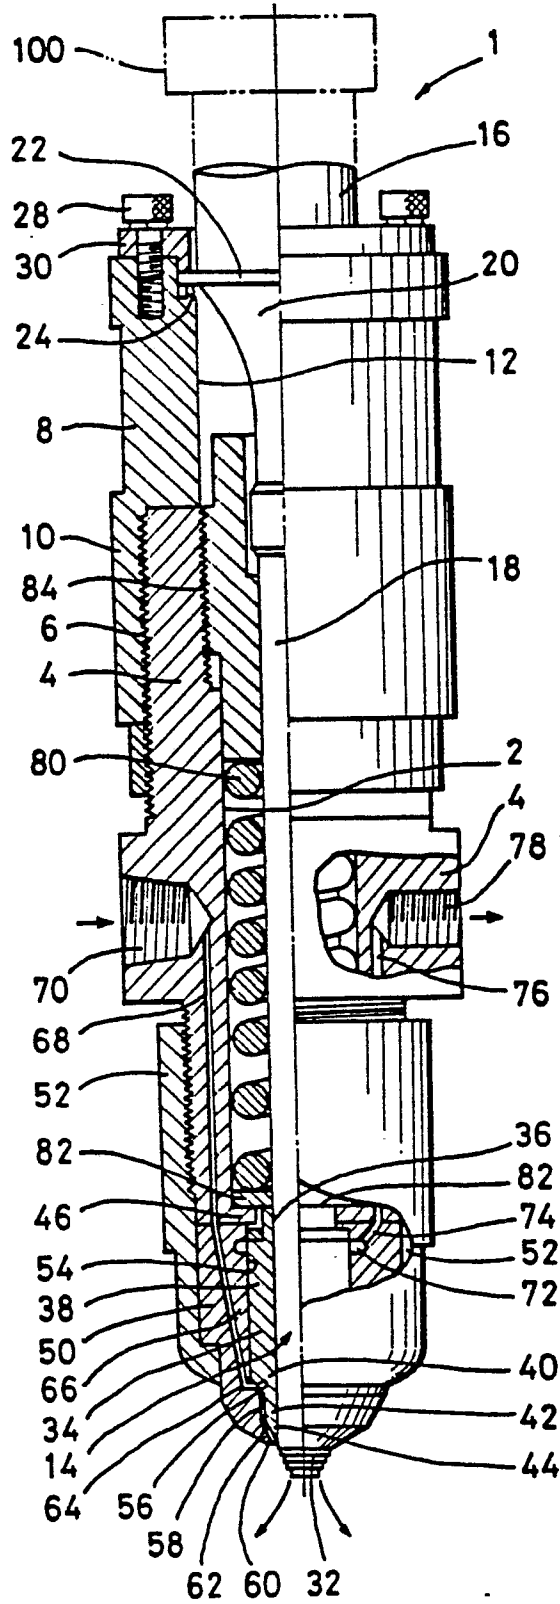


FIG. 2




FIG. 3




FIG. 4

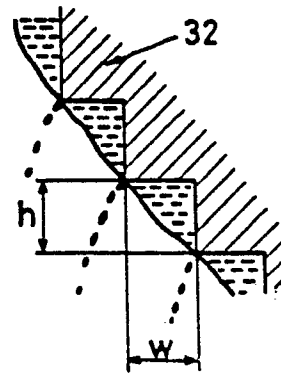


FIG. 5

