



(51) International Patent Classification:  
G02B 6/44 (2006.01)

(21) International Application Number:  
PCT/US2018/045766

(22) International Filing Date:  
08 August 2018 (08.08.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
62/560,829 20 September 2017 (20.09.2017) US

(71) Applicant: CORNING RESEARCH & DEVELOPMENT CORPORATION [US/US]; One Riverfront Plaza, Corning, New York 14831 (US).

(72) Inventor: KUBINSKI, Nico; One Riverfront Plaza, Corning, New York 14831 (US).

(74) Agent: MONAGHAN, Joseph, G. et al.; 106 Pinedale Springs Way, Cary, North Carolina 27511 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: FIBER OPTIC SPLICE TRAY

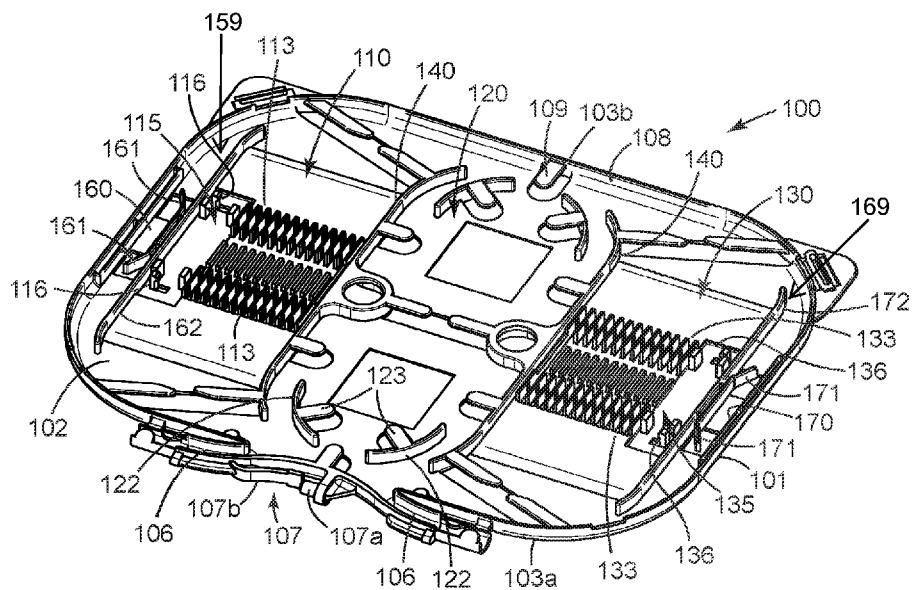


FIG. 1A

(57) Abstract: An optical fiber splice tray is described that has a base, a fiber management region, a first splicing zone on a first side of the fiber management region and separated from the fiber management region by a first containment wall, a second splicing zone on a second side of the fiber management region and separated from the fiber management region by a second containment wall, the second side opposite the first side, at least one first optical component location disposed adjacent to the first splicing zone opposite the fiber management region, the first splicing zone between the at least one first optical component location and the fiber management region, and at least one second optical component location disposed adjacent to the second splicing zone, the second splicing zone between the at least one second optical component location and the fiber management region.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## FIBER OPTIC SPLICE TRAY

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of priority to U.S. Provisional Patent Application Serial No. 62/560,829 filed on September 20, 2017, the content of which is relied upon and incorporated herein by reference in its entirety.

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0002] The present invention is directed to a high-density fiber optic splice tray.

#### Background

[0003] Telecommunication cables are used for distributing all manner of data across vast networks. A telecommunication cable typically includes a bundle of individual telecommunication lines (either optical fibers or copper wires) that are encased within a protective sheath. As telecommunication cables are routed across data networks, it is necessary to periodically open the cable so that one or more telecommunication lines therein may be spliced, thereby allowing data to be distributed to other cables or "branches" of the telecommunication network. The cable branches may be further distributed until the network reaches individual homes, businesses, offices, premises, and so on.

[0004] At each point where a telecommunication cable is opened, some type of enclosure is provided to protect the exposed interior of the cable. Commonly, the enclosure has one or more ports through which cables enter and/or exit the enclosure. Once inside the enclosure, the cable is opened to expose the telecommunication lines therein. Conventional telecommunication enclosures are constructed to facilitate the management and protection of individual telecommunication lines and splices thereof.

[0005] Frequently, these telecommunication enclosures include fiber optic splice trays to interconnect a plurality of optical fibers. With increasing bandwidth demands, telecommunication companies are seeking new ways to increase connection densities within their existing infrastructure. However, space is frequently at a premium. Thus, there is a need for new more dense and compact components for use in telecommunication enclosures.

### SUMMARY

[0006] An optical fiber splice tray is described that has a base having an external perimeter, a fiber management region within the external perimeter of the base, a first splicing zone on a first side of the fiber management region and separated from the fiber management region by a first containment wall extending from the base, a second splicing zone on a second side of the fiber management region and separated from the fiber management region by a second containment wall extending from the base, the second side opposite the first side, at least one first optical component location disposed adjacent to the first splicing zone opposite the fiber management region, the first splicing zone between the at least one first optical component location and the fiber management region, and at least one second optical component location disposed adjacent to the second splicing zone, the second splicing zone between the at least one second optical component location and the fiber management region.

[0007] Optical components which can be held in the optical component locations include optical fiber splitters, wavelength-division multiplexing (WDM) devices, fanout devices or multifiber splice devices. In one exemplary embodiment, the at least one optical component location adjacent to each splicing zone is a splitter location for holding one of an optical fiber splitter and a WDM device. In an alternative embodiment, each of the least one optical component location can further include an optical component holder that is configured to hold one of a fanout device and a multifiber splice. In a different embodiment, each of the optical component locations can be configured for two optical fiber splitters.

[0008] The exemplary fiber optic splice trays are compact, having an overall thickness between about 4 mm and about 8 mm and an internal volume of between about 2.3 in<sup>3</sup> and about 3.0 in<sup>3</sup> and providing for a single fiber splice density of at least 5 single splices/in<sup>3</sup>.

[0009] The above summary of the present invention is not intended to describe each illustrated embodiment or every implementation of the present invention. The figures and the detailed description that follows more particularly exemplify these embodiments.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The present invention will be further described with reference to the

accompanying drawings, wherein:

[0011] Figs. 1A and 1B are two views of an exemplary high-density fiber optic splice tray according to an embodiment of the present invention.

[0012] Figs. 2A and 2B are two views of an alternative exemplary high-density fiber optic splice tray according to an embodiment of the present invention.

[0013] While the invention is amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the invention to the particular embodiments described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the scope of the invention as defined by the appended claims.

#### DETAILED DESCRIPTION OF THE EMBODIMENTS

[0014] In the following Detailed Description, reference is made to the accompanying drawings, which form a part hereof, and in which is shown by way of illustration specific embodiments in which the invention may be practiced. In this regard, directional terminology, such as "top," "bottom," "front," "back," "forward," etc., is used with reference to the orientation of the Figure(s) being described. Because components of embodiments of the present invention can be positioned in a number of different orientations, the directional terminology is used for purposes of illustration and is in no way limiting. It is to be understood that other embodiments may be utilized and structural or logical changes may be made without departing from the scope of the present invention. The following detailed description, therefore, is not to be taken in a limiting sense, and the scope of the present invention is defined by the appended claims.

[0015] Referring to Figs. 1A and 1B, splice tray 100 (may also be referred to herein as a tray, fiber optic splice tray, etc.) has a tray body 101 comprising a generally rectangular base 102 extending longitudinally from a first end 103a to a second end 103b, wherein the base 102 includes a cable entrance region 105 at the first end 103a of the splice tray 100 and a side wall 108 extending from the base 102 from a first edge of the cable entrance region 105 on one side, around the external perimeter of the base 102, to a second opposite edge of the cable entrance region 105. In other words, the splice tray 100 includes a sidewall 108 extending from the base 102 at least partially around the external perimeter of the base 102, where the sidewall 108 defines a cable entrance region 105. The sidewall 108 can have a

plurality of first tabs 109 extending from the top edge of the sidewall 108 toward the interior of the splice tray 100 to control the vertical positioning of the optical fibers within the splice tray 100.

**[0016]** Splice tray 100 has first and second splicing zones 110, 130 disposed on either side of a fiber management region 120. In other words the splice tray 100 includes a fiber management region 120 within an external perimeter of the base 102. Each of each of the splicing zones 110 is separated from the fiber management region 120 by containment walls 140 extending from the base 102 of the splice tray 100. The containment walls 140 are configured to separate the fiber management region 120 from the splicing zones 110, 130 as well as to help guide and manage the bend radius of the optical fibers being routed within the splice tray 100. In particular, the containment walls 140 are configured to route optical fibers within the fiber management region 120 of the splice tray 100. In other words, the splice tray 100 includes a first splicing zone 110 on a first side of the fiber management region 120 and separated from the fiber management region 120 by a first containment wall 140 extending from the base 102, and a second splicing zone 130 on a second side of the fiber management region 120 and separated from the fiber management region 120 by a second containment wall 140 extending from the base, the second side opposite the first side.

**[0017]** The containment walls 140 can have a number of second tabs 142 extending from the top edge of the containment walls 140 toward the fiber management region 120 to control the vertical positioning of the optical fibers within the splice tray 100 and a number of fourth tabs 143 extending from the top edge of the containment walls 140 in a direction opposite second tabs 142 that extend toward the free ends of the first tabs 109 to manage the optical fibers (not shown) entering and leaving the first and second splicing zones 110, 130.

**[0018]** The fiber management region 120 can be generally elliptical or oval shaped as defined by bend control walls 122. The bend control walls 122 can have a plurality of third tabs 123 extending from the top edge of the bend control walls 122 toward the center of the fiber management region 120 of the splice tray 100 to control the vertical positioning of the optical fibers within the fiber management region 120. In other words, the splice tray 100 includes a plurality of bend control walls 122 defining a generally elliptical shape of the fiber management region 120. The bend control walls 122 are configured to prevent exceeding a minimum bend radius of optical fibers routed within the splice tray 100.

**[0019]** The combination of the sidewall 108, the containment walls 140 and the bend control walls 122 provide an orderly means of routing and managing a plurality of optical fibers, in particular 250 micron-coated optical fibers, in a small space. The area bounded by bend control walls 122 can be used to store up to a meter length of the 250 micron-coated optical fibers being connected within the tray. The space between the bend control walls 122 and the containment walls 140 provides an orderly means of managing optical fibers being routed from the fiber management region 120 (may also be referred to herein as a storage area) to one of the splicing zones 110, 130, and the sidewall 108 ensures that all of the optical fibers being connected in the splice tray 100 stay in the splice tray 100.

**[0020]** The first and second splicing zones 110, 130 include a plurality of catch walls 113, 133 in the first and second splicing zones 110, 130, respectively, that are configured to hold a plurality of single fiber optical fiber splices (not shown). In an exemplary aspect, the single fiber optical fiber splices can be single fiber fusion splices single fiber mechanical splices such as a Fibriok™ Mechanical Splice available from 3M Company (St. Paul, MN).

**[0021]** Splice tray 100 also includes at least one optical component location disposed adjacent to each of the first and second splicing zone 159, 169 on a side opposite the fiber management region 120 that can be configured to hold an optical fiber splitter, a wavelength-division multiplexing (WDM) device, a fanout device, or a multifiber splice.

**[0022]** In the exemplary embodiment shown in Figs. 1A and 1B, each of at least one optical component location 159, 169 can include a splitter location 160, 170 disposed on either side of the first and second splicing zone 110, 130 on a side opposite the fiber management region 120, such that splice tray 100 includes a first splitter location 160 disposed between the first splicing 110 zone and side wall 108 and a second splitter location 170 disposed between the second splicing 110 zone and sidewall 108 opposite the first splitter location 160. In other words, each of the at least one first optical component location 159 and the at least one second optical component location 169 includes at least one splitter location 160, 170 for holding at least one of an optical fiber splitter and a WDM device. In certain embodiments, the first splitter location 160 and the second splitter location 170 include two splitter locations (see Figs. 2A and 2B). Optical splitters can be held in place in the splitter location 160, 170 by flexible arms 161, 171 of each splitter location 160, 170. The flexible arms 161, 171 are positioned with an angle relative to a support wall 162, 172 disposed between the splitter location 160, 170 and the adjacent splicing zone 110, 130. When an optical splitter is introduced in the space (splitter location

160, 170) between the flexible arms 161, 171 and sidewall 108, the optical splitter is held against the sidewall 108 by the flexible arms 161, 171.

**[0023]** In certain embodiments, the at least one optical component location 159, 169 can also include an optical component holder 115, 135 that is configured to hold one of a multifiber splice device (not shown) or an optical fanout device (not shown). In other words, in certain embodiments, each of the at least one first optical component location 159 and the at least one second optical component location 169 includes an optical component holder 115, 135 that is configured to hold one of a multifiber splice device or an optical fanout device. The optical component holder 115, 135 includes a plurality of latch arms 116, 136 extending from the base 102 of the splice tray 100 to retain an optical component adjacent to one or both of the first and second splicing zones 110, 130. In an alternative aspect, optical component holder 115, 135 can be considered an additional optical component location disposed in each of the splice zones 110, 130 and their associated splitter location 160, 170.

**[0024]** The entrance region 105 of splice tray 100 includes a pair of fiber entrance/exit channels 106 extending from entrance region 105 in a slightly curved configuration to prevent potential kinks or unintended bends being placed on the entering/exiting fibers that are received by the splice tray 100. In other words, the splice tray 100 includes a pair of curved fiber channels 106 extending from the entrance region 105. In an exemplary aspect, the entrance region 105 may also include a latching mechanism 107 that is configured to attach the splice tray 100 to a tray organizer in a rotational manner. In one embodiment, latching mechanism 107 can comprise a latch post 107a and a coupling member 107b that can be depressed to allow the splice tray 100 to be assembled to a tray organizer. Releasing the coupling member 107b locks the splice tray 100 to the tray organizer while still allowing the splice tray 100 to rotate with respect to the tray organizer.

**[0025]** The fiber entrance/exit channels 106 provide continual support to the entering/exiting optical fibers as the splice tray 100 is being rotated forward and backward when the splice tray 100 is secured on splice tray organizer (not shown). In a preferred aspect, the channels 106 are formed having a (relatively) deep "U" shape in cross-section, which supports and holds fiber disposed therein even when the splice tray 100 is fully tilted in either direction.

**[0026]** In an exemplary second embodiment as shown in FIGS. 2A and 2B, splice tray



200 is shown. Splice tray 200 includes similar components and functionality as provided and described above with respect to the splice tray 100 of FIGS. 1A and 1B, except where otherwise noted. Splice tray 200 includes a tray body 201 comprising a generally rectangular base 202 that includes a cable entrance region 205 at the first end of the splice tray 200 and a side wall 208 extending from the base 202 from a first edge of the cable entrance region 205 on one side, around the external perimeter of the base 202, to a second opposite edge of the cable entrance region 205. In other words, the splice tray 200 includes a sidewall 208 extending from the base 202 at least partially around the external perimeter of the base 202, where the sidewall 208 defines a cable entrance region 205. The sidewall 208 can have a plurality of second tabs 209 extending from the top edge of the sidewall 208 toward the interior of the splice tray 200 to control the vertical positioning of the optical fibers within the splice tray 200.

**[0027]** Splice tray 200 has first and second splicing zones 210, 230 disposed on either side of a fiber management region 220. In other words, the splice tray 200 includes a fiber management region 220 within an external perimeter of the base 202. Each of the splicing zones 210, 230 is separated from the fiber management region 220 by a containment wall 240 extending from the base 202 of the splice tray 200. The containment walls 240 are configured to separate the fiber management region 220 from the splicing zone 210, 230 as well as to help guide and manage the bend radius of the optical fibers being routed within the splice tray 200. In other words, the splice tray 200 includes a first splicing zone 210 on a first side of the fiber management region 220 and separated from the fiber management region 220 by a first containment wall 240 extending from the base 202, and a second splicing zone 230 on a second side of the fiber management region 220 and separated from the fiber management region 220 by a second containment wall 240 extending from the base, the second side opposite the first side. The containment walls 240 are configured to route optical fibers within the fiber management region 220 of the splice tray 200.

**[0028]** The containment walls 240 can have some number of second tabs 242 extending from the top edge of the containment walls 240 toward the fiber management region 220 to control the vertical positioning of the optical fibers within the splice tray 200, and a number of fourth tabs 243 extending from the top edge of the containment walls 240 in a direction opposite second tabs 242 that extent toward the free ends of first tabs 209 to manage the optical fibers (not shown) entering and leaving the first and second splicing zones 210, 230.

**[0029]** As with the splice tray 100 of FIGS. 1A and 1B, fiber management region 220 can

be generally elliptical or oval shaped as defined by bend control walls 222. The bend control walls 222 can have some number of third tabs 223 extending from the top edge of the bend control walls 222 toward the center of the fiber management region 220 of the splice tray 200 to control the vertical positioning of the optical fibers within the fiber management region 220.

**[0030]** The combination of the sidewall 208, the containment walls 240, and the bend control walls 222 provides an orderly means of routing and managing a plurality of optical fibers, in particular 250-micron coated optical fibers in a small space, as described previously. The first and second splicing zones 210, 230 include a plurality of catch walls 213, 233 in the first and second splicing zones 210, 230, respectively, that are configured to hold a plurality of single fiber optical fiber splices (not shown). Splice tray 200 also includes at least one optical component location 259, 269 disposed adjacent to each of the first and second splicing zone 210, 230 on a side opposite the fiber management region 220.

**[0031]** The primary difference between splice tray 100 and splice tray 200 is that splice tray 200 includes four splitter locations 260a,b and 270a,b. Two splitter locations 260a, 260b are disposed adjacent to the first splicing zone 210 on a side opposite the fiber management region 220, and two splitter locations 270a, 270b are disposed adjacent to the second splicing zone 230 on a side opposite the fiber management region 220. In the exemplary embodiment shown in Figs 2A and 2B, tray 200 includes a pair of first splitter locations 260a, 260b disposed between the first splicing zone 210 and side wall 208 and a second pair of splitter locations 270a, 270b disposed between the second splicing 230 zone and sidewall 208 opposite the first splitter locations 260a, 260b. The optical splitters can be held in place in the splitter locations 260a, 260b, 270a, 270b by flexible arms 261a, 261b, 271a, 271b of each splitter location 260a, 260b, 270a, 270b, respectively and a support wall 262a, 262b, 272a, 272b or the sidewall 208.

**[0032]** Flexible arms 261a of splitter location 260a are positioned at an angle relative to a support wall 262a disposed between splitter location 260a and the adjacent first splicing zone 210 and extend toward the support wall 262b. The flexible arms 261a form a spring clip to hold a splitter or other optoelectronic component or device between the flexible arms 261a and the support wall 262b. Similarly, flexible arms 261b of splitter location 260b are positioned at an angle relative to a support wall 262b disposed between splitter locations 260a, 260b, and extending toward sidewall 201 such that the flexible arms 261b can hold a

splitter or other optoelectronic device between the flexible arms 261b and the sidewall 201. Splice tray 200 is biaxially symmetric such that the left side of the splice tray 200 is essentially a mirror image of the right side of the splice tray 200. Thus, flexible arms 271a of splitter location 270a are positioned at an angle relative to a support wall 272a disposed between splitter location 270a and the second splicing zone 230. The free ends of the flexible arms 271a extend toward support wall 272b forming a spring clip to hold a splitter or other optoelectronic component or device between the flexible arms 271a and support wall 272b. Similarly, flexible arms 271b of splitter location 260b are positioned at an angle relative to a support wall 272b disposed between splitter locations 270a, 270b, and extend toward sidewall 201 such that the flexible arms 271b can hold a splitter or other optoelectronic component or device between the flexible arms 271b and the sidewall 201.

**[0033]** The entrance region 205 of splice tray 200 is analogous to entrance region 105 of splice tray 100 and as such does not need to be repeated here.

**[0034]** The exemplary tray 100, 200 of the present disclosure can hold between 12 and 24 single fiber splices, preferably between 16 and 24 single fiber splices, depending on the size of the single fiber splices being held and the number and type of additional optical components. In the embodiments shown, the exemplary tray 100, 200 can hold up to 4 passive or active optical components. In one embodiment, the optical component is an optical fiber splitter. For example, the exemplary trays described herein can hold 2- 1x8 splitters, 4- 1x4 splitters, or 2- 1x16 splitter. Other combinations are possible depending on the tray configuration and should be considered part of the present invention. Splice trays 100, 200 are biaxially symmetric along a centerline 90 (see, e.g., FIG. 2B) of the tray 200 that extends between fiber entrance/exit channels 106, 206 through the center of the fiber management region 120, 220 such that the first fiber splicing zone 110, 210 is disposed on one side of the centerline 90 and the second splicing zone 130, 230 is disposed on the opposite side of the centerline 90.

**[0035]** In an exemplary aspect, each of the first and second splicing zones 110, 130, 210, 230 can be configured to hold between 8 and 12 single fiber splices. Thus, the total splice capacity for the exemplary splice trays 100, 200 can be between 16 and 24 single fiber splices.

**[0036]** The exemplary splice trays can be relatively thin compared to many conventional splice trays. In an exemplary embodiment, the exemplary trays 100, 200 can have a thickness of between 0.16 in (0.4 cm) and about 0.28 in (0.7 cm), preferably about 0.2 in

(0.51cm) in depth and can have an internal volume of between about 2.3 in<sup>3</sup> (38 cm<sup>3</sup>) and about 3.0 in<sup>3</sup> (50 cm<sup>3</sup>), preferably about 2.7 in<sup>3</sup> (38 cm<sup>3</sup>). In certain embodiments, the splice tray 100 has a thickness of between 4 mm and 8 mm, and preferably about 5 mm. Alternatively, the present invention provides fiber optic splice trays 100, 200 having a defined connection density of splice holders per unit of volume of the splice tray of at least 5 single splices/in<sup>3</sup>, preferably at least 7 single splices/in<sup>3</sup>, and more preferably at least 9 single splices/in<sup>3</sup>, in addition to providing capacity for at least two optical components such as optical fiber splices, multifiber splices or WDM devices.

**[0037]** Although the term "splice tray" is used throughout this disclosure, in alternative aspects, the trays described herein can hold passive and/or active optical components, as well as splices.

**[0038]** Various modifications, equivalent processes, as well as numerous structures to which the present invention may be applicable will be readily apparent to those of skill in the art to which the present invention is directed upon review of the present specification.

What is Claimed is:

1. An optical fiber splice tray comprising:  
a base having an external perimeter;  
a fiber management region within the external perimeter of the base;  
a first splicing zone on a first side of the fiber management region and separated from the fiber management region by a first containment wall extending from the base;  
a second splicing zone on a second side of the fiber management region and separated from the fiber management region by a second containment wall extending from the base, the second side opposite the first side;  
at least one first optical component location disposed adjacent to the first splicing zone opposite the fiber management region, the first splicing zone between the at least one first optical component location and the fiber management region; and  
at least one second optical component location disposed adjacent to the second splicing zone, the second splicing zone between the at least one second optical component location and the fiber management region.
2. The optical fiber splice tray of claim 1, further comprising a sidewall extending from the base at least partially around the external perimeter of the base, the sidewall defining a cable entrance region.
3. The optical fiber splice tray of claims 1 or 2, further comprising a pair of curved fiber channels extending from the entrance region.
4. The optical fiber splice tray of claim 3, wherein the optical fiber splice tray is biaxially symmetric along a centerline extending between the fiber channels through the center of the fiber management region such that the first fiber splicing zone is disposed on one side of the centerline and the second splicing zone is on an opposite side of the centerline.
5. The optical fiber splice tray of any of claims 1-4, wherein each of the at least one first optical component location and the at least one second optical component location is configured to hold at least one of an optical fiber splitter, a wavelength-division

multiplexing (WDM) device, a fanout device, and a multifiber splice.

6. The optical fiber splice tray of any of claims 1-5, wherein each of the at least one first optical component location and the at least one second optical component location comprises at least one splitter location for holding at least one of an optical fiber splitter and a WDM device.

7. The optical fiber splice tray of claim 6, wherein the at least one splitter location comprises two splitter locations.

8. The optical fiber splice tray of any of claims 1-7, wherein each of the at least one first optical component location and the at least one second optical component location comprises an optical component holder configured to hold at least one of a fanout device and a multifiber splice.

9. The optical fiber splice tray of any of claims 1-8, wherein the first containment wall and the second containment wall are configured to route optical fibers within the fiber management region of the optical fiber splice tray.

10. The optical fiber splice tray of any of claims 1-9, further comprising a plurality of bend control walls defining a generally elliptical shape of the fiber management region, the bend control walls configured to prevent exceeding a minimum bend radius of optical fibers routed within the optical fiber splice tray.

11. The optical fiber splice tray of any of claims 1-10, wherein the optical fiber splice tray has a thickness of between 4 mm and about 8 mm.

12. The optical fiber splice tray of any of claims 1-11, wherein the thickness of the optical fiber splice tray is about 5 mm.

13. The optical fiber splice tray of any of claims 1-12, wherein the optical fiber splice tray has an internal volume of between about 2.3 in<sup>3</sup> and about 3.0 in<sup>3</sup>.

14. The optical fiber splice tray of any of claims 1-13, wherein the optical fiber splice tray has an internal volume of about  $2.7 \text{ in}^3$ .
15. The optical fiber splice tray of any of claims 1-14, wherein the optical fiber splice tray is configured to provide a connection density of at least  $5 \text{ single splices/in}^3$ .
16. The optical fiber splice tray of any of claims 1-15, wherein the optical fiber splice tray is configured to provide a splice connection density of at least  $7 \text{ single splices/in}^3$ .
17. The optical fiber splice tray of any of claims 1-16, wherein the optical fiber splice tray is configured to provide a splice connection density of at least  $9 \text{ single splices/in}^3$ .

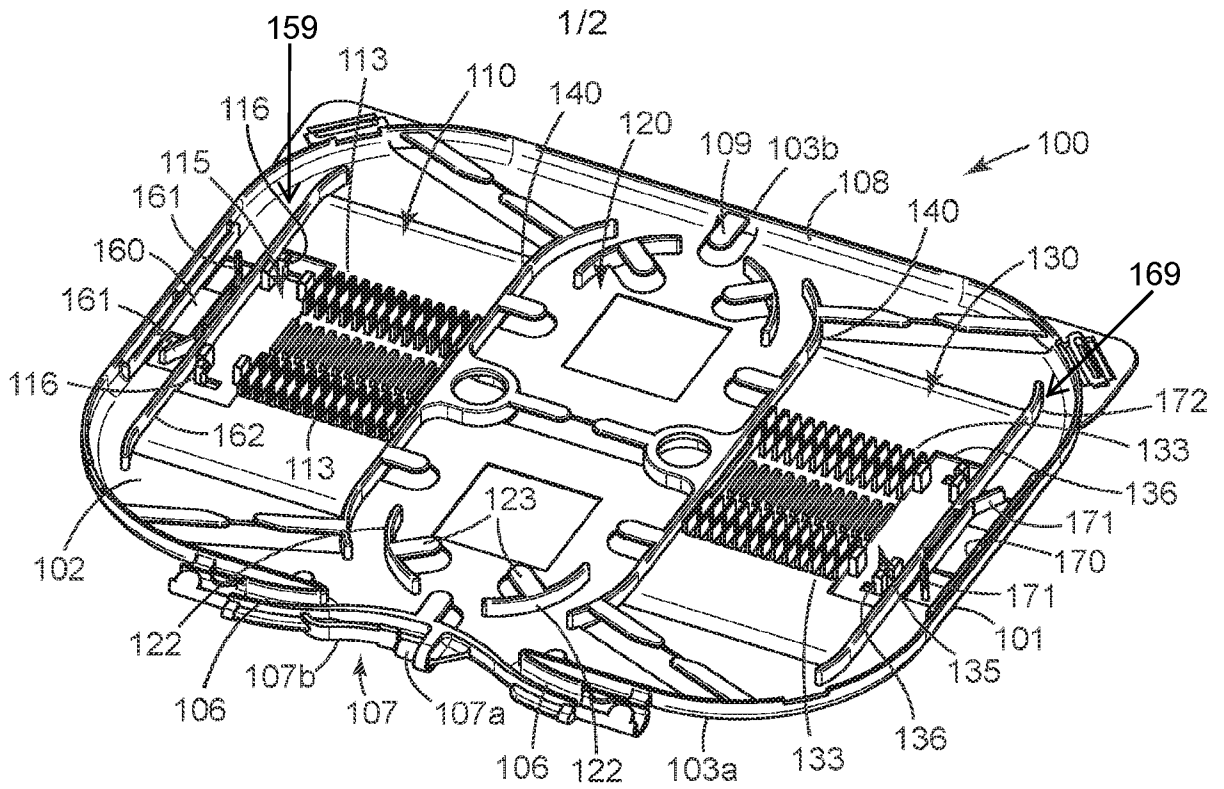


FIG. 1A



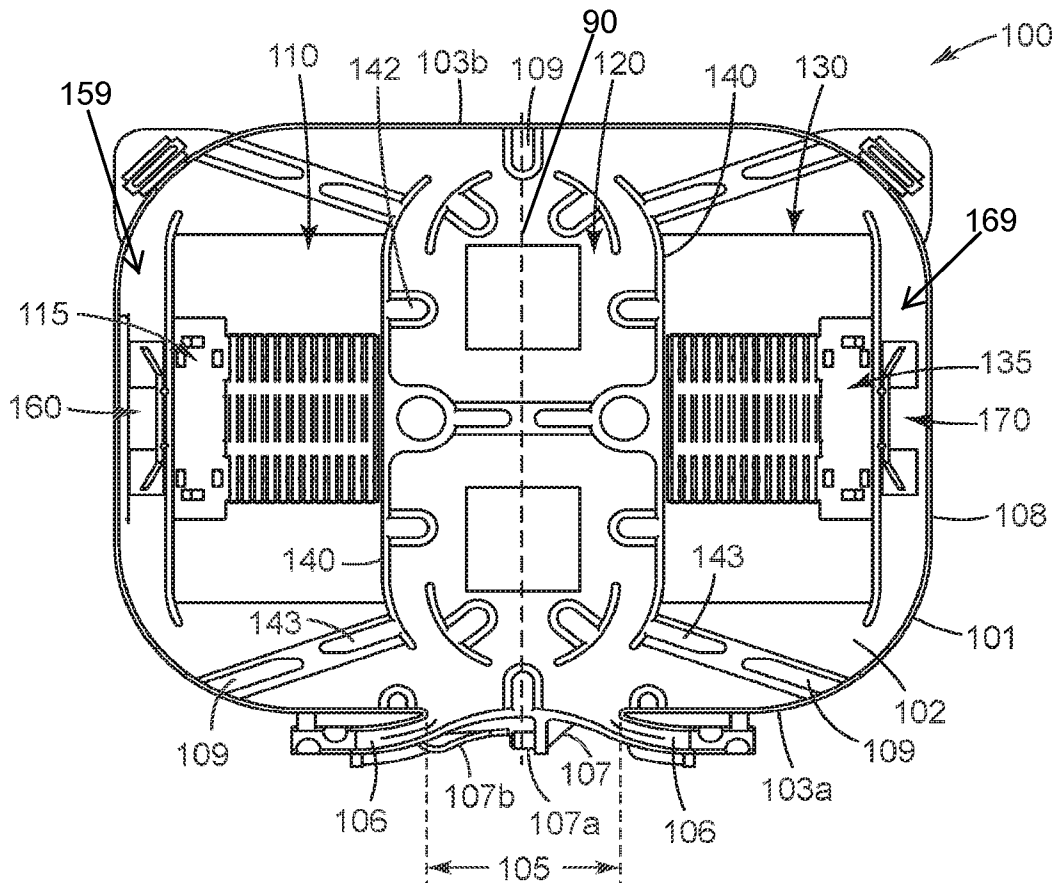


FIG. 1B

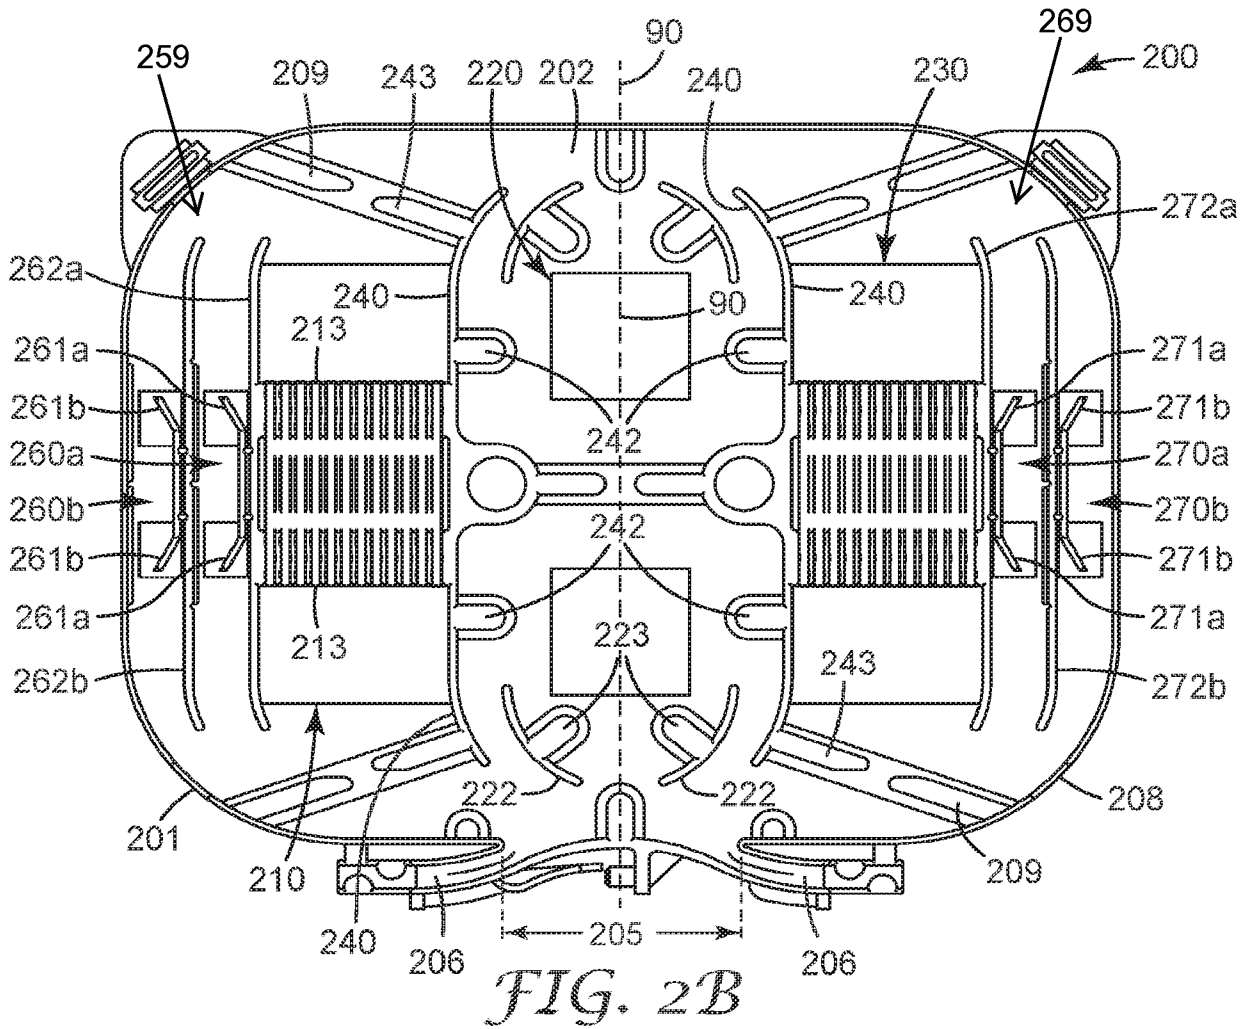

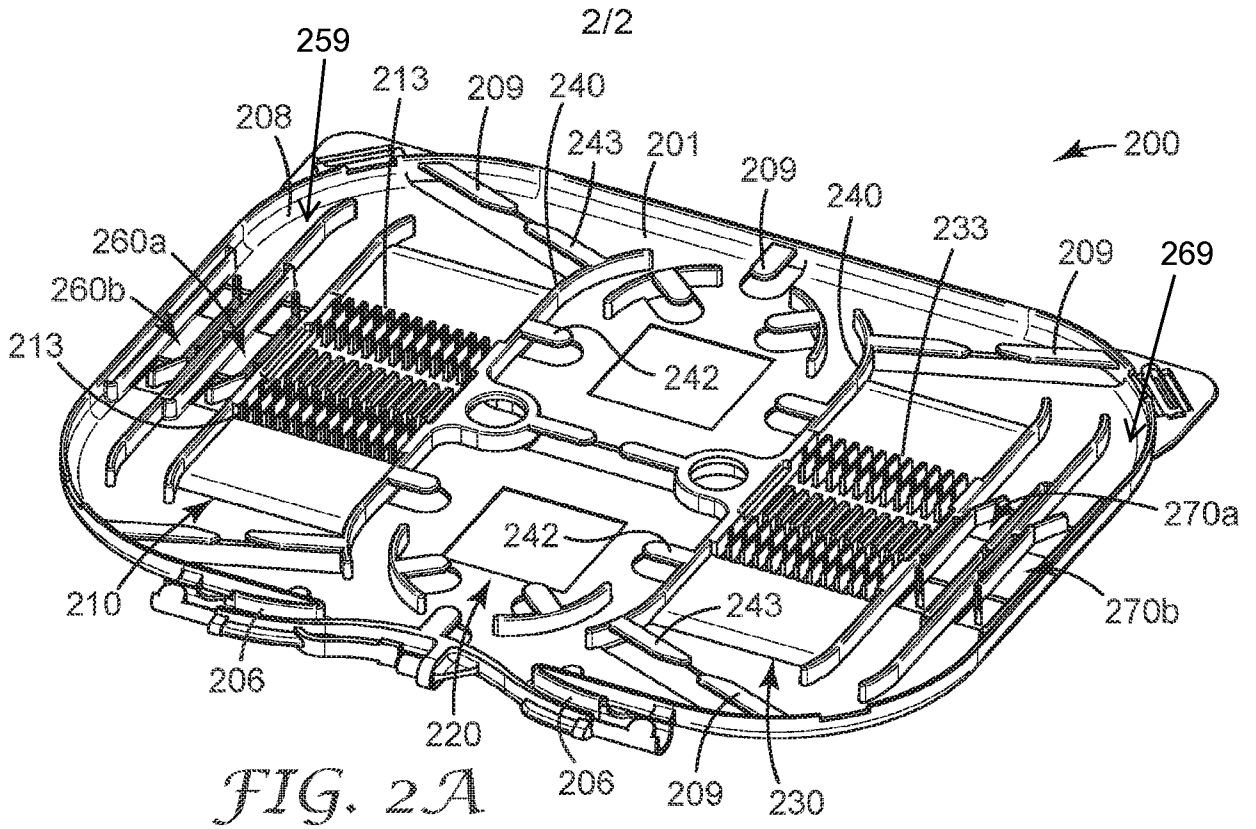

INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2018/045766

A. CLASSIFICATION OF SUBJECT MATTER  
INV. G02B6/44  
ADD.  
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
Minimum documentation searched (classification system followed by classification symbols)  
G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 144 792 A (KIM TAE-RYONG [KR] ET AL) 7 November 2000 (2000-11-07)	1-4,8-17
Y	column 4, line 56 - column 5, line 9; figures 2,4 column 6, lines 29-52 column 5, lines 61-64	5-7
Y	----- WO 2009/048795 A1 (3M INNOVATIVE PROPERTIES CO [US]; DESARD CHRISTOPHE [FR]) 16 April 2009 (2009-04-16) page 7, lines 7-11; figures 5A,6	5-7
A	----- US 2011/299823 A1 (BRAN DE LEON OSCAR FERNANDO [US] ET AL) 8 December 2011 (2011-12-08) figures 1,2 ----- -/--	1-17

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search  11 October 2018	Date of mailing of the international search report  22/10/2018
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Verdrager, Véronique
--	--

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2018/045766

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 619 608 A (FOSS RAYMOND C [GB] ET AL) 8 April 1997 (1997-04-08) figure 2	1-17
	-----	
A	US 6 112 006 A (FOSS RAYMOND CHARLES [GB]) 29 August 2000 (2000-08-29) figure 14	1-17
	-----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2018/045766
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 6144792	A	07-11-2000	CN 1181512 A	13-05-1998
			DE 19747145 A1	16-07-1998
			FR 2755250 A1	30-04-1998
			GB 2318648 A	29-04-1998
			JP 3138244 B2	26-02-2001
			JP H10133035 A	22-05-1998
			RU 2137166 C1	10-09-1999
			US 6144792 A	07-11-2000
			-----	
WO 2009048795	A1	16-04-2009	NONE	
-----				
US 2011299823	A1	08-12-2011	AR 071488 A1	23-06-2010
			CN 102067003 A	18-05-2011
			EP 2277071 A2	26-01-2011
			US 2009290842 A1	26-11-2009
			US 2011299823 A1	08-12-2011
			WO 2009131895 A2	29-10-2009
-----				
US 5619608	A	08-04-1997	AU 5976194 A	29-08-1994
			CA 2155030 A1	18-08-1994
			DE 69409634 D1	20-05-1998
			DE 69409634 T2	06-08-1998
			DE 69701064 D1	10-02-2000
			DE 69701064 T2	28-09-2000
			EP 0682779 A1	22-11-1995
			EP 0816887 A2	07-01-1998
			US 5619608 A	08-04-1997
			WO 9418590 A1	18-08-1994
-----				
US 6112006	A	29-08-2000	AT 192856 T	15-05-2000
			AU 7634096 A	11-06-1997
			DE 69608314 D1	15-06-2000
			DE 69608314 T2	04-01-2001
			EP 0873536 A1	28-10-1998
			US 6112006 A	29-08-2000
			WO 9719377 A1	29-05-1997
-----				