



(51) International Patent Classification:

H04N 19/11 (2014.01) H04N 19/463 (2014.01)
H04N 19/152 (2014.01) H04N 19/70 (2014.01)
H04N 19/159 (2014.01) H04N 19/593 (2014.01)
H04N 19/176 (2014.01)

(21) International Application Number:

PCT/RU2017/000487

(22) International Filing Date:

05 July 2017 (05.07.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: HUAWEI TECHNOLOGIES CO., LTD.

[CN/CN]; Huawei Administration Building, Bantian, Longgang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventor; and

(71) Applicant (for RU only): FILIPPOV, Alexey Konstantinovich [RU/CN]; Huawei Administration Building, Bantian, Longgang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventor: RUFITSKIY, Vasily Alexeevich; Huawei Administration Building, Bantian, Longgang District, Shenzhen, Guangdong 518129 (CN).

(74) Agent: LAW FIRM "GORODISSKY & PARTNERS" LTD. et al.; MITS, Alexander Vladimirovich, B. Spasskaya str., 25, bldg. 3, Moscow, 129090 (RU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(54) Title: DEVICES AND METHODS FOR VIDEO CODING

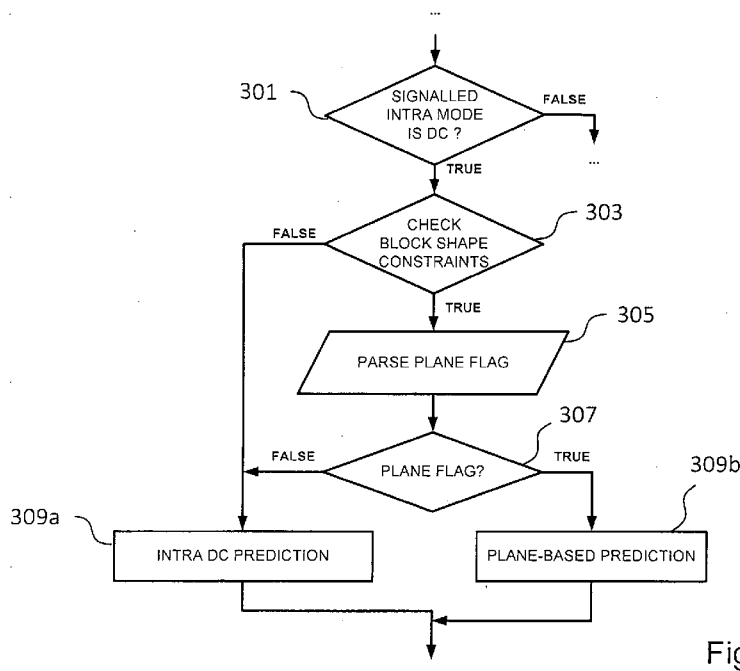


Fig. 3

(57) Abstract: The invention relates to an apparatus (121) for decoding encoded video data, wherein the encoded video data comprises a plurality of frames, each frame being partitioned into a plurality of video coding blocks, including a current video coding block. The apparatus (121) comprises: a decoding unit (123) configured to decode the encoded video data for providing a residual video coding block associated with the current video coding block and to extract an intra-prediction mode identifier from the encoded video data; an intra prediction unit (125) configured to generate for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode, wherein the intra-prediction unit (125) is configured to pre-select a plane-based intra-prediction mode and a further intra-prediction mode, in case the extracted intra-prediction mode identifier is equal to a first predefined intra-prediction mode identifier, and to select either the plane-based intra-prediction mode or the further intra-prediction mode on the basis of (a) an



KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

additional flag extracted from the encoded video data or (b) a deviation measure, wherein the deviation measure quantifies deviations of a plurality of reference samples from neighbouring video coding blocks of the current video coding block from a plurality of fitting samples defined by a fitting plane based on the plurality of reference samples; and a restoration unit (127) configured to restore the current video coding block on the basis of the residual video coding block and the predicted video coding block.

DESCRIPTION**DEVICES AND METHODS FOR VIDEO CODING**5 TECHNICAL FIELD

The invention relates to the field of video coding. More specifically, the invention relates to an apparatus an encoding apparatus and a decoding apparatus using intra prediction of a video coding block as well as corresponding methods.

10

BACKGROUND

Digital video communication and storage applications are implemented by a wide range of digital devices, e.g. digital cameras, cellular radio telephones, laptops, broadcasting
15 systems, video conferencing systems, etc. One of the most important and challenging tasks of these applications is video compression. The task of video compression is complex and is constrained by two contradicting parameters: compression efficiency and computational complexity. Video coding standards, such as ITU-T H.264/AVC or ITU-T H.265/HEVC, provide a good tradeoff between these parameters. For that reason support
20 of video coding standards is a mandatory requirement for almost any video compression application.

The state-of-the-art video coding standards are based on partitioning of a source picture into video coding blocks. Processing of these blocks depend on their size, spatial position
25 and a coding mode specified by an encoder. Coding modes can be classified into two groups according to the type of prediction: intra- and inter-prediction modes. Intra-prediction modes use pixels of the same picture (also referred to as frame or image) to generate reference samples to calculate the prediction values for the pixels of the block being reconstructed. Intra-prediction is also referred to as spatial prediction. Inter-
30 prediction modes are designed for temporal prediction and uses reference samples of previous or next pictures to predict pixels of the block of the current picture. After a prediction stage, transform coding is performed for a prediction error that is the difference between an original signal and its prediction. Then, the transform coefficients and side
information are encoded using an entropy coder (e.g., CABAC for AVC/H.264 and
35 HEVC/H.265). The recently adopted ITU-T H.265/HEVC standard (ISO/IEC 23008-2:2013, "Information technology - High efficiency coding and media delivery in

heterogeneous environments – Part 2: High efficiency video coding", November 2013) declares a set of state-of-the-art video coding tools that provide a reasonable tradeoff between coding efficiency and computational complexity. An overview on the ITU-T H.265/HEVC standard has been given by Gary J. Sullivan, "Overview of the High
5 Efficiency Video Coding (HEVC) Standard", in IEEE Transactions on Circuits and Systems for Video Technology, Vol. 22, No. 12, December 2012, the entire content of which is incorporated herein by reference.

Similarly to the ITU-T H.264/AVC video coding standard, the HEVC/H.265 video coding
10 standard provides for a division of the source picture into blocks, e.g., coding units (CUs). Each of the CUs can be further split into either smaller CUs or prediction units (PUs). A PU can be intra- or inter-predicted according to the type of processing applied for the pixels of PU. In case of inter-prediction, a PU represents an area of pixels that is processed by motion compensation using a motion vector specified for a PU. For intra
15 prediction, the adjacent pixels of neighbor blocks are used as reference samples to predict a current block. A PU specifies a prediction mode that is selected from the set of intra-prediction modes for all the transform units (TUs) contained in this PU. A TU can have different sizes (e.g., 4x4, 8x8, 16x16 and 32x32 pixels) and can be processed in different ways. For a TU, transform coding is performed, i.e. the prediction error is
20 transformed with a discrete cosine transform or a discrete sine transform (in the HEVC/H.265 standard, it is applied to intra-coded blocks) and quantized. Hence, reconstructed pixels contain quantization noise (it can become apparent, for examples, as blockiness between units, ringing artifacts along with sharp edges, etc.) that in-loop filters such as Deblocking Filter (DBF), Sample Adaptive Offset (SAO) and Adaptive Loop Filter
25 (ALF) try to suppress. The use of sophisticated prediction coding (such as motion compensation and intra-prediction) and partitioning techniques (e.g., quadtree for CUs and PUs as well as residual quadtree for TUs in the HEVC/H.265 standard and quadtree plus binary tree for the JEM reference software from version JEM-3.0 onwards) allowed the standardization committee to significantly reduce the redundancy in PUs. The
30 fundamental difference between the quadtree (QT) and quadtree plus binary tree (QTBT) partitioning mechanisms is that the latter one enables not only square but also rectangular blocks by using partitioning based on both quad- and binary-tree.

In the H.264/AVC standard, four intra-prediction modes are available for 16x16 blocks for
35 a luma color component. One of those modes is plane-based and can predict a source-

signal gradient within a block. The formula used to calculate pixels to be predicted using the plane-based mode is expressed as follows:

$$p_{\text{pred}}[x, y] = \text{clip}_3(0, 2^n - 1, (a + b(x - 7) + c(y - 7) + 16) \gg 5),$$

5

where a , b and c are plane (multiple regression) parameters. It is worth noting that the clip3 function, $p_{\text{pred}}[x, y] = \text{clip}_3(p_{\text{min}}, p_{\text{max}}, \hat{p}_{\text{pred}}[x, y])$, is used in the equation above. In the clip3 function, p_{min} and p_{max} are the minimum and maximum values of pixels that are possible for a given bit depth (e.g., $p_{\text{min}} = 0$ and $p_{\text{max}} = 255$ for bit depth 8) respectively;

10 $\hat{p}_{\text{pred}}[x, y]$ and $p_{\text{pred}}[x, y]$ are values of predictors at the position $[x, y]$ before and after clipping respectively.

Despite similarities to the DC intra prediction mode, the plane-based intra prediction mode is signaled independently of the other mode(s). For compressing a prediction mode the H.264/AVC standard supports the most probable mode (MPM) which is an estimation of the prediction mode using the above and left adjacent neighboring blocks of a current video coding block. The MPM is the minimum of the prediction modes of these two neighboring blocks. If one of these prediction modes is not available the corresponding value is set to 2 (DC mode). Thus, if these two neighboring blocks are predicted using the plane-based mode, it becomes the MPM. In the HEVC/H.265 standard, the concept of MPM was extended to include not only one mode but a set of prediction modes. In particular, the MPM list can contain up to 3 and 5 intra-prediction modes for the HM and JEM frameworks, respectively.

25 According to the HEVC/H.265 standard, 35 intra prediction modes are available and include a planar mode (the intra-prediction mode index is 0), a DC mode (the intra-prediction mode index is 1), and 33 directional modes (the intra-prediction mode index ranges from 2 to 34). From the JEM-1.0 software onwards, the set of directional intra-prediction modes has been extended up to 65 modes (almost doubled) by decreasing a step angle between directional intra-prediction modes by a factor of 2. As seen from the listed modes above, a plane-based mode was adopted neither for HEVC/H.265 nor for the JEM software. In fact, this mode was replaced by the planar one that does not always result in a plane-based predictor.

30

In A. Said, X. Zhao, J. Chen, M. Karczewicz, "Position dependent intra prediction combination," Contribution COM16-C1046-E to the ITU-T Study Group 16 meeting, Geneva, Switzerland, October 2015 (a similar disclosure can be found in WO2017/058635) a new intra-prediction technique referred to as position dependent intra-
5 prediction combination (PDPC) was proposed. PDPC is a tool that performs smoothing over an intra-predictor using both filtered and unfiltered reference samples. It is worth to note that PDPC requires a one-bit flag per each intra-coded block (independently of what intra-prediction mode is selected) to indicate whether this tool is turned on or off.

10 In US2012/0147955 a mode adaptive intra prediction smoothing technique is presented. The decision to filter reference samples or not as well as the strength of the smoothing filter depends on the selected intra-prediction mode and a flag encoded in the video bit stream. Subject to the intra-prediction mode defined for a block, reference samples could be either smoothed by a filter or used without being modified. The current HEVC/H.265
15 standard uses this technique partially. Specifically, filter smoothing is turned off for several combinations of intra-mode and block size, i.e. a flag is not required.

In Alexey Filippov, and Vasily Ruffitskiy, "Reference sample adaptive filtering for intra coding," ITU-T SG16 Q6, COM16-C983, October 2015, Geneva, Switzerland a reference
20 sample adaptive filter (RSAF) also known as adaptive reference sample smoothing (ARSS) was considered. The main difference with the mode-adaptive intra-prediction smoothing technique is that a data hiding procedure is used to signal a smoothing flag. It was adopted for the Joint Exploration Model 1 (JEM1).

25 Another method for generating secondary reference samples is described in the patent application PCT/RU2016/000703 based on input reference samples and predicted samples. In a first stage, the respective position of a reference sample p_{rs1} on the opposite side is defined. This position depends on the intra-prediction mode, size of the block to be predicted and the position of a pixel being predicted. If this position does not
30 fall into known reference sample side, generated side values are used. Otherwise, p_{rs1} is calculated from known reference samples. Reference samples p_{rs0} and p_{rs1} are not necessary located at integer pixel position but may require sub-pixel interpolation process, e.g. as defined by HEVC standard. The next stage comprises calculating weights for the reference samples p_{rs0} and p_{rs1} . These weights are calculated from the values of
35 distance between pixel position and reference samples p_{rs0} and p_{rs1} (d_{rs0} and d_{rs1}

respectively). In fact, distances can be normalized to the overall distance between p_{rs0} and p_{rs1} . Evidently, it is possible to derive the value of d_{rs1} from d_{rs0} and vice versa. The predicted pixel value is calculated using distance-weights and reference pixel values on the basis of the following equation:

5

$$p[x, y] = \frac{d_{rs1}}{D} p_{rs0} + \frac{d_{rs0}}{D} p_{rs1},$$

wherein D denotes the distance between positions of p_{rs0} and p_{rs1} . A gradient component P_{grad} of secondary reference samples is derived from the primary reference samples adjacent to bottom-left and upper-right corner pixels of the block to be predicted. Thus, due to the properties of distance weighting equation given above, samples of predicted signal fall within a range between minimum and maximum values of reference sample pixels.

As discussed in "EE7 Adaptive Clipping in JEM3.0" by F. Galpin et al., Contribution JVET-D0033 to the 4th JVET meeting, China, 2016, the adaptive clipping mechanism, initially proposed in "Adaptive Clipping in JEM2.0" by F. Galpin et al., Contribution JVET-C0040 to the 3rd JVET meeting, Switzerland, 2016, is used to restrict pixel values in blocks (e.g., in a predictor) from the JEM-4.0 software onwards. This technique uses clipping bounds that are determined at the encoder side and are explicitly signaled in the bit-stream, namely, in slice headers. Clipping bounds are defined as actual minimum $p_{min}(C)$ and maximum $p_{max}(C)$ sample values of coded pictures separately for every color component.

20

Mathematically, adaptive clipping operation can be presented as follows:

$$p_{pred}(x, y, C) = \text{clip}_3(p_{min}(C), p_{max}(C), \hat{p}_{pred}(x, y, C)) = \text{clip}_A(\hat{p}_{pred}(x, y, C), C),$$

25

where C is an index of a selected color component. This mechanism, similar to the $\text{clip}_3()$ function, is directly applied to pixel values, e.g., within a predictor.

For the JEM-3.0 software, a new partitioning mechanism based on both quad-tree and binary tree and known as QTBT was proposed. QTBT partitioning can provide not just square but rectangular blocks as well. Of course, some signaling overhead and increased computational complexity at the encoder side are the price of the QTBT partitioning as

30

compared to conventional quad-tree based partitioning used in the HEVC/H.265 standard. Nevertheless, the QTBT-based partitioning is endowed with better segmentation properties and, hence, demonstrates significantly higher coding efficiency than the conventional quad-tree partitioning.

5

A major problem not addressed by the above conventional approaches is to integrate a plane-based intra prediction mode (that is missing in the HEVC/H.265 standard) and its modifications based on directional modes into the HM and JEM frameworks without losing the coding efficiency as compared to other intra prediction modes and avoiding a signaling overhead. More specifically, currently there are no solutions for including the plane-based mode in the current intra prediction mode signaling mechanism without adversely affecting other modes that, for example, can be popped out from the MPM list if the plane-based mode or any others are added to this list.

10

15 In light of the above, there is a need for improved devices and methods for video coding, which allow increasing the signaling efficiency for intra prediction modes.

SUMMARY

20 It is an object of the invention to provide improved devices and methods for video coding, which allow increasing the signaling efficiency for intra prediction modes.

The foregoing and other objects are achieved by the subject matter of the independent claims. Further implementation forms are apparent from the dependent claims, the description and the figures.

25

Generally, the invention is based on the idea to provide a hierarchical signaling mechanism for including a plane-based intra prediction mode (herein referred to as plane-based mode or PbM) into the current signaling schemes. For instance, in an embodiment, two modes, including PbM and, for instance, the DC intra prediction mode, correspond to index 1 (DC_IDX) that previously indicated only one mode (the DC mode). Then, one of these two modes is either derived or explicitly signaled. Moreover, embodiments of the invention provide processing options for PbM and its modifications based on directional modes in PDPC and RSAF/ARSS. Thus, embodiments of the invention provide, in particular, the following advantages: additional coding gain can be reached by integration into a codec; embodiments of the invention can be used in many potential applications in

30

35

hybrid video coding paradigms that are compatible with the HM software and the VPX video codec family as well as the JEM software and the VPX/AV1 video codec family that are a state-of-the-art and a next-generation video coding frameworks, respectively; hardware and computational complexities are kept low at both encoder and decoder
5 sides; and embodiments of the invention can be easily implemented in codecs that use conventional intra-prediction mechanisms.

The following disclosure employs a plurality of terms which, in embodiments, have the following meaning: Slice – a spatially distinct region of a picture that is independently
10 encoded/decoded. Slice header – Data structure configured to signal information associated with a particular slice. Video coding block (or short block) – an MxN (M-column by N-row) array of pixels or samples (each pixel/sample being associated with at least one pixel/sample value), or an MxN array of transform coefficients. Coding Tree Unit (CTU) grid – a grid structure employed to partition blocks of pixels into macro-blocks for video
15 encoding. Coding Unit (CU) – a coding block of luma samples, two corresponding coding blocks of chroma samples of an image that has three sample arrays, or a coding block of samples of a monochrome picture or a picture that is coded using three separate color planes and syntax used to code the samples. Picture Parameter Set (PPS) - a syntax structure containing syntax elements that apply to zero or more entire coded pictures as
20 determined by a syntax element found in each slice segment header. Sequence Parameter Set (SPS) - a syntax structure containing syntax elements that apply to zero or more entire coded video sequences as determined by the content of a syntax element found in the PPS referred to by a syntax element found in each slice segment header. Video Parameter Set (VPS) - a syntax structure containing syntax elements that apply to
25 zero or more entire coded video sequences. Prediction Unit (PU) – a prediction block of luma samples, two corresponding prediction blocks of chroma samples of a picture that has three sample arrays, or a prediction block of samples of a monochrome picture or a picture that is coded using three separate color planes and syntax used to predict the prediction block samples. Transform Unit (TU) – a transform block of luma samples, two
30 corresponding transform blocks of chroma samples of a picture that has three sample arrays, or a transform block of samples of a monochrome picture or a picture that is coded using three separate color planes and syntax used to predict the transform block samples. Supplemental enhancement information (SEI) - extra information that may be inserted into a video bit-stream to enhance the use of the video. Luma – information indicating the
35 brightness of an image sample. Chroma – information indicating the color of an image

sample, which may be described in terms of red difference chroma component (Cr) and blue difference chroma component (Cb).

More specifically, according to a first aspect the invention relates to an apparatus for
 5 decoding encoded video data, the encoded video data comprising a plurality of frames,
 each frame being partitioned into a plurality of video coding blocks, including a current
 video coding block. The apparatus comprises: a decoding unit configured to decode the
 encoded video data for providing a residual video coding block associated with the current
 10 video coding block and to extract an intra-prediction mode identifier from the encoded
 video data; an intra-prediction unit configured to generate for the current video coding
 block a predicted video coding block on the basis of a selected intra-prediction mode,
 wherein the intra-prediction unit is configured to pre-select a plane-based intra-prediction
 mode and a further intra-prediction mode, in case the extracted intra-prediction mode
 15 identifier is equal to a first predefined intra-prediction mode identifier, and to select either
 the plane-based intra-prediction mode or the further intra-prediction mode on the basis of
 (a) an additional flag extracted from the encoded video data or (b) a deviation measure,
 wherein the deviation measure quantifies deviations of a plurality of reference samples
 from neighbouring video coding blocks of the current video coding block from a plurality of
 fitting samples defined by a fitting plane based on the plurality of reference samples; and
 20 a restoration unit configured to restore the current video coding block on the basis of the
 residual video coding block and the predicted video coding block.

Thus, an improved decoding apparatus for video coding is provided, which allows
 increasing the coding efficiency by including a plane-based intra-prediction mode, while
 25 not adversely affecting the signaling efficiency.

In a further possible implementation form of the first aspect, the intra-prediction unit is
 configured to determine the deviation measure E_{DEV} on the basis of one of the following
 equations:

30

$$E_{DEV} = \frac{1}{N+1} \sum_{k=0}^N \Delta[k]^2, \text{ or}$$

$$E_{DEV} = \frac{1}{N+1} \sum_{k=0}^N |\Delta[k]|,$$

wherein $N + 1$ denotes the number of reference samples from neighbouring video coding
 35 blocks of the current video coding block, k denotes a reference sample index and wherein
 $\Delta[k]$ is defined by the following equation:

$$\Delta[k] = p_{rs}[k] - \hat{p}_{rs}[k],$$

wherein $p_{rs}[k]$ denotes the sample value of the k -th reference sample and $\hat{p}_{rs}[k]$ denotes
 5 the fitting sample value of the k -th fitting sample.

In a further possible implementation form of the first aspect, the intra-prediction unit is
 configured to select the plane-based intra-prediction mode on the basis of the deviation
 measure E_{DEV} , when the deviation measure E_{DEV} is smaller than a predefined deviation
 10 threshold E_{THR} .

In a further possible implementation form of the first aspect, the decoding unit is
 configured to extract the predefined deviation threshold E_{THR} from the encoded video
 data.

15 In a further possible implementation form of the first aspect, the intra-prediction unit is
 configured to select the plane-based intra-prediction mode on the basis of the deviation
 measure E_{DEV} by determining a ratio R and to select the plane-based intra-prediction
 mode, when the ratio R is smaller than a predefined ratio threshold R_{THR} , wherein the the
 20 intra-prediction unit is configured to determine the ratio R on the basis of one of the
 following equations:

$$R = \frac{E_{DEV}}{E_{rs}} = \frac{\sum_{k=0}^N \Delta[k]^2}{\sum_{k=0}^N p_{rs}[k]^2}, \text{ or}$$

$$R = \frac{E_{DEV}}{E_{rs}} = \frac{\sum_{k=0}^N |\Delta[k]|}{\sum_{k=0}^N |p_{rs}[k]|}.$$

25 In a further possible implementation form of the first aspect, the decoding unit is
 configured to extract the predefined ratio threshold R_{THR} from the encoded video data.

In a further possible implementation form of the first aspect, the intra-prediction unit is
 30 configured to determine the fitting plane on the basis of the plurality of reference samples
 by determining fitting plane parameters a , b and c on the basis of the plurality of reference
 samples such that the plurality of fitting sample values $\hat{p}_{rs}[x, y]$ are defined by the
 following equation:

35
$$\hat{p}_{rs}[x, y] = ax + by + c,$$

wherein x, y denote the position of the fitting sample within the frame.

5 In a further possible implementation form of the first aspect, in case the plane-based intra-prediction mode is the selected intra-prediction mode, the intra-prediction unit is configured to generate the predicted video coding block using the fitting plane.

10 In a further possible implementation form of the first aspect, the further intra-prediction mode is a DC intra-prediction mode, a PLANAR intra-prediction mode or a directional intra-prediction mode.

15 In a further possible implementation form of the first aspect, the intra prediction unit is configured to generate for the current video coding block the predicted video coding block on the basis of the selected intra-prediction mode using the position dependent intra prediction combination, PDPC, mechanism.

20 In a further possible implementation form of the first aspect, the intra prediction unit is configured to remove outliers of the plurality of reference samples and to generate for the current video coding block the predicted video coding block on the basis of the plurality of reference samples without the outliers.

25 In a further possible implementation form of the first aspect, the intra prediction unit is configured to remove outliers of the plurality of reference samples using RSAF and/or ARSS.

30 According to a second aspect the invention relates to a corresponding method for decoding encoded video data, the encoded video data comprising a plurality of frames, each frame being partitioned into a plurality of video coding blocks, including a current video coding block. The method comprises: decoding the encoded video data for providing a residual video coding block associated with the current video coding block and extracting an intra-prediction mode identifier from the encoded video data; generating for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode, wherein a plane-based intra-prediction mode and a further intra-prediction mode are pre-selected, in case the extracted intra-prediction mode identifier is equal to a first predefined intra-prediction mode identifier, and either the plane-based
35 intra-prediction mode or the further intra-prediction mode is selected on the basis of (a) an

additional flag extracted from the encoded video data or (b) a deviation measure, wherein the deviation measure quantifies deviations of a plurality of reference samples from neighbouring video coding blocks of the current video coding block from a plurality of fitting samples defined by a fitting plane based on the plurality of reference samples; and
5 restoring the current video coding block on the basis of the residual video coding block and the predicted video coding block.

Thus, an improved decoding method for video coding is provided, which allows increasing the coding efficiency by including a plane-based intra-prediction mode, while not
10 adversely affecting the signaling efficiency.

The decoding method according to the second aspect of the invention can be performed by the decoding apparatus according to the first aspect of the invention. Further features of the decoding method according to the second aspect of the invention result directly
15 from the functionality of the decoding apparatus according to the first aspect of the invention and its different implementation forms.

According to a third aspect the invention relates to a corresponding apparatus for encoding video data, the encoded video data comprising a plurality of frames, each frame
20 being dividable into a plurality of video coding blocks, including a current video coding block. The encoding apparatus comprises: an intra-prediction unit configured to generate for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode of a plurality of intra-prediction modes, including a plane-based intra-prediction mode and a further intra-prediction mode; and an encoding unit
25 configured to generate encoded video data, wherein the encoded video data contains an encoded video coding block based on the predicted video coding block and wherein the encoded video data contains an intra-prediction mode identifier, wherein the encoded video data contains the same intra-prediction mode identifier, in case the plane-based intra-prediction mode or the further intra-prediction mode has been selected.

30

Thus, an improved encoding apparatus for video coding is provided, which allows increasing the coding efficiency by including a plane-based intra-prediction mode, while not adversely affecting the signaling efficiency.

35 According to a fourth aspect the invention relates to a corresponding method for encoding video data, the encoded video data comprising a plurality of frames, each frame being

dividable into a plurality of video coding blocks, including a current video coding block. The encoding method comprises: generating for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode of a plurality of intra-prediction modes, including a plane-based intra-prediction mode and a further
5 intra-prediction mode; and generating encoded video data, wherein the encoded video data contains an encoded video coding block based on the predicted video coding block and wherein the encoded video data contains an intra-prediction mode identifier, wherein the encoded video data contains the same intra-prediction mode identifier, in case the plane-based intra-prediction mode or the further intra-prediction mode has been selected.

10

Thus, an improved encoding method for video coding is provided, which allows increasing the coding efficiency by including a plane-based intra-prediction mode, while not adversely affecting the signaling efficiency. The encoding method according to the fourth aspect of the invention can be performed by the encoding apparatus according to the third
15 aspect of the invention.

15

According to a fifth aspect the invention relates to a computer program comprising program code for performing the method according to the second aspect or the method according to the fourth aspect when executed on a computer.

20

The invention can be implemented in hardware and/or software.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Further embodiments of the invention will be described with respect to the following figures, wherein:

30

Fig. 1 shows a schematic diagram illustrating an encoding apparatus according to an embodiment and a decoding apparatus according to an embodiment;

Fig. 2 shows a schematic diagram illustrating the intra-prediction mode signaling of the JEM framework, which can be implemented in an encoding apparatus according to an embodiment and a decoding apparatus according to an embodiment;

35 Fig. 3 shows a flow diagram illustrating a first implementation form of intra-prediction mode selection implemented in a decoding apparatus according to an embodiment;

Fig. 4 shows a flow diagram illustrating a second implementation form of intra-prediction mode selection implemented in a decoding apparatus according to an embodiment;

- 5 Fig. 5 shows a schematic diagram illustrating the relation between reference samples and fitting samples according to an embodiment;

Fig. 6 shows a schematic diagram illustrating a fitting plane determined by an encoding apparatus according to an embodiment and/or a decoding apparatus according to an
10 embodiment;

Fig. 7 shows a flow diagram illustrating a further embodiment including filtering of outliers based on RSAF and/or ARSS;

- 15 Fig. 8 shows a flow diagram illustrating a decoding method according to an embodiment; and

Fig. 9 shows a flow diagram illustrating an encoding method according to an embodiment.

- 20 In the various figures, identical reference signs will be used for identical or at least functionally equivalent features.

DETAILED DESCRIPTION OF EMBODIMENTS

- 25 In the following description, reference is made to the accompanying drawings, which form part of the disclosure, and in which are shown, by way of illustration, specific aspects in which the invention may be placed. It is understood that other aspects may be utilized and structural or logical changes may be made without departing from the scope of the invention. The following detailed description, therefore, is not to be taken in a limiting
30 sense, as the scope of the invention is defined by the appended claims.

- For instance, it is understood that a disclosure in connection with a described method may also hold true for a corresponding device or system configured to perform the method and vice versa. For example, if a specific method step is described, a corresponding device
35 may include a unit to perform the described method step, even if such unit is not explicitly described or illustrated in the figures. Further, it is understood that the features of the

various exemplary aspects described herein may be combined with each other, unless specifically noted otherwise.

5 Figure 1 shows a schematic diagram illustrating an encoding apparatus 101 for encoding video data according to an embodiment and a decoding apparatus 121 for decoding video data according to an embodiment.

10 The encoding apparatus 101 is configured to encode video data, wherein the encoded video data comprises a plurality of frames, each frame is dividable into a plurality of video coding blocks, including a current, i.e. currently processed, video coding block, each video coding block comprising a plurality of samples or pixels having at least one sample or pixel value.

15 In an embodiment, the current video coding block can be a CU consisting of sub-blocks in the form of PUs and/or TUs. Alternatively, the current video coding block can be a PU consisting of sub-blocks in the form of TUs.

20 The encoding apparatus 101 comprises an intra prediction unit 105 configured to generate for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode of a plurality of intra-prediction modes, including a plane-based intra-prediction mode and a further intra-prediction mode. In an embodiment, the intra prediction unit 105 is configured to select a selected intra-prediction mode on the basis of a rate-distortion criterion.

25 Furthermore, the encoding apparatus 101 comprises an encoding unit 103 configured to generate encoded video data, wherein the encoded video data contains an encoded video coding block based on the predicted video coding block and wherein the encoded video data contains an intra-prediction mode identifier, wherein the encoded video data contains the same intra-prediction mode identifier, in case the plane-based intra-prediction mode or
30 the further intra-prediction mode has been selected by the intra prediction unit 105.

In an embodiment, the encoding apparatus 101 could be implemented as a hybrid encoder, as defined, for instance, in the HEVC standard, and could comprise further components not shown in figure 1, such as an entropy encoder.

35

The decoding apparatus 121 is configured to decode the encoded video data provided by the encoding apparatus 101, for instance, in the form of a bitstream.

5 The decoding apparatus 121 comprises a decoding unit 123 configured to decode the encoded video data for providing a residual video coding block associated with the current video coding block and to extract an intra-prediction mode identifier from the encoded video data.

10 Moreover, the decoding apparatus 121 comprises an intra prediction unit 125 configured to generate for the current video coding block a predicted video coding block on the basis of the selected intra-prediction mode, wherein the intra-prediction unit is configured to pre-select a plane-based intra-prediction mode and a further intra-prediction mode, in case the extracted intra-prediction mode identifier is equal to a first predefined intra-prediction mode identifier, and to select either the plane-based intra-prediction mode or the further
15 intra-prediction mode on the basis of (a) an additional flag extracted from the encoded video data or (b) a deviation measure, wherein the deviation measure quantifies deviations of a plurality of reference samples 503 (shown in figure 5) from neighbouring video coding blocks of the current video coding block from a plurality of fitting samples defined by a fitting plane 601 (shown in figure 6 based on the plurality of reference
20 samples.

Moreover, the decoding apparatus 121 comprises a restoration unit 127 (sometimes also referred to as transform unit) configured to restore the current video coding block on the basis of the residual video coding block and the predicted video coding block.

25 In an embodiment, the decoding apparatus 121 could be implemented as a hybrid decoder, as defined, for instance, in the HEVC standard, and could comprise further components not shown in figure 1. In case the plane-based intra-prediction mode is the selected intra-prediction mode, the intra-prediction unit 125 can be configured to generate
30 the predicted video coding block using the fitting plane.

In the following further embodiments of the encoding apparatus 101 and the decoding apparatus 121 will be described in more detail.

35 Figure 2 shows a schematic diagram illustrating the intra-prediction mode signaling of the JEM framework, which can be implemented in the encoding apparatus 101 according to

an embodiment and the decoding apparatus 121 according to an embodiment. In the current JEM framework, each selected intra prediction mode can be separately signaled using the mechanism shown in Figure 2. It is worth to note that the DC mode (DC_IDX == 1) is the 2nd (after the PLANAR mode) of the default intra-prediction modes in the MPM list. Embodiments of the invention avoid a redesign of the current signaling mechanism, by defining that the intra-prediction mode identifier DC_IDX can indicate both the plane-based mode (PbM) as well as, for instance, the DC mode and PbM. In other embodiments, the further intra prediction mode could be, for instance, the PLANAR intra-prediction mode (PLANAR_IDX == 0) or a directional intra-prediction mode instead of the DC mode. As already described above, in order to distinguish between these two modes, one of the implementation forms illustrated in figures 3 and 4 can be used.

Figure 3 shows a flow diagram illustrating a first implementation form of intra-prediction mode selection implemented in the decoding apparatus 121 according to an embodiment. In a block 301, the intra prediction unit 125 checks whether the intra-prediction mode identifier indicates to pre-select the plane-based mode and the further intra prediction mode, which in this example is the DC mode. If this is the case, the intra prediction unit 125 can check in a further block 303 whether block shape constraints are met by the current video coding block. For example, for blocks which have a side with length of 4, the intra prediction unit 125 can always select the DC mode. If the block shape constraints are met by the current video coding block, the intra prediction unit 125 proceeds in blocks 305 and 307 by checking whether the encoded video data includes an additional plane flag indicating the use of the plane-based mode. If this flag is set, the intra prediction unit 125 will use the plane-based intra prediction mode (block 309b), otherwise the DC mode (block 309a).

Figure 4 shows a flow diagram illustrating a second implementation form of intra-prediction mode selection implemented in the decoding apparatus 121 according to an embodiment. In a block 401, the intra prediction unit 125 checks whether the intra-prediction mode identifier indicates to pre-select the plane-based mode and the further intra prediction mode, which in this example is the DC mode. If this is the case, the intra prediction unit 125 can check in a further block 403 whether block shape constraints are met by the current video coding block. For example, for blocks which have a side with length of 4, the intra prediction unit 125 can always select the DC mode. If the block shape constraints are met by the current video coding block, the intra prediction unit 125 proceeds in blocks 405, 407 and 409 by generating a fitting plane on the basis of a

plurality of reference samples from neighboring (already predicted) video coding blocks of the current video coding block (block 405), determine the deviations or differences between the plurality of reference sample values and the fitting sample values provided by the fitting plane using a deviation measure (block 407) and checking whether the deviation measure value, i.e. the differences between the plurality of reference sample values and the fitting sample values, which can be represented as a deviation energy E_{DEV} is smaller than a predefined deviation threshold E_{THR} . If this is the case, the intra prediction unit 125 will use the plane-based intra prediction mode (block 411b), otherwise the DC mode (block 411a).

10

As shown in Figure 4, the decision of which of the two modes should be selected is derived by the intra prediction unit 125, i.e. no additional syntax elements are introduced to distinguish between the DC mode and PbM. The basic idea behind this approach is to estimate how accurate the plane-based prediction is, for example, by computing the deviation energy E_{DEV} relative to the fitting plane generated using the reference samples. The relation between the plurality of reference samples 503 and the corresponding fitting samples is illustrated in figure 5.

15

In an embodiment, the intra-prediction unit 125 is configured to determine the deviation measure E_{DEV} on the basis of one of the following equations:

20

$$E_{DEV} = \frac{1}{N+1} \sum_{k=0}^N \Delta[k]^2, \text{ or}$$

$$E_{DEV} = \frac{1}{N+1} \sum_{k=0}^N |\Delta[k]|,$$

wherein $N + 1$ denotes the number of reference samples 503 from neighbouring video coding blocks of the current video coding block, k denotes a reference sample index and wherein $\Delta[k]$ is defined by the following equation:

25

$$\Delta[k] = p_{rs}[k] - \hat{p}_{rs}[k],$$

30

wherein $p_{rs}[k]$ denotes the sample value of the k -th reference sample and $\hat{p}_{rs}[k]$ denotes the fitting sample value of the k -th fitting sample. It is worth to note that the factor $\frac{1}{N+1}$ only depends on block width W and height H , i.e. $N = f(W, H)$. For instance, $N = W + H$ can be used, if the primary reference samples that are adjacent to a block to be predicted are used to estimate parameters of multiple linear regression.

35

In an embodiment, the intra-prediction unit 125 is configured to select the plane-based intra-prediction mode on the basis of the deviation measure E_{DEV} , when the deviation measure E_{DEV} is smaller than a predefined deviation threshold E_{THR} .

5

In an embodiment, the decoding unit 123 is configured to extract the predefined deviation threshold E_{THR} from the encoded video data, which can be signaled using SPS.

In an embodiment, the intra-prediction unit 125 is configured to select the plane-based intra-prediction mode on the basis of the deviation measure E_{DEV} by determining a ratio R and to select the plane-based intra-prediction mode, when the ratio R is smaller than a predefined ratio threshold R_{THR} , wherein the the intra-prediction unit 125 is configured to determine the ratio R on the basis of one of the following equations:

15

$$R = \frac{E_{DEV}}{E_{rs}} = \frac{\sum_{k=0}^N \Delta[k]^2}{\sum_{k=0}^N p_{rs}[k]^2}, \text{ or}$$

$$R = \frac{E_{DEV}}{E_{rs}} = \frac{\sum_{k=0}^N |\Delta[k]|}{\sum_{k=0}^N |p_{rs}[k]|}$$

In an embodiment, the decoding unit 123 is configured to extract the predefined ratio threshold R_{THR} from the encoded video data, which can be signaled using SPS.

20

Figure 6 shows a schematic diagram of a fitting plane 601 determined by the intra prediction unit 125 using a MLR-based model, wherein the reference samples 503 as illustrated in figure 5 are used to estimate regression parameters of the MLR-based model for constructing the fitting plane 601. As a comparison, a fitting plane predicted by the DC mode in the HEVC/H.265 standard is also shown in figure 6. Thus, the intra prediction unit 125 is configured to estimate parameters of a Multiple Linear Regression (MLR) and fit the plane 601 to the reference samples 503.

In an embodiment, the intra prediction unit 125 is configured to determine the fitting plane 601 on the basis of the plurality of reference samples 503 by determining fitting plane parameters a , b and c on the basis of the plurality of reference samples 503 such that the plurality of fitting sample values $\hat{p}_{rs}[x, y]$ are defined by the following equation:

35

$$\hat{p}_{rs}[x, y] = ax + by + c,$$

wherein x, y denote the position of the fitting sample within the frame.

In an embodiment, the intra prediction unit is configured to generate for the current video coding block the predicted video coding block on the basis of the selected intra-prediction mode using the position dependent intra prediction combination, PDPC, mechanism. In such an embodiment the second stage of PDPC would include in addition to the planar mode, the DC mode and the 33 directional modes the plane-based mode as well as any modifications thereof. Moreover, in the third stage of PDPC the look-up tables for the weights have to be adapted. More details about the PDPC mechanism can be found in WO2017/058635, which is herein fully incorporated by reference.

In an embodiment, the intra prediction unit 125 is configured to remove outliers of the plurality of reference samples 503 and to generate for the current video coding block the predicted video coding block on the basis of the plurality of reference samples 503 without the outliers. For instance, the intra prediction unit 125 can be configured to remove outliers of the plurality of reference samples using RSAF and/or ARSS. A corresponding embodiment is illustrated in figure 7. In a block 701 the reference samples are processed by a reference sample filter based on RSAF and/or ARSS for suppressing outliers. These filtered reference samples are further used to derive parameters of the fitting plane (block 703). Parameter values are further used to calculate values of the fitting plane at the positions of the reference samples (block 707) and to calculate plane values within the block to be predicted (block 705). Thus, the fitting plane is generated using either unfiltered or filtered reference samples subject to a value of the RSAF/ARSS flag. The results of block 707 are subtracted from the original reference samples and the difference is used to generate a differential prediction signal for the block using a defined intra prediction mode (block 709). The fitting values based on the fitting plane (i.e. the results of block 705) are combined with the differential prediction signal (i.e. the result of block 709) to provide the prediction signal for the block to be predicted.

Figure 8 shows a flow diagram illustrating a corresponding decoding method 800 according to an embodiment. The decoding method 800 comprises the steps of: decoding 801 the encoded video data for providing a residual video coding block associated with the current video coding block and extracting an intra-prediction mode identifier from the encoded video data; generating 803 for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode, wherein a plane-based intra-prediction mode and a further intra-prediction mode are pre-selected, in case the

extracted intra-prediction mode identifier is equal to a first predefined intra-prediction mode identifier, and either the plane-based intra-prediction mode or the further intra-prediction mode is selected on the basis of (a) an additional flag extracted from the encoded video data or (b) a deviation measure, wherein the deviation measure quantifies
5 deviations of a plurality of reference samples from neighbouring video coding blocks of the current video coding block from a plurality of fitting samples defined by a fitting plane based on the plurality of reference samples; and restoring 805 the current video coding block on the basis of the residual video coding block and the predicted video coding block.

10 Figure 9 shows a flow diagram illustrating an encoding method 900 according to an embodiment. The encoding method 900 comprises the steps of: generating 901 for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode of a plurality of intra-prediction modes, including a plane-based intra-prediction mode and a further intra-prediction mode; and generating 903 encoded video
15 data, wherein the encoded video data contains an encoded video coding block based on the predicted video coding block and wherein the encoded video data contains an intra-prediction mode identifier, wherein the encoded video data contains the same intra-prediction mode identifier, in case the plane-based intra-prediction mode or the further intra-prediction mode has been selected.

20

While a particular feature or aspect of the disclosure may have been disclosed with respect to only one of several implementations or embodiments, such a feature or aspect may be combined with one or more further features or aspects of the other implementations or embodiments as may be desired or advantageous for any given or
25 particular application. Furthermore, to the extent that the terms "include", "have", "with", or other variants thereof are used in either the detailed description or the claims, such terms are intended to be inclusive in a manner similar to the term "comprise". Also, the terms "exemplary", "for example" and "e.g." are merely meant as an example, rather than the best or optimal. The terms "coupled" and "connected", along with derivatives thereof may
30 have been used. It should be understood that these terms may have been used to indicate that two elements cooperate or interact with each other regardless whether they are in direct physical or electrical contact, or they are not in direct contact with each other.

Although specific aspects have been illustrated and described herein, it will be
35 appreciated that a variety of alternate and/or equivalent implementations may be substituted for the specific aspects shown and described without departing from the scope

of the present disclosure. This application is intended to cover any adaptations or variations of the specific aspects discussed herein.

5 Although the elements in the following claims are recited in a particular sequence with corresponding labeling, unless the claim recitations otherwise imply a particular sequence for implementing some or all of those elements, those elements are not necessarily intended to be limited to being implemented in that particular sequence.

10 Many alternatives, modifications, and variations will be apparent to those skilled in the art in light of the above teachings. Of course, those skilled in the art readily recognize that there are numerous applications of the invention beyond those described herein. While the invention has been described with reference to one or more particular embodiments, those skilled in the art recognize that many changes may be made thereto without departing from the scope of the invention. It is therefore to be understood that within the
15 scope of the appended claims and their equivalents, the invention may be practiced otherwise than as specifically described herein.

20

CLAIMS

1. An apparatus (121) for decoding encoded video data, the encoded video data
 5 comprising a plurality of frames, each frame being partitioned into a plurality of video
 coding blocks, including a current video coding block, wherein the apparatus (121)
 comprises:

a decoding unit (123) configured to decode the encoded video data for providing a
 10 residual video coding block associated with the current video coding block and to extract
 an intra-prediction mode identifier from the encoded video data;

an intra-prediction unit (125) configured to generate for the current video coding block a
 predicted video coding block on the basis of a selected intra-prediction mode, wherein the
 15 intra-prediction unit is configured to pre-select a plane-based intra-prediction mode and a
 further intra-prediction mode, in case the extracted intra-prediction mode identifier is equal
 to a first predefined intra-prediction mode identifier, and to select either the plane-based
 intra-prediction mode or the further intra-prediction mode on the basis of (a) an additional
 flag extracted from the encoded video data or (b) a deviation measure, wherein the
 20 deviation measure quantifies deviations of a plurality of reference samples (503) from
 neighbouring video coding blocks of the current video coding block from a plurality of
 fitting samples defined by a fitting plane (601) based on the plurality of reference samples;
 and

25 a restoration unit (127) configured to restore the current video coding block on the basis of
 the residual video coding block and the predicted video coding block.

2. The apparatus (121) of claim 1, wherein the intra-prediction unit (125) is configured
 to determine the deviation measure E_{DEV} on the basis of one of the following equations:
 30

$$E_{DEV} = \frac{1}{N+1} \sum_{k=0}^N \Delta[k]^2, \text{ or}$$

$$E_{DEV} = \frac{1}{N+1} \sum_{k=0}^N |\Delta[k]|,$$

wherein $N + 1$ denotes the number of reference samples (503) from neighbouring video
 35 coding blocks of the current video coding block, k denotes a reference sample index and
 wherein $\Delta[k]$ is defined by the following equation:

$$\Delta[k] = p_{rs}[k] - \hat{p}_{rs}[k],$$

wherein $p_{rs}[k]$ denotes the sample value of the k -th reference sample and $\hat{p}_{rs}[k]$ denotes
 5 the fitting sample value of the k -th fitting sample.

3. The apparatus (121) of claim 2, wherein the intra-prediction unit (125) is configured
 to select the plane-based intra-prediction mode on the basis of the deviation measure
 E_{DEV} , when the deviation measure E_{DEV} is smaller than a predefined deviation threshold
 10 E_{THR} .

4. The apparatus (121) of claim 3, wherein the decoding unit (123) is configured to
 extract the predefined deviation threshold E_{THR} from the encoded video data.

5. The apparatus (121) of claim 2, wherein the intra-prediction unit (125) is configured
 to select the plane-based intra-prediction mode on the basis of the deviation measure
 E_{DEV} by determining a ratio R and to select the plane-based intra-prediction mode, when
 the ratio R is smaller than a predefined ratio threshold R_{THR} , wherein the the intra-
 prediction unit (125) is configured to determine the ratio R on the basis of one of the
 20 following equations:

$$R = \frac{E_{DEV}}{E_{rs}} = \frac{\sum_{k=0}^N \Delta[k]^2}{\sum_{k=0}^N p_{rs}[k]^2}, \text{ or}$$

$$R = \frac{E_{DEV}}{E_{rs}} = \frac{\sum_{k=0}^N |\Delta[k]|}{\sum_{k=0}^N |p_{rs}[k]|}.$$

6. The apparatus (121) of claim 5, wherein the decoding unit (123) is configured to
 extract the predefined ratio threshold R_{THR} from the encoded video data.

7. The apparatus (121) of any one of claims 2 to 6, wherein the intra-prediction unit
 (125) is configured to determine the fitting plane (601) on the basis of the plurality of
 30 reference samples (503) by determining fitting plane parameters a , b and c on the basis of
 the plurality of reference samples (503) such that the plurality of fitting sample values
 $\hat{p}_{rs}[x, y]$ are defined by the following equation:

$$\hat{p}_{rs}[x, y] = ax + by + c,$$

35

wherein x, y denote the position of the fitting sample within the frame.

8. The apparatus (121) of any one of the preceding claims, wherein, in case the plane-based intra-prediction mode is the selected intra-prediction mode, the intra-
5 prediction unit (125) is configured to generate the predicted video coding block using the fitting plane (601).
9. The apparatus (121) of any one of the preceding claims, wherein the further intra-
10 prediction mode is a DC intra-prediction mode, a PLANAR intra-prediction mode or a directional intra-prediction mode.
10. The apparatus (121) of any one of the preceding claims, wherein the intra
prediction unit (125) is configured to generate for the current video coding block the
15 predicted video coding block on the basis of the selected intra-prediction mode using the position dependent intra prediction combination, PDPC, mechanism.
11. The apparatus (121) of any one of the preceding claims, wherein the intra
prediction unit (125) is configured to remove outliers of the plurality of reference samples
20 (503) and to generate for the current video coding block the predicted video coding block on the basis of the plurality of reference samples (503) without the outliers.
12. The apparatus (121) of claim 11, wherein the intra prediction unit (125) is
25 configured to remove outliers of the plurality of reference samples using RSAF and/or ARSS.
13. A method (800) for decoding encoded video data, the encoded video data
comprising a plurality of frames, each frame being partitioned into a plurality of video
coding blocks, including a current video coding block, wherein the method (800)
30 comprises:
decoding (801) the encoded video data for providing a residual video coding block
associated with the current video coding block and extracting an intra-prediction mode
identifier from the encoded video data;
35 generating (803) for the current video coding block a predicted video coding block on the
basis of a selected intra-prediction mode, wherein a plane-based intra-prediction mode

and a further intra-prediction mode are pre-selected, in case the extracted intra-prediction mode identifier is equal to a first predefined intra-prediction mode identifier, and either the plane-based intra-prediction mode or the further intra-prediction mode is selected on the basis of (a) an additional flag extracted from the encoded video data or (b) a deviation
5 measure, wherein the deviation measure quantifies deviations of a plurality of reference samples from neighbouring video coding blocks of the current video coding block from a plurality of fitting samples defined by a fitting plane based on the plurality of reference samples; and

10 restoring (805) the current video coding block on the basis of the residual video coding block and the predicted video coding block.

14. An apparatus (101) for encoding video data, the encoded video data comprising a plurality of frames, each frame being dividable into a plurality of video coding blocks,
15 including a current video coding block, wherein the apparatus (101) comprises:

an intra-prediction unit (105) configured to generate for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode of a plurality of intra-prediction modes, including a plane-based intra-prediction mode and a further
20 intra-prediction mode; and

an encoding unit (103) configured to generate encoded video data, wherein the encoded video data contains an encoded video coding block based on the predicted video coding block and wherein the encoded video data contains an intra-prediction mode identifier,
25 wherein the encoded video data contains the same intra-prediction mode identifier, in case the plane-based intra-prediction mode or the further intra-prediction mode has been selected.

15. A method (900) for encoding video data, the encoded video data comprising a
30 plurality of frames, each frame being dividable into a plurality of video coding blocks, including a current video coding block, wherein the method (900) comprises:

generating (901) for the current video coding block a predicted video coding block on the basis of a selected intra-prediction mode of a plurality of intra-prediction modes, including
35 a plane-based intra-prediction mode and a further intra-prediction mode; and

generating (903) encoded video data, wherein the encoded video data contains an encoded video coding block based on the predicted video coding block and wherein the encoded video data contains an intra-prediction mode identifier, wherein the encoded video data contains the same intra-prediction mode identifier, in case the plane-based
5 intra-prediction mode or the further intra-prediction mode has been selected.

16. A computer program comprising program code for performing the method (800) of claim 13 or the method (900) of claim 15 when executed on a computer.

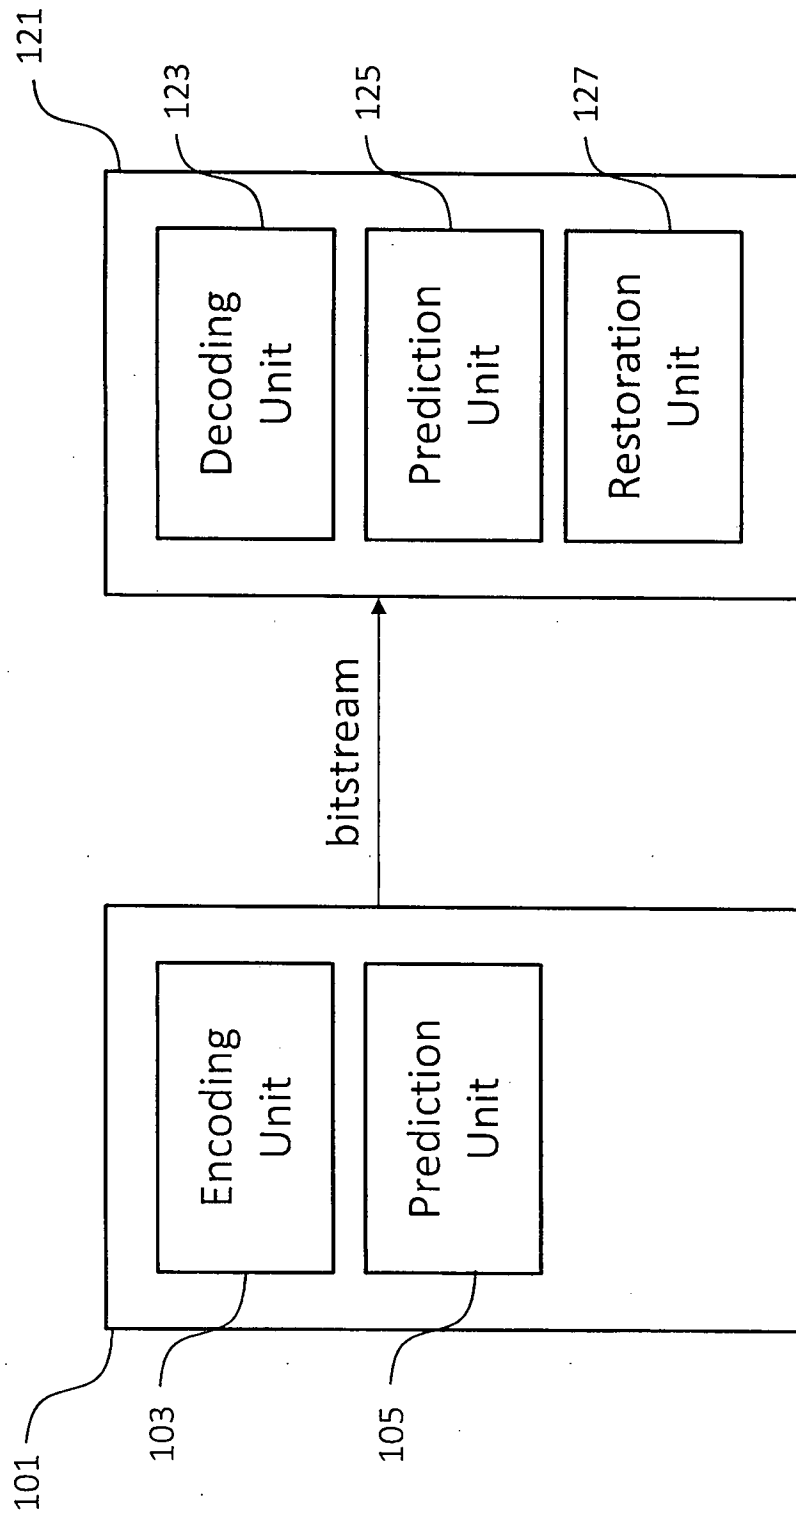


Fig. 1

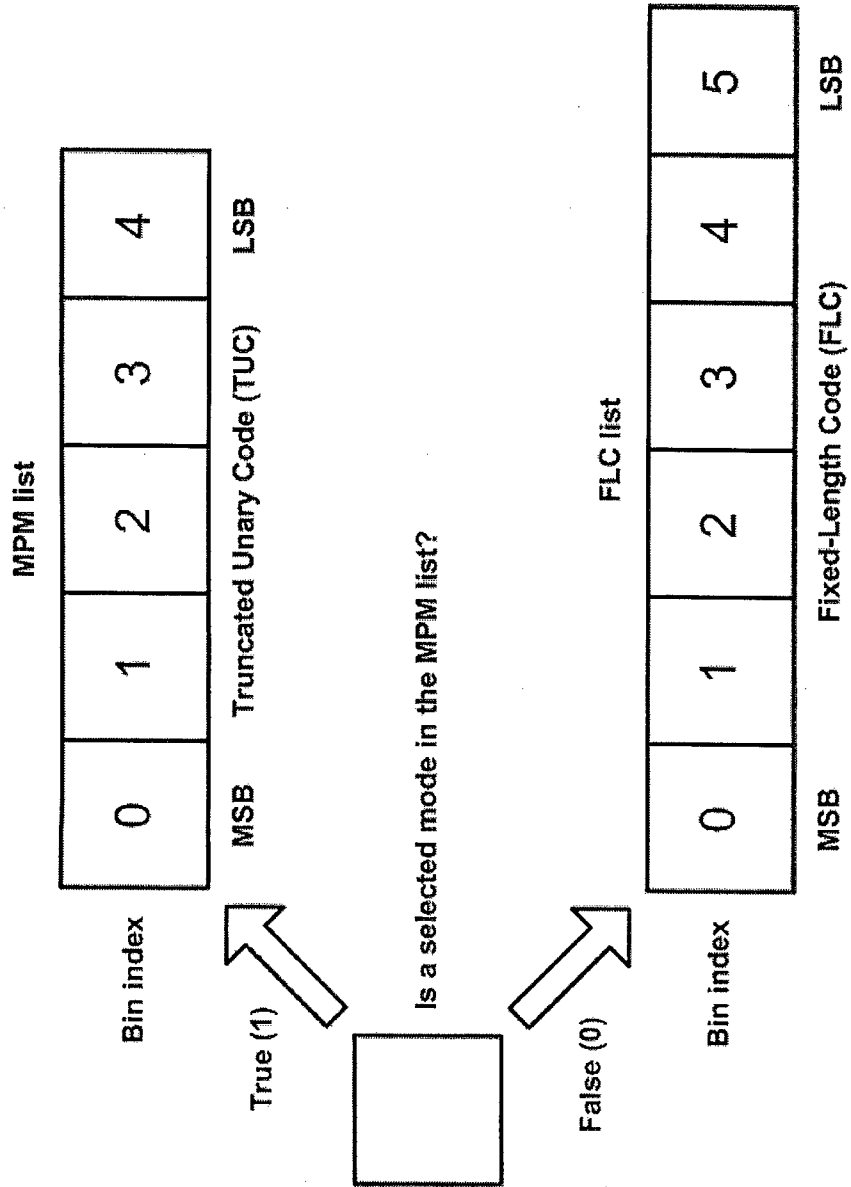


Fig. 2

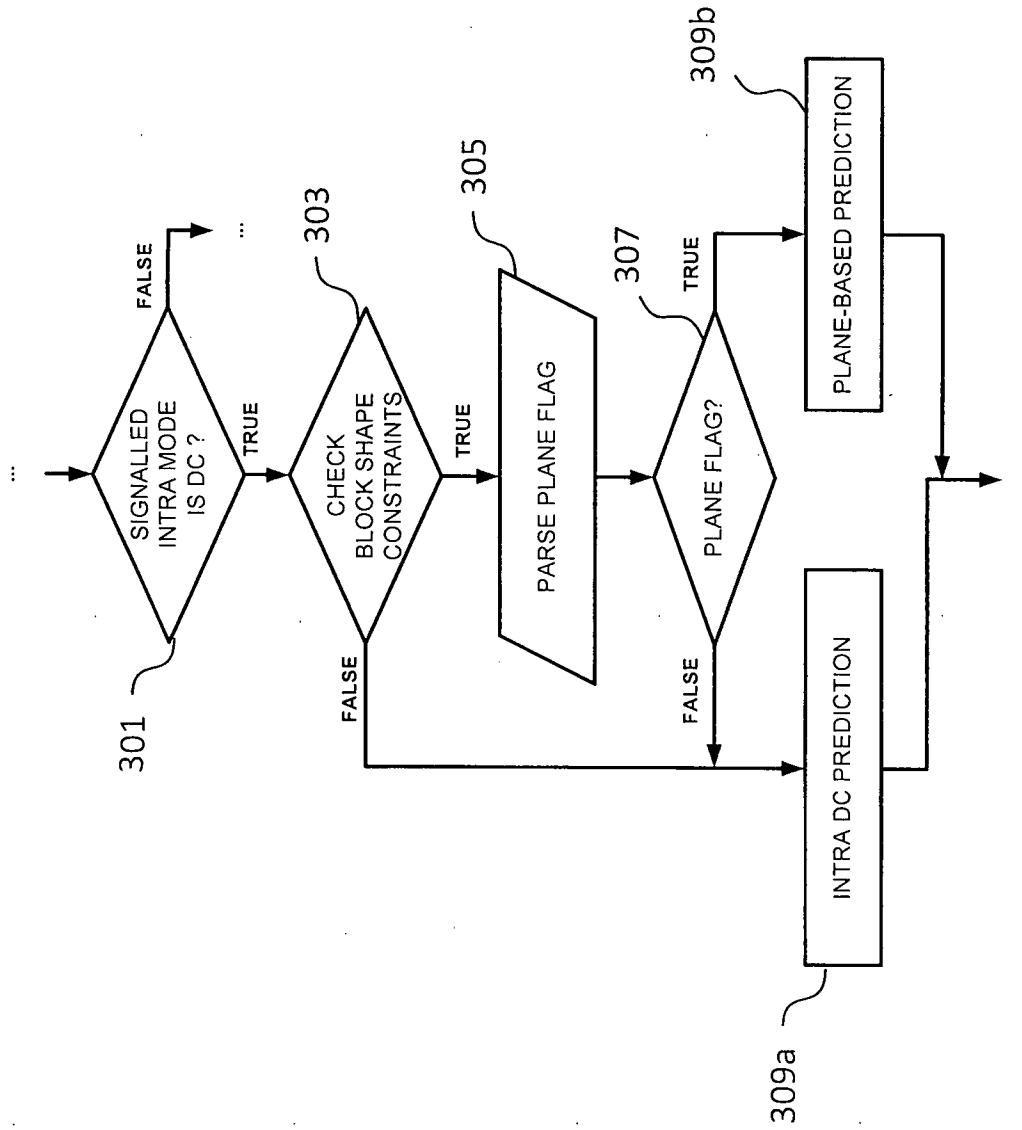


Fig. 3

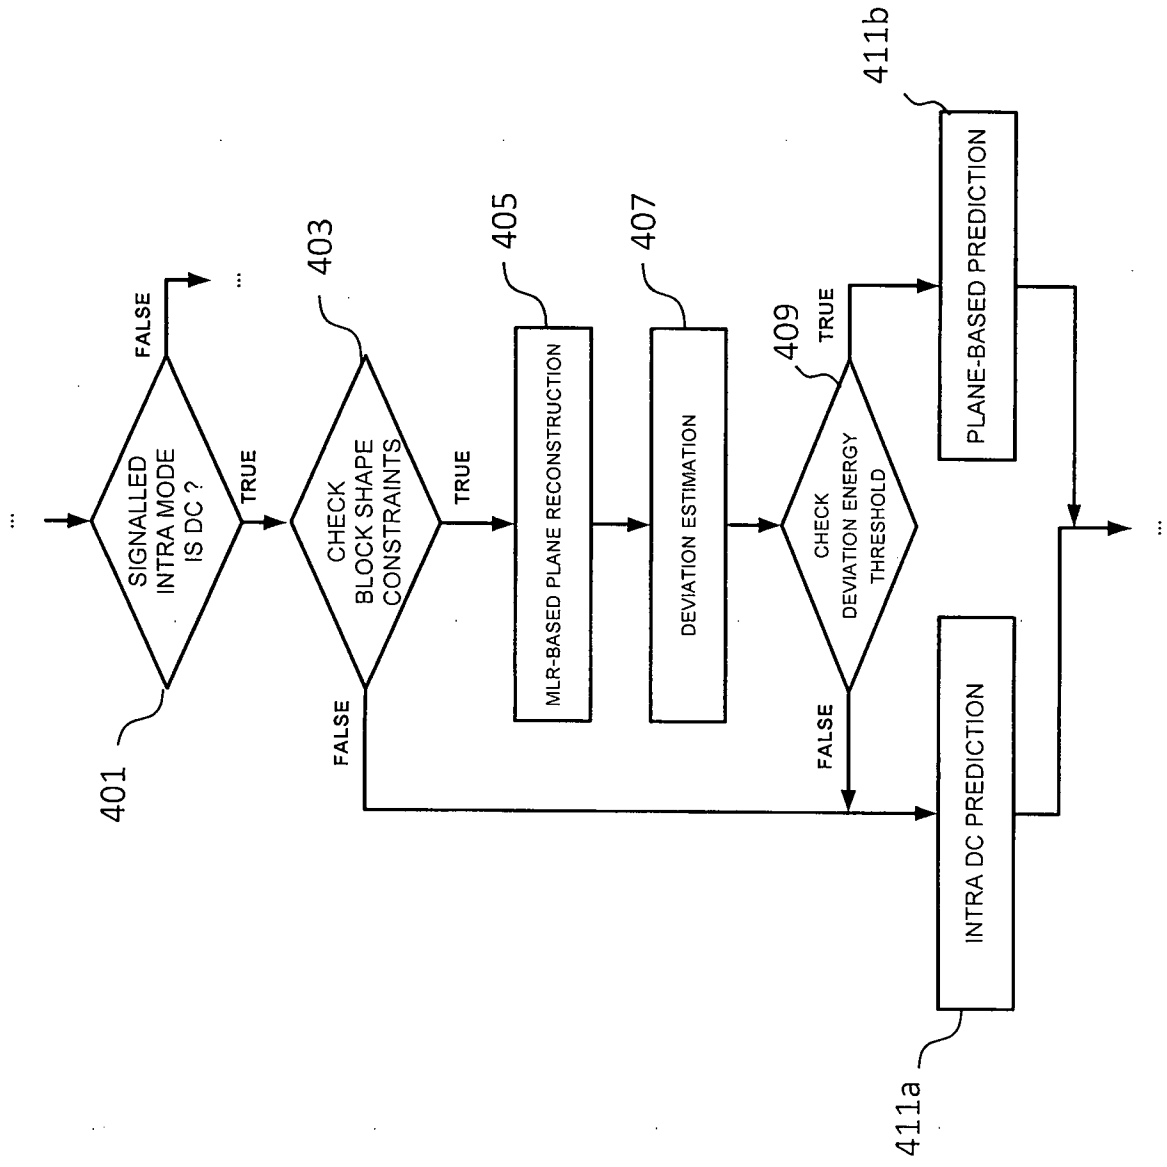


Fig. 4

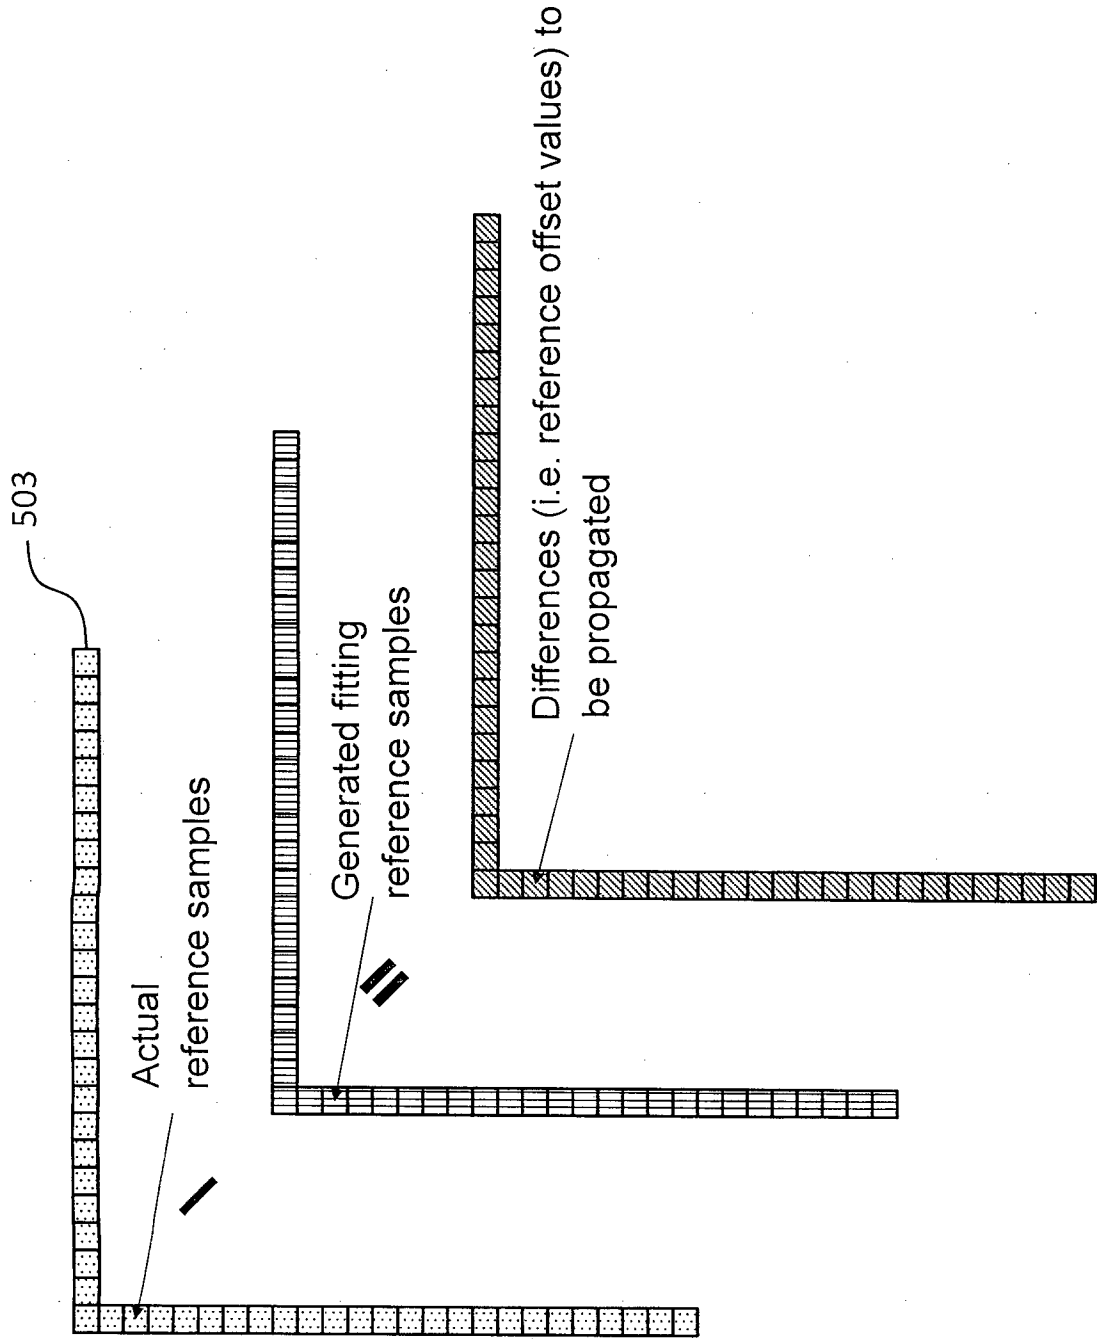


Fig. 5

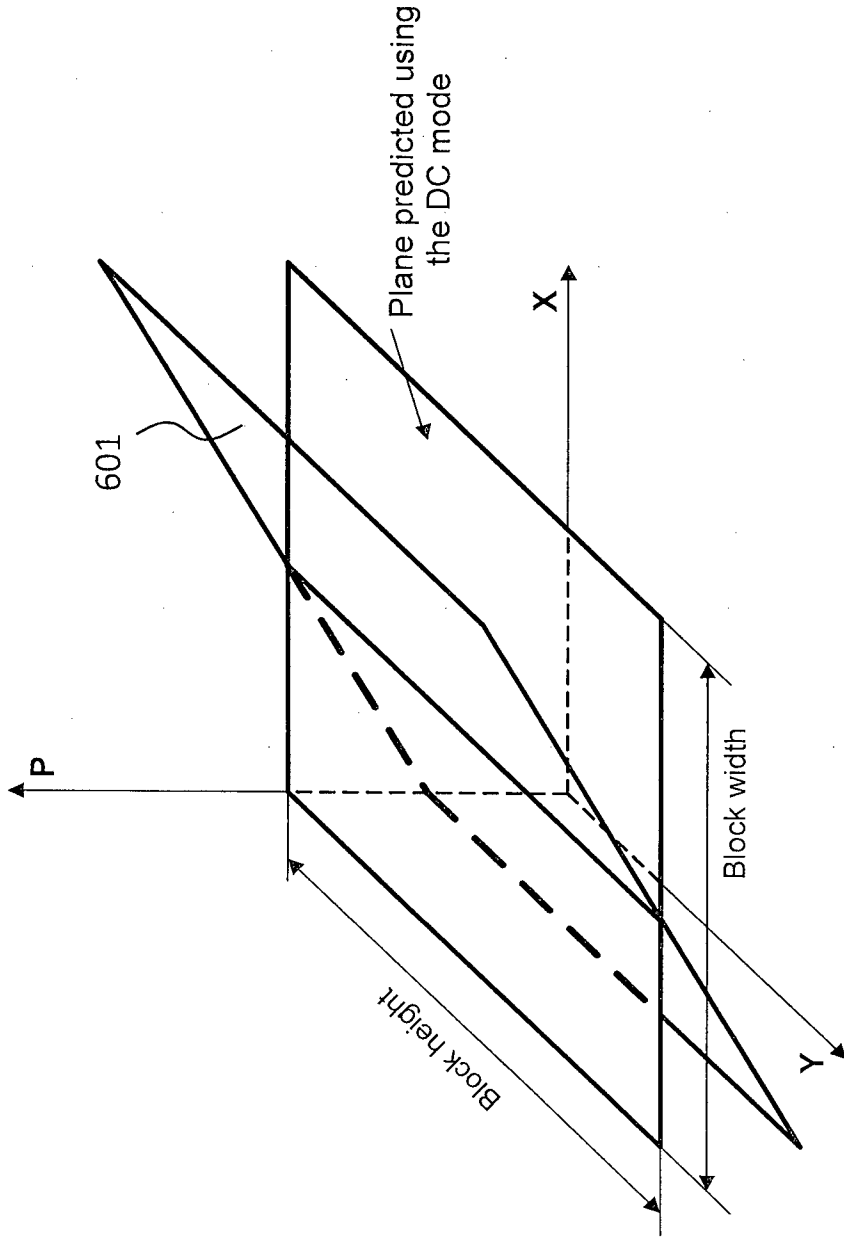


Fig. 6

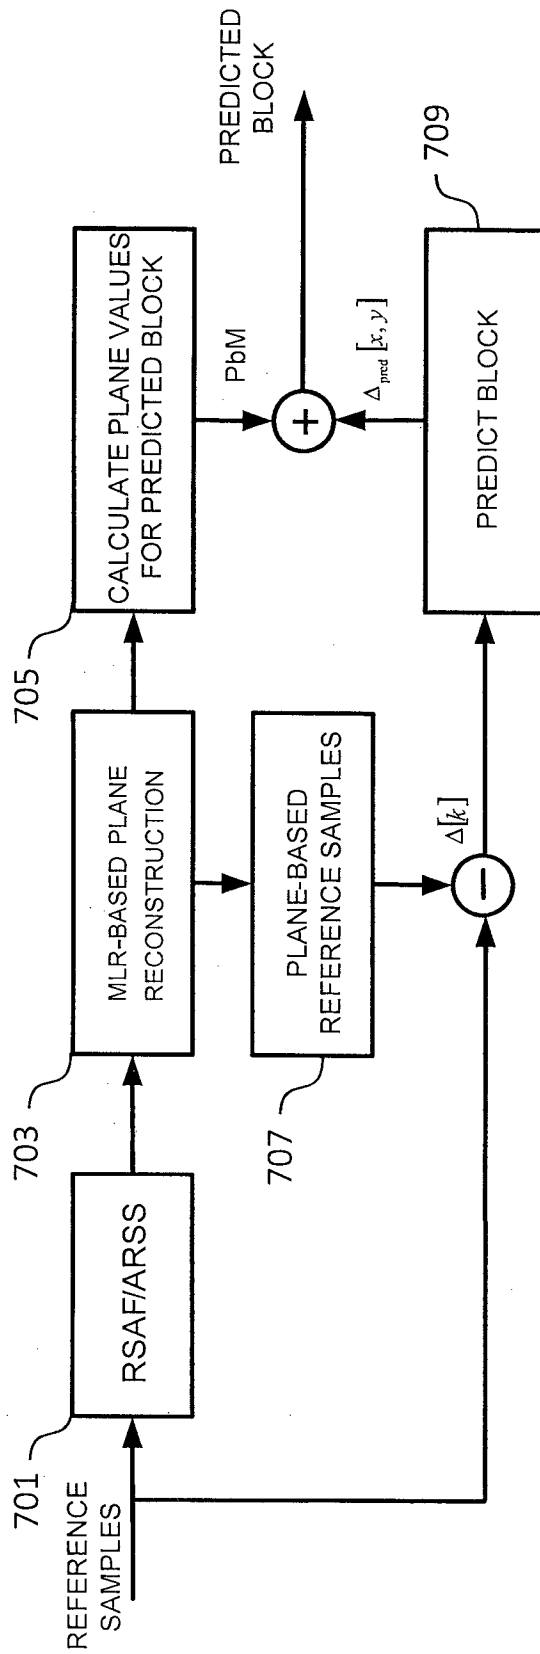


Fig. 7

800 ↗

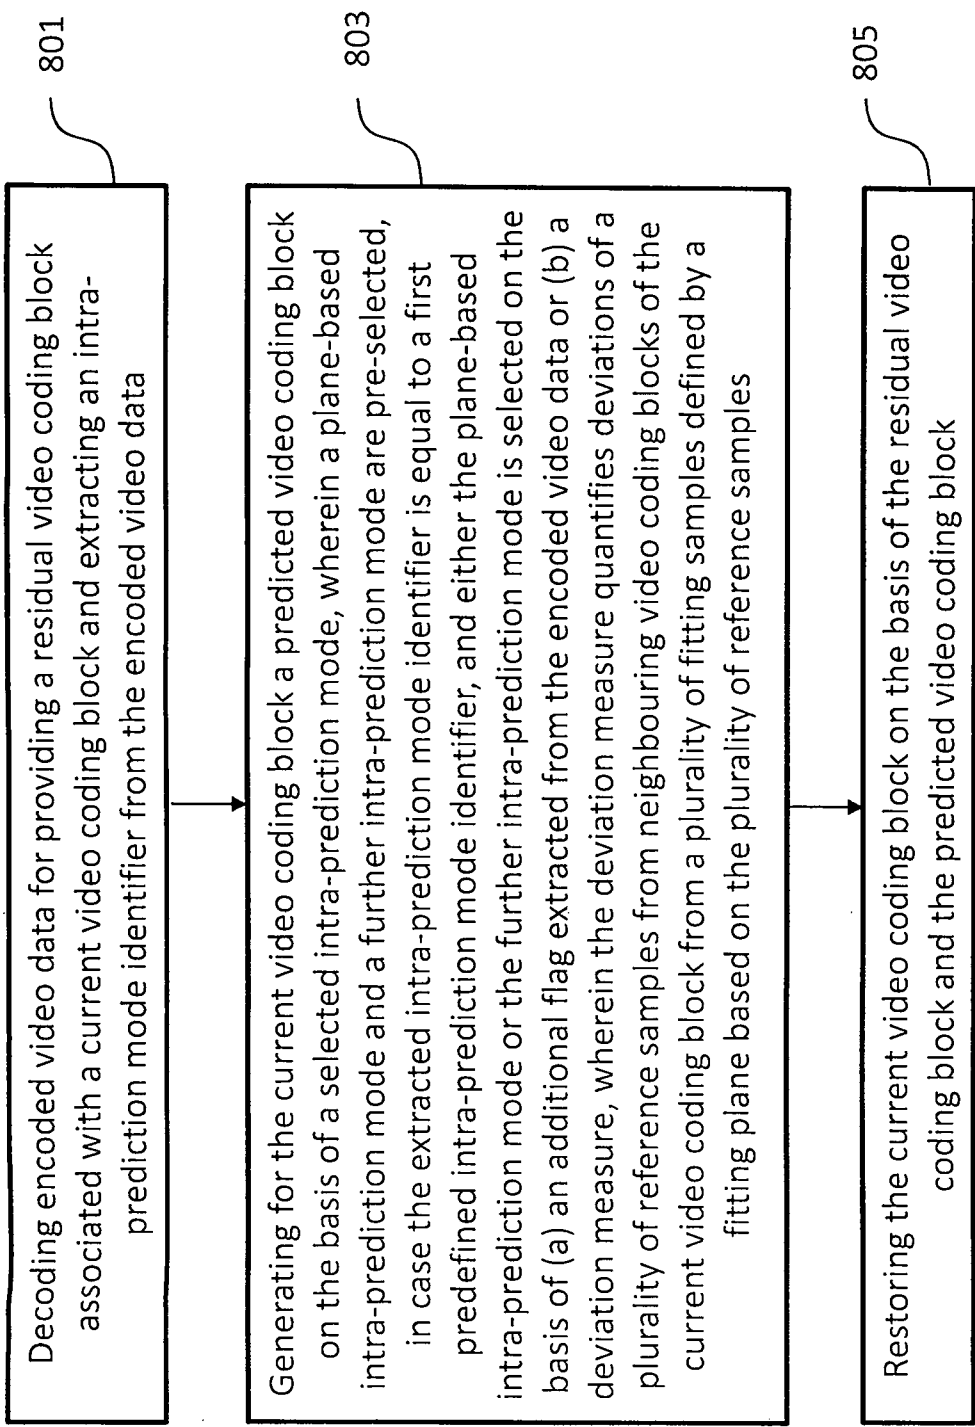


Fig. 8

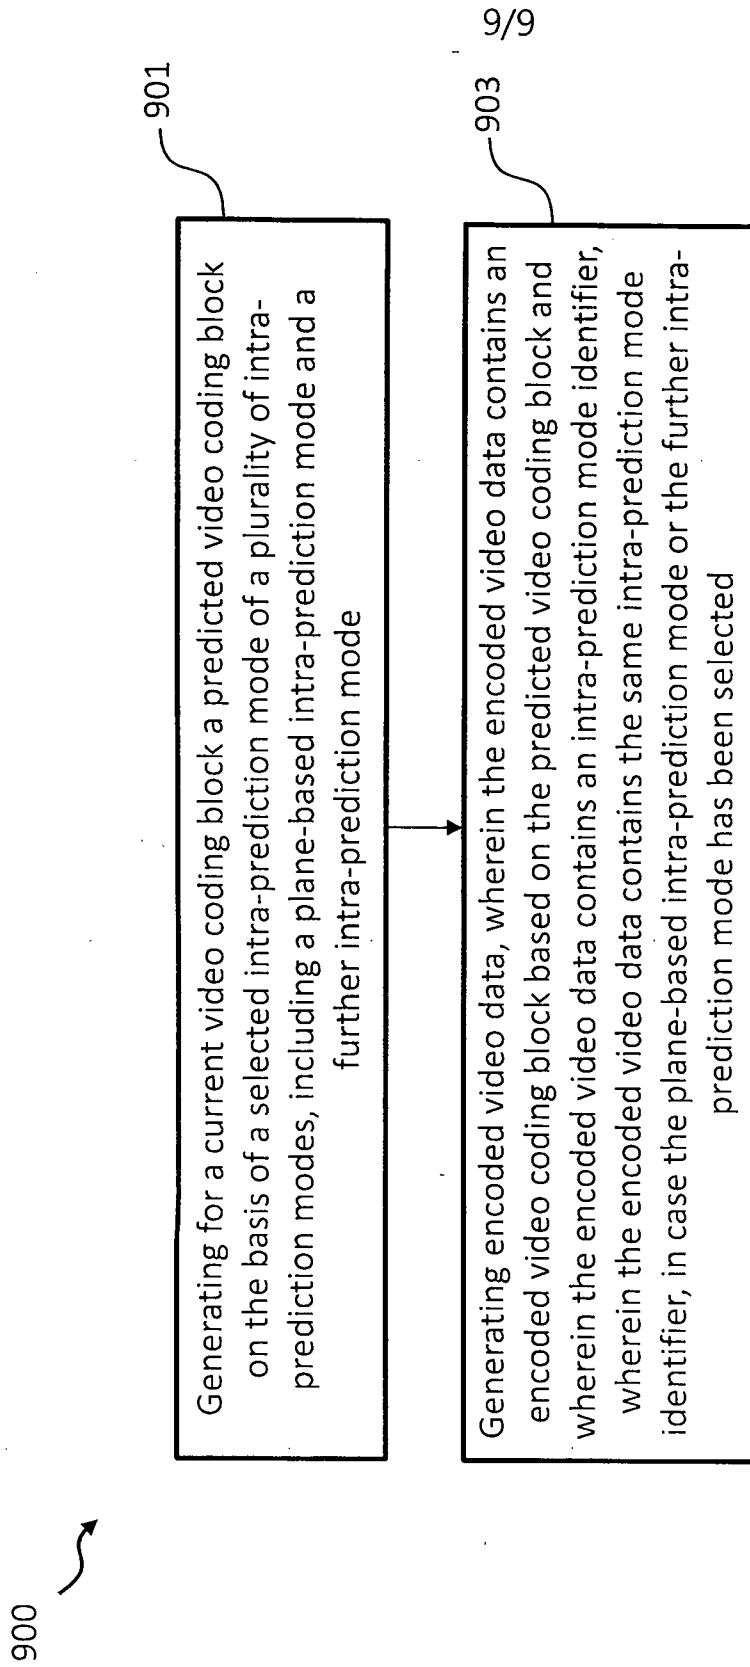


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No PCT/RU2017/000487

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H04N19/11 H04N19/152 H04N19/159 H04N19/176 H04N19/463
 H04N19/70 H04N19/593

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/126629 A1 (PARK JOONYOUNG [KR] ET AL) 8 May 2014 (2014-05-08)	1,9-16
Y	paragraphs [0071] - [0079], [0178]; figure 3	2-8
Y	----- XIU X ET AL: "EE8: Decoder-side intra mode derivation", 4. JVET MEETING; 15-10-2016 - 21-10-2016; CHENGDU; (THE JOINT VIDEO EXPLORATION TEAM OF ISO/IEC JTC1/SC29/WG11 AND ITU-T SG.16); URL: HTTP://PHENIX.INT-EVRY.FR/JVET/, , no. JVET-D0097-v4, 15 October 2016 (2016-10-15), XP030150337, sections 2.1, 2.2	2-6
A	----- -/--	1,7-16

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 6 February 2018	Date of mailing of the international search report 13/02/2018
---	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Montoneri, Fabio
--	---

INTERNATIONAL SEARCH REPORT

International application No PCT/RU2017/000487

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	SHUN-ICHI SEKIGUCHI ET AL: "A Novel Video Coding Scheme for Super Hi-Vision", PICTURE CODING SYMPOSIUM 2010; 8-12-2010 - 10-12-2010; NAGOYA,, 8 December 2010 (2010-12-08), XP030081994, section 2.5.1	7,8
A	-----	1-6,9-12
A	CHEN J ET AL: "Algorithm description of Joint Exploration Test Model 6 (JEM6)", 6. JVET MEETING; 31-3-2017 - 7-4-2017; HOBART; (THE JOINT VIDEO EXPLORATION TEAM OF ISO/IEC JTC1/SC29/WG11 AND ITU-T SG.16); URL: HTTP://PHENIX.INT-EVRY.FR/JVET/,, no. JVET-F1001, 31 May 2017 (2017-05-31), XP030150793, sections 2.2.1.1, 2.2.5, 2.2.6 -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/RU2017/000487

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014126629 A1	08-05-2014	KR 20140037130 A	26-03-2014
		US 2014126629 A1	08-05-2014
		WO 2012173315 A1	20-12-2012
