

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 October 2006 (19.10.2006)

PCT

(10) International Publication Number
WO 2006/110204 A2

(51) International Patent Classification:
H01L 29/778 (2006.01) *H01L 29/417* (2006.01)

Bay Place, Carrboro, NC 27510 (US). SHEPPARD, Scott T. [US/US]; 101 Autumn Lane, Chapel Hill, NC 27516 (US).

(21) International Application Number:
PCT/US2006/004353

(74) Agent: STANEK, Elizabeth, A.; Myers Bigel Sibley & Sajovec, P.A., P.O. Box 37428, Raleigh, NC 27627 (US).

(22) International Filing Date: 8 February 2006 (08.02.2006)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/103,117 11 April 2005 (11.04.2005) US

(71) Applicant (for all designated States except US): CREE, INC. [US/US]; 4600 Silicon Drive, Durham, NC 27703 (US).


(72) Inventors; and

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(75) Inventors/Applicants (for US only): SAXLER, Adam William [US/US]; 525 Beaver Dam Run, Durham, NC 27703 (US). WU, Yifeng [CN/US]; 528 Fireside Lane, Goleta, CA 93117 (US). PARIKH, Primit [IN/US]; 6832 Shadowbrook Drive, Goleta, CA 93117 (US). MISHRA, Umesh [US/US]; 2040 Creekside Road, Montecito, CA 93108 (US). SMITH, Richard Peter [US/US]; 242 Sweet

[Continued on next page]

(54) Title: THICK SEMI-INSULATING OR INSULATING EPITAXIAL GALLIUM NITRIDE LAYERS AND DEVICES INCORPORATING SAME

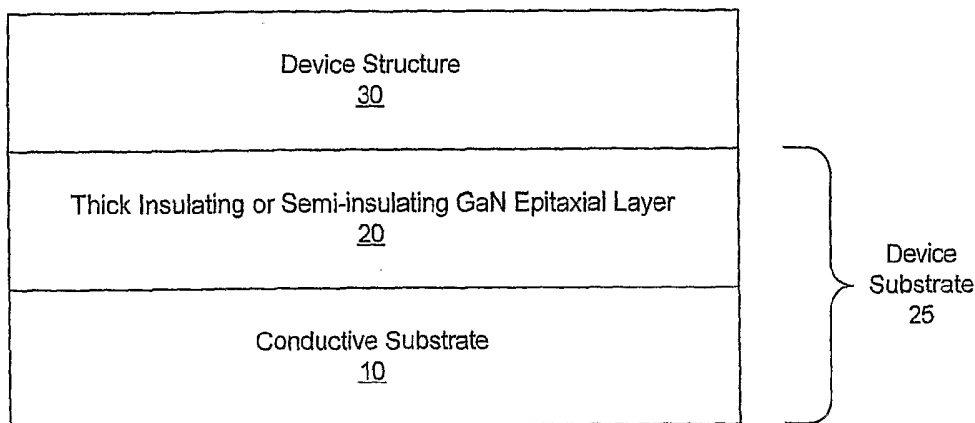

(57) Abstract: Semiconductor device structures and methods of fabricating semiconductor devices structures are provided that include a semi-insulating or insulating GaN epitaxial layer on a conductive semiconductor substrate and/or a conductive layer. The semi-insulating or insulating GaN epitaxial layer has a thickness of at least about 4 μm. GaN semiconductor device structures and methods of fabricating GaN semiconductor device structures are also provided that include an electrically conductive SiC substrate and an insulating or semi-insulating GaN epitaxial layer on the conductive SiC substrate. The GaN epitaxial layer has a thickness of at least about 4 μm. GaN semiconductor device structures and methods of fabricating GaN semiconductor device structures are also provided that include an electrically conductive GaN substrate, an insulating or semi-insulating GaN epitaxial layer on the conductive GaN substrate, a GaN based semiconductor device on the GaN epitaxial layer and a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.

WO 2006/110204 A2



Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

THICK SEMI-INSULATING OR INSULATING EPITAXIAL GALLIUM NITRIDE
LAYERS AND DEVICES INCORPORATING SAME

STATEMENT OF GOVERNMENT INTEREST

The present invention was developed with Government support under contract number N00014-02-C-0306 awarded by the United States Navy. The Government
5 has certain rights in this invention.

FIELD OF THE INVENTION

The present invention relates to semiconductor devices and, more particularly,
to Group III-Nitride semiconductor devices.
10

BACKGROUND

Materials such as silicon (Si) and gallium arsenide (GaAs) have found wide application in semiconductor devices for radio frequency (RF) applications. However, these, more familiar, semiconductor materials may not be well suited for
15 higher power because of their relatively small bandgaps (*e.g.*, 1.12 eV for Si and 1.42 for GaAs at room temperature) and/or relatively small breakdown voltages.

In light of the difficulties presented by Si and GaAs, interest in high power and/or high frequency applications and devices has turned to wide bandgap semiconductor materials such as silicon carbide (2.996 eV for alpha SiC at room
20 temperature) and the Group III nitrides (*e.g.*, 3.36 eV for GaN at room temperature). These materials, typically, have higher electric field breakdown strengths than gallium arsenide (GaAs) and GaN typically has better electron transport properties than silicon.

A device of particular interest for high power and/or high frequency applications is the High Electron Mobility Transistor (HEMT), which, in certain cases
25 where doping is provided, is also known as a modulation doped field effect transistor (MODFET). These devices may offer operational advantages under a number of circumstances because a two-dimensional electron gas (2DEG) is formed at the heterojunction of two semiconductor materials with different bandgap energies, and where the smaller bandgap material has a higher electron affinity. The 2DEG is an

accumulation layer in the undoped ("unintentionally doped"), smaller bandgap material and can contain a very high sheet electron concentration in excess of, for example, 10^{13} carriers/cm². Unlike electrons in conventional bulk-doped devices, electrons in 2DEG may have higher mobilities due to reduced ion impurity scattering.

5 This combination of high carrier concentration and high carrier mobility can give the HEMT a very large transconductance and may provide a strong performance advantage over metal-semiconductor field effect transistors (MESFETs) for high-frequency applications.

10 High electron mobility transistors fabricated in the gallium nitride/aluminum gallium nitride (GaN/AlGaN) material system can generate large amounts of RF power because of the combination of material characteristics that includes the aforementioned high breakdown fields, their wide bandgaps, large conduction band offset, and/or high saturated electron drift velocity. A major portion of the electrons in the 2DEG is attributed to polarization in the AlGaN.

15 HEMTs in the GaN/AlGaN system have already been demonstrated. U.S. Patents 5,192,987 and 5,296,395 describe AlGaN/GaN HEMT structures and methods of manufacture. U.S. Patent No. 6,316,793, to Sheppard et al., which is commonly assigned and is incorporated herein by reference, describes a HEMT device having a semi-insulating silicon carbide substrate, an aluminum nitride buffer layer on the
20 substrate, an insulating gallium nitride layer on the buffer layer, an aluminum gallium nitride barrier layer on the gallium nitride layer, and a passivation layer on the aluminum gallium nitride active structure.

Conventional Group III-nitride HEMTs have been fabricated using heteroepitaxial growth; for example, HEMTs grown on SiC, sapphire, AlN or Si
25 substrates. A HEMT grown on a thick AlN layer deposited by hydride vapor phase epitaxy (HVPE) on n-type SiC has been described. However, the growth of a thick AlN layer may require two different growth steps in two different reactors, one for growing the AlN layer and one for growing the GaN-based HEMT layers on the AlN layer.

30

SUMMARY OF THE INVENTION

Some embodiments of the present invention provide semiconductor device structures and methods of fabricating semiconductor devices structures that include a conductive semiconductor substrate and a semi-insulating or insulating GaN epitaxial

layer on the semiconductor substrate. The semi-insulating or insulating GaN epitaxial layer has a thickness of at least about 4 μm .

In some embodiments, the GaN epitaxial layer has a thickness of at least about 8 μm and, in some embodiments, at least about 10 μm . The semiconductor substrate may comprise conductive SiC and/or GaN. The GaN epitaxial layer may have a resistivity of at least about $10^5 \Omega\text{-cm}$.

In some embodiments of the present invention, the GaN epitaxial layer has an isolation voltage of at least about 50V and in further embodiments, the GaN epitaxial layer has an isolation voltage of at least about 100V.

Additional embodiments of the present invention include a GaN based semiconductor device on the GaN epitaxial layer. A via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer may also be provided. In further embodiments, the substrate is an insulating or semi-insulating substrate and the via hole and via metal extend through the substrate. In other embodiments, the substrate comprises a conductive substrate, the via hole and via metal extend to the substrate and the via metal provides an ohmic contact to the substrate. A region of higher doping concentration may also be provided in the substrate beneath the via.

In further embodiments of the present invention, the substrate comprises a conductive substrate and the device structure further comprises a conductive buffer layer disposed between the substrate and the GaN epitaxial layer. The via hole and the via metal may extend to the conductive buffer layer and the via metal may provide an ohmic contact to the conductive buffer layer. An etch stop layer may also be disposed between the conductive buffer layer and the GaN epitaxial layer.

In particular embodiments of the present invention, the conductive buffer layer comprises a first conductive layer of a first conductivity type on the substrate and a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer. The via hole and the via metal may extend through the second conductive layer to the first conductive layer.

In yet further embodiments of the present invention, the substrate comprises a conductive substrate and the device structure further comprises a two dimensional electron gas (2DEG) structure disposed between the substrate and the GaN epitaxial layer. The 2DEG structure may include multiple 2DEG layers.

In additional embodiments of the present invention, the GaN epitaxial layer is doped with a deep level transition metal dopant. The GaN epitaxial layer may be doped with Fe, Co, Mn, Cr, V and/or Ni. The concentration of the deep level transition metal dopant may be at least about $1 \times 10^{16} \text{ cm}^{-3}$.

5 Some embodiments of the present invention provide GaN semiconductor device structures and methods of fabricating GaN semiconductor device structures that include a semiconductor substrate, an insulating or semi-insulating GaN epitaxial layer on the semiconductor substrate having a thickness of at least $4 \mu\text{m}$ and a conductive semiconductor layer disposed between the semiconductor substrate and
10 the insulating or semi-insulating GaN epitaxial layer.

 In further embodiments, the GaN epitaxial layer has a thickness of at least about $8 \mu\text{m}$ and, in some embodiments, a thickness of at least about $10 \mu\text{m}$. The semiconductor substrate may be an insulating or semi-insulating semiconductor substrate. In some embodiments, the substrate comprises silicon carbide and/or
15 sapphire. In other embodiments, the substrate comprises diamond. In some embodiments, the semiconductor substrate comprises an electrically conductive substrate. The electrically conductive substrate may comprise silicon carbide and/or diamond.

 In further embodiments of the present invention, the conductive
20 semiconductor layer comprises conductive SiC, conductive diamond, SiN and/or a conductive GaN based semiconductor material.

 In additional embodiments of the present invention, a GaN based semiconductor device is provided on the GaN epitaxial layer. A via hole and corresponding via metal in the via hole may extend through layers of the GaN based
25 semiconductor device and the GaN epitaxial layer. The via hole and via metal extend to the substrate and the via metal provides an ohmic contact to the substrate. In some embodiments, the via hole and the via metal extend to the conductive semiconductor layer and the via metal provides an ohmic contact to the conductive semiconductor layer.

30 In further embodiments, the conductive semiconductor layer comprises a first conductive layer of a first conductivity type on the substrate and a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN

epitaxial layer. The via hole and the via metal may extend through the second conductive layer to the first conductive layer.

In still further embodiments of the present invention, an etch stop layer is disposed between the conductive semiconductor layer and the GaN epitaxial layer.

5 Some embodiments of the present invention provide GaN semiconductor device structures and methods of fabricating GaN semiconductor device structures that include an electrically conductive SiC substrate and an insulating or semi-insulating GaN epitaxial layer on the conductive SiC substrate. The GaN epitaxial layer has a thickness of at least about 4 μm .

10 In some embodiments, the GaN based epitaxial layer has a thickness of at least about 8 μm and, in some embodiments, at least about 10 μm . The GaN epitaxial layer may have a resistivity of at least about $10^5 \Omega\text{-cm}$. The GaN epitaxial layer may have an isolation voltage of at least about 50V and, in some embodiments, at least about 100V.

15 In additional embodiments of the present invention, the GaN based epitaxial layer is doped with a deep level transition metal dopant. The GaN epitaxial layer may be doped with Fe, Co, Mn, Cr, V and/or Ni. The concentration of the deep level transition metal dopant may be at least about $1 \times 10^{16} \text{ cm}^{-3}$. In particular embodiments of the present invention, the GaN epitaxial layer is GaN doped with Fe.

20 In further embodiments of the present invention, the semiconductor device structure includes a conductive buffer layer disposed between the conductive SiC substrate and the GaN epitaxial layer. An etch stop layer may also be disposed between the conductive buffer layer and the GaN epitaxial layer. The conductive buffer layer may comprise an epitaxial SiC layer having a higher doping concentration than the SiC substrate. The conductive buffer layer may also comprise an implanted SiC layer in the SiC substrate that has a higher doping concentration than the SiC substrate.

30 In still further embodiments of the present invention, the semiconductor device structure includes a two dimensional electron gas (2DEG) structure disposed between the conductive substrate and the GaN epitaxial layer.

Additional embodiments of the present invention include a GaN based semiconductor device on the GaN epitaxial layer. The GaN based semiconductor device may be a GaN based high electron mobility transistor on the GaN epitaxial layer. A via hole and corresponding via metal in the via hole that extend through

layers of the GaN based semiconductor device and the GaN epitaxial layer may also be provided. In some embodiments, the via hole and via metal extend through the SiC substrate. In other embodiments, the via hole and via metal extend to the substrate and the via metal provides an ohmic contact to the substrate. A region of higher doping concentration may also be provided in the substrate adjacent the via.

In further embodiments of the present invention, the semiconductor device structure includes a conductive buffer layer disposed between the substrate and the GaN epitaxial layer, the via hole and the via metal extend to the conductive buffer layer and the via metal provides an ohmic contact to the conductive buffer layer. An etch stop layer may be disposed between the conductive buffer layer and the GaN epitaxial layer. The etch stop layer may, for example, be AlN or AlGaN. The conductive buffer layer may comprise a first conductive layer of a first conductivity type on the substrate and a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer.

In additional embodiments of the present invention, the semiconductor device structure includes a two dimensional electron gas (2DEG) structure disposed between the substrate and the GaN epitaxial layer, the via hole and the via metal extend to the 2DEG structure and the via metal provides an ohmic contact to the 2DEG structure. An etch stop layer may be disposed between the 2DEG structure and the GaN epitaxial layer.

Some embodiments of the present invention provide GaN semiconductor device structures and methods of fabricating GaN semiconductor device structures that include an electrically conductive GaN substrate, an insulating or semi-insulating GaN epitaxial layer on the conductive GaN substrate, a GaN based semiconductor device on the GaN epitaxial layer and a via hole and corresponding via metal in the via hole that extend through layers of the GaN based semiconductor device and the GaN epitaxial layer.

In some embodiments of the present invention, the GaN based epitaxial layer has a thickness of at about least 4 μm . In some embodiments, the GaN based epitaxial layer has a thickness of at about least 8 μm and, in some embodiments, at least about 10 μm . The GaN epitaxial layer may have a resistivity of at least $10^5 \Omega\text{-cm}$. The GaN epitaxial layer may have an isolation voltage of at least about 50V and, in some embodiments, at least about 100V.

In particular embodiments of the present invention, the GaN based epitaxial layer is doped with a deep level transition metal dopant. The GaN epitaxial layer may be doped with Fe, Co, Mn, Cr, V and/or Ni. The concentration of the deep level transition metal dopant may be at least about $1 \times 10^{16} \text{ cm}^{-3}$.

5 In further embodiments of the present invention, a conductive buffer layer is disposed between the conductive GaN substrate and the GaN epitaxial layer. The via hole and the via metal extend to the conductive buffer layer and the via metal provides an ohmic contact to the conductive buffer layer. An etch stop layer may be disposed between the conductive buffer layer and the GaN epitaxial layer. The
10 conductive buffer layer may comprise an epitaxial layer having a higher doping concentration than the GaN substrate. The conductive buffer layer may comprise an implanted layer in the GaN substrate having a higher doping concentration than the GaN substrate.

In additional embodiments of the present invention, the semiconductor device
15 structure includes a two dimensional electron gas (2DEG) structure disposed between the conductive substrate and the GaN epitaxial layer, where the via hole and the via metal extend to the 2DEG structure and the via metal provides an ohmic contact to the 2DEG structure.

In further embodiments of the present invention, the semiconductor device
20 structure further includes a GaN based high electron mobility transistor on the GaN epitaxial layer.

In additional embodiments of the present invention, the via hole and via metal extend through the GaN substrate. The via hole and via metal may also extend to the substrate and the via metal provide an ohmic contact to the substrate. A region of
25 higher doping concentration may also be provided in the substrate beneath the via.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a cross-section of a semiconductor structure incorporating a thick semi-insulating or insulating GaN layer according to some embodiments of the
30 present invention.

Figure 2 is a cross-section of a semiconductor structure incorporating a thick semi-insulating or insulating GaN layer and a conductive SiC substrate according to further embodiments of the present invention.

Figure 3 is a cross-section of a semiconductor structure incorporating a thick semi-insulating or insulating GaN layer with a conductive buffer layer on a conductive substrate according to further embodiments of the present invention.

Figure 4 is a cross-section of a semiconductor structure incorporating a thick
5 semi-insulating or insulating GaN layer with a conductive buffer layer on a conductive SiC substrate according to further embodiments of the present invention.

Figure 5 is a cross-section of a semiconductor structure incorporating a via through a thick semi-insulating or insulating GaN layer on a conductive substrate according to further embodiments of the present invention.

Figure 6 is a cross-section of a semiconductor structure incorporating a via
10 through a thick semi-insulating or insulating GaN layer with a conductive buffer layer on a conductive substrate according to further embodiments of the present invention.

Figure 7 is a cross-section of a semiconductor structure incorporating a via through a thick semi-insulating or insulating GaN layer to an implanted layer of a
15 conductive substrate according to further embodiments of the present invention.

Figure 8 is a cross-section of a semiconductor structure incorporating a via through a thick semi-insulating or insulating GaN layer and a semiconductor substrate according to further embodiments of the present invention.

Figure 9 is a cross-section of a semiconductor structure incorporating a via
20 through a thick semi-insulating or insulating GaN layer and an etch stop layer according to further embodiments of the present invention.

Figure 10 is a cross-section of a semiconductor structure incorporating a thick semi-insulating or insulating GaN layer with a conductive layer according to further
embodiments of the present invention.

Figure 11 is a cross-section of a semiconductor structure incorporating a via
25 through a thick semi-insulating or insulating GaN layer on a conductive layer according to further embodiments of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

30 The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. However, this invention should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the

invention to those skilled in the art. In the drawings, the thickness of layers and regions are exaggerated for clarity. Like numbers refer to like elements throughout. As used herein the term "and/or" includes any and all combinations of one or more of the associated listed items.

5 The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the
10 presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

 It will be understood that when an element such as a layer, region or substrate is referred to as being "on" or extending "onto" another element, it can be directly on
15 or extend directly onto the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" or extending "directly onto" another element, there are no intervening elements present. Like numbers refer to like elements throughout the specification.

 It will be understood that, although the terms first, second, etc. may be used
20 herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second
25 element, component, region, layer or section without departing from the teachings of the present invention.

 Furthermore, relative terms, such as "lower" or "bottom" and "upper" or "top," may be used herein to describe one element's relationship to another elements as illustrated in the Figures. It will be understood that relative terms are intended to
30 encompass different orientations of the device in addition to the orientation depicted in the Figures. For example, if the device in the Figures is turned over, elements described as being on the "lower" side of other elements would then be oriented on "upper" sides of the other elements. The exemplary term "lower", can therefore, encompass both an orientation of "lower" and "upper," depending of the particular

orientation of the figure. Similarly, if the device in one of the figures is turned over, elements described as "below" or "beneath" other elements would then be oriented "above" the other elements. The exemplary terms "below" or "beneath" can, therefore, encompass both an orientation of above and below. Furthermore, the term "outer" may be used to refer to a surface and/or layer that is farthest away from a substrate.

Embodiments of the present invention are described herein with reference to cross-section illustrations that are schematic illustrations of idealized embodiments of the present invention. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments of the present invention should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. For example, a region illustrated as a rectangle will, typically, have tapered, rounded or curved features. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the precise shape of a region of a device and are not intended to limit the scope of the present invention.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and the present disclosure and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

Embodiments of the present invention may be particularly well suited for use in nitride-based devices such as Group III-nitride based HEMTs. As used herein, the term "Group III nitride" refers to those semiconductor compounds formed between nitrogen and the elements in Group III of the periodic table, usually aluminum (Al), gallium (Ga), and/or indium (In). The term also refers to ternary and quaternary compounds such as AlGa₂N and AlInGa₂N. As is well understood by those in this art, the Group III elements can combine with nitrogen to form binary (*e.g.*, GaN), ternary (*e.g.*, AlGa₂N, AlInN), and quaternary (*e.g.*, AlInGa₂N) compounds. These compounds all have empirical formulas in which one mole of nitrogen is combined with a total of

one mole of the Group III elements. Accordingly, formulas such as $Al_xGa_{1-x}N$ where $0 \leq x \leq 1$ are often used to describe them.

As illustrated in **Figure 1**, embodiments of the present invention provide a thick GaN semi-insulating or insulating epitaxial layer **20** on an electrically
5 conductive semiconductor substrate **10**. The GaN semi-insulating or insulating epitaxial layer **20** has a thickness of at least about 4 μm , in some embodiments, at least about 8 μm and, in some embodiments at least about 10 μm . The conductive semiconductor substrate **10** and the semi-insulating or insulating epitaxial layer **20** provide a device substrate **25** on which a GaN based semiconductor device structure
10 **30**, such as a GaN based HEMT, is provided.

The electrically conductive substrate **10** may, in some embodiments, be a SiC, diamond, Si and/or GaN substrate. For example, in some embodiments of the present invention, the semiconductor substrate **10** may be a conductive SiC substrate, a
15 conductive diamond substrate, a conductive Si substrate and/or a conductive GaN substrate. The conductive substrate **10** may be an n-type or p-type substrate. The substrate **10** may be a free-standing or boule grown substrate and may include, for example, a Group III nitride and/or GaN layers with a substrate of another material which may be removed. Methods of fabricating suitable substrates are known to those of skill in the art and need not be described in further detail herein. For
20 example, if the substrate is a GaN substrate, the substrate may be fabricated as described in Xu *et al.*, "Growth and Characteristics of Freestanding Gallium Nitride Substrates", ATMI, Inc., 2003; Vaudo *et al.*, "GaN Boule Growth: A Pathway to GaN Wafers With Improved Material Quality," ATMI, Inc., 2003; and/or United States Patent No. 6,765,240 entitled "BULK SINGLE CRYSTAL GALLIUM NITRIDE
25 AND METHOD OF MAKING SAME," the disclosures of which are incorporated herein as if set forth in their entirety. SiC substrates are also commercially available. For example, SiC and GaN substrates are available from Cree, Inc. of Durham, North Carolina.

In some embodiments of the present invention, the GaN epitaxial layer **20** has
30 a resistivity of at least $10^5 \Omega\text{-cm}$. The GaN epitaxial layer may have an isolation voltage of at least about 50V, where the isolation voltage is measured as described below. In some embodiments of the present invention, the GaN epitaxial layer **20** has an isolation voltage of at least about 100V.

In some embodiments of the present invention, a buffer layer(s) (not shown) may be provided between the GaN semi-insulating or insulating epitaxial layer **20** and the conductive substrate **10**. For example, where the GaN semi-insulating or insulating epitaxial layer **20** is formed on a non-GaN substrate by hetero-epitaxial growth, an AlN, AlGaN or other buffer layer may be provided. The buffer layer(s) may be of uniform or non-uniform composition. Thus, for example, a graded AlGaN layer may be provided as a buffer layer. The buffer layer(s) may also include, for example, a nucleation layer, such as a continuous or discontinuous AlN layer. Suitable buffer layers and their fabrication are described, for example, in United States Patent No. 6,841,001, entitled "STRAIN COMPENSATED SEMICONDUCTOR STRUCTURES AND METHODS OF FABRICATING STRAIN COMPENSATED SEMICONDUCTOR STRUCTURES," the disclosure of which is incorporated herein as if set forth in its entirety.

The GaN semi-insulating or insulating epitaxial layer **20** may be formed on the conductive substrate **10** by techniques known to those of skill in the art. For example, metal organic vapor phase epitaxy (MOVPE) may be utilized. Suitable source materials for the semi-insulating or insulating epitaxial layer **20** include, for example, trimethylgallium (TMGa), NH₃ and Cp₂Fe. If the substrate **10** is a GaN substrate, the GaN semi-insulating or insulating epitaxial layer **20** may be formed as described in concurrently filed United States Patent Application Serial No. _____ (Attorney Docket No. 5308-551) entitled "COMPOSITE SUBSTRATES OF CONDUCTIVE AND INSULATING OR SEMI-INSULATING GROUP III NITRIDES FOR GROUP III NITRIDE DEVICES" and/or United States Patent Application Serial No. 10/752,970, filed January 7, 2004 and entitled "CO-DOPING FOR FERMI LEVEL CONTROL IN SEMI-INSULATING GROUP III NITRIDES," the disclosures of which are incorporated herein as if set forth in its entirety.

The GaN semi-insulating or insulating epitaxial layer **20** may have deep level impurities, such as Fe, Co, Mn, Cr, V and/or Ni, and/or other point defects incorporated therein to make the epitaxial layer **20** semi-insulating or insulating. In particular embodiments of the present invention, the GaN epitaxial layer **20** is doped with Fe. For example, in some embodiments of the present invention, a dopant concentration of $1 \times 10^{18} \text{ cm}^{-3}$ may be provided. Furthermore, additional dopants may also be incorporated in the epitaxial layer **20**. For example, if the composition of the epitaxial layer **20** differs from that of the conductive substrate **10**, polarization-

induced charge may result from the compositional differences. Such polarization-induced charge may be counteracted by doping the epitaxial layer **20** to maintain the insulating behavior of the epitaxial layer **20**.

Figure 2 illustrates further embodiments of the present invention where a GaN semi-insulating or insulating epitaxial layer **120** is provided on a conductive SiC substrate **110**. The GaN semi-insulating or insulating epitaxial layer **120** has a thickness of at least about 4 μm , in some embodiments at least about 8 μm or greater and, in some embodiments, at least about 10 μm . The conductive SiC substrate **110** and the semi-insulating or insulating epitaxial layer **120** provide a device substrate **125** on which a GaN based semiconductor device structure **130**, such as a GaN based transistor structure, is provided. The thermal conductivity of SiC may be advantageous in extracting heat from such device structures formed on the substrate **110** and the thermal conductivity of conductive SiC may be higher than that of semi-insulating SiC.

While the SiC substrate **110** is illustrated as a single substrate, the substrate **110** may be provided by a SiC layer on another material, such as diamond. In particular embodiments, a conductive SiC substrate may be provided on a conductive diamond substrate. Such composite substrates may be provided as described, for example, in United States Patent Application Serial No. 10/707,898, filed January 22, 2004, entitled "SILICON CARBIDE ON DIAMOND SUBSTRATES AND RELATED DEVICES AND METHODS," the disclosure of which is incorporated herein as if set forth in its entirety. Conductive diamond may be more thermally conductive than semi-insulating diamond as selection of the growth parameters may be less constrained. For example, conductive diamond layers on conductive SiC substrates or conductive SiC layers on conductive diamond substrates may be provided as the composite substrate. Thus, in some embodiments of the present invention, the SiC substrate may be provided by a composite SiC substrate as described herein.

In some embodiments of the present invention, a buffer layer(s) (not shown) may be provided between the GaN semi-insulating or insulating epitaxial layer **120** and the conductive SiC substrate **110**. For example, an AlN or other buffer layer(s) may be provided. Suitable buffer layers and their fabrication are described, for example, in United States Patent No. 6,841,001 as discussed above.

The substrate **110** may be an n-type or p-type substrate. Electrically conductive SiC substrates may be easier and/or less expensive to produce in larger sizes and/or with higher structural quality than semi-insulating or insulating substrates. Methods of fabricating electrically conductive SiC substrates are known to those of skill in the art and need not be described further herein. Suitable SiC substrates are available from Cree, Inc., Durham, North Carolina.

The GaN semi-insulating or insulating epitaxial layer **120** may be formed on the substrate **110** by techniques known to those of skill in the art. For example, metal organic vapor phase epitaxy (MOVPE) may be utilized. Suitable source materials for the GaN semi-insulating or insulating epitaxial layer **120** include, for example, trimethylgallium (TMGa), NH₃ and Cp₂Fe. Because the substrate **110** may be conductive it may provide a higher quality (e.g. reduced defect density) substrate for the semi-insulating or insulating epitaxial layer **120**.

The semi-insulating or insulating epitaxial layer **120** may have deep level impurities, such as Fe, Co, Mn, Cr, V and/or Ni, and/or other point defects incorporated therein to make the epitaxial layer **120** semi-insulating or insulating. In particular embodiments of the present invention, the GaN epitaxial layer **120** is doped with Fe. For example, in some embodiments of the present invention, a dopant concentration of $1 \times 10^{18} \text{ cm}^{-3}$ may be provided. Furthermore, additional dopants may also be incorporated in the epitaxial layer **120**. Because the composition of the epitaxial layer **120** differs from that of the substrate **110** or buffer layer(s) if present, polarization-induced charge may result from the compositional differences. Such polarization-induced charge may be counteracted by doping the epitaxial layer **120** to maintain the insulating behavior of the epitaxial layer **120**.

Figure 3 illustrates further embodiments of the present invention where a conductive buffer layer **315** is provided between a conductive substrate **310** and a semi-insulating or insulating GaN epitaxial layer **320**. The GaN semi-insulating or insulating epitaxial layer **320** may, in some embodiments, have a thickness of at least about 4 μm , in some embodiments at least about 8 μm and, in some embodiments, at least about 10 μm . The semiconductor substrate **310** and the semi-insulating or insulating epitaxial layer **320** provide a device substrate **325** on which a GaN based semiconductor device structure **330**, such as a GaN based HEMT, is provided.

In some embodiments of the present invention, a buffer layer(s) (not shown) may be provided between the GaN semi-insulating or insulating epitaxial layer **320**

and the conductive buffer layer **315**. Optionally, a buffer layer (not shown) could be provided between the conductive substrate **310** and the conductive buffer layer **315**. For example, an AlN, AlGaN or other buffer layer may be provided. The buffer layer(s) may be of uniform or non-uniform composition. Thus, for example, a graded AlGaN layer may be provided as a buffer layer. The buffer layer(s) may also include, for example, a nucleation layer, such as a continuous or discontinuous AlN layer. Suitable buffer layers and their fabrication are described, for example, in United States Patent No. 6,841,001 as discussed above.

The substrate **310** may, in some embodiments, be a conductive SiC substrate, a conductive GaN substrate, a conductive diamond substrate or a conductive Si substrate. The substrate **310** may also be a composite substrate of SiC and diamond. The substrate **310** may be an n-type or p-type substrate. The substrate **310** may be a free-standing or boule grown substrate and may include, for example, a Group III nitride and/or GaN layers with a substrate of another material which may be removed. In the case of SiC and diamond, the diamond would not be removed. SiC/diamond substrates may be provided, for example, as described in United States Patent Application Serial No. 10/707,898, discussed above. Methods of fabricating suitable substrates are known to those of skill in the art and need not be described in further detail herein.

The conductive buffer layer **315** may, for example, be an epitaxial layer on the substrate **310** or may be an implanted region in the substrate **310**. In some embodiments of the present invention, ion implantation of dopant into the substrate **310** and annealing could also be used to provide the conductive buffer layer **315**, which may help form ohmic contacts to the substrate **310**. Such ion implantation and/or annealing could be carried out before formation of the epitaxial layer **320**.

The conductive buffer layer **315** may have the same composition as the substrate **310** or may have a different composition. For example, if the substrate **310** is a SiC substrate, the conductive buffer layer **315** could be a SiC epitaxial layer or implanted region or the conductive buffer layer **315** could be a conductive GaN epitaxial layer, GaN dots and/or a conductive AlGaN layer. The conductive buffer layer **315** may have the same conductivity type as the substrate **310** or may be of opposite conductivity type. In some embodiments of the present invention, the conductive buffer layer **315** has a higher doping concentration than is present in the substrate **310**. Furthermore, a higher dopant concentration buffer layer **315** may

provide for a higher quality ohmic contact and/or a lower thermal treatment to provide an ohmic contact to the buffer layer 315 and, through the buffer layer 315, to the substrate 310.

The conductive buffer layer 315 may also include multiple layers. For example, the conductive buffer layer 315 may provide a two dimensional electron gas (2DEG) structure. Multiple 2DEG structures could be grown near the substrate to enhance current spreading at the expense of vertical resistance. In some embodiments, thin AlGa_N layers could be appropriately doped with Si or appropriately graded in Al composition so as to reduce or minimize the barrier to vertical conduction of electrons. Combinations of a conductive epitaxial layer and a 2DEG structure may also be provided.

The conductive buffer layer 315 could also be provided, for example, by a conductive GaN layer on a conductive AlGa_N layer on implanted SiC. Other suitable techniques for making a conductive interface between GaN and SiC may also be used. Thus, the conductive buffer layer 315 may be provided as described, for example, in United States Patent Application Publication No. 2002/0008241 entitled "GROUP III NITRIDE PHOTONIC DEVICES ON SILICON CARBIDE SUBSTRATES WITH CONDUCTIVE BUFFER INTERLAYER STRUCTURE," the disclosure of which is incorporated herein as if set forth in its entirety.

As an example, in some embodiments of the present invention, the conductive buffer layer 315 may be an even more heavily n-type doped layer, an n⁺⁺ GaN layer may be epitaxially grown prior to, but preferably in the same run as, the semi-insulating layer 320 to act as an ohmic contact and/or current spreading layer. Thin epi layers may often be doped more heavily than thick substrates without significant defects in the crystal. In some embodiments, the n⁺⁺ layer is grown as thick and as heavily doped as possible without introducing significant defects. A thicker n⁺⁺ layer may better spread current with lower total resistance than the substrate alone. Furthermore, the thicker the n⁺⁺ layer, the more easily low resistance ohmic contacts may be made to the n⁺⁺ layer without requiring precise etch times. Small amounts of In may be incorporated to reduce the strain in heavily Si doped layers, reduce defects and allow more Si incorporation, and possibly serve as an indicator for when the etch should be stopped.

In some embodiments, the conductive buffer layer 315 may include conductive layers of opposite conductive type. For example, the conductive buffer

lay **315** may include an n++ GaN layer adjacent the substrate **310** and a p-type GaN layer on the n++ GaN layer opposite the substrate **310**. Such an opposite conductivity type layer may serve as a higher barrier for electron injection into the semi-insulating or insulating GaN layer **320** from the substrate **310**.

5 **Figure 4** illustrates further embodiments of the present invention where a conductive buffer layer **415** is provided between a conductive SiC substrate **410** and a semi-insulating or insulating GaN epitaxial layer **420**. The GaN semi-insulating or insulating epitaxial layer **420** may, in some embodiments, have a thickness of at least about 4 μm , in some embodiments at least about 8 μm and, in some embodiments, at
10 least about 10 μm . The semiconductor substrate **410** and the semi-insulating or insulating epitaxial layer **420** provide a device substrate **425** on which a GaN based semiconductor device structure **430**, such as a GaN based HEMT, is provided.

 In some embodiments of the present invention, a buffer layer(s) (not shown) may be provided between the GaN semi-insulating or insulating epitaxial layer **420**
15 and the conductive buffer layer **415**. For example, an AlN, AlGaIn or other buffer layer may be provided. The buffer layer(s) may be of uniform or non-uniform composition. Thus, for example, a graded AlGaIn layer may be provided as a buffer layer. The buffer layer(s) may also include, for example, a nucleation layer, such as a continuous or discontinuous AlN layer. Suitable buffer layers and their fabrication
20 are described, for example, in United States Patent No. 6,841,001 as discussed above.

 The conductive buffer layer **415** may, for example, be an epitaxial layer on the substrate **410**, or may be an implanted region in the substrate **410**. In some
embodiments of the present invention, ion implantation of dopant into the substrate
25 **410** and annealing could also be used to provide the conductive buffer layer **415**, which may help form ohmic contacts to the substrate **410**. Such ion implantation could be carried out before formation of the epitaxial layer **420**. For example, ion implantation of a SiC substrate may be provided as described in United States Patent
Application Publication No. 2004/0149993 entitled "METHODS OF TREATING A SILICON CARBIDE SUBSTRATE FOR IMPROVED EPITAXIAL DEPOSITION
30 AND RESULTING STRUCTURES AND DEVICES" and/or United States Patent Application Publication No.2005/0029526 entitled "METHODS OF TREATING A SILICON CARBIDE SUBSTRATE FOR IMPROVED EPITAXIAL DEPOSITION AND RESULTING STRUCTURES AND DEVICES," the disclosures of which are
incorporated herein as if set forth in their entirety.

The conductive buffer layer 415 may have the same composition as the substrate 410, or may have a different composition. For example, the conductive buffer layer 415 could be a SiC epitaxial layer or implanted region or the conductive buffer layer 415 could be a conductive GaN epitaxial layer, GaN dots and/or a conductive AlGaN layer. The conductive buffer layer 415 may have the same conductivity type as the substrate 410 or may be of opposite conductivity type. In some embodiments of the present invention, the conductive buffer layer 415 has a higher doping concentration than is present in the substrate 410. Furthermore, a higher dopant concentration buffer layer 415 may provide for a higher quality ohmic contact and/or a lower thermal treatment to provide an ohmic contact to the buffer layer 415 and, through the buffer layer 415, to the substrate 410.

The conductive buffer layer 415 may also include multiple layers. For example, the conductive buffer layer 415 may provide a two dimensional electron gas (2DEG) structure. The 2DEG structure may include multiple 2DEG layers. For example, multiple 2DEG layers could be provided near the substrate to enhance current spreading at the expense of vertical resistance. In some embodiments, thin AlGaN layers could be heavily Si doped to increase the charge and reduce vertical resistance. Combinations of a conductive epitaxial layer and a 2DEG structure may also be provided.

As an example, in some embodiments of the present invention, the conductive buffer layer 415 may be an even more heavily n-type doped layer, an n++ SiC layer may be epitaxially grown prior to the semi-insulating layer 420 to act as an ohmic contact and/or current spreading layer. In some embodiments, the n++ layer is grown as thick and as heavily doped as possible without introducing significant defects. A thicker n++ layer may better spread current with lower total resistance than the substrate alone. Existence of a n++ current-spreading layer may slightly relax the high doping concentration requirements of the substrate, reducing costs. Furthermore, the thicker the n++ layer, the more easily low resistance ohmic contacts may be made to the n++ layer without requiring precise etch times.

In some embodiments, the conductive buffer layer 415 may include conductive layers of opposite conductive type. For example, the conductive buffer layer 415 may include an n++ SiC or GaN layer adjacent the substrate 410 and a p-type SiC or GaN layer on the n++ SiC or GaN layer opposite the substrate 410. Such an

opposite conductivity type layer may serve as a higher barrier for electron injection into the semi-insulating or insulating GaN layer **420** from the substrate **410**.

Fabrication of the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** may be controlled to control the strain in the layer. For example, the
5 III-V composition and/or the pressure under which the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** is fabricated may be controlled to control the strain in the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420**. By increasing the III-V ratio, the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** may be made more compressive.
10 Furthermore, by fabricating the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** at lower pressures the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** may be more compressive. Additionally, as the thickness of the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** increases, an otherwise compressive strained layer may become tensile strained.
15 Such tensile strain may result in defects, such as cracking, of the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420**. Accordingly, the thickness, growth conditions and source materials may be controlled to avoid changes in the strain of the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** during fabrication.

20 Control of the GaN/AlN nucleation conditions to control the initial strain through island growth and coalescence may also be used to control the strain of the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420**. For example, the pressure and NH₃ flow rates may be adjusted to reduce and/or control strain and bow resulting from the growth of the GaN semi-insulating or insulating
25 epitaxial layer **20**, **120**, **320** and/or **420**.

Because a GaN based semiconductor device **30**, **130**, **330** and **430** is fabricated on the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420**, GaN based semiconductor device **30**, **130**, **330** and **430** may be electrically isolated from the substrates **10**, **110**, **310** and **410**. Furthermore, because GaN based semiconductor
30 device **30**, **130**, **330** and **430** and the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** are both GaN based structures, unlike an AlN isolation layer, the GaN based semiconductor device **30**, **130**, **330** and **430** and the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** may be fabricated in a single step, using the same fabrication technique and/or in a single reactor.

Furthermore, GaN may be grown faster than AlGa_N or AlN by MOCVD. Thick GaN may also have a lower dislocation density than thick AlN grown under similar conditions (*e.g.*, the same growth temperature).

In certain embodiments of the present invention, the GaN semi-insulating or insulating epitaxial layer **20**, **120**, **320** and/or **420** may be fabricated as follows. In the present example, the substrate is a SiC substrate and buffer layers between the substrate and insulating GaN may comprise one or a combination of the following: AlN, AlN graded to GaN, AlGa_N, AlGa_N graded to GaN, AlGa_N/Ga_N/AlGa_N superlattices, multiple layers of low-temperature GaN interlayers to terminate dislocations, multiple layers of micro-ELO through sparse-SiN or sparse-AlN to reduce dislocations, etc. The dislocation termination or reduction layers may be conductive, for example, sparse SiN may be n-type, and may provide the conductive layer on which the semi-insulating or insulating GaN layer is provided. Suitable GaN layers may be deposited by MOCVD (*e.g.*, MOVPE/OMCVD/OMVPE) using TMGa, NH₃, and Cp₂Fe as precursors. Semi-insulating GaN has been deposited on multiple wafers up to 100mm in diameter at the same time using a growth pressure of 0.2 bar, a temperature of 1000 °C, a V/III ratio of 250, a growth rate of 6 μm/hr and a Fe doping density of 2 x 10¹⁸ cm⁻³. A 30-200 nm AlN nucleation layer is deposited on a SiC substrate. The first part of the GaN layer is grown to control the strain primarily by adjusting the growth pressure and ammonia flow rate. For example, the pressure may be decreased to 0.1 bar to obtain a less tensile (more compressive) GaN film than that grown at 0.2 bar.

Semi-insulating GaN layers have been fabricated to thicknesses of about 30 μm on high purity SiC substrates with minimal cracking. In such a case, a thin, approximately 30 nm, layer of AlN was deposited using TMAI and NH₃ at low pressure. Then, 30 μm of GaN was deposited at 0.15 atmosphere using TMGa and NH₃ with a V/III ratio of 500. The layers were deposited at approximately 1000 °C. The dislocation density was reduced to about 10⁸ cm⁻² for layers of this thickness.

As discussed above, the GaN epitaxial layer **20**, **120**, **320** and/or **420** is semi-insulating or insulating and the substrate **10**, **110**, **310**, **410** is conductive. The terms "conductive," "semi-insulating" and "insulating" are understood by one of skill in the art and are used descriptively rather than in an absolute sense and, thus, are used to describe the relative conductivity/resistivity of the respective materials. In particular embodiments of the present invention, the semi-insulating or insulating epitaxial layer

20, 120, 320 and/or **420** has a resistivity equal to or higher than about $1 \times 10^5 \Omega\text{-cm}$ at room temperature and the conductive substrate **10, 110, 310, 410** has a resistivity of equal to or less than about $0.1 \Omega\text{-cm}$ at room temperature.

In some embodiments of the present invention, a conductive substrate **10, 110, 310, 410** may have a resistivity of about $0.02 \Omega\text{-cm}$ or less for reduced or minimal resistance when used as the ground to which via metal through the semi-insulating or insulating GaN layer **20, 120, 320, 420** is connected. Doping in the substrate **10, 110, 310, 410** may be n-type at a level of greater than about $1 \times 10^{18} \text{cm}^{-3}$ and, in some embodiments a level of greater than about $1 \times 10^{19} \text{cm}^{-3}$. The substrate **10, 110, 310, 410** may be doped as high as possible without increasing electrical resistance due to lower mobility or significantly impairing the crystal quality or thermal conductivity of the substrate. (As noted above, making the doping as high as possible in the conductive substrate may be relaxed somewhat, if there is an n++ current-spreading layer. This might make it cheaper and also better in terms of substrate defects to not require n++ 4H-SiC substrates.)

The epitaxial layer **20, 120, 320, 420** should be sufficiently insulating to provide electrical isolation of the device structure **30, 130, 330, 430** from the conductive substrate **10, 110, 310, 410**. In particular embodiments, the epitaxial layer **20, 120, 320, 420** should be sufficiently insulating to provide electrical isolation of a source region from a drain region of a transistor, such as a HEMT, when a gate of the transistor is biased to pinch off the channel. Thus, the high field characteristics of the epitaxial layer **20, 120, 320, 420** may, in some embodiments of the present invention, be more determinative than the resistivity of the epitaxial layer **20, 120, 320, 420**. Such high field characteristics may be characterized by the isolation voltage of the structure. Thus, in some embodiments of the present invention, the epitaxial layer **20, 120, 320, 420** is sufficiently insulating to provide an isolation voltage of at least 50 V and, in further embodiments of the present invention, the epitaxial layer is sufficiently insulating to provide an isolation voltage of at least 100 V. The isolation voltage refers to the voltage that provides a 1mA/mm current for an ungated transistor structure on the epitaxial layer **20, 120, 320, 420**. Thus, for example, the isolation voltage of a structure may be measured by forming a HEMT structure on the epitaxial layer **20, 120, 320, 420** with a 5 μm source to drain spacing and removing the gate from the structure. A 3- μm region, centered between source and drain, is damaged,

for example, by ion implantation, or the channel is etched away, for example, by reactive ion etching (RIE), to destroy the channel region of the device. A voltage is then applied from the source to the drain and the current measured. The voltage at which 1 mA per mm of width of current flow is measured is referred to herein as the
5 isolation voltage of the structure.

The thickness of the semi-insulating or insulating epitaxial layer **20, 120, 320, 420** may depend on the device that is formed on the semi-insulating or insulating epitaxial layer **20, 120, 320, 420** and the expected operating conditions for the device. For example, for a HEMT structure with an expected operating frequency of 2 GHz, a
10 thickness of 5 μm may be suitable. For a HEMT structure with an expected operating frequency of 10 GHz, a thickness of 10 μm may be suitable. The particular thickness of the semi-insulating or insulating epitaxial layer **20, 120, 320, 420** may be controlled by the acceptable capacitance between the active device region and the underlying conductive substrate. Such capacitance may be affected by other layers
15 between the device layers and a conductive layer. For example, if a non-conductive layer is provided between the semi-insulating or insulating epitaxial layer **20, 120, 320, 420**, the thickness of the semi-insulating or insulating epitaxial layer **20, 120, 320, 420** may be adjusted based on the characteristics of the non-conductive layer, such as thickness and dielectric constant, to provide the acceptable capacitance.

20 In addition, because the substrate **10, 110, 310, 410** is conductive, the substrate **10, 110, 310, 410** may be used as a contact of the device structure **30, 130, 330, 430**. Embodiments of the present invention incorporating via holes and via metal structures are illustrated in **Figures 5** through **9**.

In **Figures 5** through **7** and **9**, a conductive substrate **510** may be provided as
25 described above with reference to **Figures 1** through **4** with regard to the substrates **10, 110, 310** and **410**. The substrate **810** may be conductive, semi-insulating or insulating. A semi-insulating or insulating GaN epitaxial layer **520** or **820** may be provided as described above with reference to the semi-insulating GaN epitaxial layers **20, 120, 320** and **420**. Buffer layers may also be provided between the semi-
30 insulating or insulating GaN epitaxial layers **520** or **820** and the substrates **510, 810** as described above. A device structure **530** is provided on the semi-insulating or insulating GaN epitaxial layers **520** or **820** and may be a device structure **30, 130, 330** or **430** as described above. As is further illustrated in **Figure 6**, a conductive buffer layer **615** may be provided as described above with reference to the conductive buffer

layers **315** and **415**. Accordingly, these aspects of the embodiments illustrated in **Figures 5** through **8** will not be described in further detail below.

As illustrated in **Figure 5**, contacts **540**, **550** and **560** may be provided for the semiconductor device **530**. The contacts **540**, **550** and **560** may, for example, be a source contact, a drain contact and a gate contact, respectively, for a GaN based transistor, such as a HEMT. While three contacts are illustrated in **Figures 5** through **9**, fewer or more contacts may be provided based on the semiconductor device provided. A passivation layer(s) **570**, such as a SiN, SiO₂, oxynitride or other such layer, may also be provided on exposed surfaces of the semiconductor device structure **530** and/or portions of the metal contacts/overlayers. A backside ohmic contact **590** may also be provided to the substrate **510** opposite the face of the substrate **510** on which the semi-insulating or insulating GaN epitaxial layer **520** is provided. To improve the resistivity of the ohmic contact to the substrate **510**, the backside of the substrate **510** may, for example, be implanted and annealed (not shown).

As is further illustrated in **Figure 5**, a via hole **575** extends through the device structure **530** and the semi-insulating or insulating GaN epitaxial layer **520** to and/or into the conductive substrate **510**. If non-conductive buffer layers are provided between the semi-insulating or insulating GaN epitaxial layer **520** and the conductive substrate **510**, the via hole **575** should extend through the non-conductive layers to the conductive substrate.

In some embodiments, the passivation layer(s) **570** may provide an etch mask or a separate etch mask may be utilized for forming the via hole **575**. For example, a thick photo resist may be used as a mask to protect the GaN based device structure **530**. The via hole **575** may be formed, for example, by reactive ion etching (RIE) or inductively coupled plasma (ICP) with a plasma containing chlorine compounds, such as Cl₂, BCl₃, or other compounds.

A via metal **580** is provided in the via hole **575** and contacts the substrate **510**. The via metal may be selected to provide an ohmic contact to the substrate **510**. For example, if the substrate **510** is SiC, nickel or other suitable metal, may be used as the via metal **580**. Other conductors, such as polysilicon and/or metal silicides may also be used as the via metal **580**. Multiple materials may be used as the via metal **580**. For example, the metal in direct contact with the substrate **510** or the conductive buffer layer **615** described below may be nickel while the remained of the metal may

be gold. Accordingly, references to via metal refer to a conductor of one or more conductive materials within a via hole.

Figure 6 illustrates the inclusion of the conductive buffer layer **615** between the semi-insulating or insulating GaN epitaxial layer **520** to the conductive substrate **510**. In some embodiments, the conductive buffer layer **615** is an implanted layer in the substrate **510** and/or a highly doped epitaxial layer on the substrate **510**. As seen in **Figure 6**, the via hole **675** extends through the device structure **530** and the semi-insulating or insulating GaN epitaxial layer **520** to and/or into the conductive buffer layer **615**. If non-conductive buffer layers are provide between the semi-insulating or insulating GaN epitaxial layer **520** and the conductive buffer layer **615**, the via hole **675** should extend through the non-conductive layers to the conductive buffer layer **615**. The via metal **680** extends into the via hole **675** and contacts the conductive buffer layer **615**. The via metal **680** may be selected to provide an ohmic contact to the conductive buffer layer **615**. As discussed above, providing the conductive buffer layer may provide for a higher quality ohmic contact and may provide for current spreading to the substrate **510**. In some embodiments, the conductive buffer layer **615** may act as an etch stop layer.

The via hole **675** may be etched as described above with respect to **Figure 5**. However, because the RIE or ICP may have limited selectivity between the GaN epitaxial layer **520** and the conductive buffer layer **615**, the conductive buffer layer **615** may, in some cases, be etched through to the substrate **510**. Thus, in some embodiments of the present invention, the via hole **675** extends through the conductive buffer layer **615** to the substrate **510**.

In embodiments of the present invention where the conductive buffer layer **615** includes conductive layers of opposite conductivity type, the via hole **675** may extend through the layer of opposite conductivity type to the substrate **510** and to or into the layer with the same conductivity type as the substrate **510**. For example, if the substrate **510** is an n-type SiC substrate and the conductive buffer lay **615** includes an n++ SiC layer and a p-type SiC layer on the n++ SiC layer, the via hole **675** may extend through the p-type SiC layer and to or into the n++ SiC layer.

In some embodiments of the present invention the via hole **675** may extend through the conductive buffer layer **615** to the substrate **510**. For example, if the conductive buffer layer **615** comprises a 2DEG structure, the via hole **675** and via metal **680** may extend through the 2DEG structure to the substrate **510**.

Figure 7 illustrates the inclusion of a region **715** of higher dopant concentration in the substrate **510** where the region **715** is provided in the opening exposed by the via hole **775**. Such a region may be provided, for example, by implanting dopant through the via hole **775** to provide an implanted region beneath or adjacent the via hole **775** and then activating the implanted dopant. As seen in **Figure 7**, the via hole **775** extends through the device structure **530** and the semi-insulating or insulating GaN epitaxial layer **520** to and/or into the substrate **510**. If non-conductive buffer layers are provided between the semi-insulating or insulating GaN epitaxial layer **520** and the substrate **510**, the via hole **775** should extend through the non-conductive layers to the substrate **510**. The via metal **780** extends into the via hole **775** and contacts the region **715**. The via metal may be selected to provide an ohmic contact to the region **715**. As discussed above, providing a region of higher dopant concentration may provide for a higher quality ohmic contact to the substrate **510**. The via hole **775** may be etched as described above with respect to **Figure 5**.

Figure 8 illustrates further embodiments of the present invention where the via hole **880** extends through the substrate **810** and the via metal **880** extends through the via hole **875** to contact a backside contact **890**. The backside contact **890** is on a face of the substrate **810** opposite the semi-insulating or insulating GaN epitaxial layer **820**. Techniques for fabricating such a via are described, for example, in United States Patent Application Publication No. US2004/0241970, published December 4, 2004 and entitled "METHOD OF FORMING VIAS IN SILICON CARBIDE AND RESULTING DEVICES AND CIRCUITS," the disclosure of which is incorporated herein by reference as if set forth in its entirety.

In addition to the structures illustrated above with reference to **Figures 1 through 4**, an additional layer(s) may be included between the semi-insulating or insulating GaN epitaxial layer **520** and the substrate **510** that provide an etch stop for etching the via holes **575**, **675** and **775** illustrated in **Figures 5**, **6** and **7**. Such a structure is illustrated in **Figure 9**. As seen in **Figure 9**, an etch stop layer **910** is provided between the conductive buffer layer **615** and the semi-insulating or insulating epitaxial layer **520**. The via hole **975** extends through the etch stop layer **910** and the via metal **985** extends through the etch stop layer **910** to contact the buffer layer **615**. If the etch stop layer **910** is conductive, the via hole **975** and the via metal **985** may only extend to contact the etch stop layer **910**.

For example, a thin AlN layer may be provided between the semi-insulating or insulating GaN epitaxial layer **520** and the substrate **510** or the conductive buffer layer **615** as the etch stop layer **910**. In such a case, adding a fluorine-containing compound, such as CF₄, NF₃ and/or SiF₄ to the conventional chlorine-containing plasmas used for RIE or ICP of GaN and other Group III-N materials may result in a highly selective etch that will slow or stop at the AlN layer. In some embodiments, the thickness of an AlN nucleation layer may be adjusted to provide the etch stop layer **910**. The nucleation layer may be thick enough to provide an etch stop but thin enough to be removed with a non-selective etch for AlN and SiC. If the AlN layer etch stop layer **910** is thin, it could be removed with a non-selective etch or, alternatively, it could be removed with a wet etch such as a strong base without etching through the buffer layer **615**. If a non-selective etch is used, the thickness of the buffer layer **615** may be much greater than the thickness of the etch stop layer **910**.

While the use of an etch stop layer **910** has been illustrated with respect to embodiments incorporating a conductive buffer layer **615**, the etch stop layer **910** could be used without the presence of the buffer layer **615** to control the depth of etch into the substrate **510** or as a precursor to the implantation as illustrated in **Figure 7**. Furthermore, if multiple layers of the same or different conductivity type are provided, an etch stop layer **910** could be provided between ones of the multiple layers. The implantation illustrated in **Figure 7** could be carried out with the etch stop layer present or removed. If the implantation is performed with the etch stop layer **910** present, the etch stop layer **910** could be removed prior to formation of the via metal **780**.

By using vias through a GaN semi-insulating or insulating epitaxial layer to a conductive substrate, no wafer thinning may be needed. Thus, reduced warping and the thermal properties of the substrate may be maintained – also higher yield processes are available.

While each of the embodiments of the present invention described above utilize a conductive substrate, some embodiments of the present invention are not limited to the use of a conductive substrate. The isolation benefits of a thick semi-insulating or insulating GaN epitaxial layer may be provided where a conductive layer is present between the semi-insulating or insulating GaN epitaxial layer irrespective

of whether the substrate itself is conductive. Such embodiments of the present invention are illustrated in **Figures 10** and **11**.

Figure 10 illustrates further embodiments of the present invention where a conductive layer **1015** is provided between a substrate **1010** and a semi-insulating or insulating GaN epitaxial layer **1020**. The GaN semi-insulating or insulating epitaxial layer **1020** may, in some embodiments, have a thickness of at least about 4 μm , in some embodiments at least about 8 μm and, in some embodiments, at least about 10 μm . The semiconductor substrate **1010** and the semi-insulating or insulating epitaxial layer **1020** provide a device substrate **1025** on which a GaN based semiconductor device structure **1030**, such as a GaN based HEMT, is provided.

In some embodiments of the present invention, a buffer layer(s) (not shown) may be provided between the GaN semi-insulating or insulating epitaxial layer **1020** and the conductive layer **1015**. Optionally, a buffer layer (not shown) could be provided between the substrate **1010** and the conductive layer **1015**. For example, an AlN, AlGaN or other buffer layer may be provided. The buffer layer(s) may be of uniform or non-uniform composition. Thus, for example, a graded AlGaN layer may be provided as a buffer layer. The buffer layer(s) may also include, for example, a nucleation layer, such as a continuous or discontinuous AlN layer. Suitable buffer layers and their fabrication are described, for example, in United States Patent No. 6,841,001 as discussed above.

The substrate **1010** may, in some embodiments, be a SiC substrate, a GaN substrate, a diamond substrate, an AlN substrate, a sapphire substrate or a Si substrate. The substrate **1010** may also be a composite substrate of SiC and diamond. The substrate **1010** may be semi-insulating or insulating. The substrate **1010** may be a free-standing or boule grown substrate and may include, for example, a Group III nitride and/or GaN layers with a substrate of another material which may be removed. In the case of SiC and diamond, the diamond would, typically not be removed. Thus, in some embodiments of the present invention, the conductive layer **1015** and the substrate **1010** may be provided as a conductive SiC layer on an insulating or semi-insulating diamond substrate or as an insulating or semi-insulating SiC layer on a conductive diamond substrate. SiC/diamond substrates may be provided, for example, as described in United States Patent Application Serial No. 10/707,898, discussed above. Methods of fabricating suitable substrates are known to those of skill in the art and need not be described in further detail herein.

The conductive layer **1015** could also be provided by conductive GaN, AlGa_N, AlGa_N graded to GaN, AlGa_N/Ga_N/AlGa_N superlattices, multiple layers of low-temperature GaN interlayers to terminate dislocations, multiple layers of micro-ELO through sparse-SiN or sparse-AlN to reduce dislocations, etc. In particular
5 embodiments of the present invention, the dislocation termination or reduction layers provide the conductive layer **1015**. For example, sparse SiN may be n-type, and may provide the conductive layer **1015** on which the semi-insulating or insulating GaN layer is provided. In some embodiments of the present invention, a conductive layer **1015** is provide by an epitaxial lateral overgrowth (ELO) structure on a sapphire
10 substrate. Other structures that provide a conductive layer may also be utilized. Furthermore, the conductive layer **1015** could be provided by multiple layers, possibly separated by semi-insulating or insulating layers.

Fabrication of the GaN semi-insulating or insulating epitaxial layer **1020** may be carried out as described above with reference to the GaN semi-insulating or
15 insulating epitaxial layer **20**, **120**, **320** and/or **420**.

Because a GaN based semiconductor device **1030** is fabricated on the GaN semi-insulating or insulating epitaxial layer **1020**, the GaN based semiconductor device **1030** may be electrically isolated from the conductive layer **1015**.
Furthermore, because GaN based semiconductor device **1030** and the GaN semi-
20 insulating or insulating epitaxial layer **1020** are both GaN based structures, unlike an AlN isolation layer, the GaN based semiconductor device **1030** and the GaN semi-insulating or insulating epitaxial layer **1020** may be fabricated in a single step and/or in a single reactor. Furthermore, as discussed above, GaN may be grown faster than AlGa_N or AlN by MOCVD. Thick GaN may also have a lower dislocation density
25 than thick AlN grown under similar conditions (*e.g.*, the same growth temperature).

In particular embodiments of the present invention, the semi-insulating or insulating epitaxial layer **1020** has a resistivity equal to or higher than about 1×10^5 Ω-cm at room temperature and the conductive layer **1015** has a resistivity of equal to or less than about 0.1 Ω-cm at room temperature. In some embodiments of the
30 present invention, conductive layer **1015** may have a resistivity of about 0.02 Ω-cm or less. The epitaxial layer **1020** should be sufficiently insulating to provide electrical isolation of the device structure **1030** from the conductive layer **1015**. In particular embodiments, the epitaxial layer **1020** should be sufficiently insulating to provide

electrical isolation of a source region from a drain region of a transistor, such as a HEMT, when a gate of the transistor is biased to pinch off the channel as described above. Thus, in some embodiments of the present invention, the epitaxial layer **1020** is sufficiently insulating to provide an isolation voltage of at least 50 V and, in further
5 embodiments of the present invention, the epitaxial layer is sufficiently insulating to provide an isolation voltage of at least 100 V.

Further embodiments of the present invention incorporating via hole and via metal structures are illustrated in **Figure 11**. **Figure 11** illustrates a via hole **1075** and via metal **1080** that extend to through conductive layer **1015** between the semi-
10 insulating or insulating GaN epitaxial layer **1020** and the substrate **1010**. As seen in **Figure 11**, the via hole **1075** and via metal **1080** extends through the device structure **1030**, the semi-insulating or insulating GaN epitaxial layer **1020**, the conductive layer **1015** and the substrate **1010** and contacts a backside contact **1090** is on a face of the substrate **1010** opposite the semi-insulating or insulating GaN epitaxial layer **1020**.
15 Techniques for fabricating such a via are described, for example, in United States Patent Application Publication No. US2004/0241970, published December 4, 2004 and entitled "METHOD OF FORMING VIAS IN SILICON CARBIDE AND RESULTING DEVICES AND CIRCUITS," the disclosure of which is incorporated herein by reference as if set forth in its entirety.

20 In addition to the via structure of **Figure 11** or alternatively, the via structure of **Figure 6** could be used with the structure of **Figure 10**. The conductive layer **1015** could be coupled to the backside contact by the via extending through the conductive layer **1015** or, alternatively or additionally, a via from the backside could be provided to the conductive layer **1015**.

25 While some embodiments of the present invention are not limited to a particular GaN semiconductor device structure **30, 130, 330, 430, 530, 1030** in some embodiments of the present invention, the GaN semiconductor device structure **30, 130, 330, 430, 530, 1030** may be a GaN based transistor structure. For example, the GaN semiconductor device structure **30, 130, 330, 430, 530, 1030** may comprise a
30 high electron mobility transistor (HEMT) structure. For example, some embodiments of the present invention may include transistor structures such as those described in commonly assigned U.S. Patent 6,316,793 and U.S. Patent Publication No. 2002/0066908A1 filed July 12, 2001 and published June 6, 2002, for "ALUMINUM GALLIUM NITRIDE/GALLIUM NITRIDE HIGH ELECTRON MOBILITY

TRANSISTORS HAVING A GATE CONTACT ON A GALLIUM NITRIDE
BASED CAP SEGMENT AND METHODS OF FABRICATING SAME," U. S.
Patent No. 6,849,882 to Smorchkova *et al.*, entitled "GROUP-III NITRIDE BASED
HIGH ELECTRON MOBILITY TRANSISTOR (HEMT) WITH
5 BARRIER/SPACER LAYER", U.S. Patent Application Serial No. 10/617,843 filed
July 11, 2003 for "NITRIDE-BASED TRANSISTORS AND METHODS OF
FABRICATION THEREOF USING NON-ETCHED CONTACT RECESSES," U.S.
Patent Application Serial No. 10/772,882 filed February 5, 2004 for "NITRIDE
HETEROJUNCTION TRANSISTORS HAVING CHARGE-TRANSFER INDUCED
10 ENERGY BARRIERS AND METHODS OF FABRICATING THE SAME," U.S.
Patent Application Serial No. 10/897,726, filed July 23, 2004 entitled "METHODS
OF FABRICATING NITRIDE-BASED TRANSISTORS WITH A CAP LAYER
AND A RECESSED GATE," U.S. Patent Application Serial No. 10/849,617, filed
May 20, 2004 entitled "METHODS OF FABRICATING NITRIDE-BASED
15 TRANSISTORS HAVING REGROWN OHMIC CONTACT REGIONS AND
NITRIDE-BASED TRANSISTORS HAVING REGROWN OHMIC CONTACT
REGIONS," U.S. Patent Application Serial No. 10/849,589, filed May 20, 2004 and
entitled "SEMICONDUCTOR DEVICES HAVING A HYBRID CHANNEL
LAYER, CURRENT APERTURE TRANSISTORS AND METHODS OF
20 FABRICATING SAME," U.S. Patent Publication No. 2003/0020092 filed July 23,
2002 and published January 30, 2003 for "INSULATING GATE ALGAN/GAN
HEMT", U.S. Patent Application Serial No.10/996,249, filed November 23, 2004 and
entitled "CAP LAYERS AND/OR PASSIVATION LAYERS FOR NITRIDE-
BASED TRANSISTORS, TRANSISTOR STRUCTURES AND METHODS OF
25 FABRICATING SAME," United States Patent Application Serial No. _____
(Attorney Docket No. 5308-516), filed March 15, 2005 and entitled "GROUP III
NITRIDE FIELD EFFECT TRANSISTORS (FETs) CAPABLE OF
WITHSTANDING HIGH TEMPERATURE REVERSE BIAS TEST
CONDITIONS," United States Patent Application Serial No. 11/005,107, filed
30 December 6, 2004 and entitled " HIGH POWER DENSITY AND/OR LINEARITY
TRANSISTORS," and United States Patent Application Serial No. 11/005,423, filed
December 6, 2004 and entitled "FIELD EFFECT TRANSISTORS (FETs) HAVING
MULTI-WATT OUTPUT POWER AT MILLIMETER-WAVE FREQUENCIES,"
the disclosures of which are incorporated herein as if described in their entirety.

Embodiments of the present invention may also be utilized with HEMT structures such as described in, for example, Yu et al., "Schottky barrier engineering in III-V nitrides via the piezoelectric effect," Applied Physics Letters, Vol. 73, No. 13, 1998, or in U.S. Patent No. 6,584,333 filed July 12, 2001, for "ALUMINUM GALLIUM
5 NITRIDE/GALLIUM NITRIDE HIGH ELECTRON MOBILITY TRANSISTORS HAVING A GATE CONTACT ON A GALLIUM NITRIDE BASED CAP SEGMENT AND METHODS OF FABRICATING SAME," the disclosures of which are incorporated herein by reference as if set forth fully herein.

While various exemplary embodiments of the present invention have been
10 described with reference to **Figures 1 through 11**, combinations and/or sub-combinations of the features and elements illustrated in the figures may also be provided. Thus, for example, an etch stop layer illustrated with **Figure 9** may be provided in the embodiments of the present invention illustrated in **Figures 1 through 8, 10 and 11**.

15 In the drawings and specification, there have been disclosed typical embodiments of the invention, and, although specific terms have been employed, they have been used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

THAT WHICH IS CLAIMED IS:

1. A semiconductor device structure, comprising:
an electrically conductive semiconductor substrate; and
a semi-insulating or insulating GaN epitaxial layer on the semiconductor
5 substrate, the semi-insulating or insulating GaN epitaxial layer having a thickness of
at least about 4 μm .
2. The semiconductor device structure of Claim 1, wherein the GaN
epitaxial layer has a thickness of at least about 8 μm .
10
3. The semiconductor device structure of Claim 1, wherein the GaN
epitaxial layer has a thickness of at least about 10 μm .
4. The semiconductor device structure of Claim 1, wherein the GaN
15 epitaxial layer has a resistivity of at least $10^5 \Omega\text{-cm}$.
5. The semiconductor device structure of Claim 1, wherein the GaN
epitaxial layer has an isolation voltage of at least about 50V.
- 20 6. The semiconductor device structure of Claim 1, wherein the GaN
epitaxial layer has an isolation voltage of at least about 100V.
7. The semiconductor device structure of Claim 1, further comprising a
conductive buffer layer disposed between the substrate and the semi-insulating or
25 insulating GaN epitaxial layer, the conductive buffer layer comprising:
a first conductive layer of a first conductivity type; and
a second conductive layer of a second conductivity type, opposite the first
conductivity type, on the first conductive layer and disposed between the first
conductive layer and the GaN epitaxial layer.
30
8. The semiconductor device structure of Claim 1, further comprising a
GaN based semiconductor device on the GaN epitaxial layer.

9. The semiconductor device structure of Claim 8, further comprising a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.
- 5 10. The semiconductor device structure of Claim 9, wherein the via hole and via metal extend to the substrate and wherein the via metal provides an ohmic contact to the substrate.
- 10 11. The semiconductor device structure of Claim 10, further comprising a region of higher doping concentration in the substrate beneath the via.
12. The semiconductor device structure of Claim 9, further comprising a conductive buffer layer disposed between the substrate and the GaN epitaxial layer.
- 15 13. The semiconductor device structure of Claim 12, wherein the via hole and the via metal extend to the conductive buffer layer and wherein the via metal provides an ohmic contact to the conductive buffer layer.
14. The semiconductor device structure of Claim 12, further comprising an etch stop layer disposed between the conductive buffer layer and the GaN epitaxial layer.
- 20 15. The semiconductor device structure of Claim 12, wherein the conductive buffer layer comprises:
25 a first conductive layer of a first conductivity type; and
a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer; and
wherein the via hole and the via metal extend through the second conductive
30 layer to the first conductive layer.
16. The semiconductor device structure of Claim 9, further comprising a two dimensional electron gas structure (2DEG) disposed between the substrate and the GaN epitaxial layer.

17. The semiconductor device structure of Claim 16, wherein the via hole and via metal extend through the 2DEG structure and to the substrate and wherein the via metal provides an ohmic contact to the substrate

5

18. The semiconductor device structure of Claim 1, wherein the GaN epitaxial layer is doped with a deep level transition metal dopant.

19. The semiconductor device structure of Claim 18, wherein the GaN epitaxial layer is doped with Fe, Co, Mn, Cr, V and/or Ni.

10

20. The semiconductor device structure of Claim 19, wherein the concentration of the deep level transition metal dopant is at least about $1 \times 10^{16} \text{ cm}^{-3}$.

15

21. A GaN semiconductor device structure, comprising:

a semiconductor substrate;

an insulating or semi-insulating GaN epitaxial layer on the semiconductor substrate, the GaN epitaxial layer having a thickness of at least $4 \mu\text{m}$; and

a conductive semiconductor layer disposed between the semiconductor substrate and the insulating or semi-insulating GaN epitaxial layer.

20

22. The semiconductor device structure of Claim 21, wherein the GaN epitaxial layer has a thickness of at least about $8 \mu\text{m}$.

25

23. The semiconductor device structure of Claim 21, wherein the GaN epitaxial layer has a thickness of at least about $10 \mu\text{m}$.

24. The semiconductor device structure of Claim 21, wherein the semiconductor substrate comprises an insulating or semi-insulating semiconductor substrate.

30

25. The semiconductor device structure of Claim 24, wherein the substrate comprises silicon carbide and/or sapphire.

26. The semiconductor device structure of Claim 24, wherein the substrate comprises diamond.
27. The semiconductor device structure of Claim 21, wherein the
5 semiconductor substrate comprises an electrically conductive substrate.
28. The semiconductor device structure of Claim 27, wherein the electrically conductive substrate comprises silicon carbide and/or diamond.
- 10 29. The semiconductor device structure of Claim 21, wherein the conductive semiconductor layer comprises conductive SiC, conductive diamond, SiN and/or a conductive GaN based semiconductor material.
30. The semiconductor device structure of Claim 21, further comprising a
15 GaN based semiconductor device on the GaN epitaxial layer.
31. The semiconductor device structure of Claim 30, further comprising a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.
20
32. The semiconductor device structure of Claim 31, wherein the via hole and via metal extend to the substrate and wherein the via metal provides an ohmic contact to the substrate.
- 25 33. The semiconductor device structure of Claim 32, wherein the via hole and the via metal extend to the conductive semiconductor layer and wherein the via metal provides an ohmic contact to the conductive semiconductor layer.
34. The semiconductor device structure of Claim 33, wherein the
30 conductive semiconductor layer comprises:
a first conductive layer of a first conductivity type; and
a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer; and

wherein the via hole and the via metal extend through the second conductive layer to the first conductive layer.

5 35. The semiconductor device structure of Claim 21, wherein the conductive semiconductor layer comprises:
a first conductive layer of a first conductivity type; and
a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer.

10

36. The semiconductor device structure of Claim 21, further comprising an etch stop layer disposed between the conductive semiconductor layer and the GaN epitaxial layer.

15 37. A GaN semiconductor device structure, comprising:
an electrically conductive SiC substrate; and
an insulating or semi-insulating GaN epitaxial layer on the conductive SiC substrate, the GaN epitaxial layer having a thickness of at least 4 μm .

20 38. The semiconductor device structure of Claim 37, wherein the GaN based epitaxial layer has a thickness of at least about 8 μm .

39. The semiconductor device structure of Claim 37, wherein the GaN based epitaxial layer has a thickness of at least about 10 μm .

25

40. The semiconductor device structure of Claim 37, wherein the GaN epitaxial layer has a resistivity of at least about $10^5 \Omega\text{-cm}$.

30 41. The semiconductor device structure of Claim 37, wherein the GaN epitaxial layer has an isolation voltage of at least about 50V.

42. The semiconductor device structure of Claim 37, wherein the GaN epitaxial layer has an isolation voltage of at least about 100V.

43. The semiconductor device structure of Claim 37, wherein the GaN based epitaxial layer is doped with a deep level transition metal dopant.
44. The semiconductor device structure of Claim 43, wherein the GaN epitaxial layer is doped with Fe, Co, Mn, Cr, V and/or Ni.
45. The semiconductor device structure of Claim 43, wherein the concentration of the deep level transition metal dopant is at least about $1 \times 10^{16} \text{ cm}^{-3}$.
46. The semiconductor device structure of Claim 37, further comprising a conductive buffer layer disposed between the conductive SiC substrate and the GaN epitaxial layer.
47. The semiconductor device structure of Claim 46, further comprising an etch stop layer disposed between the conductive buffer layer and the GaN epitaxial layer.
48. The semiconductor device structure of Claim 46, wherein the conductive buffer layer comprises an epitaxial SiC layer having a higher doping concentration than the SiC substrate.
49. The semiconductor device structure of Claim 46, wherein the conductive buffer layer comprises an implanted SiC layer in the SiC substrate, which has a higher doping concentration than the SiC substrate.
50. The semiconductor device structure of Claim 46, wherein the conductive buffer layer comprises:
a first conductive layer of a first conductivity type; and
a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer.

51. The semiconductor device structure of Claim 37, further comprising a two dimensional electron gas (2DEG) structure disposed between the conductive substrate and the GaN epitaxial layer.

5 52. The semiconductor device structure of Claim 37, further comprising a GaN based semiconductor device on the GaN epitaxial layer.

53. The semiconductor device structure of Claim 52, wherein the GaN based semiconductor device comprises a GaN based high electron mobility transistor
10 on the GaN epitaxial layer.

54. The semiconductor device structure of Claim 52, further comprising a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.

15

55. The semiconductor device structure of Claim 54, wherein the via hole and via metal extend through the SiC substrate.

56. The semiconductor device structure of Claim 54, wherein the via hole and via metal extend to the substrate and wherein the via metal provides an ohmic
20 contact to the substrate.

57. The semiconductor device structure of Claim 56, further comprising a region of higher doping concentration in the substrate beneath the via.

25

58. The semiconductor device structure of Claim 57, further comprising an etch stop layer disposed between the substrate and the GaN epitaxial layer.

59. The semiconductor device structure of Claim 52, further comprising a
30 conductive buffer layer disposed between the substrate and the GaN epitaxial layer and wherein the via hole and the via metal extend to the conductive buffer layer and wherein the via metal provides an ohmic contact to the conductive buffer layer.

60. The semiconductor device structure of Claim 59, further comprising an etch stop layer disposed between the conductive buffer layer and the GaN epitaxial layer.

5 61. The semiconductor device structure of Claim 59, wherein the conductive buffer layer comprises:

a first conductive layer of a first conductivity type; and

a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first

10 conductive layer and the GaN epitaxial layer; and

wherein the via hole and the via metal extend through the second conductive layer to the first conductive layer.

62. The semiconductor device structure of Claim 52, further comprising a
15 two dimensional electron gas (2DEG) structure disposed between the substrate and the GaN epitaxial layer and wherein the via hole and the via metal extend to the 2DEG structure and wherein the via metal provides an ohmic contact to the 2DEG structure.

20 63. The semiconductor device structure of Claim 62, further comprising an etch stop layer disposed between the 2DEG structure and the GaN epitaxial layer.

64. The semiconductor device structure of Claim 52, further comprising a
25 two dimensional electron gas (2DEG) structure disposed between the substrate and the GaN epitaxial layer and wherein the via hole and the via metal extend through the 2DEG structure and wherein the via metal provides an ohmic contact to the substrate.

65. A GaN semiconductor device structure, comprising:
an electrically conductive GaN substrate;
30 an insulating or semi-insulating GaN based epitaxial layer on the conductive GaN substrate;
a GaN based semiconductor device on the GaN based epitaxial layer; and
a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN based epitaxial layer.

66. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer has a thickness of at about least 5 μm .

5 67. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer has a thickness of at about least 10 μm .

68. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer has a resistivity of at least $10^5 \Omega\text{-cm}$.

10

69. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer has an isolation voltage of at least about 50V.

70. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer has an isolation voltage of at least about 100V.

15

71. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer is doped with a deep level transition metal dopant.

20 72. The semiconductor device structure of Claim 71, wherein the GaN based epitaxial layer is doped with Fe, Co, Mn, Cr, V and/or Ni.

73. The semiconductor device structure of Claim 71, wherein the concentration of the deep level transition metal dopant is at least about $1 \times 10^{16} \text{cm}^{-3}$.

25

74. The semiconductor device structure of Claim 65, further comprising a conductive buffer layer disposed between the conductive GaN substrate and the GaN epitaxial layer, wherein the via hole and the via metal extend to the conductive buffer layer and wherein the via metal provides an ohmic contact to the conductive buffer layer.

30

75. The semiconductor device structure of Claim 74, further comprising an etch stop layer disposed between the conductive buffer layer and the GaN based epitaxial layer.

76. The semiconductor device structure of Claim 74, wherein the conductive buffer layer comprises:

a first conductive layer of a first conductivity type; and

5 a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer; and

wherein the via hole and the via metal extend through the second conductive layer to the first conductive layer.

10

77. The semiconductor device structure of Claim 74, wherein the conductive buffer layer comprises an epitaxial layer having a higher doping concentration than the GaN substrate.

15

78. The semiconductor device structure of Claim 74, wherein the conductive buffer layer comprises an implanted layer in the GaN substrate and having a higher doping concentration than the GaN substrate.

20

79. The semiconductor device structure of Claim 65, further comprising a two dimensional electron gas (2DEG) structure disposed between the conductive substrate and the GaN based epitaxial layer, wherein the via hole and the via metal extend to the 2DEG structure and wherein the via metal provides an ohmic contact to the 2DEG structure.

25

80. The semiconductor device structure of Claim 65, further comprising a two dimensional electron gas (2DEG) structure disposed between the conductive substrate and the GaN based epitaxial layer, wherein the via hole and the via metal extend through the 2DEG structure and wherein the via metal provides an ohmic contact to the substrate.

30

81. The semiconductor device structure of Claim 65, wherein the GaN based semiconductor device comprises a GaN based high electron mobility transistor on the GaN epitaxial layer.

82. The semiconductor device structure of Claim 65, wherein the via hole and via metal extend through the GaN substrate.

83. The semiconductor device structure of Claim 65, wherein the via hole and via metal extend to the substrate and wherein the via metal provides an ohmic contact to the substrate.

84. The semiconductor device structure of Claim 65, further comprising a region of higher doping concentration in the substrate beneath the via.

85. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer comprises GaN.

86. The semiconductor device structure of Claim 65, wherein the GaN based epitaxial layer comprises GaN doped with Fe.

87. A method of fabricating a semiconductor device structure, comprising: epitaxially forming a semi-insulating or insulating GaN epitaxial layer on a conductive semiconductor substrate, the semi-insulating or insulating GaN epitaxial layer having a thickness of at least about 4 μm .

88. The method of Claim 87, wherein the GaN epitaxial layer has a thickness of at least about 8 μm .

89. The method of Claim 87, wherein the GaN epitaxial layer has a thickness of at least about 10 μm .

90. The method of Claim 87, wherein the GaN epitaxial layer has a resistivity of at least $10^5 \Omega\text{-cm}$.

91. The method of Claim 87, further comprising forming a GaN based semiconductor device on the GaN epitaxial layer.

92. The method of Claim 91, wherein GaN based layers of the semiconductor device and the GaN epitaxial layer are formed by the same fabrication technique.

5 93. The method of Claim 91, further comprising forming a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.

10 94. The method of Claim 93, wherein the via hole and via metal extend to the substrate and wherein the via metal provides an ohmic contact to the substrate.

95. The method of Claim 93, further comprising forming a region of higher doping concentration in the substrate beneath the via.

15 96. The method of Claim 91, further comprising forming a conductive buffer layer disposed between the substrate and the GaN epitaxial layer.

20 99. The method of Claim 96, wherein the via hole and the via metal extend to the conductive buffer layer and wherein the via metal provides an ohmic contact to the conductive buffer layer.

100. The method of Claim 99, further comprising forming an etch stop layer disposed between the conductive buffer layer and the GaN epitaxial layer.

25 101. The method of Claim 99, wherein forming a conductive buffer layer comprises:

forming a first conductive layer of a first conductivity type on the substrate;

and

30 forming a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer; and

wherein the via hole and the via metal extend through the second conductive layer to the first conductive layer.

102. The method of Claim 95, further comprising forming a two dimensional electron gas structure (2DEG) disposed between the substrate and the GaN epitaxial layer.
- 5 103. The method of Claim 87, wherein the GaN epitaxial layer is doped with a deep level transition metal dopant.
104. The method of Claim 103, wherein the GaN epitaxial layer is doped with Fe, Co, Mn, Cr, V and/or Ni.
- 10 105. The method of Claim 104, wherein the concentration of the deep level transition metal dopant is at least about $1 \times 10^{16} \text{ cm}^{-3}$.
106. A method of fabricating a GaN semiconductor device structure,
15 comprising:
epitaxially forming an insulating or semi-insulating GaN epitaxial layer on a semiconductor substrate, the GaN epitaxial layer having a thickness of at least $4 \mu\text{m}$; and
forming a conductive semiconductor layer disposed between the
20 semiconductor substrate and the insulating or semi-insulating GaN epitaxial layer.
107. The method of Claim 106, wherein the GaN epitaxial layer has a thickness of at least about $8 \mu\text{m}$.
- 25 108. The method of Claim 106, wherein the GaN epitaxial layer has a thickness of at least about $10 \mu\text{m}$.
109. The method of Claim 106, wherein the semiconductor substrate comprises an insulating or semi-insulating semiconductor substrate.
- 30 110. The method of Claim 106, wherein the substrate comprises silicon carbide and/or sapphire.
111. The method of Claim 109, wherein the substrate comprises diamond.

112. The method of Claim 106, wherein the semiconductor substrate comprises an electrically conductive substrate.

5 113. The method of Claim 112, wherein the electrically conductive substrate comprises silicon carbide and/or diamond.

114. The method of Claim 106, wherein the conductive semiconductor layer comprises conductive SiC, conductive diamond, SiN and/or a conductive GaN based
10 semiconductor material.

115. The method of Claim 106, further comprising a GaN based semiconductor device on the GaN epitaxial layer.

15 116. The method of Claim 115, further comprising forming a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.

117. The method of Claim 116 wherein the via hole and via metal extend to
20 the substrate and wherein the via metal provides an ohmic contact to the substrate.

118. The method of Claim 116, wherein the via hole and the via metal extend to the conductive semiconductor layer and wherein the via metal provides an ohmic contact to the conductive semiconductor layer.

25 119. The method of Claim 116, wherein forming a conductive semiconductor layer comprises:

forming a first conductive layer of a first conductivity type on the substrate;
and

30 forming a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer; and

wherein the via hole and the via metal extend through the second conductive layer to the first conductive layer.

120. The method of Claim 103, further comprising forming an etch stop layer disposed between the conductive semiconductor layer and the GaN epitaxial layer.
5

121. A method of fabricating a GaN semiconductor device structure, comprising:
epitaxially forming an insulating or semi-insulating GaN epitaxial layer on a
10 conductive SiC substrate, the GaN epitaxial layer having a thickness of at least 4 μm .

122. The method of Claim 121, wherein the GaN based epitaxial layer has a thickness of at about least 8 μm .

123. The method of Claim 121, wherein the GaN based epitaxial layer has a
15 thickness of at about least 10 μm .

124. The method of Claim 121, wherein the GaN epitaxial layer has a resistivity of at least about $10^5 \Omega\text{-cm}$.
20

125. The method of Claim 121, wherein the GaN based epitaxial layer is doped with a deep level transition metal dopant.

126. The method of Claim 125, wherein the GaN epitaxial layer is doped
25 with Fe, Co, Mn, Cr, V and/or Ni.

127. The method of Claim 125, wherein the concentration of the deep level transition metal dopant is at least about $1 \times 10^{16} \text{ cm}^{-3}$.

128. The method of Claim 121, further comprising forming a conductive buffer layer disposed between the conductive SiC substrate and the GaN epitaxial layer.
30

129. The method of Claim 128, further comprising an etch stop layer disposed between the conductive buffer layer and the GaN epitaxial layer.

5 130. The method of Claim 128, wherein forming a conductive buffer layer comprises:

forming a first conductive layer of a first conductivity type on the substrate;
and

forming a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first
10 conductive layer and the GaN epitaxial layer.

131. The method of Claim 128, wherein the conductive buffer layer comprises an epitaxial SiC layer having a higher doping concentration than the SiC substrate.

15

132. The method of Claim 128, wherein the conductive buffer layer comprises an implanted SiC layer in the SiC substrate, which has a higher doping concentration than the SiC substrate.

20 133. The method of Claim 121, further comprising forming a two dimensional electron gas (2DEG) structure disposed between the conductive substrate and the GaN epitaxial layer.

25 134. The method of Claim 121, further comprising forming a GaN based semiconductor device on the GaN epitaxial layer.

135. The method of Claim 134, wherein the GaN based semiconductor device comprises a GaN based high electron mobility transistor on the GaN epitaxial layer.

30

136. The method of Claim 134, further comprising a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.

137. The method of Claim 136, wherein the via hole and via metal extend through the SiC substrate.

138. The method of Claim 136, wherein the via hole and via metal extend to
5 the substrate and wherein the via metal provides an ohmic contact to the substrate.

139. The method of Claim 138, further comprising forming a region of higher doping concentration in the substrate beneath the via.

140. The method of Claim 139, further comprising forming an etch stop layer disposed between the substrate and the GaN epitaxial layer.

141. The method of Claim 134, further comprising forming a conductive buffer layer disposed between the substrate and the GaN epitaxial layer and wherein
15 the via hole and the via metal extend to the conductive buffer layer and wherein the via metal provides an ohmic contact to the conductive buffer layer.

142. The method of Claim 141, wherein forming a conductive buffer layer comprises:

20 forming a first conductive layer of a first conductivity type on the substrate;
and

forming a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer; and

25 wherein the via hole and the via metal extend through the second conductive layer to the first conductive layer.

143. The method of Claim 141, further comprising an etch stop layer disposed between the conductive buffer layer and the GaN epitaxial layer.

30

144. The method of Claim 134, further comprising forming a two dimensional electron gas (2DEG) structure disposed between the substrate and the GaN epitaxial layer and wherein the via hole and the via metal extend to the 2DEG structure and wherein the via metal provides an ohmic contact to the 2DEG structure.

145. The method of Claim 144, further comprising forming an etch stop layer disposed between the 2DEG structure and the GaN epitaxial layer.

5 146. A method of fabricating a GaN semiconductor device structure, comprising:
epitaxially forming an insulating or semi-insulating GaN epitaxial layer on a conductive GaN substrate;
forming a GaN based semiconductor device on the GaN epitaxial layer; and
10 forming a via hole and corresponding via metal in the via hole that extends through layers of the GaN based semiconductor device and the GaN epitaxial layer.

147. The method of Claim 146, wherein the GaN based epitaxial layer has a thickness of at about least 4 μm .

15

148. The method of Claim 146, wherein the GaN based epitaxial layer has a thickness of at about least 10 μm .

149. The method of Claim 146, wherein the GaN based epitaxial layer has a
20 resistivity of at least $10^5 \Omega\text{-cm}$.

150. The method of Claim 146, wherein the GaN based epitaxial layer is doped with a deep level transition metal dopant.

25 151. The method of Claim 150, wherein the GaN based epitaxial layer is doped with Fe, Co, Mn, Cr, V and/or Ni.

152. The method of Claim 150, wherein the concentration of the deep level transition metal dopant is at least about $1 \times 10^{16} \text{ cm}^{-3}$.

30

153. The method of Claim 146, further comprising forming a conductive buffer layer disposed between the conductive GaN substrate and the GaN epitaxial layer, wherein the via hole and the via metal extend to the conductive buffer layer and wherein the via metal provides an ohmic contact to the conductive buffer layer.

154. The method of Claim 153, wherein forming a conductive buffer layer comprises:

forming a first conductive layer of a first conductivity type on the substrate;
and

5 forming a second conductive layer of a second conductivity type, opposite the first conductivity type, on the first conductive layer and disposed between the first conductive layer and the GaN epitaxial layer; and

wherein the via hole and the via metal extend through the second conductive layer to the first conductive layer.

10

155. The method of Claim 153, further comprising forming an etch stop layer disposed between the conductive buffer layer and the GaN based epitaxial layer.

156. The method of Claim 153, wherein the conductive buffer layer
15 comprises an epitaxial layer having a higher doping concentration than the GaN substrate.

157. The method of Claim 153, wherein the conductive buffer layer
20 comprises an implanted layer in the GaN substrate and having a higher doping concentration than the GaN substrate.

158. The method of Claim 146, further comprising forming a two
dimensional electron gas (2DEG) structure disposed between the conductive substrate
and the GaN based epitaxial layer, wherein the via hole and the via metal extend to
25 the 2DEG structure and wherein the via metal provides an ohmic contact to the 2DEG structure.

159. The method of Claim 146, wherein the GaN based semiconductor
device comprises a GaN based high electron mobility transistor on the GaN epitaxial
30 layer.

160. The method of Claim 146, wherein the via hole and via metal extend
through the GaN substrate.

161. The method of Claim 146, wherein the via hole and via metal extend to the substrate and wherein the via metal provides an ohmic contact to the substrate.

5 162. The method of Claim 161, further comprising forming a region of higher doping concentration in the substrate beneath the via.

163. The method of Claim 146, wherein the GaN based epitaxial layer comprises GaN.

10 164. The method of Claim 146, wherein the GaN based epitaxial layer comprises GaN doped with Fe.

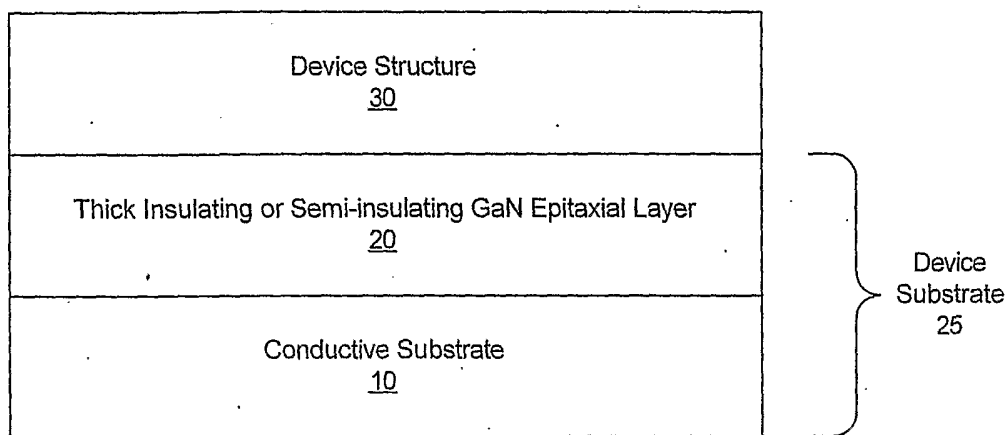


Figure 1

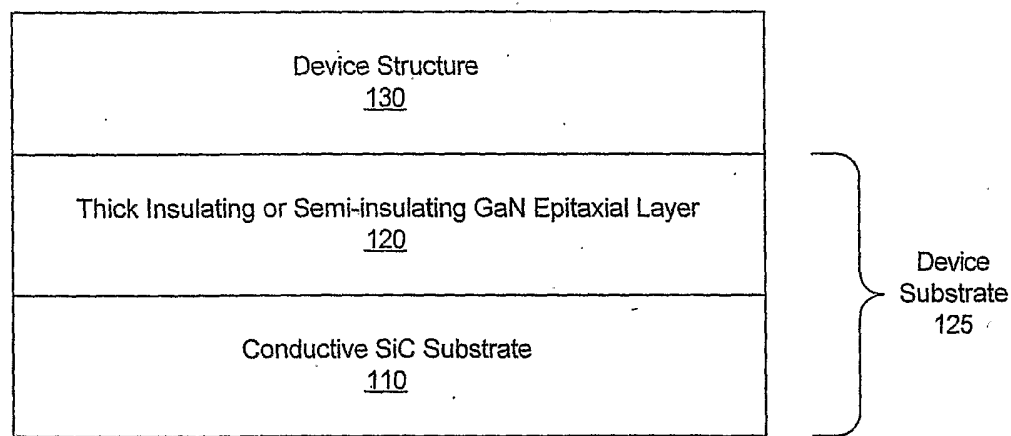


Figure 2

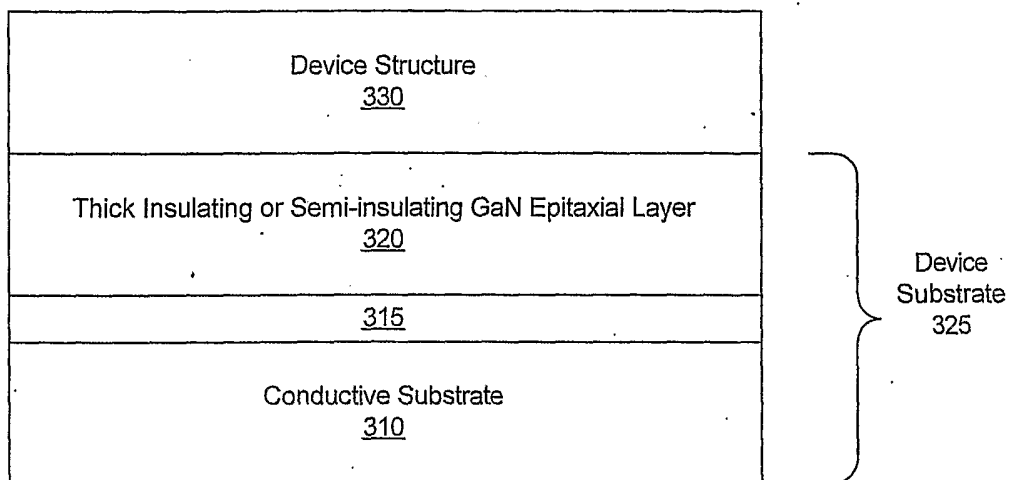


Figure 3

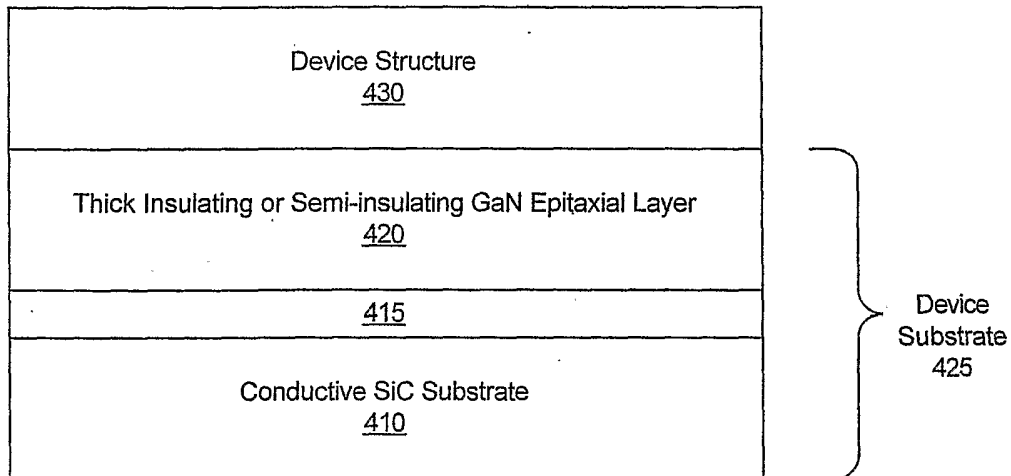


Figure 4

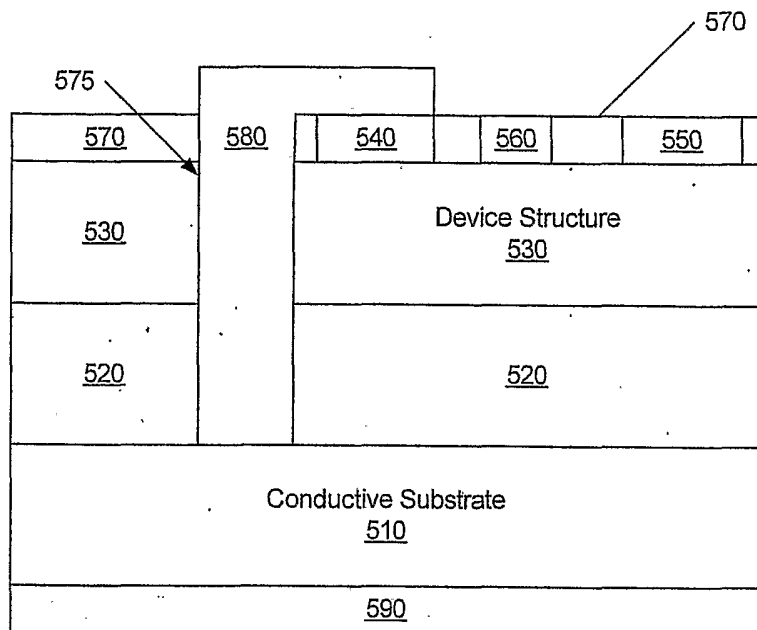


Figure 5

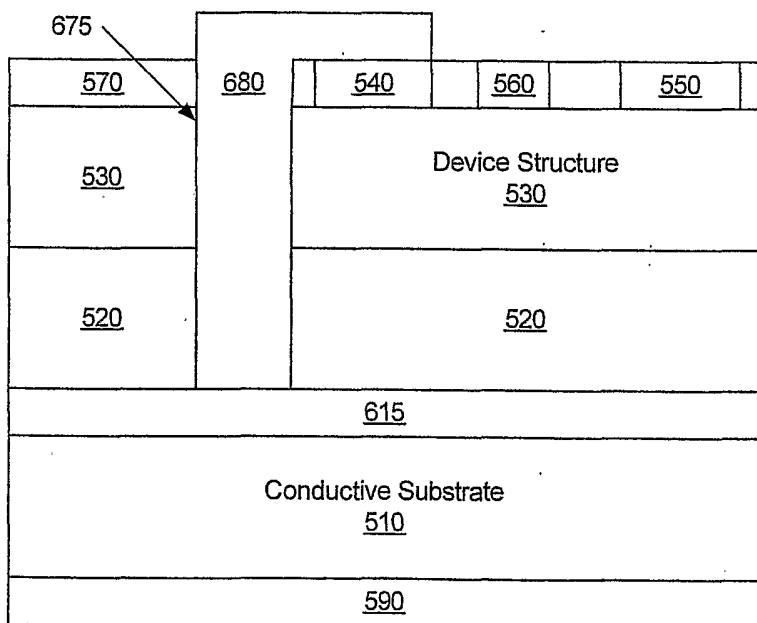


Figure 6

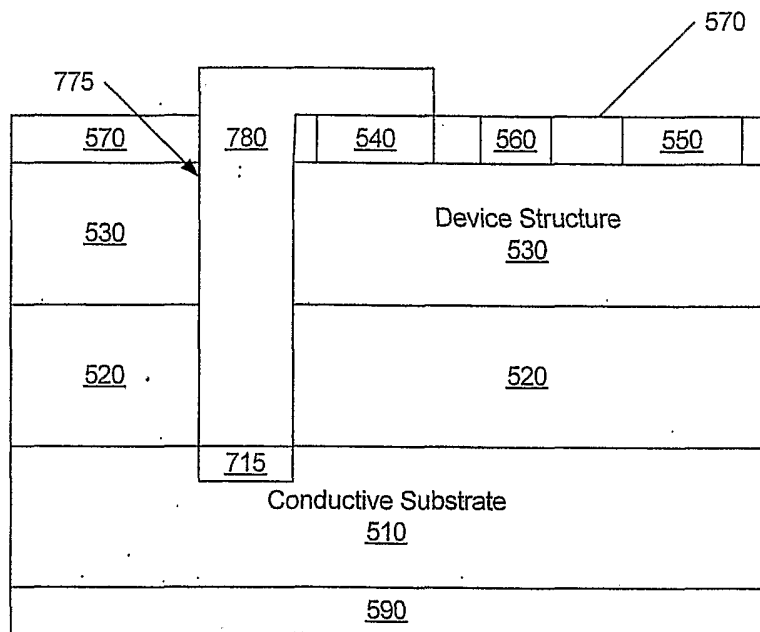


Figure 7

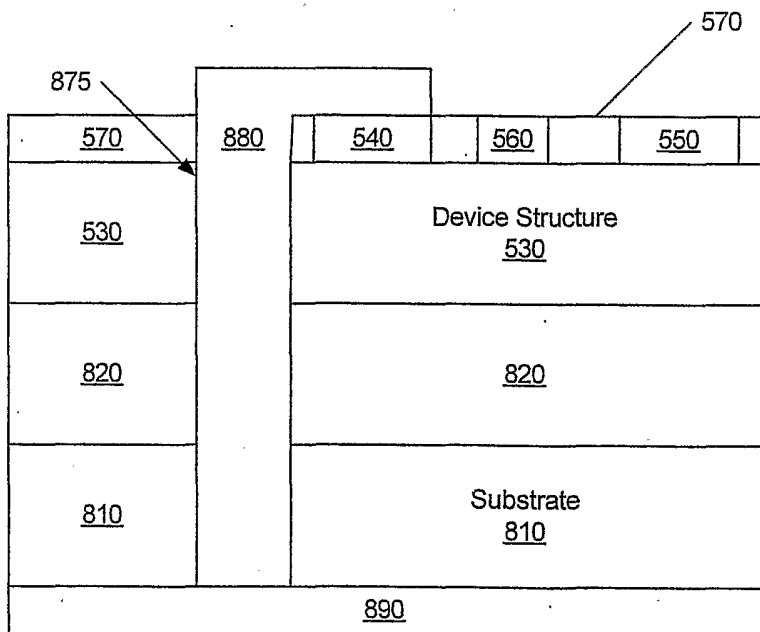


Figure 8

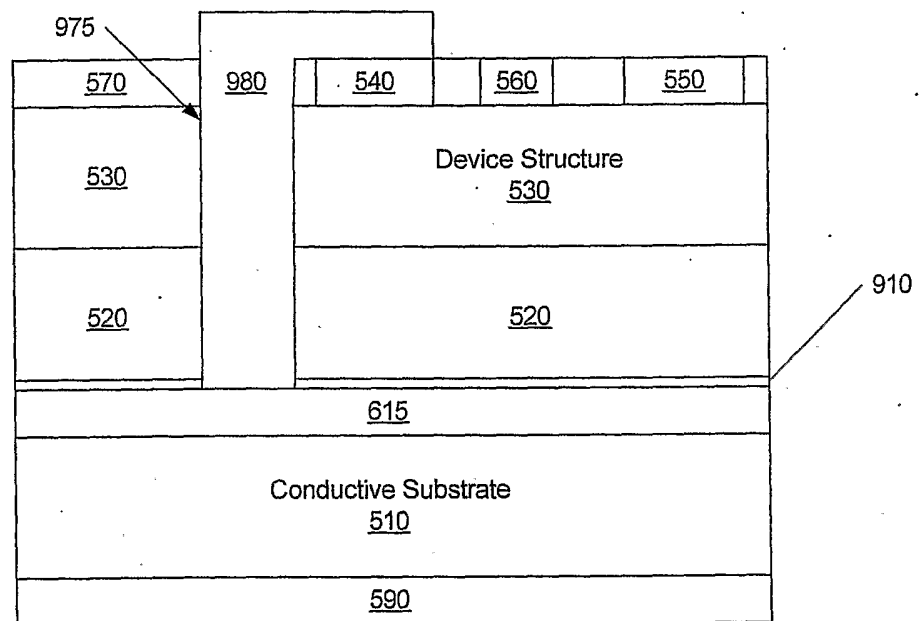


Figure 9

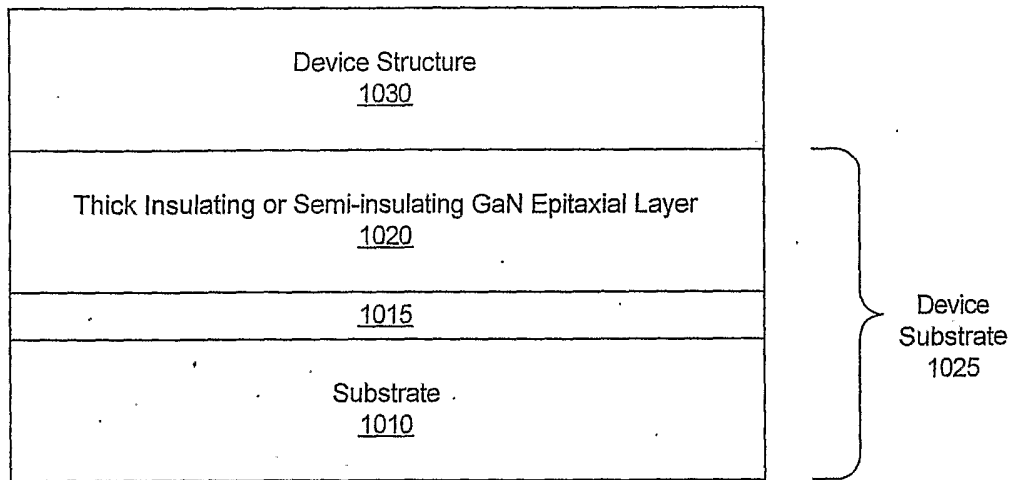


Figure 10

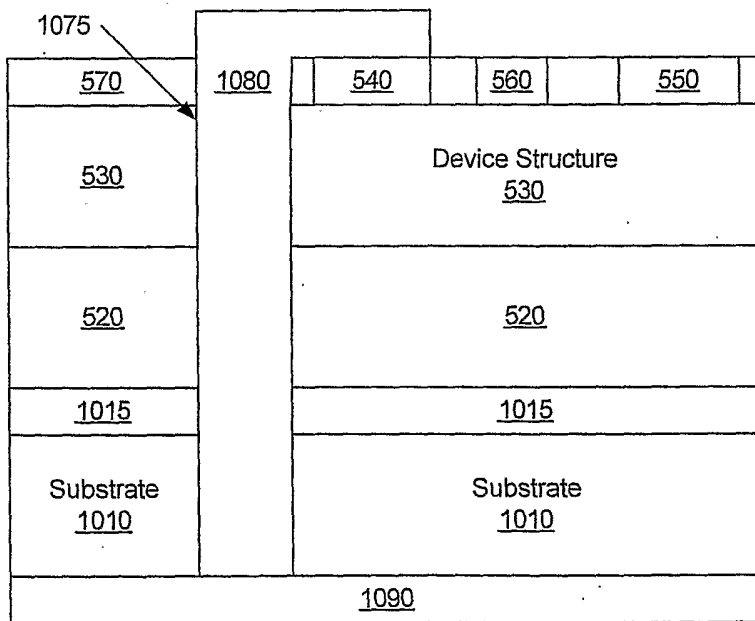


Figure 11