

(12) United States Design Patent (10) Patent No.: Holst et al.

(45) **Date of Patent:**

US D740,705 S

Oct. 13, 2015

(54) SENSOR

(71) Applicant: WESTERNGECO L.L.C., Houston,

TX (US)

Inventors: Einar Holst, Oslo (NO); Seth Friedly,

Sandvika (NO); Kambiz Iranpour, Oslo

(NO)

Assignee: WESTERNGECO L.L.C., Houston,

TX (US)

(**) Term: 14 Years

(21) Appl. No.: 29/497,503

Jul. 25, 2014 (22) Filed:

(51) LOC (10) Cl. 10-04

U.S. Cl.

USPC **D10/83**

Field of Classification Search

USPC D10/83, 70 CPC G01V 1/00-1/202; G01V 1/208-1/523; G01V 2001/204-2001/207; G01V 2001/526; G01V 2210/00-2210/74

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

7/1979 Hall, Jr. 367/160 4,163,206 A * 5,531,112 A * 7/1996 Young et al. 73/152.02 (Continued)

Primary Examiner — Antoine D Davis

(57)CLAIM

The ornamental design for a sensor, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of a sensor according to a first embodiment.

FIG. 2 is a front elevational view of the sensor according to the first embodiment, the rear elevational view thereof being a mirror image.

FIG. 3 is a right elevational view of the sensor according to the first embodiment, the left elevational view thereof being a mirror image.

FIG. 4 is a top plan view of the sensor according to the first embodiment.

FIG. 5 is a bottom plan view of the sensor according to the first embodiment.

FIG. 6 is a perspective view of a sensor according to a second embodiment.

FIG. 7 is a front elevational view of the sensor according to the second embodiment, the rear elevational view thereof being a mirror image.

FIG. 8 is a right elevational view of the sensor according to the second embodiment, the left elevational view thereof being a mirror image.

FIG. 9 is a top plan view of the sensor according to the second embodiment.

FIG. 10 is a bottom plan view of the sensor according to the second embodiment.

FIG. 11 is a perspective view of a sensor according to a variant of the first embodiment.

FIG. 12 is a front elevational view of the sensor according to the variant of the first embodiment, the rear elevational view thereof being a mirror image.

FIG. 13 is a right elevational view of the sensor according to the variant of the first embodiment, the left elevational view thereof being a mirror image.

FIG. 14 is a top plan view of the sensor according to the variant of the first embodiment.

FIG. 15 is a bottom plan view of the sensor according to the variant of the first embodiment.

FIG. 16 is a perspective view of a sensor according to a variant of the second embodiment.


FIG. 17 is a front elevational view of the sensor according to the variant of the second embodiment, the rear elevational view thereof being a mirror image.

FIG. 18 is a right elevational view of the sensor according to the variant of the second embodiment, the left elevational view thereof being a mirror image.

FIG. 19 is a top plan view of the sensor according to the variant of the second embodiment; and,

FIG. 20 is a bottom plan view of the sensor according to the variant of the second embodiment.


1 Claim, 12 Drawing Sheets

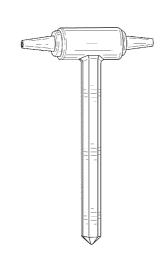


US D740,705 S

Page 2

(56)	References Cited					Krumhansl et al 181/121 Manin et al
	U.S. PATENT DOCUMENTS			2011/0210023 A1* 2012/0134237 A1*		Esteban-Campillo
			Wooters	2013/0308426 A1*	11/2013	et al
	D698,677 S *	2/2014	Gateman D10/83 Brizard D10/83	* cited by examine	•	

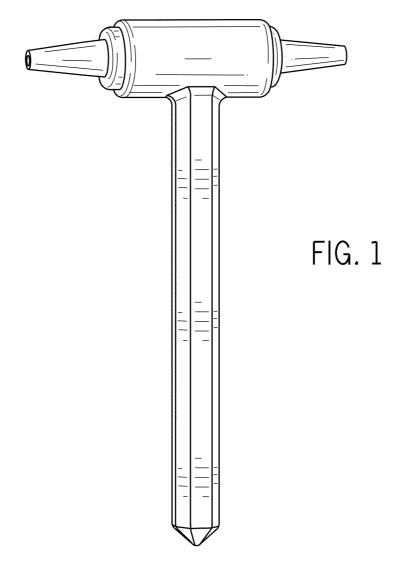

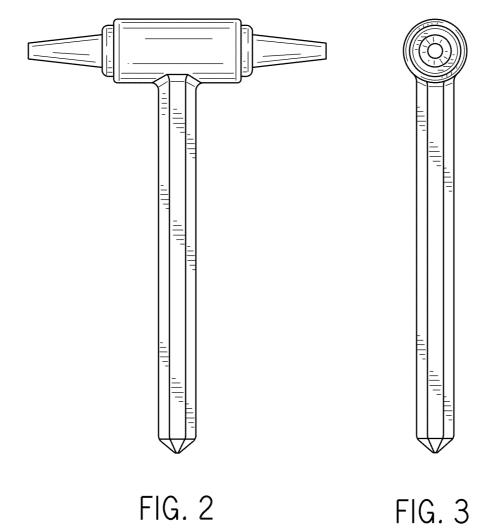




FIG. 4


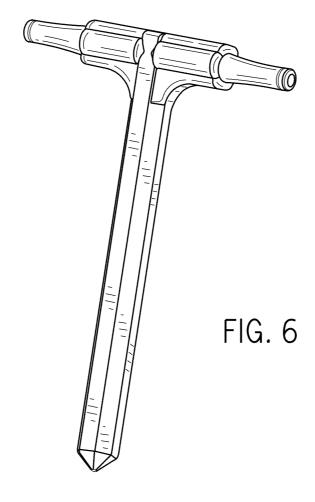


FIG. 5



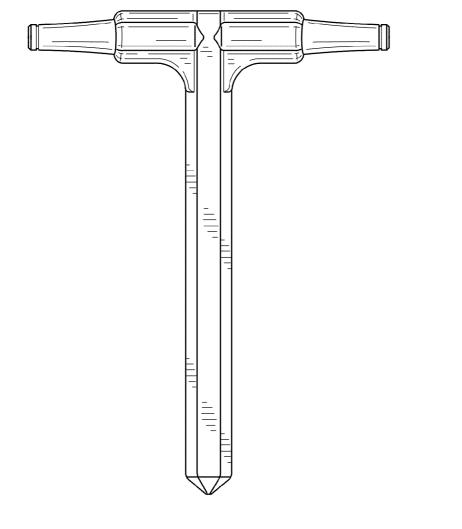


FIG. 7




FIG. 8




FIG. 9


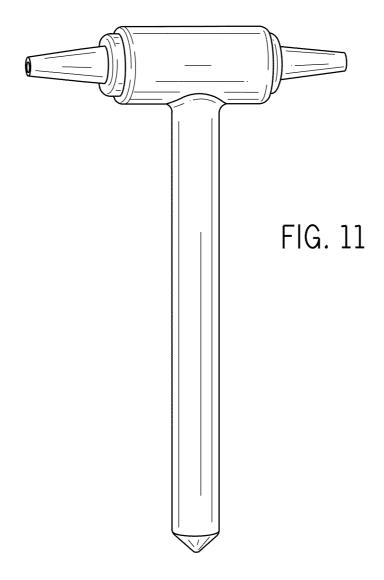


FIG. 10



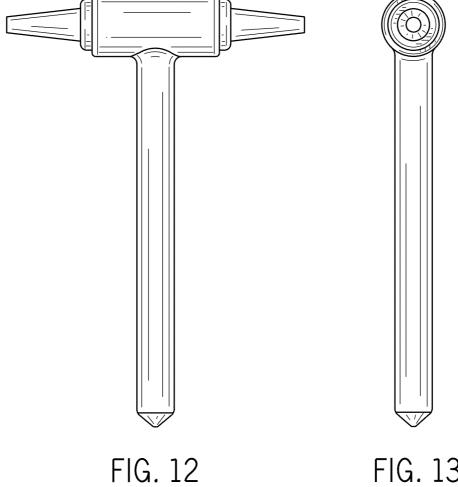


FIG. 13




FIG. 14


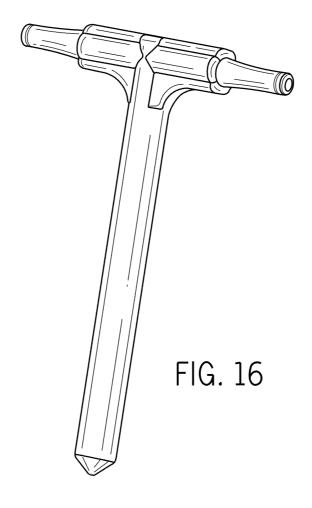
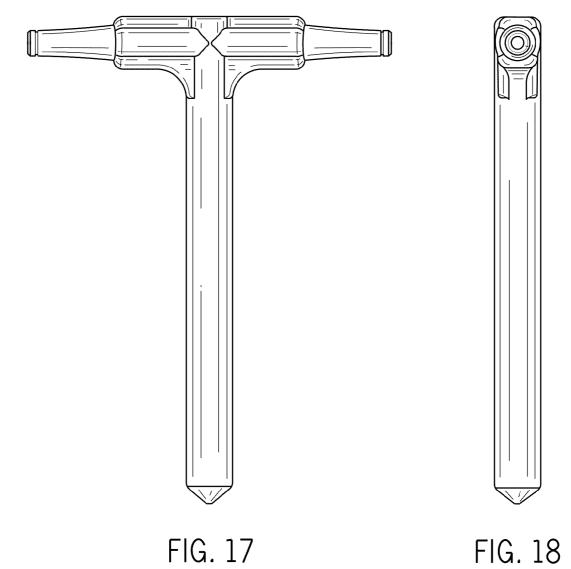
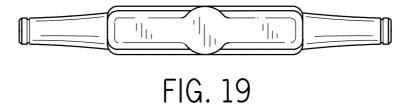


FIG. 15










FIG. 20