




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B05B 17/00	A1	(11) International Publication Number: WO 94/00244 (43) International Publication Date: 6 January 1994 (06.01.94)
(21) International Application Number: PCT/US93/02632 (22) International Filing Date: 23 March 1993 (23.03.93) (30) Priority data: 902,089 22 June 1992 (22.06.92) US (71)(72) Applicants and Inventors: JOHNSON, Lonnie, G. [US/US]; 4030 Ridgehurst Drive, Smyrna, GA 30080 (US). D'ANDRADE, Bruce, M. [US/US]; 3 Ten Eyck Road, Whitehouse Station, NJ 08889 (US). (74) Agents: NADEL, Alan, S. et al.; Panitch Schwarze Jacobs & Nadel, 1601 Market Street, 36th Floor, Philadelphia, PA 19103 (US).		(81) Designated States: AU, BB, BG, BR, FI, HU, JP, KP, KR, LK, MG, MN, MW, NO, NZ, PL, RO, RU, SD, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: WATER ARROW PROJECTING BOW**(57) Abstract**

A toy water bow which is operated by selectively releasing water from a water reservoir (15) that is pressurized with air. The bow is formed in the general shape of an archery bow that has a manually operated air pump (49) incorporated into it. The air pump pressurizes the water reservoir and consequently exerts pressure on water contained therein. The pressurized air and water have an avenue of release (23) that is regulated by a pull mechanism (9) of the invention. When no force is applied to the pull mechanism, the pressurized air and water are held at bay without release from the reservoir. When force is applied to the pull mechanism in a predetermined manner, water is released from the pressurized reservoir and is channeled through a narrow nozzle (13). The escape of the water through the narrow nozzle creates a stream of propelled water in the form of an "arrow" of predetermined length. The shooting may be repeated until the water is consumed or until the pressure of the reservoir equals that of the ambient air.

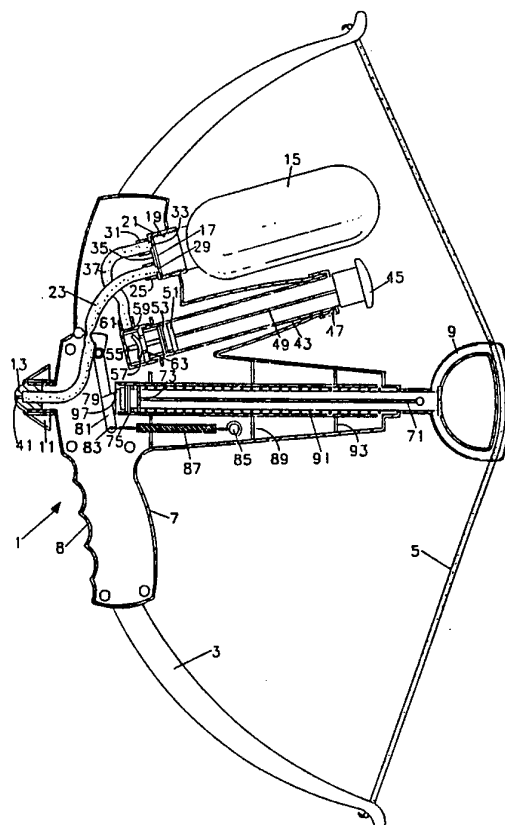

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CJ	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

-1-

WATER ARROW PROJECTING BOWBACKGROUND OF THE INVENTION1. Field of the Invention

5 The present invention is directed toward a
pressurized toy water gun bow for projecting
water arrows and more particularly to such toy
water gun bows that use self-contained means of
pressurizing a water reservoir with air, creating
a pressure differential between the contained
water and the ambient atmosphere and utilizing
10 this pressure differential to propel water from
the toy in a predetermined manner to create an
"arrow" of water.

2. Prior Art Statement

15 Water guns have for decades been a very
popular child's toy. Since the toy industry is
very competitive, hundreds of different style

-2-

water guns have been developed in an attempt to profit from the toy's inherent popularity. The most traditional forms of water guns are activated by a pumping action, either manually through the trigger or automatically through a battery operated motor. Such pump action water guns work, but the guns are limited in the distance the water traveled, the amount of water projected and the duration of the pumping cycle.

In an attempt to improve upon water guns, the toy industry has developed pressure activated water guns. Such pressure water guns work upon the principle of pressure differentials between the water held within the toy and the atmosphere.

The water within the toy is held at a pressure higher than that of the ambient air. As a

-3-

result, when the water within the toy is given an avenue of escape, the water will stream out under pressure.

Two primary types of pressure activated water toys exist. The first type is when the water itself is worked to a pressure higher than that of the ambient air. This type of water gun is exemplified by the following:

United States Patent No. 3,197,070 to Curtis F. Pearl et al, shows a water gun activated by trapping water in a collapsible area. As the device is collapsed, the pressure of the water builds, spraying the water out of the one small orifice left within the pressured area. Once the confined area is fully collapsed, the re-expansion of the area draws forth more water from

a reservoir, thus priming the water gun for another cycle.

United States Patent No. 4,854,480 to Robert S. Shindo and United States Patent No. 4,735,239 to Michael E. Salmon et al, both show toy water devices that use an elastic bladder to pressurize water. The bladders are filled with high pressure water, and the bladders respond by elastically deforming. The source of pressurized water is then removed and the water within the expanded bladder is held in place by a clapping device activated by a trigger. The water gun is used by selectively releasing the water from the expanded bladder.

The second type of pressure activated water toys are toys that use air pressure to force

water through squirt channels. Such toys that use this technology are exemplified by United States Patent No. 4,214,674 to Jones et al. The Jones patent shows a two piece apparatus

5 consisting of a pressurized water reservoir and a discharging gun. The Jones patent has a hand operated air pump but differs from the present invention in that it is not a bow, it does not have a one piece self-contained pressurization

10 system, and it lacks the valve configuration needed to support such a self-contained system. Additionally, the present invention has the capability of working at very high pressures and incorporates safety criteria into its design to

15 eliminate the inherent dangers of high pressure liquids.

United States Patent No. 4,911,364 is directed to a water gun which is encompassed in a bow handle and utilizes a bow string to impart strong force to fire the gun. It does not
5 utilize increased air pressure on water to propel water by opening a release means.

United States Patent No. 3,877,611 covers a combination bow/water gun and includes water storage in the bow handle. It fires a slug of
10 water using a plunger but does not use air to pressurize water in its storage reservoir nor utilize a pull mechanism to open a release means upon release of the pull mechanism.

Thus, the prior art does teach the use of
15 toy water guns that operate by the pressurization of stored water, but the prior art does not teach

or suggest a toy water gun bow that has a self-contained means of pressurizing stored water with air, and has a valve configuration that allows pressuring inlet air and exiting pressurized air and water to exit the stored water reservoir through and by the same opening. Thus, the water gun of the present invention may be a one piece unit with a high pressurization capacity which results in ease of both use and manufacture.

Also, the prior art fails to teach or suggest the use of highly pressurized air with toy water gun bows and fails to recognize the needed design criteria and safety allowances to eliminate the traditional hazards of producing, storing and discharging high pressure liquids.

SUMMARY OF THE INVENTION

The present invention is a toy water bow which is operated by selectively releasing water from a water reservoir that is pressurized with air. The present invention is a one piece device

5 formed in the general shape of an archery bow that has a manually operated air pump incorporated into it. The air pump pressurizes a water reservoir and consequently exerts pressure on water contained therein. The pressurized air

10 and water have an avenue of release that is regulated by a pull mechanism of the invention. When no force is applied to the pull mechanism, the pressurized air and water are held at bay with no means of release from the reservoir.

15 When force is applied to the pull mechanism in a predetermined manner, water is released from the

-9-

pressurized reservoir and is channeled through a narrow nozzle. The escape of the water through the narrow nozzle creates a stream of propelled water in the form of an "arrow" of a

5 predetermined length. The shooting may be repeated until the water is consumed or until the pressure of the reservoir equals that of the ambient air.

BRIEF DESCRIPTION OF THE DRAWINGS

10 The invention will be more fully understood by referring to the following detailed specifications, the above specification and the claims set forth herein, when taken in connection with the drawing appended hereto, wherein:

15 Figure 1 shows a vertical cross-sectional of one preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

5 The present invention is, as mentioned,
directed toward a toy water gun bow that uses air
to pressurize water in a storage reservoir and to
propel the water through a narrow nozzle.

Pressurized water toys are not new; they have
been in existence for decades. Water pressure
has been used in the toy industry for everything
from launching toy rockets to propelling toy
10 cars. Pressurized water toys come in two primary
types. First are water toys that use mechanical
means to directly compress and pressurize water.
Such toys represent a majority of the water toys
manufactured today, and are exemplified by
15 traditional water guns that use a trigger
operated pump or a battery powered motor to

-11-

squirt small amounts of water.

The problem with toys that directly pump water is that to achieve the required pressure for a satisfactory squirt, a small diameter piston is required. This in turn limits the amount of water that can be squirted in each shot. In addition, the speed at which the pump is activated, whether manually or by motor, affects the distance of the shot, and it requires many cycles to project any significant amount of water.

To solve these, toy manufacturers have turned to the technology of compressed air to pressurize a reservoir of water. Air is compressed to high pressures and this high pressure can be transferred to stored water.

This technology is easily adapted to a child's strength and allows a relatively large amount of water to be pressurized at one time. This large reserve of pressurized water allows a water gun to fire a large continuous stream of water at one time without the need for repeated pumping cycles.

The problem with air pressurized toys is one of safety. Toys are designed to be inexpensive so as to be widely marketable. As such, most toys are made of plastics or other inexpensive materials. Such materials do not have large tensile strengths or fatigue characteristics, and therefore do not lend themselves well to containing pressurized fluids. Plastic containments of pressurized liquids, if not

-13-

properly designed, can rupture and explode causing severe injury. The present invention has a unique design that allows for both the use of high pressure air and the elimination of potential rupturing hazards. The present invention has a cylindrical water reservoir which is attached to the housing of the bow. There is a single orifice, in conjunction with the generous radii used at the cylinder ends, to serve to maintain the integrity of the water reservoir walls and minimize the leak points throughout the material of the water reservoir at its connection to the housing, allowing for the safe use of high pressures while relying upon a single orifice for pressurizing air to enter and pressurized air and water to exit the reservoir.

-14-

The present invention was designed so that both the pressurized air from the air pump and the exiting pressurized water utilize the same opening without back flow problems to either.

5 Additionally, since the water reservoir must be periodically refilled with water, a separate fill cap may be used, or in a preferred embodiment, the water reservoir has only one opening and is designed to detach from the air pump inlet and
10 the pressurized water outlet so that ambient pressure water can be added.

 The present invention is generally a toy device formed in the general shape of a bow that has a manually operated air pump incorporated
15 into the design. The air pump pressurizes a water reservoir and consequently pressurizes the

-15-

air so as to exert pressure on water contained therein. The pressurized air and water have an avenue of release that is regulated by a water release means which itself is actuated by a pull mechanism of the invention. When no force is applied to the water release means, the pressurized water is held at bay with no means of release from the reservoir. When force is applied to the water release means via the pull mechanism, water is released from the pressurized container and is channeled through a narrow nozzle. The escape of the pressurized water through the narrow nozzle creates a stream of propelled water that lasts for a predetermined amount of time, e.g. by regulation of recovery of closure of the water release means. Repeat shots

-16-

can be made until the water supply is exhausted
or until the pressure of the water equals that of
the ambient air. Water is added to the present
invention by removing either a fill cap or the
5 entire water reservoir from the gun, filling the
reservoir and reattaching the cap or reservoir.
Upon reattachment, there is an orifice which
serves as both the entrance point of pressurized
air from the air pump, and the exit point of the
10 pressurized air and water. This single orifice
water reservoir exit design holds the integrity
of the reservoir's walls intact, allowing the
water reservoir to hold high pressures without
fear of rupture. Additionally, the danger of
15 rupture is eliminated by a release means device
that automatically and safely discharges

-17-

pressurized water when over pressurized, until the maximum allowable pressure is reached.

The present invention water gun bow is, as mentioned, operated by releasing the pressurized water through a narrow nozzle. The release of the pressurized water is controlled by the pull mechanism which actuates the water release means. Since the present invention has the ability to operate at high pressures, the water release means performs two functions. First, it controls the amount of water released and, second, it serves as a safety valve. The release means of the present invention pinches the exit hosing for the pressurized water. The pinching force is created by a spring. When the water release means is actuated, the spring bias of the

-18-

pinching member is overcome and water is released. Similarly, when the pressure in the water reservoir reaches beyond safety limitations, the force of the compressed air will overcome the spring bias of the pinching member allowing air and/or water to be released until the pressure within the reservoir reaches a safe level.

Referring now to Figure 1, there is shown a vertical cross-sectional view of one preferred embodiment of the present invention toy water gun bow 1 in the general shape of a bow, having a main housing 7 with extending bow arms such as arm 3, bow string 5 and pull mechanism handle 9. The detachable water storage reservoir 15 is held to the main housing 7 via an attachment collar 19

-19-

and reservoir mount 21. The air pump of the present invention is embodied within the main housing 7 but the handle to the pump is a slider handle 45 attached to the piston rod 49 that
5 travels along, and is guided by the piston cylinder 43.

To fill the water reservoir 15 with water, the water reservoir 15 must be detached from the main housing 7 by unscrewing the threaded collar
10 19 from the sympathetically threaded reservoir mount 21. Water is then placed into the reservoir 15 and the water reservoir 15 is rethreaded into position. Once filled with
15 water, the toy water gun bow 1 is operated by pressurizing the water reservoir 15 with air. Air is forced into the reservoir by the relative

-20-

movement of the piston 51 within the air pump cylinder 43. The piston 51 is operated by the pump rod 49 that connects the piston 51 to the slider handle 45. The slider handle 45 is operated manually by the user of the toy water gun bow 1. A user holds the slider handle 45 with one hand and the bow 1 at grip handle 8 with the other. The slider handle 45 is then moved back and forth along the length of the cylinder 43. The back and forth action is transferred to the piston 51, which forces air past an O-ring valve 53 and through openings, such as orifice 63, and through a one way flow valve 57, which seats on rest 55. The air exits at opening 59, through connector 61, flexible inlet tube 37 (connected to mount 21 at coupler 31) into inlet

-21-

orifice 33, single orifice 17 and into the water reservoir 15. Air is continuously added to the water reservoir 15 until a desired pressure is reached.

5

Once under pressure, the water in reservoir 15 is prevented from flowing freely through the outlet tube 23 by a pinch bar 81 that clamps the outlet tube 23 against a stop 82 that is part of the main housing 7. The pinch bar 81 is biased

10

against the outlet tube 23 by a calibrated spring 87. The spring is held at one end by a formation 85 of the main housing 7 and at the other end to pinch bar 81 at opening 83. The strength of the spring 87 in its biased configuration is

15

calibrated, so that when the pressure on the water within reservoir 15 and within the outlet

-22-

tube 37 reaches a predetermined maximum valve, the spring 87 will allow the pinch bar 81 to rise (open) and water will be released until safe pressure is maintained.

5 Absent an automatic water release for an
overly high pressure, water is released in the
following manner. The user holds housing 7 at
handle 8 in one hand and pulls on pull mechanism
handle 9 and this compresses spring 91 via piston
10 rod 71 and piston 73. O-ring 75 allows air into
cylinder 93 but not out and thus acts as a one
way valve. When handle 9 is released, bow string
5 and spring 91 push the handle 9, piston rod 71
and piston 73 inward compressing air and pushing
15 plunger 97. Plunger 97 is connected to cylinder
93 so cylinder and plunger move together to push

-23-

against pinch bar. Plunger 97 pushes against
pinch bar 81 to open outlet tube 23 as the
transferred force applied to the pinch bar 81
acts in opposition to the biasing force of spring
5 87. When the force of the plunger 97 overcomes
the force of the spring 87 the pinch bar 81 is
lifted from the outlet tube 23 and water is
allowed to pass through the outlet tube 23. The
outlet tube 23 terminates at a nozzle head 13
10 attached to housing 7 by nozzle housing 11
(preferably in the shape of an arrow head).
Water streams out of the narrow opening 41 as
long as compressed air remains between piston 73
and plunger 97. The compressed air is allowed to
15 leak through opening 79. After all compressed
air has leaked out then pinch bar and spring 87

return plunger 97 to the at rest position and
exerts pressure by way of the pinch bar to the
outlet tube. Opening 79 in plunger 97 is
calibrated to retain enough compressed air to
5 move plunger 97 and to leak the air for a length
of time so a slug of water is ejected for a
predetermined amount of time in the form of an
"arrow" shot.

It is understood that although the invention
10 described within the above specification shows
the best known mode of the present invention, the
invention may be formed, shaped, practiced, or
made of differing materials than is specifically
described within. For example, the pull
15 mechanism could open the pinch bar or other
release means upon pulling instead of releasing

so as to allow the user to control the duration
of the shot. Likewise, other release means than
a pinch bar could be used, e.g. a gate valve or
other valve or closing mechanism. Also, the
5 storage reservoir could be of a different shape
and could be integrated further into the design,
and/or multiple tanks could be used.

Further, as used in this invention, the
claimed storage reservoir could be used in
10 conjunction with an alternative water source.

Other variations should be deemed to now be
within the purview of the artisan without
exceeding the scope of the invention.

15

WHAT IS CLAIMED IS:

1. An air pressurized toy water bow for firing water, which comprises:
 - (a) a housing shaped generally like an archery bow;
 - (b) a water storage reservoir attached to said housing and having an orifice through which liquids and gasses pass from said reservoir to said housing;
 - (c) an attachment means located on said water bow for attaching said water storage reservoir to said water bow housing with a seal impervious to water;
 - (d) a pressurizing means for pressurizing said water storage reservoir with air,

said means being an integral part of

said water bow housing;

(e) an avenue of release for water

displaced by said pressurized air, said

avenue of release extending from said

attachment means to a nozzle on said

bow housing;

(f) a water release means for regulating

the fluid flow through said avenue of

release, said water release means being

attached to said housing and actuated

by the movement of a pull mechanism;

(g) a pull mechanism attached to said

housing and functionally connected to

said release means such that movement

of said pull mechanism in a

-28-

predetermined manner will actuate said water release means; and,

(h) a nozzle located on said housing, said nozzle being connected to said avenue of release.

2. The bow of claim 1, wherein said water storage reservoir is adapted to hold at least 100 pounds per square inch of pressure.
3. The bow of claim 1, wherein said means for pressurizing said water storage reservoir is a hand operated air pump.
4. The bow of claim 1, further including a bow

-29-

string, wherein said pull mechanism is attached to said bow string and said pull mechanism and bow string may be pulled and released together to actuate said water release means.

5. The bow of claim 1, wherein said nozzle is positioned on said housing in a central location to simulate the positioning of an arrow.
6. The bow of claim 1, wherein said avenue of release is a flexible tube connecting said attachment means with said nozzle.
7. The bow of claim 6, wherein said water

-30-

release means is a spring-biased pinch bar that clamps said avenue of release against said housing, collapsing said avenue of release and thus restricting the fluid flow therethrough.

8. The bow of claim 7, wherein pinch bar has a spring with a spring bias which is overcome by a force applied to said pinch bar in a direction away from said spring through the action of said pull mechanism.
9. The bow of claim 8, wherein said pull mechanism actuates said pinch bar release by being pulled and released and by forcing a plunger against said pinch bar, said plunger

-31-

being pushed by compressed air ahead of a spring locked piston.

10. The bow of claim 9, wherein said piston has a controlled return so as to regulate the amount of water exiting said nozzle.
11. The bow of claim 7, wherein said spring bias is calibrated to yield to pressure within said avenue of release, when said pressure within said avenue of release exceeds a predetermined value.
12. The bow of claim 7, wherein said spring bias is formed by an extension spring having two ends, one end being anchored to said housing

and said second end anchored to said pinch bar.

13. The bow of claim 1, wherein the flow of air from said water storage reservoir to said pressurizing means is prevented by a one way flow device.

14. The bow of claim 1, wherein the flow of water from said water storage reservoir into said pressurizing means is prevented by a one way flow device.


15. The bow of claim 1, wherein said water storage reservoir has a threaded neck surrounding said orifice that attaches to

said water gun housing via a sympathetically threaded housing mount.

16. The bow of claim 1, wherein said nozzle has a narrow orifice therethrough with a cross-sectional area less than that of said avenue of release.

17. The bow of claim 11, wherein said maximum value for the yielding of said spring bias to said pressure within said avenue of release is between about 50 pounds per square inch and about 90 pounds per square inch.

FIG. 1

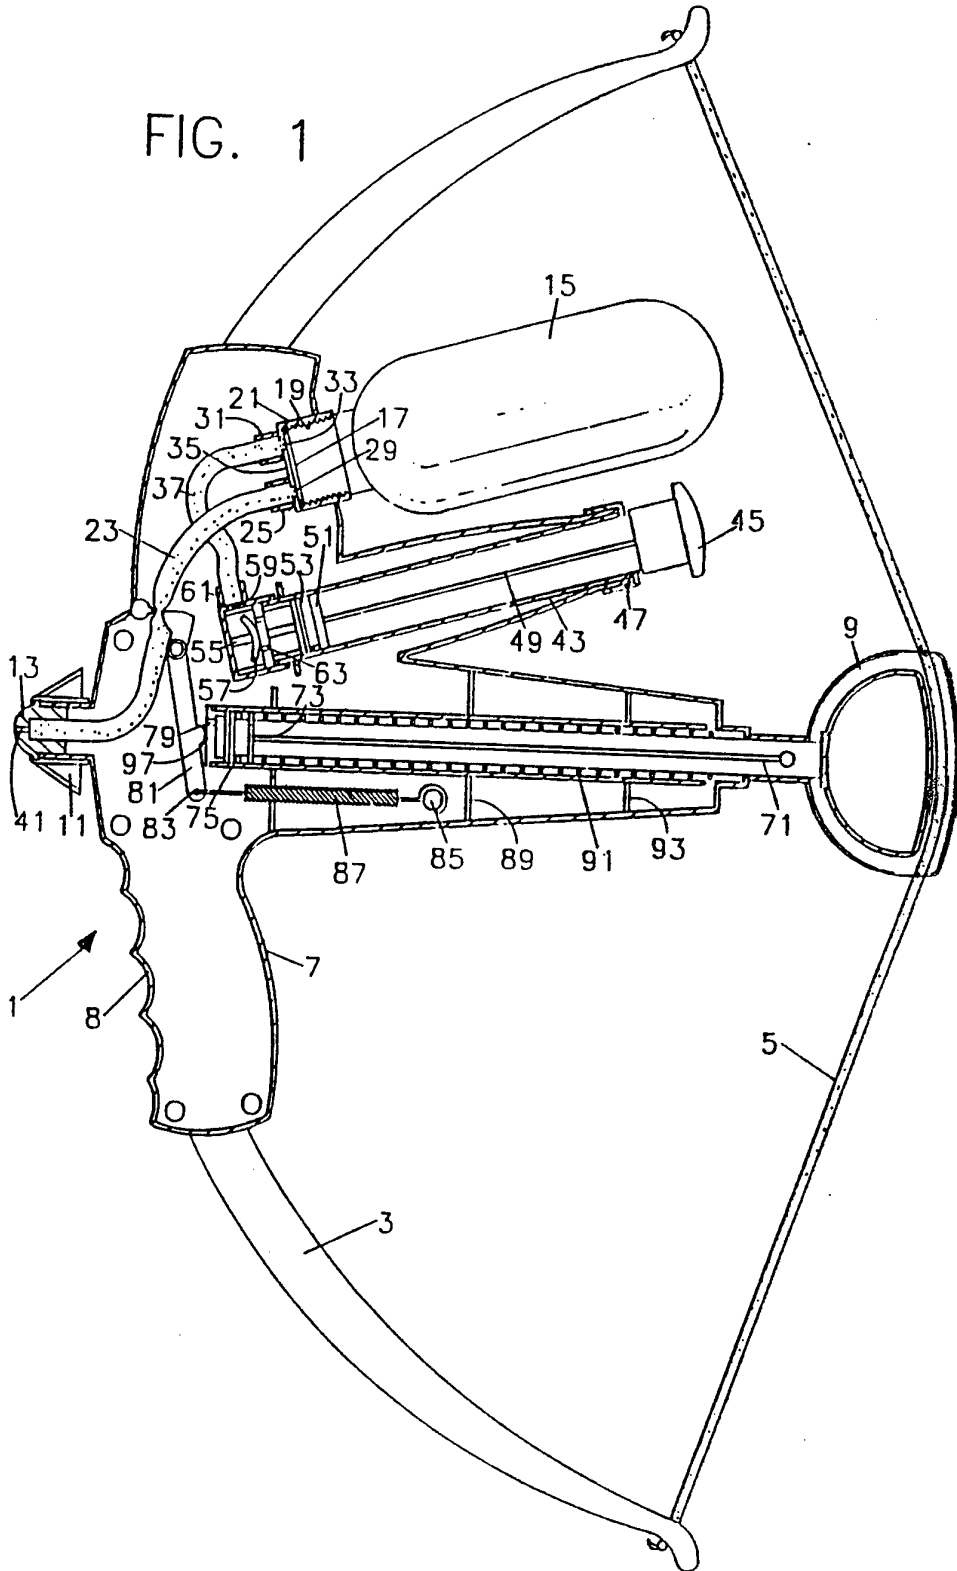

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/02632

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : B05B 17/00
US CL : 222/78

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 222/79,130,325,396,400,7,400,8,401; 42/54; 273/349; 446/473,475; 124/70,73; 239/99,333

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 2,589,977 (STELZER) 18 March 1952, See the entire document	1-8,11-17
Y	US, A, 3,877,611 (MORRISON ET AL.) 15 April 1975, See the entire document	1-8,11-17
Y	US, A, 4,214,674 (JONES ET AL.) 29 July 1980, See the entire document	1-8,11-17
A, P	US, A, 5,184,756 (AMRON) 09 February 1993.	
A, P	US, A, 5,184,755 (BROVELLI) 09 February 1993.	
A,&	US, A, 5,150,819 (JOHNSON ET AL.) 29 September 1992.	

Further documents are listed in the continuation of Box C. See patent family annex.

<p>* Special categories of cited documents:</p> <p>*A* document defining the general state of the art which is not considered to be part of particular relevance</p> <p>*E* earlier document published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>*&* document member of the same patent family</p>
---	---

Date of the actual completion of the international search

05 MAY 1993

Date of mailing of the international search report

16 JUL 1993

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

GREGORY L. HUSON

Telephone No. (703) 308-2580

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/02632

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,&	US, A, 5,074,437 (D'ANDRADE ET AL.) 24 December 1991.	
A	US, A, 4,911,364 (IRIE) 27 March 1990.	
A	US, A, 4,854,480 (SHINDO) 08 August 1989.	