

[54] **METHOD OF FLOCKING METAL ARTICLES**

[75] Inventor: **Tracy W. Barnes, Peoria, Ill.**

[73] Assignee: **Laidlaw Corporation, Peoria, Ill.**

[22] Filed: **Dec. 11, 1972**

[21] Appl. No.: **314,138**

[52] **U.S. Cl.**..... 117/17, 117/17.5, 117/24, 117/25, 117/33, 118/309, 118/634

[51] **Int. Cl.**..... **B05b 5/02, B44c 1/08, B44d 1/092**

[58] **Field of Search**..... 117/17, 33, 17.5, 24, 25; 118/309, 629, 630, 631, 632, 633, 634, 635

[56] **References Cited**

UNITED STATES PATENTS

2,173,032	9/1939	Wintermute.....	117/17
2,174,328	9/1939	Meston et al.....	118/629
2,419,435	4/1947	Behr.....	223/88
2,435,111	1/1948	Wahl.....	223/88
2,572,534	10/1951	Summer.....	223/88
2,605,030	7/1952	Fischer.....	223/8
2,866,583	12/1958	Batts.....	223/88
2,889,805	6/1959	Freeder.....	117/17
3,059,824	10/1962	Henry.....	223/88
3,157,324	11/1964	Barnes.....	223/88
3,218,184	11/1965	Lemelson.....	117/DIG. 6
3,225,980	12/1965	Wieckmann.....	223/88

3,323,933	6/1967	Barford et al.....	117/17
3,348,745	10/1967	Basile et al.....	223/88
3,425,604	2/1969	Mauldin.....	223/88
3,460,726	8/1969	Rooz.....	223/95
3,646,909	3/1972	Cole et al.....	118/629

FOREIGN PATENTS OR APPLICATIONS

1,019,312	1/1953	France.....
-----------	--------	-------------

OTHER PUBLICATIONS


Product Engineering, pg. 123, June 19, 1967.

Primary Examiner—Michael Sofocleous
Attorney, Agent, or Firm—Molinare, Allegretti, Newitt & Witcoff

[57] **ABSTRACT**

A method for flocking a wire garment hanger in which electrostatically charged fibrous flock particles are applied to an adhesive film on a portion of the hanger and the hanger is immediately heated to set the adhesive while the fibers remain radially oriented on the wire. The invention also contemplates blowing air sequentially on various portions of the surface of a bed of flock to cause the fibers to become suspended in air above the bed, through which suspension the hangers are passed.

6 Claims, 6 Drawing Figures

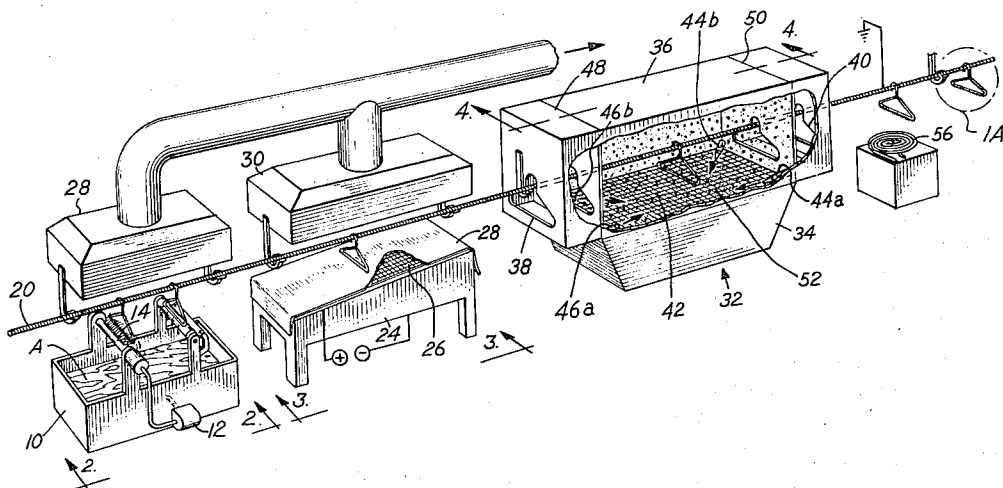

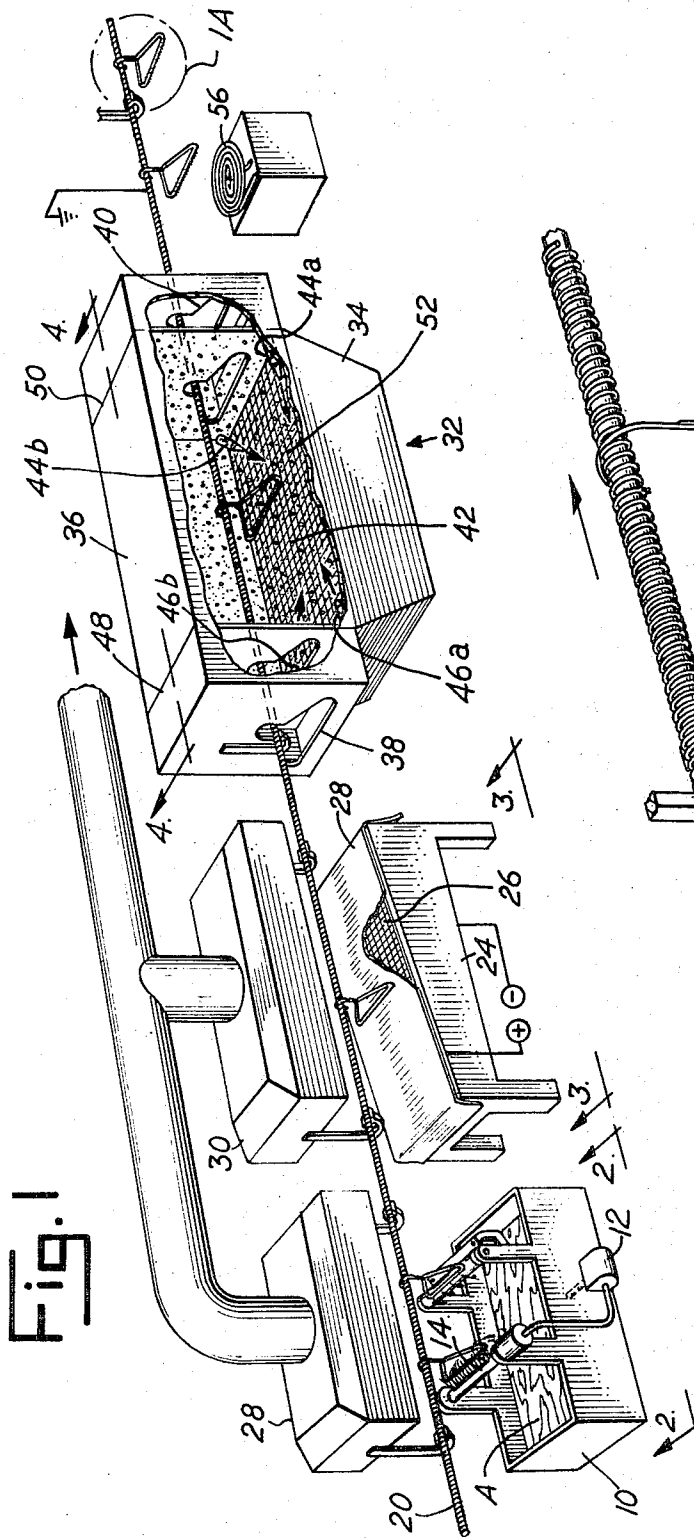


Fig. 1

Fig. 1A

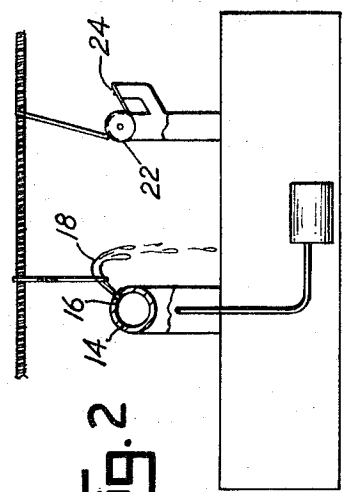
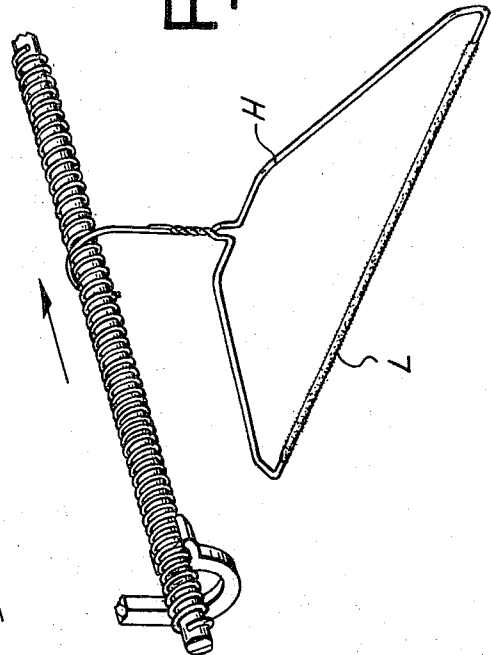


Fig. 2

Fig. 3

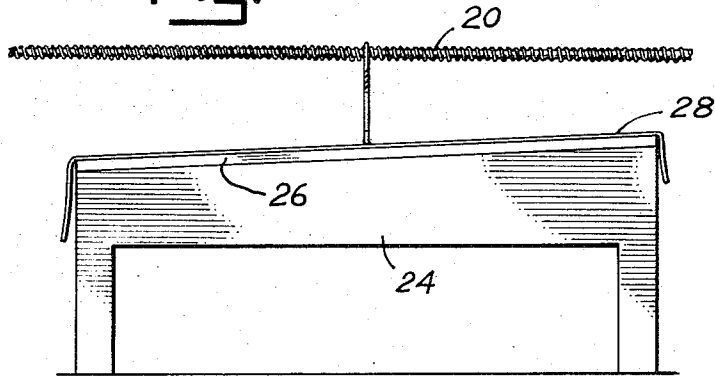


Fig. 4


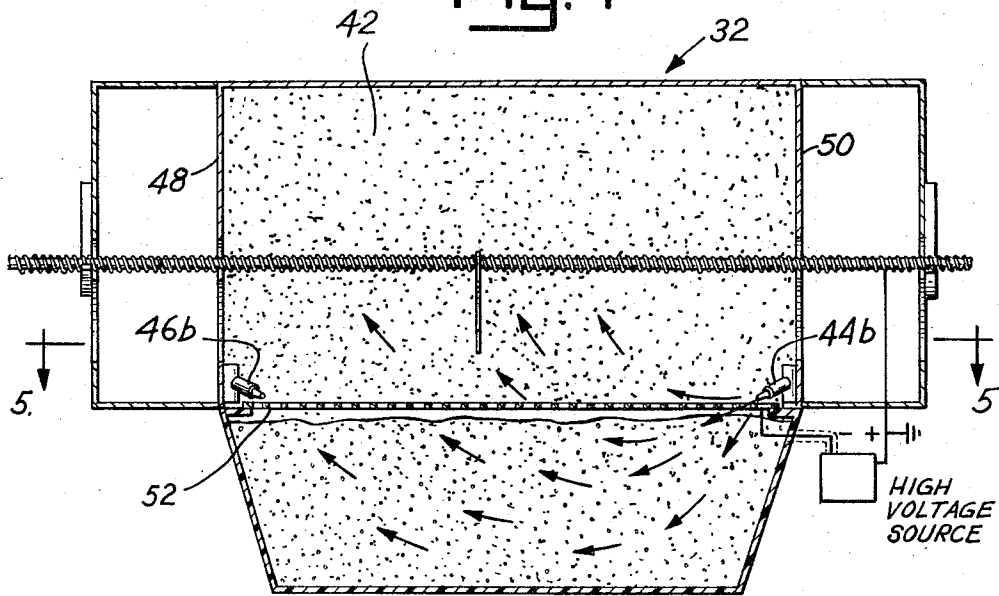


Fig. 5

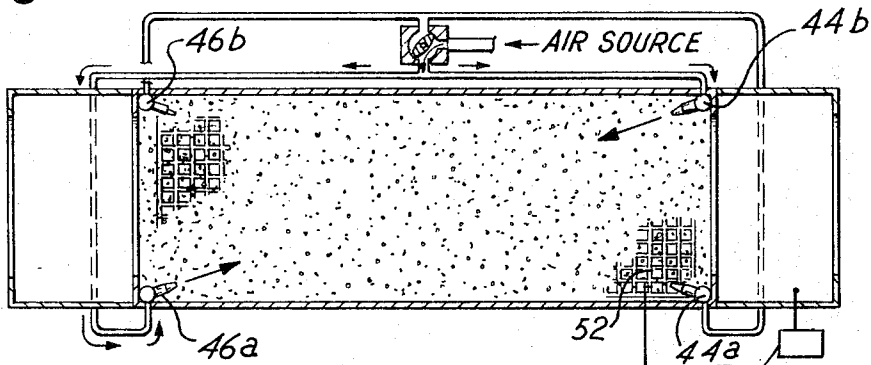

METHOD OF FLOCKING METAL ARTICLES

This invention relates to a method for flocking wire garment hangers and similar metal objects, and more particularly to a method of adhering fibrous particles to a selected portion of the wire from which the hanger is formed. Wire garment hangers frequently have a paper sleeve or cover over the lower horizontal stretch portion of the hanger to increase the diameter of the wire thus preventing creasing a garment draped over the wire. One of the objects of this invention is to provide a low cost substitute covering of fibers which project from the wire surface to provide a clean non-slip, non-creasing surface over which a garment may be hung.

It has been proposed heretofore to flock metal articles by blowing or spraying fibers on an adhesive applied to the surface of the article. But this method has not been completely satisfactory because the flock which consists of short fibers tend to clog the spray nozzle. Cellulose fibers particularly are not free flowing but have a tendency to interlock and become compacted which makes them difficult to convey in an air stream. In the present invention, a film of liquid adhesive is applied to the portion of the wire hanger to be flocked. The hanger is then passed through an enclosed space in which the flock is suspended in air whereupon the fibers adhere to the still-wet adhesive. Preferably the fibers are charged electrostatically of one polarity and the metal hanger is charged oppositely so that the fibers are attracted to the wire surface oriented on radii of the round wire. The metal hanger is immediately heated to dry the adhesive. It is important that this heating step be carried out promptly so that the fibers do not become saturated with the adhesive and flatten out in the liquid adhesive, rather than being disposed with their ends projecting outwardly from the adhesive-coated surface.

The invention generally lies in the method steps which cooperate to produce a wire hanger having a soft flocked portion.

More particularly, the present invention is directed to the method and means for producing an environment containing fibers suspended in air through which the metal article is passed to cover the adhesive film with the fibers standing on end. It has been discovered that if streams of air are passed upwardly through a bed of cellulose flock or directed against the surface of the bed, the fibers will become entrained in the air stream for a short time. However, as the stream continues to flow, it forms fissures in the bed. The fibers interlock and pack on the surface of the fissures to provide a channel through which the air flows without lifting fibers from the bed. I have discovered that if a plurality of air nozzles are operated intermittently for a very short period of time, say 1-2 seconds, the formation of fissures can be avoided. One nozzle or a group of nozzles may be directed at a particular area of the fiber bed surface and another nozzle or group of nozzles disposed opposite the first set may be directed at another adjoining area of the surface. Air from the first nozzle or group of nozzles causes the fibers to be lifted from the surface of the bed and entrained in the air above the bed. After a couple of seconds of operation, the first set of nozzles is shut off and simultaneously the second set comes into operation. By this means, the air above the bed becomes filled with fibers. Preferably the fibers are electrostatically charged as they rise from the

bed by causing them to pass through a charged grid-type electrode overlying the bed.

The invention may be understood from the following detailed description and the accompanying drawings in which:

FIG. 1 is a perspective semi-diagrammatic view of apparatus which may be used in accordance with the invention for flocking garment hangers made from wire.

FIG. 1a is an enlarged view of a hanger prepared in accordance with the invention and comprises the portion within the circle designated 1a in FIG. 1.

FIG. 2 is a front elevational view taken along the line 2-2 illustrating the apparatus for applying the adhesive to the horizontal stretch of the hanger.

FIG. 3 is a front elevational view taken along the line 3-3 of FIG. 1 illustrating the detearing apparatus for removing excess adhesive from the wire.

FIG. 4 is a sectional view taken along the line 4-4 of FIG. 1, showing the flocking enclosure.

FIG. 5 is a top sectional view taken along the line 5-5 of FIG. 4.

A suitable adhesive A for adhering the flock to the wire is provided in the vat 10 equipped with a pump 12 which moves the adhesive into the pipe 14 having a slot 16 extending longitudinally thereof. The adhesive is expelled through the slot 16 to provide a fountain 18 of adhesive through which the horizontal lower stretch portion L of the hanger H passes as the hanger H advances along the rotating worm conveyor 20. The adhesive falls back into the vat and is recirculated by the pump. A rotating cylinder 22 mounted above the surface of the vat 10 is provided for removing the excess adhesive which drips down from the wire portion L. The cylinder 22 is driven by any suitable means and a doctor blade 24 is in contact with the surface to scrape off the adhesive to prevent build up of the adhesive on the surface.

An electrostatically detearing apparatus 24 having a charged grid 26 is provided just downstream of the adhesive vat 10. Any adhesive drips on the underside of the wire L and is removed by this apparatus. This is a standard piece of equipment commonly used for detearing. The grid 26 is inclined upwardly toward the downstream end of the apparatus to avoid concentration of the electrical charge at the edge of the grid. The grid is covered with paper 28 which may be replaced periodically as it becomes laden with adhesive. The paper prevents the adhesive removed from the wire L from building up on the grid 26.

A pair of hoods 28, 30 are provided above the adhesive vat 10 and the detearing apparatus 24 to remove from the room solvent which volatilizes from the adhesive during the coating operation. The wire hangers are advanced through the apparatus by means of a rotating worm 20 which cooperates with the hook on the hanger.

The flocking apparatus 32 has a hopper-like bottom 34 filled with a mass of flock. The upper portion of the apparatus is enclosed with a transparent plastic cover 36 having cut-out portions 38, 40 at opposed ends to permit the hanger H on the conveyor to pass through the enclosed space 42. This space is filled with flock entrained in the air by means of nozzles 44a, 44b, 46a, 46b disposed at the four corners of the hopper 34 and which direct air against the bed of fibers in the hopper. Panels 48 and 50 are provided within the enclosure to

form vestibules at the entrance and exit thereby reducing the tendency of the flock to escape from the enclosure into the room. The vestibules are connected to an exhaust system. A grid 52 connected to an electrostatic generator is provided above the surface of the hopper to electrostatically charge fiber particles which rise upwardly therethrough in the air streams provided by the nozzles 44, 46. The conveyor screw 20 is grounded so that the hangers in electrical connection therewith are oppositely charged to the particles and, therefore, attract the particles from the air as the hangers pass through the space 42. The electrostatic charge causes the fibers to stand on end, radially of the wire L.

In order to dry the adhesive quickly and lock the fibers in place, I have provided an induction coil 56 just downstream of the flocking apparatus 32. As the wire hangers pass over the coil, a current is induced in the metal which causes it to heat instantaneously and dry the adhesive. It is important to carry out this heating step promptly after the flock has been applied to the adhesive. If the fibers remain in contact with the liquid adhesive for more than a few minutes, the adhesive will wick along the length of the fiber and cause it to lie flat within the adhesive film. For maximum efficiency in operation, the fibers should be standing on end.

The flocking apparatus 32 is operated in an intermittent fashion to prevent fissures from forming in the fiber bed as illustrated in FIGS. 4 and 5. The fibers useful for purposes of the invention may be made from rayon, 6 denier weight, and averaging about 0.045 inch in length. These fibers mat together and become compacted under the force of air. Once compacted, it is extremely difficult to break up the fibers into individual particles. I have found that by expelling air from diagonally opposed nozzles 44a and 46b simultaneously while shutting off the air to the corresponding nozzles 44b and 46a, the fibers can be lifted from the surface of the bed and entrained in the air within the space 42. The air is expelled for only a second or so and this length of time is not sufficient to cause the fissures to form. At the time nozzles 44a and 46b are shut off, the remaining nozzles in the other corners of the apparatus are turned on, thus causing a different area of the flock bed to be subjected to the air streams. Some of the fibers which are lifted by the nozzles 44b and 46a are deposited in the path of the nozzles 44a and 46b whereupon they are lifted during the next blast of air coming from these nozzles. In this way, the entire surface of the flock bed is being agitated to cause continual shifting of the fibers so that fissures do not form. The intermittent blasts of air from opposed nozzles seem to be responsible for the fact that the fibers do not become compacted. If desired or necessary to work the entire surface area of the bed, the nozzles may be mounted to oscillate rather than stationary.

The adhesive A is prepared from thermosetting resin containing a white pigment dissolved in a suitable solvent such as an aromatic hydrocarbon. The resins used in the adhesive, such as a mixture of a minor proportion of polyvinyl chloride in a thermosetting alkyd are selected so that they will set up at about 300°F. and will not soften below that temperature after setting.

It will be appreciated that by following the teaching of the present invention, the adhesive is placed precisely where it is desired. The tearing at the corners is eliminated by using the electrostatic device 24. The flock is applied uniformly with the fibers standing on

end by reason of the electrostatic charge imparted to the fibers as they are entrained in the air in the apparatus 32. The induction heating apparatus 56 provides the prompt rise in temperature required to set the adhesive film immediately and lock the fibers into place. If desired, a means for knocking the hanger to shake off fibers other than those deposited on the adhesive may be provided. As the hanger passes through the enclosure 42, some of the fibers are collected on the wire which is not coated with adhesive and it is desirable to shake these fibers off before the hangers are packed for shipment.

Having described my invention, I claim:

1. A method for flocking a metal article comprising:

- a. applying a film of liquid adhesive to the surface of the article;
- b. providing an enclosed space containing a mass of flock fibers and foraminous electrode means for imparting an electrostatic charge to said fibers, said fibers being characterized by the ability to pack together under pressure;
- c. directing a plurality of air streams intermittently for short time periods against the surface of said mass to lift fibers from the mass, entrain them in the air and carry them past said electrode means, thereby at least partially filling the space above said mass with charged fibers;
- d. passing said article through said space while charging the article oppositely to the electrostatic charge on the fibers, thus causing the fibers in said space to deposit on the liquid adhesive film; and
- e. drying the film to cause it to set and lock the fibers to the surface of the metal article.

2. The method of claim 1 including the step of selectively operating opposed sources for said air streams intermittently so that different areas of said mass surface are acted upon at different times by separate air streams.

3. The method of claim 1 in which said drying step is effected by induction heating of said metal article.

4. The method of claim 1 in which said air streams pass through said foraminous electrode as they flow to said fiber mass to prevent build up of flock on the surface of the electrode.

5. A method of flocking a wire garment hanger having a hook and a straight portion opposite said hook comprising:

- a. applying a film of liquid adhesive to said straight portion of the hanger;
- b. providing an enclosed space containing a mass of flock fibers and foraminous electrode means for imparting an electrostatic charge to said fibers, said fibers being characterized by the ability to pack together under pressure;
- c. directing a plurality of air streams intermittently for short time periods against the surface of said mass to lift fibers from the mass, entrain them in the air and carry them past said electrode means, thereby at least partially filling the space above said mass with charged fibers;
- d. passing said hanger through said space while charging the surface thereof oppositely to the charge on the fibers, thus causing the fibers in the space to deposit on the surface of the hanger;

5

6

- e. drying the adhesive film by inductively heating the hanger to cause the film to set and lock the fibers to the surface of the hanger; and
- f. removing flock from the hanger wire not coated

- with adhesive.
- 6. The method of claim 1 in which the air streams operate intermittently for a period of a few seconds.

* * * * *

5

10

15

20

25

30

35

40

45

50

55

60

65