

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 March 2009 (19.03.2009)

PCT


(10) International Publication Number
WO 2009/035232 A1

- (51) **International Patent Classification:**
H04L 12/26 (2006.01)
- (21) **International Application Number:**
PCT/KR2008/005223
- (22) **International Filing Date:**
4 September 2008 (04.09.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
10-2007-0093080
13 September 2007 (13.09.2007) KR
- (71) **Applicant (for all designated States except US):** LG ELECTRONICS INC. [KR/KR]; 20, Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721 (KR).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** YOUN, Ae Ran [KR/KR]; LG Institute, Hogye 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). CHUN, Jin Young [KR/KR]; LG Institute, Hogye 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). CHOI,
- (74) **Agents:** KIM, Yong In et al.; KBK & Associates, 7th Floor, Hyundai Building, 175-9 Jamsil-dong, Songpa-ku, Seoul 138-861 (KR).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** METHOD OF TRANSMITTING AND RECEIVING CHANNEL QUALITY IDENTIFIER FOR SLEEP MODE MOBILE STATION

FIG. 3

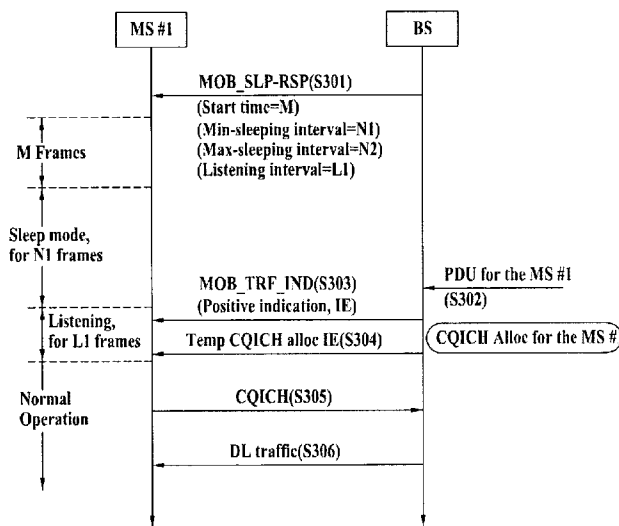

(57) **Abstract:** A method of transmitting and receiving a channel quality indicator (CQI) for a sleep-mode mobile station is disclosed. When data to be transmitted to the mobile station is present, the mobile station which is in a sleep mode is directed to transition to a normal mode and simultaneously a temporary CQI channel is allocated thereto. Thus the mobile station which has transitioned to the normal mode from the sleep mode efficiently transmits the CQI, and data applying a proper modulation and coding scheme can be transmitted.

WO 2009/035232 A1



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

【DESCRIPTION】**【Invention Title】**

METHOD OF TRANSMITTING AND RECEIVING CHANNEL QUALITY
IDENTIFIER FOR SLEEP MODE MOBILE STATION

5 **【Technical Field】**

The present invention relates to a method of transmitting and receiving a channel quality indicator in a mobile communication system, and more particularly, to a method for a sleep-mode mobile station to effectively
10 transmit a channel quality indicator and a method of allocating a channel quality identifier transmission channel.

【Background Art】

A broadband wireless access system supports a sleep
15 mode to minimize power consumption of a mobile station. The sleep mode is comprised of a sleep interval for preventing power consumption in an interval during which a mobile station does not communicate with a base station and a listening interval for receiving an indication of whether
20 data traffic is present between sleep intervals from the base station.

The length of the listening interval is fixed by a sleep request message (e.g., "MOB_SLP-REQ" message) and a sleep response message (e.g., "MOB_SLP-RSP" message). During the listening interval, the mobile station receives 5 indications as to whether downlink traffic of the mobile station is present and whether ranging for maintaining uplink (UL) communication and a proper downlink (DL) coding type according to signal quality should be performed, through a traffic indication message (e.g., "MOB_TRF-IND" 10 message) transmitted in broadcast form from the base station.

Meanwhile, a channel quality indicator (CQI) reporting procedure of a sleep-mode mobile station is as follows.

15 The sleep-mode mobile station may report a CQI to a slot allocated through a CQI channel (CQICH) allocation information element (CQICH_Allocation_IE) during a normal mode according to a designated period, a report type, a feedback type, etc. Here, a stop CQI allocation flag of a 20 sleep control message including the MOB_SLP-RSP message, a ranging response (RNG-RSP) message, a downlink sleep control extended subheader, etc. may indicate '1' and at this time, the mobile station stops reporting the CQI allocated through the CQICH_Allocation_IE.

When resource allocation for CQICH transmission is stopped as described above, if a sleep-mode mobile station of a broadband wireless access system recognizes that downlink traffic is present, the mobile station transmits a bandwidth request message for reporting the CQI to the base station using a contention-based random access method. In this case, if collision occurs during random access, a backoff process is implemented and thus transmission of the CQI is delayed. Accordingly, since the base station can not acquire information about a downlink channel state at a corresponding time point, the base station can not apply an accurate adaptive modulation and coding scheme to data transmitted to a corresponding mobile station.

Moreover, even though the mobile station periodically transmits the CQI, the same problem occurs if a time point when the mobile station recognizes that traffic is present does not coincide with a CQI reporting time point.

【Disclosure】

【Technical Problem】

An object of the present invention devised to solve the problem lies in providing a method of causing a mobile station to efficiently transmit a CQI and of transmitting data by applying a proper adaptive modulation and coding

scheme, when downlink traffic to be transmitted to a sleep-mode mobile station is present.

In an embodiment of the present invention, a method of allocating resources for transmitting a temporary CQICH is proposed. Especially, cases where the resources for transmitting the temporary CQICH are allocated are specified.

In another embodiment of the present invention, an improved structure of a traffic indication message (i.e., MOB_TRF-IND message) for resource allocation for transmission of the temporary CQICH and a structure of a temporary CQICH allocation information element are provided.

【Technical Solution】

The object of the present invention can be achieved by providing a method for a base station to receive a channel quality indicator (CQI) from a mobile station. The method includes, directing a mobile station which is in a sleep mode to transit to a normal mode when data to be transmitted to the mobile station is present, allocating a temporary channel quality indicator channel (CQICH) to the mobile station, and receiving a CQI from the mobile station through the temporary CQICH.

When the mobile station is set to transmit the CQI

at given periods during the sleep mode, the allocating a temporary CQICH may be performed when a difference between a time corresponding to a period set to transmit the CQI and a time when data to be transmitted to the mobile station is generated is greater than a prescribed threshold value. And, the allocating a temporary CQICH may be performed when the allocation of a CQICH is cancelled through a sleep control message during the sleep mode of the mobile station.

10 The temporary CQICH may be allocated to a region which is not used in a fast feedback channel when allocating the temporary CQICH is performed. The temporary CQICH may be allocated by a temporary CQICH allocation information element, and the temporary CQICH
15 allocation information element may include at least one of allocation offset information, frame offset information, transmission period information, and transmission duration information.

In another aspect of the present invention, provided
20 herein is a method for a mobile station which is in a sleep mode to transmit a channel quality identifier (CQI) to a base station. The method includes transitioning to a normal mode from the sleep mode upon receipt of a command from a base station, and transmitting the CQI through a

temporary channel quality identifier channel (CQICH)
allocated from the base station.

The command from the base station may be received
when data to be transmitted to the mobile station is
5 present.

【Advantageous Effects】

According to the present invention, when downlink
traffic to be transmitted to a sleep-mode mobile station is
present, the mobile station efficiently transmits a CQI and
10 thus a base station can transmit data applying a proper
adaptive modulation and coding scheme.

In addition, since when resources for transmitting a
temporary CQI are to be allocated is specified, setting for
efficiently transmitting a CQI can be performed.

15 【Description of Drawings】

The accompanying drawings, which are included to
provide a further understanding of the invention,
illustrate embodiments of the invention and together with
the description serve to explain the principle of the
20 invention.

In the drawings:

FIG. 1 is a diagram illustrating an example of

periodically transmitting a CQI by a sleep-mode mobile station in a broadband wireless communication system (IEEE 802.16e system);

FIG. 2 is a flow diagram illustrating a processing procedure when downlink traffic to be transmitted to a sleep-mode mobile station is generated in a broadband wireless communication system (IEEE 802.16e system); and

FIG. 3 is a flow diagram illustrating a processing procedure when data to be transmitted to a sleep-mode mobile station is generated according to an embodiment of the present invention.

【Mode for Invention】

Reference will now be made in detail to the exemplary embodiments of the present invention, examples of which are illustrated in the accompanying drawings. The detailed description, which will be given below with reference to the accompanying drawings, is intended to explain exemplary embodiments of the present invention, rather than to show the only embodiments that can be implemented according to the invention. For example, the following description is given by way of example of a broadband wireless access system, specifically an IEEE 802 series system, but may be applied to any communication systems supporting a power

saving mode of a mobile station.

The following detailed description includes specific details in order to provide a thorough understanding of the present invention. However, it will be apparent to those skilled in the art that the present invention may be practiced without such specific details.

In some instances, known structures and devices are omitted or are shown in block diagram form, focusing on important features of the structures and devices, so as not to obscure the concept of the present invention. The same reference numbers will be used throughout this specification to refer to the same or like parts.

The present invention provides a method of causing a mobile station to efficiently transmit a CQI and of transmitting data by applying a proper adaptive modulation and coding scheme, when downlink traffic to be transmitted to a sleep-mode mobile station is present. To this end, a method for a sleep-mode mobile station to transmit a CQI in a general broadband wireless access system and a method of processing data when downlink traffic to be transmitted to the sleep-mode mobile station is present are described in detail.

FIG. 1 is a diagram illustrating an example of periodically transmitting a CQI by a sleep-mode mobile

station in a broadband wireless communication system (IEEE 802.16e system).

As mentioned above, the sleep-mode mobile station may report a CQI to a slot allocated through a CQICH allocation IE during a normal mode according to a designated period, a report type, a feedback type, etc. Referring to FIG. 1, the mobile station may attempt to transmit a CQI at a period P before entering a sleep mode 101. After entering the sleep mode, the mobile station has intervals (e.g., 103 and 105) during which a CQI report is available and intervals (e.g., 102 and 104) during which a CQI reporting is unavailable. In the interval during which a CQI report is unavailable, the mobile station does not transmit the CQI even at the CQI reporting period as illustrated in FIG. 1.

Meanwhile, a method of processing data when downlink traffic to be transmitted to the sleep-mode mobile station is present in a general broadband wireless communication system will be described below.

FIG. 2 is a flow diagram illustrating a processing procedure when downlink traffic to be transmitted to a sleep-mode mobile station is generated in a broadband wireless communication system (IEEE 802.16e system).

Referring to FIG. 2, a serving base station BS

transmits a MOB_SLP-RSP message to a first mobile station MS#1 in step S201. The MOB_SLP-RSP message is a sleep response message, including sleep mode start time information (in FIG. 2, after M frames) of the mobile station MS#1, minimum sleep interval length information (N1 frames), maximum sleep interval length information (N2 frames), and a listening interval length information (L1 frames). Therefore, the mobile station is in a sleep mode starting from after M frames for at least N1 frames.

10 Next, the base station transmits a MOB_TRF-IND message to the mobile station during a listening interval of the mobile station to indicate whether traffic to be transmitted to a corresponding mobile station is generated in step S202. In step S202, if the base station indicates
15 that no traffic to be transmitted to the mobile station is generated through a negative indication, the mobile station enters the sleep mode for at least $(2 \times N1)$ frames. The $(2 \times N1)$ frames are the number of frames calculated from the expiration of the previous sleep mode as illustrated in FIG.
20 1.

Meanwhile, while the mobile station is in the sleep mode, the base station may include data (i.e., PDU for the MS#1) to be transmitted to the mobile station in step S203. Then the base station may inform the mobile station that

traffic to be transmitted to the mobile station has been generated through a MOB_TRF-IND message. That is, the base station transmits a positive indication to the mobile station in a next listening interval in step S204. The
5 mobile station, which has received the positive indication through the MOB_TRF-IND message, transitions to a normal mode so as to be ready to receive corresponding data.

In order for the mobile station which has transitioned to a normal mode to efficiently receive data
10 according to a proper adaptive modulation and coding scheme, the base station should recognize downlink channel information at a corresponding time point. However, a resource for transmission of a CQICH, which is additionally allocated for CQI report by the mobile station, may be not
15 present around a time for transmitting data to the mobile station which has transitioned to the normal mode from the sleep mode.

More specifically, even if the mobile station periodically transmits a CQI during the sleep mode as
20 described in FIG. 1, there may be a long interval between a time point when the mobile station recognizes whether traffic is present and a time point corresponding to a setting period for a CQI report. In this case, if the base station transmits data after receiving a CQI report at a

corresponding period from the mobile station while the base station waits for the CQI report until a time corresponding to a CQI transmission period, data transmission may be delayed beyond a threshold permitted by a system.

5 Conversely, if the base station transmits data to the mobile station without receiving a CQI report for a downlink from the mobile station, the base station can not apply a proper modulation and coding scheme. The threshold may be appropriately set according to a transmission delay
10 degree permitted in the system.

On the other hand, a resource for transmitting a CQICH allocated through a CQI allocation IE may be cancelled through a sleep control message during a sleep mode of the mobile station. Namely, while the mobile
15 station is in a sleep mode, the mobile station may receive a sleep control message, including a MOB_SLP-RSP message, a ranging response message, and a downlink sleep control enlarged subheader, in a state indicating that a stop CQI allocation flag is 1. If the resource allocation for CQICH
20 transmission is stopped, the mobile station transmits a bandwidth request message to the base station using a contention-based access method to report a CQI. In this case, if collision occurs in random access, a backoff process is implemented and thus transmission of the CQI is

delayed.

Therefore, one embodiment of the present invention provides a mechanism for a sleep-mode mobile station to efficiently report a CQI. That is, when data is to be transmitted to the sleep-mode mobile station from a base station, the base station directs the mobile station to transition to a normal mode and allocates resources for transmitting a temporary CQICH to the mobile station, thereby rapidly transmitting the CQI. Thereafter, the base station transmits data to the mobile station by applying an adaptive modulation and channel coding scheme based on the CQI. Thus since the mobile station, which has transitioned to a normal mode from a sleep mode, rapidly transmits the CQI, the data can be transmitted to a corresponding mobile station through a proper modulation and coding scheme without delay.

Such a method according to an embodiment of the present invention is described with reference to FIG. 3.

FIG. 3 is a flow diagram illustrating a processing procedure when data to be transmitted to a sleep-mode mobile station is generated according to an embodiment of the present invention.

In FIG. 3, processes prior to step S303 are similar to the processes described in FIG. 2 and therefore a

detailed description thereof is omitted. A mobile station MS#1, that has received a MOB_SLP-RSP message from a serving base station in step S301, enters a sleep mode and, during this sleep mode, data may occur to be transmitted to the mobile station from the base station in step S302.

If data to be transmitted to the mobile station is generated, the serving base station may indicate that data is to be transmitted to the mobile station by a positive indication through a MOB_TRF-IND message in step S303. The mobile station, which has received the MOB_TRF-IND message representing a positive indication, transitions to a normal mode.

The serving base station allocates a resource for transmitting a temporary CQICH to the mobile station in step S304, in addition to transmitting the MOB_TRF-IND message representing a positive indication in step S303. Allocating the resource for transmitting the temporary CQICH to the mobile station as in step S304 is desirably performed: (1) when an interval between a CQI reporting period of the mobile station and a time when the mobile station recognizes that data to be transmitted thereto is generated exceeds a given threshold in the case where the mobile station periodically transmits a CQI, and (2) when CQICH allocation setting allocated through a sleep control

message to the mobile station is cancelled while the mobile station is in a sleep mode. In addition to the above cases, the resource for transmitting the temporary CQICH may be simultaneously allocated to mobile stations transitioning to a normal mode from a sleep mode and the resource allocation for the temporary CQICH is not limited to the above two cases. The resource for transmitting the temporary CQICH may temporally use a slot which is not used during a corresponding interval in a fast feedback channel. Furthermore, a detailed report type may use parameters defined in the latest CQICH allocation IE.

If the resource for transmitting the temporary CQICH is allocated to the mobile station in step S304, the mobile station transmits a CQI through the temporary CQICH in step S305. Then the base station determines a modulation and coding scheme of corresponding data through the CQI received in step S305 and transmits data which is modulated and coded according to the determined modulation and coding scheme to the mobile station in step S306.

Meanwhile, an exemplary embodiment of the present invention provides an improved structure of a MOB_TRF-IND message to allocate a resource for transmitting the temporary CQICH to the mobile station which transitions to a normal mode from a sleep mode and provides a structure of

a temporary CQICH_Allocation_IE.

A structure of a MOB_TRF-IND message proposed according to the exemplary embodiment of the present invention is as follows.

5

Table 1

Syntax	Size	Notes
MOB_TRF-IND_Message_format() {	-	-
Management message type = 52	8 bits	-
FMT	1 bit	-
if (FMT == 0) {	-	-
SLPID Group Indication bit-map	32 bits	N-th bit of SLP ID-Group indication bit-map (MSB corresponds to N = 0) is allocated to SLPID Group that includes MS with SLPID values from N*32 to N*32+31. Meaning of this bit 0: There is no traffic for all the 32 MS that belong to the SLPID-Group 1: There is traffic for at least one MS in SLPID-Group.
Traffic Indication Bitmap	variable	Traffic Indication bit map comprises the multiples of 32-bit long Traffic Indication unit. A Traffic Indication unit for 32 SLPIDs is added to MOB_TRF-IND message whenever its SLPID Group is set to 1. 32 bits of Traffic Indication Unit (starting from MSB) are allocated to MS in the ascending order of their SLPID values: 0: Negative indication 1: Positive indication
Num_Pos_Ind	8 bits	Number of positive indications
for (i=0; i<Num_Pos_Ind; i++) {		
Temp CQICH Allocation IE (A)	variable	

}		
} else {	-	-
Num_Pos	8 bits	Number of CIDs following
for (i=0; i<Num_Pos; i++) {	-	-
SLPIDs	10 bits	-
Temp CQICH Allocation IE (B)	variable	
}	-	-
}	-	-
Padding	variable	If needed, for alignment to byte boundary.
TLV encoded items	variable	-
}	-	-

As indicated in Table 1, the MOB_TRF-IND message specifies a temporary CQICH allocation IE corresponding to the number of positive indications included in the MOB_TRF-IND message as can be appreciated by a parameter denoted by 'A'. Further, the temporary CQICH allocation IE corresponding to the number of the following connection identifiers (CIDs) is specified according to the positive indication as can be appreciated by a parameter denoted by 'B'.

When the MOB_TRF-IND message has the structure shown in Table 1, a structure of the temporary CQICH allocation IE is as follows.

Table 2

Syntax	Size	Notes
Temp CQICH_Alloc_IE() {	-	-
Allocation offset	6 bits	Index to the fast feedback channel region marked by UIUC = 0
Frame offset	3 bits	The MS starts reporting at the frame of which the number has the same 3 LSB as the specified frame offset. If the current frame is

		specified, the MS should start reporting in eight frames.
Period (p)	2 bits	A CQI feedback is transmitted on the CQICH every 2^p frames.
Duration (d)	3 bits	A CQI feedback is indexed by CQICH ID for 10^d frames and transmitted on the CQICH. If $d=0$, the CQICH is deallocated. If $d=0b111$, the MS (or SS) continues to report CQI until the BS directs the MS (or SS) to stop CQI report.
}	-	-

As shown in Table 2, the temporary CQICH allocation IE may include at least one of allocation offset information, frame offset information, period information, and duration information. In more detail, the allocation offset information may indicate an index to a fast feedback channel region denoted by uplink interval usage code (UIUC)=0 based on an existing IEEE 802.16e system. However, specification for a corresponding UIUC may differ according to a system. A corresponding mobile station may be specified as starting reporting at a frame having the same number as 3 least significant bits (LSBs) specified as a frame offset according to the frame offset information. If a current frame is specified through a frame offset field, the mobile station should start reporting within but not limited to 8 frames.

The period information p included in the temporary CQICH allocation IE specifies that a CQI feedback is transmitted on the CQICH every 2^p frames. The duration

information d indicates a duration during which the mobile station keeps a CQI report. In Table 2, the CQI feedback of the mobile station is indexed by CQICH_ID for 10^d frames and transmitted on the CQICH. If $d=0$, the CQICH is deallocated. If $d=0b111$, the mobile station should report the CQI until the base station directs the mobile station to stop the CQI report.

The structure of the MOB_TRF-IND message shown in Table 1 and the structure of the temporary CQICH_Allocation_IE shown in Table 2 are illustrative only and not intended to be limiting.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

For example, although the method for a sleep-mode mobile station to efficiently transmit a CQI in a broadband wireless communication system, specifically in an IEEE 802 series system, has been described, the present invention may be applied to any system as a method for a mobile station which has not set channel quality, that is, a

mobile station which has not transmitted a report for a long time or which starts a report for the first time, to efficiently transmit a CQI. Furthermore, although a subject receiving a signal in a downlink has been described as a mobile station (MS), other terms such as 'mobile terminal', 'subscriber station (SS)', 'user equipment (UE)', etc. may be used. Similarly, although a subject transmitting a signal to a downlink has been described as a base station, other terms such as 'Node B', 'base transceiver station (BTS)' etc. may be used.

Accordingly, the invention should not be limited to the specific embodiments described herein, but should be accorded the broadest scope consistent with the principles and novel features disclosed herein.

15 **【Industrial Applicability】**

A method of allocating a resource for transmitting a temporary CQICH and a method of transmitting and receiving a CQI using the same are applied to an IEEE 802.16m system which is being developed to improve performance of a broadband wireless communication system and can overcome a shortcomings of an existing IEEE 802.16e system. When data to be transmitted to a mobile station which has not performed a report for a downlink channel state for a long

time is generated, an efficient processing method can be applied to any communication systems supporting a power saving mode and requiring channel information for data transmission, as well as the IEEE 802 series communication
5 system.

【CLAIMS】

【Claim 1】 A method of receiving a channel quality indicator (CQI), the method comprising:

directing a mobile station which is in a sleep mode
5 to transit to a normal mode, when data to be transmitted to
the mobile station is present;

allocating a temporary channel quality indicator
channel (CQICH) to the mobile station; and

receiving a channel Quality indicator (CQI) from the
10 mobile station through the temporary CQICH.

【Claim 2】 The method according to claim 1, wherein when
the mobile station is set to transmit the CQI at given
periods during the sleep mode, said allocating a
temporary CQICH is performed when a difference between a
15 time corresponding to a period set to transmit the CQI
and a time when data to be transmitted to the mobile
station is generated is greater than a prescribed
threshold value.

【Claim 3】 The method according to claim 1, wherein said
allocating a temporary CQICH is performed when the

allocation of a CQICH is cancelled through a sleep control message during the sleep mode of the mobile station.

【Claim 4】 The method according to claim 1, wherein the temporary CQICH is allocated to a region which is not used in a fast feedback channel when said allocating the temporary CQICH is performed.

5 **【Claim 5】** The method according to claim 1, wherein the temporary CQICH is allocated by a temporary CQICH allocation information element, and

the temporary CQICH allocation information element includes at least one of allocation offset information, frame offset information, transmission period information,
10 and transmission duration information.

【Claim 6】 A method for a mobile station which is in a sleep mode to transmit a channel quality identifier (CQI), the method comprising:

15 transitioning to a normal mode from the sleep mode upon receipt of a command from a base station; and
transmitting a channel quality indicator (CQI)

through a temporary channel quality identifier channel (CQICH) allocated from the base station.

【Claim 7】 The method according to claim 6, wherein the command from the base station is received when data to be
5 transmitted to the mobile station is present.

FIG. 1

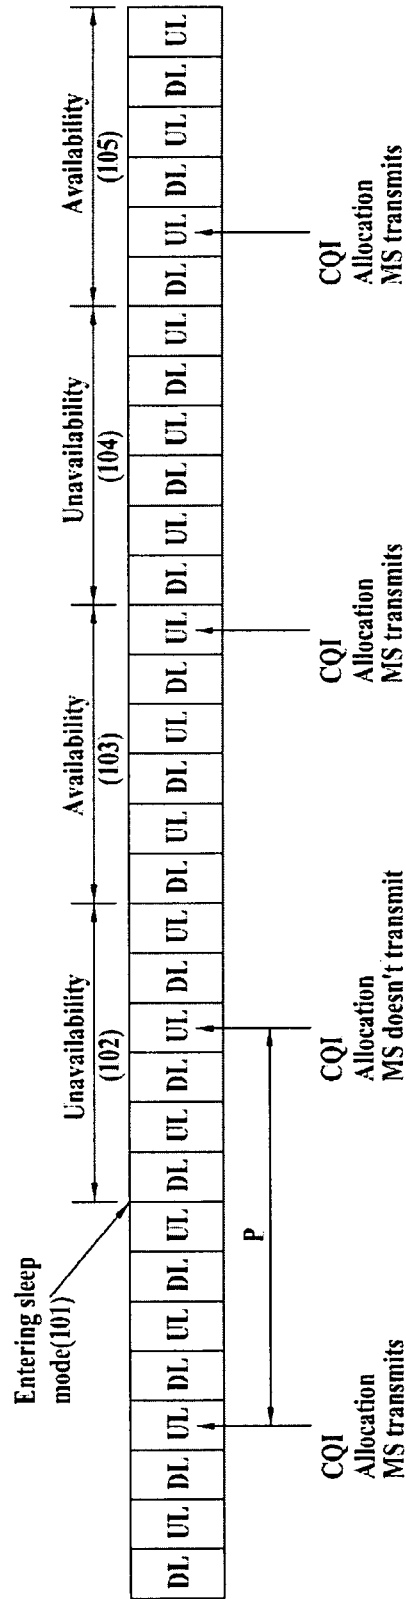


FIG. 2


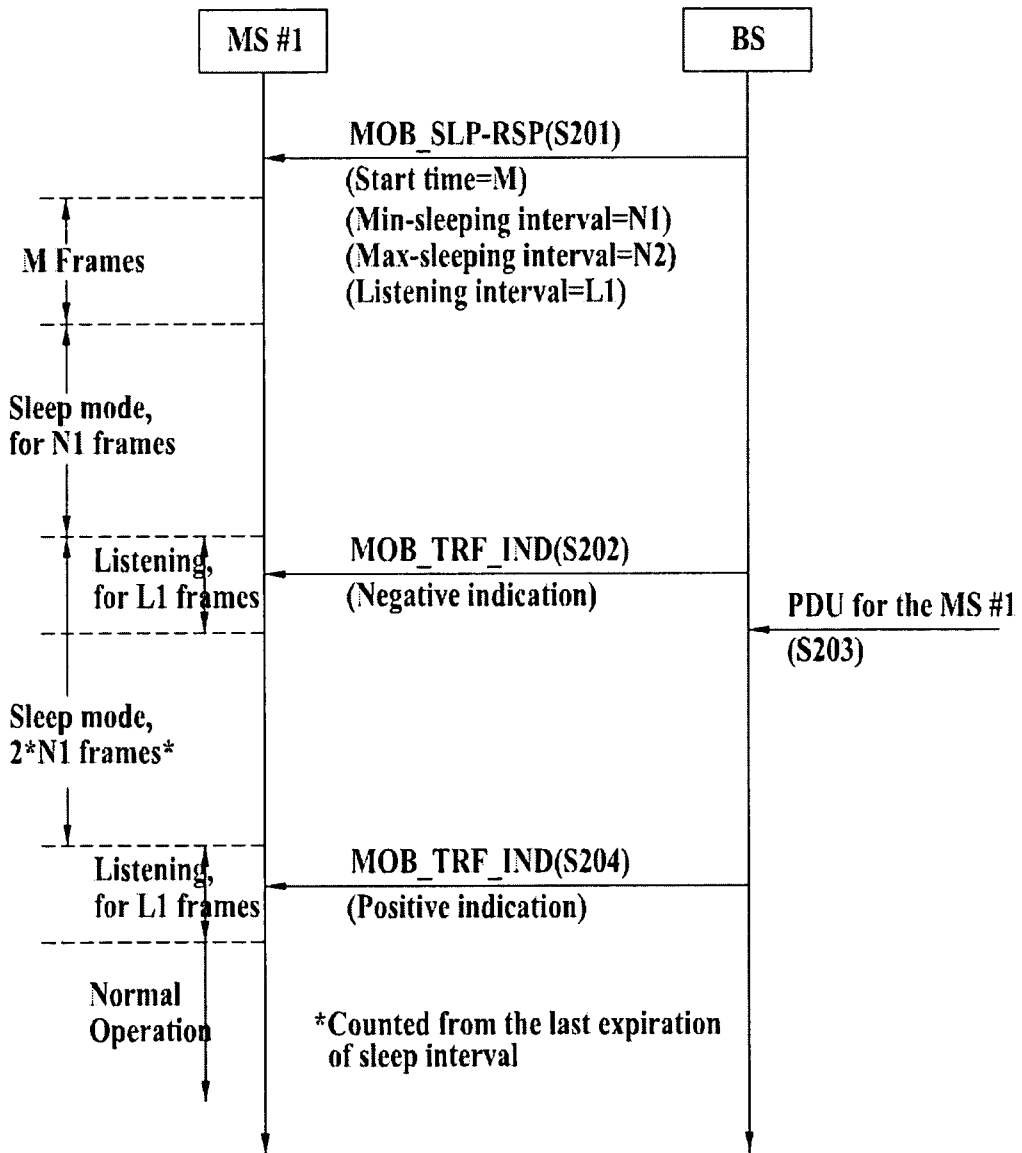


FIG. 3

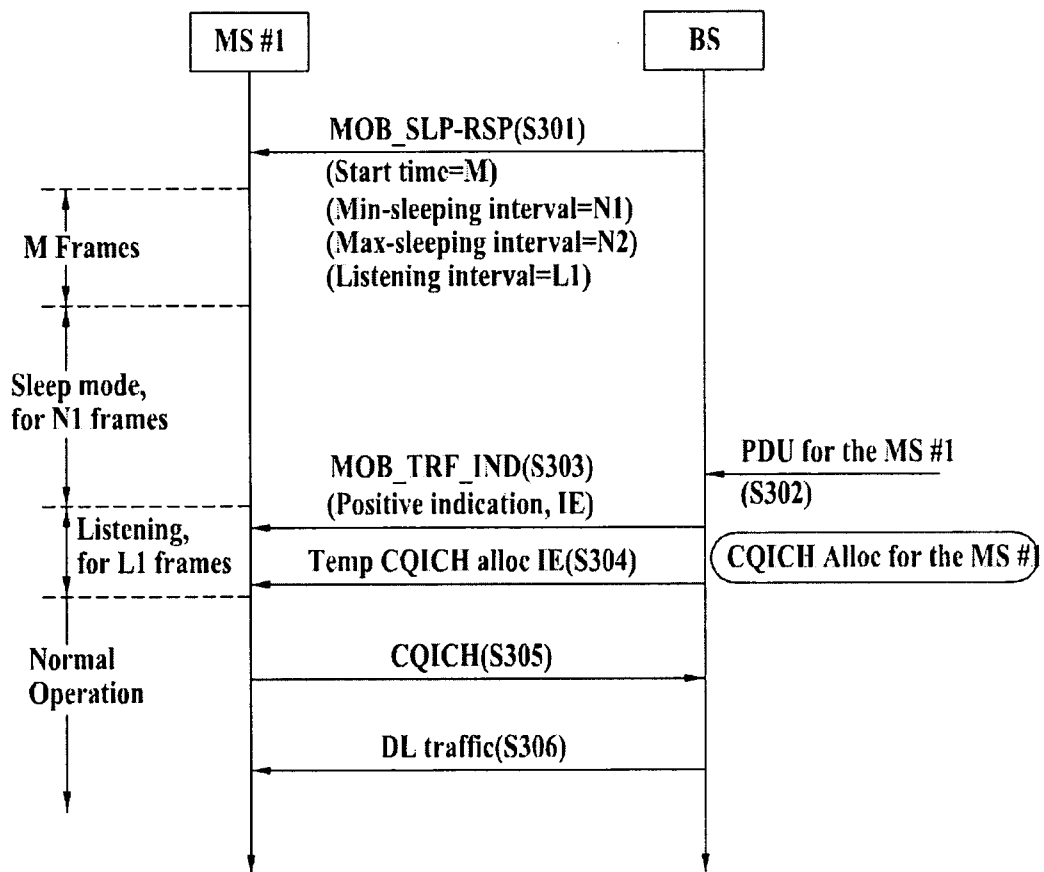

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2008/005223**A. CLASSIFICATION OF SUBJECT MATTER****H04L 12/26(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC : H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

KOREAN UTILITY MODELS AND APPLICATIONS FOR UTILITY MODELS SINCE 1975

JAPANESE UTILITY MODELS AND APPLICATIONS FOR UTILITY MODELS SINCE 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS(internal), IEL, google & Keywords : sleep mode, normal mode, CQI, CQICH

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 2005/065056 A2(SAMSUNG ELECTRONICS CO., LTD. ET AL.) 21 JULY 2005 See abstract; page 6, lines 3-5; page 17, line 13- page 19, line 4	1,6,7 2-5
A	US 7269145 B2(CHANG-HOI KOO ET AL.) 11 SEPTEMBER 2007 See abstract; column 3, line 39-column 4, line 14	1-7
P, A	WO 2008/035905 A1(SAMSUNG ELECTRONICS CO., LTD.) 27 MARCH 2008 See abstract; page 7, line 22- page 11, line 9	1-7

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 JANUARY 2009 (29.01.2009)

Date of mailing of the international search report

29 JANUARY 2009 (29.01.2009)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Hee Bong

Telephone No. 82-42-481-5686



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2008/005223

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2005/065056 A2	21.07.2005	KR 10-2005-0071339 A	07.07.2005
US 7269145 B2	11.09.2007	US 2003-0117969 A1	26.06.2003
WO 2008/035905 A1	27.03.2008	EP 1903814 A2	26.03.2008
		KR 10-2008-0026012 A	24.03.2008