



(12) PATENT ABRIDGMENT (11) Document No. AU-B-17698/95
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 675614

- (54) Title
POLAR CELL MODULE HAVING A SURFACE PROTECTIVE MEMBER COMPOSED OF A FLUORORESIN CONTAINING A ULTRAVIOLET ABSORBER DISPERSED THEREIN
- International Patent Classification(s)
(51)⁵ **H01L 031/0203 H01L 031/048**
- (21) Application No. : **17698/95** (22) Application Date : **27.04.95**
- (30) Priority Data
- (31) Number (32) Date (33) Country
6-90987 28.04.94 JP JAPAN
- (43) Publication Date : **09.11.95**
- (44) Publication Date of Accepted Application : **06.02.97**
- (71) Applicant(s)
CANON KABUSHIKI KAISHA
- (72) Inventor(s)
ICHIRO KATAOKA; TAKAHIRO MORI; SATORU YAMADA; HIDENORI SHIOTSUKA; AYAKO KOMORI
- (74) Attorney or Agent
SPRUSON & FERGUSON , GPO Box 3898, SYDNEY NSW 2001
- (56) Prior Art Documents
JP 62-273780
US 4383129
- (57) Claim

1. A solar cell module comprising (a) a photovoltaic element, (b) a transparent resin filler layer, (c) a transparent surface layer, and (d) a reinforcing member, said transparent resin filler layer (b) and said transparent surface layer (c) being disposed in the named order on a light receiving face of said photovoltaic element, and said reinforcing member (d) being disposed on the rear face of said photovoltaic element, wherein:

said transparent surface layer comprises a film composed of a fluororesin with a high fluorine content selected from the group consisting of ethylene-tetrafluoroethylene copolymer, poly(chlorotrifluoroethylene) resin, ethylene-chlorotrifluoroethylene copolymer, tetrafluoroethylene-perfluoroalkylvinylether copolymer and tetrafluoroethylene-hexafluoropropylene copolymer and which

(11) AU-B-17698/95
(10) 675614

-2-

contains a ultraviolet absorber dispersed therein and said filler layer (b) comprises a resin selected from the group consisting of polyolefinic resins, butyral resins, urethane resins, and silicone resins.

TITLE OF THE INVENTION

SOLAR CELL MODULE HAVING A SURFACE PROTECTIVE
MEMBER COMPOSED OF A FLUORORESIN CONTAINING
A ULTRAVIOLET ABSORBER DISPERSED THEREIN

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an improved,
reliable solar cell module which excels in weatherability
and in resistance to light degradation and which
10 continuously exhibits a desirable photoelectric conversion
efficiency without being deteriorated even upon repeated
use over a long period of time under severe environmental
conditions of high temperature and high humidity. More
particularly, the present invention relates to an improved
15 solar cell module comprising a photovoltaic element
enclosed by a filler resin and a surface protective member
disposed to cover said photovoltaic element, said surface
protective member being composed of a specific fluororesin
containing a ultraviolet absorber (hereinafter referred to
20 as a UV absorber) dispersed therein, wherein the
photovoltaic element is tightly sealed by means of the
aforesaid specific surface protective member with an
improved adhesion between the filler resin. The solar cell

module excels especially in light transmission and weatherability. Further, the solar cell module excels in resistance to light degradation, moisture resistance, heat resistance and abrasion resistance and it continuously
5 exhibits a desirable photoelectric conversion efficiency without being deteriorated even upon repeated use over a long period of time under severe environmental conditions of high temperature and high humidity.

Related Background Art

10 In recent years, heating of the earth because of the so-called greenhouse effect due to an increase of atmospheric CO₂ has been predicted. In view of this, there is an increased demand for a means of power generation capable of providing clean energy without causing CO₂
15 buildup.

In order to meet such demand, there have proposed various solar cells which can supply electric power without causing such problem as above mentioned and are expected to be a future power generation source.

20 Such solar cell includes single crystal silicon solar cells, polycrystal silicon solar cells, amorphous silicon solar cells (including microcrystal silicon solar cells), copper indium selenide solar cells, and compound semiconductor solar cells. Of these solar cells, various
25 studies have been made on so-called thin film crystal

silicon solar cells, compound semiconductor solar cells and amorphous silicon solar cells since their semiconductor active layer can be relatively easily formed in a large area and in a desired form and they therefore can be easily
5 produced at a relatively low production cost.

Particularly, thin film amorphous solar cells, specifically, amorphous silicon solar cells, comprising a metal substrate, an amorphous silicon semiconductor active layer disposed on said substrate, and a transparent and
10 conductive layer disposed on said semiconductor active layer have been evaluated as being the most advantageous among the conventional solar cells because their semiconductor active layer comprised of amorphous silicon (hereinafter referred to as a-Si) can be easily formed in a
15 large area and in a desired form on a relatively inexpensive substrate with a low production cost and they are light and excel in shock resistance and flexibility, and in addition, they can be designed into a solar cell module in a desired configuration which can be used as a
20 power generation source.

Now, in the case of an amorphous silicon solar cell having a semiconductor active layer comprising, for example, an a-Si thin film disposed on a glass plate as a substrate, light is impinged through the substrate side,
25 and because of this, the glass plate can be designed to

serve as a protective member. However, in the case of the
aforementioned solar cell having the a-Si semiconductor
active layer disposed on the metal substrate, because the
metal substrate does not permit incident light to transmit
5 therethrough, light is impinged through the side opposite
the metal substrate, and therefore, it is necessary to
dispose an appropriate transparent protective member on the
side through which light is impinged such that it protects
the solar cell element. In the conventional manner to do
10 this, a transparent fluororine-containing polymer film
having a good weatherability is used as the surface
protective member and a transparent thermoplastic resin is
used as a filler under the transparent fluorine-containing
polymer film.

15 In fact, the fluorine-containing polymer film is
often used in the above described manner, since it is
advantageous in that it is satisfactory in terms of
weatherability and water-repellency and serves to diminish
a deterioration in the photoelectric conversion efficiency
20 of the solar cell element caused due to a reduction in the
transmittance of the surface protective member occurred
when the protective member is yellowed or clouded as a
result of the protective member having been deteriorated.

As for the thermoplastic resin used as the filler in
25 combination with the fluorine-containing polymer film, it

is also often used since it is relatively inexpensive and suitable for protecting the solar cell element.

Now, description will be made of the conventional solar cell module with reference to FIG. 4.

5 FIG. 4 is a schematic cross-sectional view of an example of the conventional solar cell module. In FIG. 4, reference numeral 401 indicates a photovoltaic element (or a solar cell), reference numeral 402 a transparent thermoplastic resin as a filler, reference numeral 403 a
10 transparent surface protective member comprising a fluorine-containing polymer thin film, and reference numeral 404 an insulating member.

 In this solar cell module, the filler disposed on the rear side of the photovoltaic element 401 is comprised of
15 the same thermoplastic resin as that disposed on the side of the photovoltaic element through which light is impinged.

 Specific examples of the fluorine-containing polymer thin film as the transparent surface protective member 403
20 are fluoro-resin films such as ETFE (ethylene-tetrafluoroethylene copolymer) film, PVF (polyvinyl fluoride) film, PVDF (polyvinylidene fluoride) film and the like. Specific examples of the transparent thermoplastic resin as the filler 402 are EVA (ethylene-vinyl acetate
25 copolymer), butyral resin, and the like.

The insulating member 404 is disposed in order to reinforce the solar cell module while adding an appropriate rigidity thereto. The insulating member 404 is usually comprised of an organic resin film such as nylon film, 5 aluminum foil sandwiched with TEDLAR (trademark name), or the like.

The thermoplastic resin 402 serves as an adhesive between the photovoltaic element 401 and the surface protective member 403 (that is, the fluororesin film) and 10 also as an adhesive between the photovoltaic element and the insulating member 404. In addition to this, the thermoplastic resin 402 also serves as a filler of preventing the photovoltaic element from being externally damaged and from being suffered from external shock.

15 However, the conventional solar cell module thus constituted has such problems as will be described in the following, because the transparent thermoplastic resin is insufficient in weatherability. That is, when the solar cell module is continuously exposed to sunlight in outdoors 20 over a long period of time (for example, over 20 years), the thermoplastic resin as the filler is liable to gel due to continuous irradiation of ultraviolet rays whereby resulting in being clouded or it is liable to yellow due to an increase in conjugated double bond in the chemical 25 structure of the resin as a result of continuous

irradiation of ultraviolet rays. The occurrence of such cloudiness or yellowing makes the thermoplastic resin as the filler to be poor in light transmittance, resulting in reducing the photoelectric conversion efficiency of the solar cell module. Hence, the thermoplastic resin as the filler is not sufficient enough not only in terms of weatherability but also in terms of durability upon repeated use in outdoors over a long period of time (for example, over 20 years). And these problems will become significant when the solar cell module is placed at a roof of a building or is integrated with the roof and it is continuously used in severe outdoor atmosphere of high temperature and high humidity.

Herein, as for the solar cell module in which the filler is constituted by EVA, it is known that when the solar cell module is continuously used at a temperature of 80 °C or above, the filler is liable to remarkably yellow.

In addition, the deterioration of the transparent thermoplastic resin as the filler causes not only the foregoing problem of reducing its light remittance but also another problem of extinguishing its rubber elasticity or/and reducing its adhesion. In the case where the filler is poor in rubber elasticity, there is a fear that a stress occurred when the the photovoltaic element or/and the electric connection terminals are expanded or shrunk due to

a sudden change in the environmental temperature or when the solar cell module is deformed due to an external force applied thereto is not sufficiently absorbed to damage the photovoltaic element or to cause a removal between the
5 photovoltaic element and the filler. Further, in the case where the filler is poor in adhesion, there is a fear that a removal is liable to occur between the filler and the photovoltaic element or between the filler and the surface protective member.

10 Hence, there has not been provided a desirable organic material which has a highly improved weatherability and is highly transparent and which is capable of desirably attaining the requirements desired for the surface coating member for a solar cell module.

15 SUMMARY OF THE INVENTION

Three of the five present inventors and one other person have previously proposed a photoelectric conversion module (a solar cell module in other words) comprising a photovoltaic element enclosed by a transparent resin filler
20 and a transparent surface protective layer disposed on the light receiving face side of the photovoltaic element, wherein the transparent resin filler is composed of a fluorine-containing polymer resin (1) having a fluorine content of 20 to 40 wt.% and which has been cross-linked
25 with a peroxide, and the transparent surface protective

layer is composed of a fluorine-containing polymer resin
(ii) having a fluorine content of 40 to 60 wt.% (see,
Japanese patent application No. 216048/1993 (filed August
31, 1993) and Japanese patent application No. 180129/1994
5 (filed August 1, 1994)). This solar cell module
(hereinafter referred to as "prior solar cell module") is
aimed at eliminating the occurrence of cloudiness or
yellowing at the thermoplastic resin as the filler in the
conventional solar cell module due to incident light
10 wherein the occurrence of said cloudiness or yellowing
makes the thermoplastic resin to be poor in light
transmittance, resulting in reducing the photoelectric
conversion efficiency of the solar cell module.

As a result of extensive studies by the present
15 inventors in order to improve the prior solar cell module,
it was found that the prior solar cell module has some
problems which are necessary to be solved. That is,
firstly, the fluorine-containing polymer resin (i) as the
filler is essentially inferior to a polyolefin series
20 thermoplastic resin (hereinafter referred to as
polyolefinic thermoplastic resin) such as EVA in terms of
adhesion. In fact, the fluorine-containing polymer resin
(i) as the filler has a tendency of causing a reduction in
its adhesion particularly with the photovoltaic element
25 under such severer conditions as in a ultra-accelerated

moisture deterioration test using pressurized high temperature steam (that is, a so-called pressure cooker test). When such reduction in the adhesion of the filler is liable to cause a removal between the filler and the
5 photovoltaic element when the solar cell module is continuously exposed to sunlight under severer environmental conditions with a high humidity and with frequent changes in the environmental temperature, wherein such removal causes a clearance between the filler and the
10 photovoltaic element.

Now, the solar cell module comprises the photovoltaic element enclosed by resin materials only as above described. Thus, it is almost impossible to make the solar cell module to be completely free of moisture invasion.
15 Therefore, when moisture is invaded into the inside of the solar cell module, it is liable to accumulate in the aforesaid clearance, wherein the moisture thus accumulated is contacted with the collecting electrode constituted by a highly conductive metal such as Ag of the photovoltaic
20 element to cause a so-called migration phenomenon of repeatedly conducting ionization and precipitation for the conductive metal to grow an independent metal layer. The metal layer thus grown functions to electrically short-circuit the photovoltaic element, whereby the performance
25 of the photovoltaic element is remarkably reduced. Hence,

in order to attain a high reliability for the solar cell module so that it can be desirably used in outdoors even under severer environmental conditions, it is necessary to make the filler to be free not only from the occurrence of
5 cloudiness or yellowing but also from the occurrence of such removal between the filler and the photovoltaic element in the pressure cooker test.

The prior solar cell module includes an embodiment wherein the fluorine-containing polymer resin as the
10 filler is added with a UV absorber in order to improve the light resistance of the filler and in order to prevent other members situated thereunder from suffering an influence by ultraviolet rays. However, the UV absorber contained in the filler is liable to gradually volatilize
15 when the solar cell module is continuously exposed to sunlight in outdoors over a long period of time. In addition, when the fluorine-containing polymer resin as the filler is of a fluorine content of 40 wt.% or less, it is liable to gradually deteriorate when it continuously
20 receives irradiation of ultraviolet rays. And even when it contains a UV absorber, there is a tendency that the fluorine-containing polymer resin becomes yellowed or clouded as the UV absorber is volatilized, wherein other members situated thereunder are not sufficiently prevented
25 from suffering from negative influences by ultraviolet

rays.

Other than the above problems, the prior solar cell module has a further problem in that the fluorine-containing polymer resin is apparently more expensive in
5 comparison with a polyolefinic thermoplastic resin such as EVA used as the filler in the conventional solar cell module and in addition to this, the fluorine-containing polymer resin in a large amount is required to use for the production thereof, and because of this, it is unavoidably
10 costly.

In view of these problems found in the prior solar cell module, the present inventors made studies of the possibility of obtaining a highly reliable solar cell module using an inexpensive generally available
15 polyolefinic thermoplastic resin having a relatively high adhesion such as EVA as the filler. However, such polyolefinic thermoplastic resin, specifically, EVA has a problem in that it is liable to deteriorate when it receives irradiation of ultraviolet rays, wherein it is
20 yellowed or clouded. In order to eliminate this problem, it is considered to dispose a surface protective layer capable of preventing ultraviolet rays from passing therethrough on the filler composed of the polyolefinic thermoplastic resin (for example, EVA).

25 For this purpose, there can be considered the use of

an acrylic resin film incorporated with a UV absorber or a polycarbonate resin film incorporated with a UV absorber as the surface protective layer. However, although these resin films are effective in view of simply protecting the filler
5 composed of a polyolefinic thermoplastic resin such as EVA from being influenced by ultraviolet rays, any of them is not satisfactory in weatherability in that any of them is liable to gradually yellow and lose the transparency when continuously exposed to sunlight over a long period of
10 time. Hence, any of them is not suitable to be used as the surface protective layer for a solar cell module.

Other than the above, there can be considered the use of a film comprised of a light-resistant fluoro-resin added with a UV absorber as the surface protective layer. As such
15 film, there are commercially available a PVF (polyvinyl fluoride) film added with a UV absorber and a PVDF (polyvinylidene fluoride) film added with a UV absorber.

However, any of these films is highly crystalline and poor in transparency. Thus, it is understood that the use
20 of any of these films as the surface protective layer for a solar cell module makes the resulting solar cell module to be such that prevents light from efficiently impinging into the inside of the solar cell module and thus, is insufficient in terms of the photoelectric conversion
25 efficiency. In addition to this, in the case of using the

PVF film added with a UV absorber, since said PVF film is of a remarkably low heat distortion temperature, there is a fear for said PVF film as the surface protective layer of the solar cell module to suffer from not only a distortion
5 (or a deformation) but also a reduction in mechanical strength and also a fear of causing a removal between the PVF film and the filler situated thereunder when the solar cell module is used in outdoors under high temperature environmental condition.

10 Now, such film comprised of a light-resistant fluoro-resin added with a UV absorber is obtained by mixing a light-resistant fluoro-resin and a given UV absorber to obtain a mixture, heating said mixture at a given temperature at which said fluoro-resin is fused to obtain a
15 fused product, and subjecting the fused product to extrusion molding.

In this case, commercially available fluoro-resins are mostly of more than 200 °C in melting point and because of this, the UV absorber is liable to decompose or volatilize
20 at the temperature of fusing the fluoro-resin used, wherein it is difficult to obtain a fluoro-resin film having a desirable function of absorbing ultraviolet rays.

Presently, there has not provided a fluoro-resin film having a desirable ultraviolet-screening function which can
25 be used as the surface protective layer for a solar cell

module. It is a matter of course that a solar cell module having a surface protective layer comprising such fluororesin film has not provided.

The present inventors made extensive studies in order
5 to make it possible to desirably use a high fluorine content-bearing fluororesin excelling in weatherability, heat resistance and stain resistance and having an excellent transparency as the surface protective layer for a solar cell module. The present inventors prepared a film
10 sample by providing a film of a high fluorine content-bearing fluororesin (ETFE (ethylene-tetrafluoroethylene copolymer), PCTFE (poly(chlorotrifluoroethylene copolymer)), ECTFE (ethylene-chlorotrifluoroethylene copolymer), PFA (tetrafluoroethylene-perfluoroalkylvinylether copolymer), or
15 FEP (tetrafluoroethylene-hexafluoropropylene copolymer)) and incorporating a given UV absorber into the fluororesin film by means of the conventional dyeing manner or thermal diffusion manner. Using the resultant film sample, there was prepared a solar cell module comprising a photovoltaic
20 element enclosed by a filler composed of a polyolefinic thermoplastic resin and a surface protective layer comprising said fluororesin film sample disposed on said filler. The resultant solar cell module was examined in various viewpoints. As a result, there were obtained the
25 following findings. That is, there is ensured a sufficient

adhesion not only between the photovoltaic element and the filler but also between the filler and the surface protective layer; the photovoltaic element is maintained in a desirable state without being deteriorated even upon
5 repeated use in outdoors over a long period time without not only the filler but also the surface protective layer being negatively influenced by ultraviolet rays; the solar cell module excels in weatherability, moisture resistance, heat resistance and abrasion resistance; and the solar cell
10 module continuously exhibits a desirable photoelectric conversion efficiency without being deteriorated even upon repeated use over a long period of time under severe environmental conditions of high temperature and high humidity. The present invention has been accomplished based
15 on these findings.

An embodiment of the present invention provides

~~A principal object of the present invention is to~~

~~provide~~ a highly reliable solar cell module having an improved surface protective layer comprising a specific fluoro-resin resin film containing a UV absorber dispersed
20 therein which is hardly deteriorated even upon continuous exposure to sunlight over a long period of time and which allows light to effectively pass therethrough into the inside so that the photovoltaic element effectively exhibits a desirable photoelectric conversion efficiency.

embodiment of the present invention provides

25 Another ~~object of the present invention is to provide~~



a highly reliable solar cell module having an improved surface protective layer disposed on a filler composed of a polyolefinic thermoplastic resin by which a photovoltaic element is enclosed, said surface protective layer
5 comprising a specific fluoro-resin resin film containing a UV absorber dispersed therein, wherein said surface protective layer effectively prevents said polyolefinic thermoplastic resin filler from being yellowed or clouded by ultraviolet rays even upon continuous exposure to
10 sunlight over a long period of time and allows light to effectively arrive in the photovoltaic element so that a desirable photoelectric conversion efficiency is provided.

embodiment of the present invention provides
A further ~~object of the present invention is to~~

provide a highly reliable solar cell module having an
15 improved surface protective layer disposed on a filler composed of a polyolefinic thermoplastic resin by which a photovoltaic element is enclosed, said surface protective layer comprising a specific fluoro-resin resin film containing a UV absorber dispersed therein, wherein a
20 sufficient adhesion is ensured not only between the photovoltaic element and the filler but also between the filler and the surface protective layer, the surface protective layer effectively prevents the filler from being yellowed or clouded by ultraviolet rays even upon
25 continuous exposure to sunlight over a long period of time



and allows light to effectively arrive in the photovoltaic element so that a desirable photoelectric conversion efficiency is provided.

embodiment of the present invention provides
A further ~~object of the present invention is to~~

5 ~~provide~~ a highly reliable solar cell module having an improved surface protective layer disposed on a filler composed of a polyolefinic thermoplastic resin containing a UV absorber by which a photovoltaic element is enclosed, said surface protective layer comprising a specific
10 fluororesin resin film containing a UV absorber dispersed therein, wherein a sufficient adhesion is ensured not only between the photovoltaic element and the filler but also between the filler and the surface protective layer, the surface protective layer effectively prevents the UV
15 absorber contained in the filler from being volatilized so that the filler is not deteriorated even upon continuous exposure to sunlight over a long period of time and allows light to effectively arrive in the photovoltaic element so that a desirable photoelectric conversion efficiency is
20 provided.

embodiment of the present invention provides
A further ~~object of the present invention is to~~

~~provide~~ a highly reliable solar cell module in which the filler is comprised of a conventional polyolefinic thermoplastic resin which can be produced at a reduced
25 production cost.



BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic cross-sectional view illustrating the constitution of an example of a solar cell module according to the present invention.

5 FIG. 2(a) is a schematic cross-sectional view illustrating the constitution of an example of a photovoltaic element which can be used in the present invention.

FIG. 2(b) is a schematic plan view illustrating a
10 light receiving face of the photovoltaic element shown in FIG. 2(a).

FIG. 3 is a schematic cross-sectional view illustrating the constitution of another example of a solar cell module according to the present invention.

15 FIG. 4 is a schematic cross-sectional view illustrating the constitution of a solar cell module for comparison purposes.

DESCRIPTION OF THE INVENTION AND PREFERRED

EMBODIMENTS

20 ~~The present invention is to eliminate the foregoing problems in the prior art and also in the foregoing prior solar cell module and to attain the above described objects.~~

A typical embodiment of the solar cell module
25 according to the present invention comprises (a) a



photovoltaic element comprising a substrate, and a photoelectric conversion layer with at least a pair of electrodes disposed on said substrate, (b) a transparent resin filler layer, (c) a transparent surface layer, and (d) a reinforcing member, said transparent resin filler layer (b) and said transparent surface layer (c) being disposed in the named order on the light receiving face of said photovoltaic element, and said reinforcing member (d) being disposed on the rear face of said photovoltaic element, wherein said transparent surface layer comprises a film composed of a fluoro-resin with a high fluorine content selected from the group consisting of ethylene-tetrafluoroethylene copolymer (ETFE), poly(chlorotrifluoroethylene copolymer) (PCTFE), ethylene-chlorotrifluoroethylene copolymer (ECTFE), tetrafluoroethylene-perfluoroalkylvinylether copolymer (PFA), tetrafluoroethylene-hexafluoropropylene copolymer (FEP) and which contains a ultraviolet absorber (a UV absorber) dispersed therein and said filler layer (b) comprises a resin selected from the group consisting of polyolefinic resins, butyral resins, urethane resins, and silicone resins.

The UV absorber bearing fluoro-resin film is one formed by a dyeing manner wherein a resin film of ETFE, PCTFE, ECTFE, PFA or FEP is immersed in an organic solvent



such as xylene or toluene containing a given UV absorber dissolved therein, if necessary, while heating, to thereby incorporate said UV absorber into said resin film, followed by drying the resultant at a desired temperature to
5 volatilize the solvent, or a thermal diffusion manner wherein a resin film of ETFE, PCTFE, ECTFE, PFA or FEP is placed in a vacuum chamber containing solid particles of a given UV absorber, the solid particles of the UV absorber are heated to generate a vapor of the UV absorber wherein
10 the resin film is exposed to said vapor, whereby the UV absorber is incorporated into the resin film.

The transparent resin filler layer is typically composed of a polyolefin series thermoplastic resin such as ethylene-vinyl acetate copolmer (EVA), ethylene-methyl
15 acrylate copolymer (EMA), or ethylene-ethyl acrylate copolymer (EEA).

The UV absorber-bearing fluoro-resin film having an improved ultraviolet-screening function as the transparent surface layer (that is, the surface protective layer) in
20 the solar cell module according to the present invention is highly transparent and excels in physical strength and in adhesion with a thermoplastic resin, especially, a polyolefin series thermoplastic resin. Because of this, the use of the UV absorber-bearing fluoro-resin film having an
25 improved ultraviolet-screening function as the surface

protective layer makes it possible to effectively use a polyolefin series thermoplastic resin such as EVA, EMA, or EEA as the filler to enclose the photovoltaic element wherein there is ensured a sufficient adhesion between the photovoltaic element and the filler and also between the filler and the surface protective layer. And although the filler is composed such polyelecifin series thermoplastic resin which is liable to yellow or cloud with irradiation of ultraviolet rays, the filler is maintained in a stable state without being yellowed or clouded because of the presence of the specific surface protective layer thereon even upon continuous exposure to sunlight over a long period of time.

The solar cell module according to ^{an embodiment of} the present invention is highly reliable, excels in weatherability and in resistance to light degradation, and continuously exhibits a desirable photoelectric conversion efficiency without being deteriorated even upon repeated use over a long period of time under severe environmental conditions of high temperature and high humidity. Further, the solar cell module excels in resistance to light degradation, moisture resistance, heat resistance and abrasion resistance.



In the following, detailed description will be made of the solar cell module according to the present invention.

FIG. 1 is a schematic cross-sectional view illustrating the constitution of an example of a solar cell module according to the present invention.

In FIG. 1, reference numeral 101 indicates a photovoltaic element, reference numeral 102 a transparent or substantially transparent filler (this filler will be hereinafter referred to as surface side filler), reference numeral 103 a transparent or substantially transparent film which is positioned at the outermost surface (this film will be hereinafter referred to surface protective film or surface protective layer), reference numeral 104 a filler on the rear side of the photovoltaic element 101 (this filler will be hereinafter referred to as backside filler), reference numeral 105 a back face protective film, and reference numeral 106 a back face reinforcing member.

In the solar cell module shown in FIG. 1, light is impinged through the side of the surface protective layer 103, and the light impinged passes through the surface protective layer 103 and the filler 102 to arrive in the photovoltaic element 101. A photoelectromotive force generated in the photovoltaic element 101 is outputted through outputting terminals (not shown).

The photovoltaic element 101 comprises at least a semiconductor active layer as a photoelectric conversion member disposed on an electroconductive substrate.

FIG. 2(a) is a schematic cross-sectional view illustrating the constitution of such photovoltaic element.

FIG. 2(b) is a schematic plan view illustrating the light receiving face of the photovoltaic element shown in FIG. 2(a).

In FIGs. 2(a) and 2(b), reference numeral 200 indicates the entire of a photovoltaic element, reference numeral 201 an electroconductive substrate, reference numeral 202 a back reflecting layer, reference numeral 203 a semiconductor active layer, reference numeral 204 a transparent and conductive layer, reference numeral 205 a collecting electrode (or a grid electrode), reference numeral 206a a power outputting terminal on the positive side, reference numeral 206b a power outputting terminal on the negative side, reference numeral 207 an electroconductive adhesive, reference numeral 208 a solder, and reference numeral 209 an insulating member.

As apparent from FIGs. 2(a) and 2(b), the photovoltaic element 200 comprises the back reflecting layer 202, the semiconductor active layer 203, the transparent and conductive layer 204, and the collecting electrode 205 disposed in this order on the

electroconductive substrate 201, wherein the outputting terminal 206a is electrically connected to the collecting electrode 205 by means of the electroconductive adhesive 207 and it is extending from the collecting electrode 205 while being insulated by means of the insulating member 209, and the outputting terminal 206b is electrically connected to the electroconductive substrate 201 by means of the solder 208. In this configuration, the positive side power outputting terminal and the negative side power outputting terminal may be changed into a negative side power outputting terminal and a positive side power outputting terminal depending upon the constitution of the semiconductor active layer.

Each of the constituents of the solar cell module according to ^{certain embodiments} the present invention will be detailed.

Electroconductive Substrate

The electroconductive substrate 201 serves not only as a substrate for the photovoltaic element and also as a lower electrode. As for the electroconductive substrate 201, there is no particular restriction as long as it has an electroconductive surface. Specifically, it may be an electroconductive member composed of a metal such as Ta, Mo, W, Cu, Ti, Al, or the like, or an electroconductive member composed of an alloy of these metals as stainless steel. Other than these, the electroconductive substrate



may comprise a carbon sheet or a Pb-plated steel sheet. Alternatively, the electroconductive substrate may be a film or sheet made of a synthetic resin or a sheet made of a ceramic. In this case, the substrate is deposited with an
5 electroconductive film of SnO_2 , ZnO_2 , ITO, or the like on the surface thereof.

Back Reflecting Layer

The back reflecting layer 202 disposed on the electroconductive substrate 201 may comprise a metal layer,
10 a metal oxide layer, or a two-layered structure comprising a metal layer and a metal oxide layer. The metal layer may be composed of a metal such as Ti, Cr, Mo, W, Al, Ag, Ni, or the like. The metal oxide layer may comprise any of oxides of said metals, or other metal oxide such as ZnO,
15 SnO_2 , or the like.

The back reflecting layer 202 is desired to have a roughened surface in order to make incident light to be effectively utilized.

The back reflecting layer 202 may be properly formed
20 by a conventional film-forming technique such as resistant heating evaporation, electron beam evaporation, or sputtering.

Semiconductor Active Layer

The semiconductor active layer 203 functions to
25 conduct photoelectric conversion. The semiconductor active

layer may be composed of a single crystal silicon semiconductor material, a non-single crystal silicon semiconductor material such as an amorphous silicon semiconductor material (including a microcrystalline silicon semiconductor material) or polycrystalline silicon semiconductor material, or a compound semiconductor material. In any case, the semiconductor active layer comprised of any of these semiconductor materials may be of a stacked structure with a pin junction, a pn junction or a shottky type junction. Specific examples of the compound semiconductor material are CuInSe_2 , CuInS_2 , GaAs, $\text{CdS/Cu}_2\text{S}$, CdS/CdTe , CdS/InP , $\text{CdTe/Cu}_2\text{Te}$, and the like.

The semiconductor active layer comprised of any of the above mentioned semiconductor materials may be properly formed by a conventional film-forming technique. For instance, the non-single crystal silicon semiconductor active layer may be formed by a conventional chemical vapor phase growing technique such as plasma, CVD or light-induced CVD using proper film-forming raw material gas capable of imparting silicon atoms such as silane gas or a conventional physical vapor phase growing technique such as sputtering using a Si-target. The semiconductor active layer composed of a polycrystalline silicon semiconductor material may be formed by a conventional polycrystalline silicon film-forming manner of providing a fused silicon

material and subjecting the fused silicon material to film-making processing or another conventional polycrystalline silicon film-forming manner of subjecting an amorphous silicon material to heat treatment.

5 The semiconductor active layer composed of any of the above mentioned compound semiconductor materials may be properly formed by a conventional ion plating, ion beam deposition, vacuum evaporation, sputtering, or electrolytic technique in which a precipitate is caused by way of
10 electrolysis of a desired electrolyte.

Transparent and Conductive Layer

The transparent and conductive layer 204 functions as an upper electrode. The transparent and conductive layer may comprise In_2O_3 , SnO_2 , ITO ($\text{In}_2\text{O}_3\text{-SnO}_2$), ZnO , TiO_2 , or
15 Cd_2SnO_4 . Other than this, it may comprise a crystalline semiconductor layer doped with an appropriate impurity with a high concentration.

The transparent and conductive layer constituted by any of the above mentioned materials may be properly formed
20 by a conventional resistant heating evaporation, electron beam evaporation, sputtering, spraying, or CVD.

The above described impurity-doped crystalline semiconductor layer as the transparent and conductive layer may be properly formed by a conventional impurity-diffusion
25 film-forming method.

Collecting Electrode

The collecting electrode (or the grid electrode) 204 serves to effectively collect an electric current generated by virtue of a photoelectromotive force on the transparent and conductive layer 204. The collecting electrode is desired to be in the form of a comb shape.

The collecting electrode may comprise a metal such as Ti, Cr, Mo, W, Al, Ag, Ni, Cu, Sn, or an alloy of these metals. Alternatively, the collecting electrode may be formed of an electroconductive paste. The electroconductive paste can include electroconductive pastes comprising powdery Ag, Au, Cu, Ni, or carbon dispersed in an appropriate binder resin. The binder resin herein can include polyester, epoxy resin, acrylic resin, alkyd resin, polyvinyl acetate, rubber, urethane resin, and phenol resin.

The collecting electrode may be properly formed by a conventional sputtering using a mask pattern, resistant heating evaporation, or CVD. It may be also properly formed by a manner of depositing a metal film over the entire surface and subjecting the metal film to etching treatment to form a desired pattern, a manner of directly forming a grid electrode pattern by means of light-induced CVD, or a manner of forming a negative pattern corresponding to a grid electrode pattern and subjecting the resultant to

plating treatment.

The formation of the collecting electrode using the above described electroconductive paste can be conducted by subjecting the electroconductive paste to screen printing.

5

Power Outputting Terminals

The power outputting terminals 206a and 206b serve to output an electromotive force. The outputting terminal 206a is electrically connected to the collecting electrode 205 by means of the electroconductive paste 207 in FIG. 2(a).

10 Alternatively, the electrical connection in this case may be conducted by using an appropriate connecting metal body and an electroconductive paste or solder.

The outputting terminal 206b is electrically connected to the electroconductive substrate by means of the solder 208 in FIG. 2(a). Alternatively, the electrical connection in this case may be conducted by spot welding or soldering an appropriate metal body such as copper tab.

There are provided a plurality of photovoltaic elements having the above constitution, and they are integrated in series connection or in parallel connection depending upon a desired voltage or electric current. It is possible to dispose the integrated body on an insulating member such that a desired voltage or electric current can be obtained.

25

Now, description will be made of other constituents

than the photovoltaic element 101 in FIG. 1.

Back Face Protective Film

The back face protective film 105 in FIG. 1 is used for the purpose of electrically isolating the
5 electroconductive substrate 201 of the photovoltaic element from external materials including the back face reinforcing member.

The back face protective film 105 is desired to be composed of a material capable of sufficiently electrically
10 isolating the electroconductive substrate and which excels in durability, withstands a thermal expansion and thermal contraction, and excels in flexibility. Specific examples of such material are nylon, polyethylene terephthalate (PET), and the like.

Backside Filler

The backside filler 104 serves to ensure the adhesion
between the photovoltaic element 101 and the back face protective film 105. The backside filler 104 is desired to comprise a material capable of sufficiently ensuring the
20 adhesion between the electroconductive substrate of the photovoltaic element and the back face protective film and which excels in durability, withstands a thermal expansion and thermal contraction, and excels in flexibility. Specific examples of such material are hot-melt materials

such as EVA (ethylene-vinyl acetate copolymer) and polyvinyl butyral, and epoxy adhesives. Other than these, double-coated tapes may be also used.

When the solar cell module is integrated to a roof of a building in order to use in outdoors, it is desired to use a material capable of being crosslinked as the backside fill in order to attain a sufficient adhesion between the electroconductive substrate of the photovoltaic element and the back face protective film so that the solar cell module can endure upon repeated use at high temperature.

Incidentally, EVA can be crosslinked with the use of an organic peroxide.

Back Face Reinforcing Member

The back face reinforcing member 106 is disposed outside the back face protective film 105 as shown in FIG. 1, for the purposes of improving the mechanical strength of the solar cell module and preventing the solar cell module from being distorted or warped due to a change in the environmental temperature. The back face reinforcing member may comprise a steel plate, a plastic plate, or a fiber-glass reinforced plastic plate (or a so-called FRP plate).

Surface Side Filler

The surface side filler 102 serves to cover the irregularities at the surface of the photovoltaic element, to prevent the photovoltaic element from being influenced

by external factors such as temperature changes or/and humidity changes in the external environment, impacts externally applied, or the like and to attain a sufficient adhesion between the photovoltaic element and the surface
5 protective layer. Thus, the surface side filler is required to excel especially in weatherability, adhesion, packing property, heat resistance, cold resistance, and impact resistance. In order for the surface side filler to meet these requirements, the surface side filler is comprised of
10 a resin selected from the group consisting of polyolefinic resins, butyral resins, urethane resins, and silicone resins. Specific examples of said polyolefinic resin are ethylene-vinyl acetate copolymer (EVA), ethylene-methyl acrylate copolymer (EMA), ethylene-ethyl acrylate
15 copolymer (EEA). Of these resins, EVA is the most desirable because it exhibits well-balanced physical properties suitable for a solar cell when used as the surface side filler.

Any of the above mentioned resins usable as the
20 surface side filler (this resin will be hereinafter referred to as filler resin) is low in heat deformation temperature and it is liable to readily deform or creep at a high temperature. Because of this, the filler resin is desired to be crosslinked with an appropriate crosslinking
25 agent so that it has an increased heat resistance. As the

crosslinking agent, there can be mentioned organic peroxides.

The crosslinking of the filler resin used as the surface side filler using such organic peroxide as the crosslinking agent is performed by way of drawing hydrogen atoms or halogen atoms in the resin by virtue of free radicals generated from the organic peroxide to form C-C bonds.

In order to make the organic peroxide to generate such free radicals upon crosslinking the filler resin, the organic peroxide is desired to be activated by means of the thermal decomposition process, redox decomposition process, or ion decomposition process. Of these processes, the thermal decomposition process is the most appropriate.

The organic peroxide usable as the crosslinking agent in the present invention can include hydroperoxide, dialkyl (diallyl) peroxide, diacyl peroxide, peroxyketal, peroxyester, peroxycarbonate, and ketone peroxide.

Specific examples of the hydroperoxide are t-butyl hydroperoxide, 1,1,3,3-tetramethylbutyl hydroperoxide, p-menthane hydroperoxide, cumene hydroperoxide, p-cymene hydroperoxide, diisopropylbenzene hydroperoxide, 2,5-dimethylhexane-2,5-dihydroperoxide, cyclohexane hydroperoxide, and 3,3,5-trimethylhexanone hydroperoxide.

Specific examples of the dialkyl (diallyl) peroxide

are di-t-butyl peroxide, dicumyl peroxide, and t-butylcumyl peroxide.

Specific examples of the diacyl peroxide are diacetyl peroxide, dipropionyl peroxide, diisobutyryl peroxide, 5 dioctanoyl peroxide, didecanoyl peroxide, dilauroyl peroxide, bis(3,3,5-trimethylhexanoyl)peroxide, benzoyl peroxide, m-toluyyl peroxide, p-chlorobenzoyl peroxide, 2,4-dichlorobenzoyl peroxide, and peroxy succinic acid.

Specific examples of the peroxyketal are 2,2-di-t-
10 butylperoxybutane, 1,1-di-t-butylperoxycyclohexane, 1,1-di-(t-butylperoxy)-3,3,5-trimethylcyclohexane, 2,5-dimethyl-2,5-di(t-butylperoxy)hexane, 2,5-dimethyl-2,5-di(t-butylperoxy)hexin-3,1,3-di(t-butylperoxyisopropyl)benzene, 2,5-dimethyl-2,5-dibenzoylperoxyhexane, 2,5-dimethyl-2,5-
15 di(peroxybenzoyl)hexin-3, and n-butyl-4,4-bis(t-butylperoxy)valerate.

Specific examples of the peroxyester are t-butylperoxy acetate, t-butylperoxyisobutylate, t-butylperoxypivalate, t-butylperoxyneodecanoate, t-
20 butylperoxy-3,3,5-trimethylhexanoate, t-butylperoxy-2-ethylhexanoate, (1,1,3,3-tetramethylbutylperoxy)-2-ethylhexanoate,
t-butylperoxylaurate, t-butylperoxybenzoate, di(t-butylperoxy)adipate, 2,5-dimethyl-2,5-di(peroxy-2-
25 ethylhexanoyl)hexane, di(t-butylperoxy)isophthalate,

t-butylperoxymalate, and acetylcyclohexylsulfonylperoxide.

Specific examples of the peroxy carbonate are
t-butylperoxyisopropylcarbonate, di-n-
propylperoxydicarbonate, di-sec-butylperoxydicarbonate,
5 di(isopropylperoxy)dicarbonate,
di(2-ethylhexylperoxy)dicarbonate,
di(2-ethoxyethylperoxy)dicarbonate,
di(methoxypropylperoxy)carbonate, di(3-methoxybutylperoxy)
dicarbonate, and
10 bis-(4-t-butylcyclohexylperoxy)dicarbonate.

Specific examples of the ketone peroxide are
acetylacetone peroxide, methyl ethyl ketone peroxide,
methylisobutyl ketone peroxide, and cyclohexanone peroxide.

Other than these compounds, vinyltris(t-
15 butylperoxy)silane may be also used.

The amount of such organic peroxide as the
crosslinking agent to be added to the filler resin as the
surface side filler is desired to be preferably in the
range of from 0.5 to 5 parts by weight versus 100 parts by
20 weight of the filler resin.

In the case where the amount of the organic peroxide
added is less than 0.5 part by weight, the filler resin is
not sufficiently crosslinked. In this case, the filler is
liable to deform due to heat applied, wherein the filler is
25 difficult to be maintained in a desired form. On the other

hand, in the case where the amount of the organic peroxide added exceeds 5 parts by weight, a certain amount of not only the organic peroxide but also decomposed products thereof is liable to remain in the filler, resulting in making the filler to be insufficient in terms of heat resistance and weatherability (light resistance).

The organic peroxide as the crosslinking agent may be used together with the filler resin as the surface side filler upon thermocompression-bonding the filler, wherein the filler is bonded to the photovoltaic element and also to the surface protective layer while being crosslinked with the organic peroxide. Conditions of the temperature and the period of time for the thermocompression-bonding treatment in this case may be properly determined depending upon the thermodecomposition temperature property of the organic peroxide used. However, in general, these conditions are properly determined to be such that 90% or more or preferably, 95% or more of the organic peroxide in the filler is thermally decomposed, wherein the filler is subjected to themocompression-boding to the photovoltaic element and to the surface protective layer while being crosslinked.

The crosslinked degree of the filler resin can be examined by observing the gel content of the filler resin. In order to prevent the filler resin from being deformed,

it is desired for the filler resin to be crosslinked such that the gel content is 70 wt.% or more.

In order to efficiently crosslink the filler resin, it is desired to use a crosslinking assistant such as
5 triarylcyanurate in addition to the organic peroxide as the crosslinking agent. In this case, the amount of the crosslinking assistant to be added is desired to be in the range of from 1 to 5 parts by weight versus 100 parts by weight of the filler resin.

10 The surface side filler comprised of the above described filler resin essentially excels in weatherability. However, in order to attain a further improved weatherability for the surface side filler and also in order to effectively protect a layer situated
15 thereunder, it is possible for the surface side filler to contain an appropriate UV absorber. As such UV absorber, there can be mentioned commercially available chemical compounds usable as a UV absorber. In a preferred embodiment, it is desired to use a UV absorber having a low
20 volatility.

Further, in order to improve the light resistance of the surface side filler, it is possible for the surface side filler to contain an appropriate light stabilizer. Further in addition, in order to improve the heat
25 resistance of the surface side filler, it is possible for

the surface side filler to contain an appropriate antioxidant.

Now, in the case where the solar cell module is used under severer environmental conditions, it is desired to
5 have a marked adhesion between the surface side filler and the photovoltaic element and also between the surface side filler and the surface protective layer. In order for the surface side filler to attain such adhesion, it is effective to incorporate an appropriate silane coupling
10 agent to the surface side filler.

Specific examples of such silane coupling agent are vinyltrichlorosilane, vinyltris(β -methoxy)silane, vinyltriethoxysilane, vinyltrimethoxysilane, γ -metacryloxypropyltrimethoxysilane, β -(3,4-
15 epoxy cyclohexyl)ethyltromethoxysilane, γ -glycidoxypropylmethyldiethoxysilane, N- β (aminoethyl) γ -aminopropyltrimethoxysilane, N- β (aminoethyl) γ -aminopropylmethyldimethoxysilane, γ -aminopropyltriethoxysilane,
20 N-phenyl- γ -aminopropyltrimethoxysilane, γ -mercaptopropyltrimethoxysilane, and γ -chloropropyltrimethoxysilane.

Surface Protective Layer

(or Surface Protective Film)

25 The surface protective layer 103 (or the surface

protective film) is positioned at the outermost surface of the solar cell module and because of this, it is required to excel in transparency, weatherability, water repellency, heat resistance, pollution resistance and physical
5 strength. In addition, in the case where the solar cell module is used under severe environmental conditions in outdoors, it is required for the surface protective layer to be such that it ensures the solar cell module to be sufficient enough in durability upon repeated use over a
10 long period of time. Further in addition, in order to make the solar cell module capable of being continuously used under high temperature environmental condition over a long period of time, it is desired for the surface protective layer to be formed of a resin film with a deformation
15 temperature of 70 °C or above at a pressure of 4.6 kg/cm².

In order for the surface protective layer to satisfy all these conditions, the surface protective layer comprises a film composed of a specific highly transparent fluororesin containing a UV absorber dispersed therein
20 uniformly or unevenly in the thickness direction and having a good ultraviolet-screening function.

Specific examples of the highly transparent fluororesin are ethylene-tetrafluoroethylene copolymer (ETFE), poly(chlorotrifluoroethylene) resin (PCTFE),
25 ethylene-chlorotrifluoroethylene copolymer (ECTFE),

tetrafluoroethylene-perfluoroalkylvinylether copolymer (PFA), and tetrafluoroethylene-hexafluoropropylene copolymer (FEP).

As the UV absorber, it is desired to use an UV
5 absorber having a molecular weight of 300 or more in view of preventing it from volatilizing from the surface of a film in which it is contained when the film is exposed to a high temperature. As such UV absorber, there can be mentioned commercially available aromatic organic compounds
10 having a molecular weight of 300 or more usable as a UV absorber. Said aromatic organic compounds can include benzophenone series compounds, and benzotriazole series compounds.

Specific examples of such benzophenone series
15 compound are 2,4-hydroxybenzophenone, 2-hydroxy-4-methoxybenzophenone, 2-hydroxy-4-octoxybenzophenone, 2-hydroxy-4-dodecyloxybenzophenone, 2,2'-hydroxy-4-methoxybenzophenone, 2'2'-dihydroxy-4,4'-dimethoxybenzophenone, 2-hydroxy-4-methoxy-5-
20 sulfobenzophenone, and bis(2-methoxy-4-hydroxy-5-benzophenone)methane.

Specific examples of such benzotriazole series
compound are 2-(2-hydroxy-5-tert-octylphenyl)benzotriazole,
2-(2'-hydroxy-5'-methylphenyl)benzotriazole,
25 2-(2'-hydroxy-5'-tert-butylphenyl)benzotriazole,

2-(2'-hydroxy-3',5'-di.tert-butylphenyl)benzotriazole,
2-(2'-hydroxy-3'-tert-butyl-5-methylphenyl)-5-
chlorobenzotriazole, 2-(2'-hydroxy-3',5'-di.tert-
butylphenyl)-5-chlorobenzotriazole, 2-(2'-hydroxy-3',5'-
5 di.tert-amylphenyl)benzotriazole, 2-[2'-hydroxy-3'-
(3",4",5",6"-tetrahydrophthalimidomethyl)-5'-
methylphenyl]benzotriazole, and 2,2,-methylenebis[4-
(1,1,3,3-tetramethylbutyl)-6-(2H-benzotriazole-2-
yl)phenol].

10 The film composed of any of the above described
highly transparent fluororesins (that is, ETFE, PCTFE,
ECTFE, PFA, or FEP) containing a UV absorber dispersed
therein uniformly or unevenly in the thickness direction
and having a good ultraviolet-screening function as the
15 surface protective layer according to the present invention
may be formed by a so-called dyeing manner wherein a given
fluororesin film is immersed in an organic solvent
containing a given UV absorber dissolved therein to
incorporate the UV absorber into the fluororesin film or a
20 so-called thermal diffusion manner wherein a given
fluororesin film is exposed to a vapor of a given UV
absorber to incorporate the UV absorber into the
fluororesin film.

this embodiment
In ~~the present invention~~, the incorporation of a
25 given UV absorber into a film composed of any of the above



described highly transparent fluororesins (this film will be hereinafter referred to as fluororesin film) is conducted by firstly providing said fluororesin film and incorporating a desired UV absorber selected from those UV absorbers above mentioned into the fluororesin film in accordance with the above described dyeing manner or thermal diffusion manner. The reason for this is due to the facts that the conventional film-forming manner employed in the case of forming a film from polyvinyl fluoride wherein a latent solvent is used cannot be used because the highly transparent fluororesin (ETFE, PCTFE, ECTFE, PFA, or FEP) used in ^{this embodiment of} the present invention is insoluble in the latent solvent although the UV absorber is soluble therein; and other conventional extrusion molding manner of forming a film from a resin wherein the resin is fused at a temperature of higher than 200 °C and followed by conducting extrusion molding treatment cannot be also used because the UV absorbent is readily decomposed or volatilized when it is heated at such high temperature of 200 °C or above.

As for the amount of the UV absorber to be incorporated into the highly transparent fluororesin as the surface protective layer ^{this embodiment} in the present invention, there is not any particular limitation therefor as long as the UV absorber contained is well compatible with the fluororesin.



However, in order for the surface protective layer to exhibit a desirable ultraviolet-screening function while selectively absorbing ultraviolet rays, it is desired to be made such that the light transmittance of the surface protective layer comprising (a) a film composed of any of the foregoing fluororesins containing a given UV absorber when measured with light having a wavelength of 300 to 350 nm is of 0.8 or less in terms of a relative value to that of (b) a film composed of the same fluororesin as the film (a) but containing no UV absorber when measured with light having a wavelength of 300 to 350 nm wherein the latter light transmittance is set at 1 and that the light transmittance of the film (a) when measured with light having a wavelength of 400 to 1000 nm is of 0.9 or more in terms of a relative value to that of the film (b) when measured with light having a wavelength of 400 to 1000 nm wherein the latter light transmittance is set at 1. In a preferred embodiment, it is made such that the light transmittance of the film (a) when measured with light having a wavelength of 300 to 350 nm is of 0.5 or less in terms of a relative value to that of the film (b) when measured with light having a wavelength of 300 to 350 nm and that the light transmittance of the film (a) when measured with light having a wavelength of 400 to 1000 nm is of 0.9 or more in terms of a relative value to that of

the film (b) when measured with light having a wavelength of 400 to 1000 nm. When it is made such that the light transmittance of the film (a) when measured with light having a wavelength of 300 to 350 nm is of a value

5 exceeding 0.8 in terms a relative value to that of the film (b) when measured with light having a wavelength of 300 to 350 nm, there is a tendency that ultraviolet rays pass through the surface protective layer into the filler of enclosing the photovoltaic element, wherein problems are

10 liable to entail in that the filler is deteriorated while being yellowed or/and clouded due to the ultraviolet rays arrived therein to cause a removal at the interface between the filler and the surface protective layer or/and at the interface between the filler and the photovoltaic element.

15 On the other hand, when it is made such that the light transmittance of the film (a) when measured with light having a wavelength of 400 to 1000 nm is of a value of less than 0.9 in terms a relative value to that of the film (b) when measured with light having a wavelength of 400 to 1000

20 nm, there is a tendency that light in a wavelength region effective in power generation by the photovoltaic element is prevented from arriving in the photovoltaic element, resulting in making the solar cell module to be such that is low in photoelectric conversion efficiency.

25 As for the distribution state of the UV absorber in

the surface protective layer, it is possible for the UV absorber to be uniformly or unevenly distributed in the thickness direction.

In the case where the surface protective layer
5 contains the same UV absorber as that contained in the surface side filler, the absorber in the surface protective layer is desired to be unevenly distributed in the thickness direction such that the concentration distribution is enhanced in the vicinity of the interface
10 with the surface side filler. In this case, there is provided a pronounced advantage in that the UV absorber contained in the surface side filler is prevented from being diffused into the surface protective layer, whereby the weatherability of the surface side filler is always
15 ensured and in addition to this, the members situated under the surface side filler are prevented from being influenced by ultraviolet rays.

As for the thickness of the surface protective layer, it should be properly determined while having a due care
20 about the physical strength thereof and also in economical viewpoints. However, in general, it is preferably in the range of 10 to 200 μm or more preferably, in the range of 30 to 100 μm .

Now, the surface protective layer according to ^{this embodiment of} the
25 present invention provides a marked improvement in the

adhesion with the surface side filler. As for the reason for this, it can be considered such as will be described in the following. That is, when a UV absorber having a carbonyl group or/and a hydroxyl group in the molecule thereof is incorporated into the inside of the fluororesin through its surface, the UV absorber present at the outermost surface is oriented such that the carbonyl group or/and hydroxyl group are directed outward because the fluororesin has a hydrophobic nature. Particularly, the hydrophilic functional groups of the UV absorber appear at the surface of the fluororesin to make the surface of the fluororesin have improved wetting characteristics, resulting in providing a marked improvement in the adhesion with the surface side filler composed of, for example, EVA.

In order to attain a further improvement in the adhesion of the surface protective layer with the surface side filler, it is desired for the surface protective layer to be subjected to surface treatment upon its lamination to the surface side filler. The surface treatment in this case can include corona discharging treatment and plasma treatment.

The above described surface protective layer in a solar cell module according to ^{this embodiment} the present invention provides various significant advantages. That is, the UV absorber contained in the surface protective layer is



always maintained in the originally distributed state without being diffused or volatilized through the surface thereof even upon continuous exposure to light irradiation in outdoors, wherein the surface protective layer ensures
5 the surface side filler to maintain its properties without being deteriorated while preventing not only the surface side filler but also other members situated under the surface side filler from being negatively influenced by ultraviolet rays. In addition, the surface protective layer
10 always ensures a markedly improved adhesion with the surface side filler positioned under the surface protective layer, and it excels in heat resistance and physical strength, wherein it is free from a deformation in the original shape and is free from a reduction in the physical
15 strength even upon repeated use over a long period of time under severe environmental conditions.

Further, the surface protective layer has a highly improved weatherability and transparency. And the surface protective layer has a surface with an improved water
20 repellency and an improved physical strength.

In the following, description will be made of a process for the production of a solar cell module according
an embodiment
to the present invention using the foregoing photovoltaic
element, surface side filler resin, surface protective
25 film, and back face protective materials.



In a typical embodiment, to enclose a light receiving face of the photovoltaic element by the surface side filler is conducted by obtaining a sheet of a filler material using a heat-fused product of the filler material (this sheet will be hereinafter referred to as a filler material sheet) and laminating the filler material sheet on the surface of the photovoltaic element by way of thermocompression bonding.

Particularly, a solar cell module according to the present invention may be produced, for example, in a manner of providing a photovoltaic element 101, a filler material sheet for the surface side filler 102 (hereinafter referred to as surface side filler material sheet 102), a fluororesin film for the surface protective layer 103 (hereinafter referred to as surface protective film 103), a filler material sheet for the back side filler 104 (hereinafter referred to as back side filler material sheet 104), a back face protective film 105, and a back face reinforcing member 106, laminating the surface side filler sheet 102 and the surface protective film 103 in the named order on the surface of the photovoltaic element 101, then laminating, on the rear face of the photovoltaic element 101, the back side filler material sheet 104, the back face protective film 105, the back side filler material sheet 104 in addition, and the back face reinforcing member 106

in the named order thereby obtaining a composite, and
subjecting the composite to thermocompression bonding
treatment, whereby a desirable solar cell module is
produced. The thermocompression bonding treatment should be
5 conducted at a desired temperature for a desired period of
time so that the crosslinking reaction sufficiently
proceeds in the filler material sheet.

The thermocompression bonding treatment can include
vacuum lamination and roll lamination.

10 In the following, the present invention will be
described in more detail with reference to examples which
are not intended to restrict the scope of the present
invention.

Example 1

15 1. Preparation of photovoltaic element (solar cell):

There was prepared a photovoltaic element having the
configuration shown in FIGs. 2(a) and 2(b) and which has a
semiconductor active layer composed of an amorphous silicon
material (that is, a-Si material) (this solar cell will be
20 hereinafter referred to as a-Si solar cell) in the
following manner.

That is, there was firstly provided a well-cleaned
stainless steel plate as the substrate 201. On the
substrate, there was formed a two-layered back reflecting
25 layer 202 comprising a 5000 Å thick Al film/a 5000 Å thick

ZnO film by means of the conventional sputtering process. On the back reflecting layer 202 thus formed, there was formed a tandem type photoelectric conversion semiconductor layer as the semiconductor active layer 203 comprising a
5 150 Å thick n-type amorphous silicon layer/a 4000 Å thick
i-type amorphous silicon layer/a 100 Å thick p-type
microcrystalline silicon layer/a 100 Å thick n-type
amorphous silicon layer/a 800 Å thick i-type amorphous
silicon layer/a 100 Å thick p-type microcrystalline silicon
10 layer laminated in the named order from the substrate side
by means of the conventional plasma CVD process, wherein
each n-type amorphous silicon layer was formed using SiH₄
gas, PH₃ gas and H₂ gas, each i-type amorphous silicon
layer was formed using SiH₄ gas and H₂ gas, and each p-type
15 microcrystalline silicon layer was formed using SiH₄ gas,
BF₃ gas and H₂ gas. Then, on the semiconductor active layer
203, there was formed a 700 Å thick transparent and
conductive layer 204 composed of In₂O₃ by means of the
conventional heat resistance evaporation process wherein an
20 In source was evaporated in an O₂ atmosphere. Successively,
an Ag-paste comprising powdery Ag dispersed in polyester
resin (trademark name: Ag-paste No. 5007, produced by Du
pont Company) was screen-printed on the transparent and
conductive layer 204, followed by drying, to thereby form a
25 grid electrode as the collecting electrode 205. As for the

resultant, a copper tub as the negative side power
outputting terminal 206b was fixed to the substrate 201
using a stainless solder 208, and a tin foil tape as the
positive side power outputting terminal 206a was fixed to
5 the collecting electrode 205 using an electroconductive
adhesive 207. Thus, there was obtained a solar cell.

The above procedures were repeated to obtain seventy
solar cells.

2. Preparation of solar cell module:

10 Using each of the solar cells obtained in the above
1, there were prepared seventy solar cell modules each
having the configuration shown in FIG. 3 in the following
manner.

In FIG. 3, reference numeral 301 indicates a
15 photovoltaic element (corresponding to the solar cell in
this case), reference numeral 302a a surface side filler,
reference numeral 302b a back face side filler, reference
numeral 303 a surface protective layer, reference numeral
304 a back face reinforcing member, reference numeral 305a
20 a positive side power outputting terminal (corresponding to
the foregoing power outputting terminal 206a), reference
numeral 305b a negative side power outputting terminal
(corresponding to the foregoing power outputting terminal
206b), reference numeral 306 a back face protective film,
25 and reference numeral 307 a pair of wiring holes each for

one of the power outputting terminals 305a and 305b. Each power outputting hole is penetrated through the back face constituents from the back face reinforcing member 304 such that it reaches the corresponding power outputting
5 terminal.

Preparation of a fluororesin film to be used as the surface protective layer 303:

There was provided a stretched ethylene-tetrafluoroethylene copolymer (ETFE) film of 38 μm in
10 thickness. The ETFE film was immersed in a 10% xylene solution of 2-hydroxy-4-n-octoxybenzophenone as a benzophenone series UV absorber, followed by refluxing at 100 °C for 24 hours. The ETFE film thus treated was washed with xylene, followed by drying at 80 °C for 30 minutes in
15 an oven. The resultant was then subjected to corona discharging surface treatment, wherein a surface thereof to be contacted to the surface side filler 302a. Thus, there was obtained a benzophenone series UV absorber-containing ETFE film having a surface treated by the corona
20 discharging as the surface protective layer 303.

As for the resultant UV absorber-containing ETFE film, its light transmittance was measured by means of a spectrophotometer for ultraviolet and visible region U-4000 (produced by Hitachi, Ltd.) in a case (a) using light
25 having a wavelength of 300 to 350 nm and also in a case of

using light having a wavelength of 400 to 1000 nm.

Herein, there was provided another stretched ethylene-tetrafluoroethylene copolymer (ETFE) film of 38 μm in thickness as a reference standard. As for the reference
5 standard ETFE film, its light transmittance was measured in the same manner as in the above.

The measured results for the UV absorber-containing ETFE film were compared with the measured results for the reference standard ETFE film. As a results, it was found
10 that the transmittance of the former in the case (a) is less than 0.3 in a relative value to that of the latter in the case (a) and the light transmittance of the former in the case (b) is greater than 0.95 in a relative value to that of the latter in the case (b).

15 Preparation of solar cell module:

On the light receiving face of the solar cell obtained in the above 1, there were laminated a 460 μm thick UV absorber-containing EVA film 302a (produced by Mobay Company) and the UV absorber-containing ETFE film
20 obtained in the above in the named order. On the rear face of the resultant, there were laminated a 63.5 μm thick nylon film 306 (trademark name: DARTEK, produced by Du Pont Company), a UV absorber-containing EVA film 302b (produced by Mobay Company) and a galvalume steel member (or a Zn-
25 coated steel member) 306 in the named order. Thus, there

was obtained a stacked body. The stacked body obtained was placed in a vacuum laminator, wherein it was subjected to heat treatment at 150 °C for 30 minutes while evacuating the inside of the vacuum laminator to a predetermined
5 vacuum degree, followed by cooling to room temperature.

In the above, the power outputting terminal 305a was extended to the rear side of the solar cell so that not only the power outputting terminal 305b but also the power outputting terminal 305a could be wired to the outside
10 through the wiring holes 307. Thus, there was obtained a solar cell module.

In this way, there were obtained seventy solar cell module samples.

Evaluation

15 As for the resultant solar cell modules, evaluation was conducted with respect to (1) initial photoelectric conversion efficiency, (2) light resistance, (3) weatherability, (4) heat resistance, (5) endurance against changes in environmental temperature, (6) endurance
20 against changes in environmental temperature and humidity, and (7) resistance to moisture invasion.

The evaluated results obtained are collectively shown in Table 1.

The evaluation of each of the above evaluation items
25 (1) to (7) was conducted in the following manner. In the

evaluation of each evaluation item, ten solar cell module samples were used. The result shown in Table 1 in each evaluation is of the solar cell module sample having shown the worst result among the ten solar cell module samples.

5 (1) Evaluation of the initial photoelectric conversion efficiency:

The solar cell module sample was subjected to measurement with respect to its initial photoelectric conversion efficiency by means of a solar simulator
10 (trademark name: SPI-SUN SIMULATOR 240A (AM 1.5), produced by SPIRE Company). The measured result obtained in this Example 1 is shown in Table 1 by a value of 1 which is to be a comparison standard for other results measured in other examples and comparative example which will be
15 described in the following.

(2) Evaluation of the light resistance:

The solar cell module sample was placed in a ultra exposure tester (produced by Suga Test Instruments Co., Ltd.), wherein it was subjected to a dew cycle test of
20 alternately repeating (a) a cycle of irradiating ultraviolet rays with 300 nm to 400 nm in wavelength at an intensity of 100 mW/cm^2 from a metal halide lamp under conditions of 63 °C for the black panel and 50%RH for the environmental humidity and (b) a cycle of conducting dew
25 condensation under conditions of 30 °C for the

environmental temperature and 96%RH for the environmental humidity without irradiating the ultraviolet rays, wherein the solar cell module sample was irradiated with the above ultraviolet rays in a quantity corresponding to the
5 quantity of ultraviolet rays irradiated in Tokyo for 20 years.

Thereafter, its exterior appearance was observed. The observed result shown by a mark ○ in Table 1 indicates the case where no change was observed for the exterior
10 appearance. As for the case with a change in the exterior appearance, comments are described in Table 1.

In addition, as for the solar cell module sample having been dedicated for the dew cycle test, its photoelectric conversion efficiency was examined by means
15 of the SPI-SUN SIMULATOR 240A (AM 1.5). The measured result obtained in this Example 1 is shown in Table 1 by a value of 1 which is to be a comparison standard for other results measured in other examples and comparative example which will be described in the following.

20 (3) Evaluation of the weatherability:

The solar cell module sample was placed in a xenon-arc sunshine weather meter (produced by Heraeus Company), wherein it was subjected to an accelerated weathering test of alternately repeating (a) a cycle of irradiating pseudo
25 sunlight of 100 mW/cm^2 from a Xenon lamp and (b) a cycle of

falling pure water wherein the alternate repetition of the cycles (a) and (b) was conducted for 5000 hours.

Thereafter, its exterior appearance was observed. The observed result shown by a mark ○ in Table 1 indicates the case where no change was observed for the exterior appearance. As for the case with a change in the exterior appearance, comments are described in Table 1.

(4) Evaluation of the heat resistance:

The solar cell module sample was exposed to an atmosphere of 100 °C for 24 hours, and thereafter, its exterior appearance was observed. The observed result shown by a mark ○ in Table 1 indicates the case where no change was observed for the exterior appearance. As for the case with a change in the exterior appearance, comments are described in Table 1.

(5) Evaluation of the endurance against changes in environmental temperature:

The solar cell module sample was subjected to alternate repetition of (a) a cycle of exposing to an atmosphere of - 40 °C for an hour and (b) a cycle of exposing to an atmosphere of 90 °C for an hour 50 times, and thereafter, its exterior appearance was observed. The observed result shown by a mark ○ in Table 1 indicates the case where no change was observed for the exterior appearance. As for the case with a change in the exterior

appearance, comments are described in Table 1.

(6) Evaluation of the endurance against changes in environmental temperature and humidity:

The solar cell module sample was subjected to
5 alternate repetition of (a) a cycle of exposing to an atmosphere of - 40 °C for an hour and (b) a cycle of exposing to an atmosphere of 85 °C/85 %RH for 4 hours 50 times, and thereafter, its exterior appearance was observed. The observed result shown by a mark ○ in Table 1
10 indicates the case where no change was observed for the exterior appearance. As for the case with a change in the exterior appearance, comments are described in Table 1.

(7) Evaluation of the resistance to moisture invasion:

The solar cell module sample was subjected to a
15 pressure cooker test under conditions of 120 °C for the environmental temperature and 2 atm for the water vapor pressure for 1000 hours. Thereafter, its exterior appearance was observed. The observed result shown by a mark ○ in Table 1 indicates the case where no change was
20 observed for the exterior appearance. As for the case with a change in the exterior appearance, comments are described in Table 1.

In Table 1, there is shown a result obtained as a
result of the total evaluation based on the evaluated
25 results of the evaluation items (1) to (7). The total

evaluatin result shown in Table 1 is based on the following criteria:

◎ : a case where the solar cell module sample is excellent in all the evaluation items,

5 ○ : a case where the solar cell module sample is satisfactory in all the evaluation items,

△ : a case where the solar cell module sample is problematic for use under severer environmental conditions, and

10 X : a case where the solar cell module sample is problematic and it is not practically acceptable.

Example 2

The procedures of Example 1 were repeated, except that the ETFE film used in the preparation of the
15 fluororesin film as the surface protective layer 303 was replaced by
a film of poly(chlorotrifluoroethylene) resin (PCTFE), to thereby obtain seventy solar cell module samples.

As for the solar cell module samples obtained,
20 evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in Table 1.

Example 3

The procedures of Example 1 were repeated, except
25 that the 2-hydroxy-4-n-octoxybenzophenone as the UV

absorber used in the preparation of the fluoro-resin film as the surface protective layer 303 was replaced by 2-(2-hydroxy-5-tert-octylphenyl)benzotriazole as a benzotriazole series UV absorber, to thereby obtain seventy solar cell
5 module samples.

As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in Table 1.

10 Example 4

The procedures of Example 1 were repeated, except that the ETFE film used in the preparation of the fluoro-resin film as the surface protective layer 303 was replaced by

15 a 50 μm thick film of ethylene-chlorotrifluoroethylene copolymer (ECTFE), to thereby obtain seventy solar cell module samples.

As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example
20 1. The evaluated results obtained are collectively shown in Table 1.

Example 5

The procedures of Example 1 were repeated, except that the ETFE film used in the preparation of the
25 fluoro-resin film as the surface protective layer 303 was

replaced by

a 50 μm thick film of tetrafluoroethylene-perfluoroalkylvinylether copolymer (PFA), to thereby obtain seventy solar cell module samples.

5 As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in Table 1.

Example 6

10 The procedures of Example 1 were repeated, except that the ETFE film used in the preparation of the fluororesin film as the surface protective layer 303 was replaced by
a 50 μm thick film of tetrafluoroethylene-
15 hexafluoropropylene copolymer (FEP), to thereby obtain seventy solar cell module samples.

As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in
20 Table 1.

Example 7

The procedures of Example 1 were repeated, except that the incorporation of the UV absorber into the ETFE film was conducted by the thermal diffusion manner and a
25 face of the resultant UV absorber-containing ETFE film to

be contacted with the EVA film as the surface side filler was subjected to the surface treatment by means of the corona discharging, to thereby obtain seventy solar cell module samples.

5 As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in Table 1.

In the above, the incorporation of the UV absorber
10 into the ETFE film was conducted by providing a 50 μ m thick stretched ETFE film having a surface masked by a shield, placing the ETFE film in a vacuum chamber containing solid particles of 2-hydroxy-4-n-octoxybenzophenone as a benzophenone series UV absorber therein, and heating the
15 inside of the vacuum chamber at 200 °C for 6 hours, wherein a vapor of the benzophenone series UV absorber was generated and the ETFE film having a surface masked by a shield was exposed to said vapor of the benzophenone series UV absorber. In this way, there were obtained a plurality
20 of ETFE films each incorporated with the UV absorber by the thermal diffusion manner.

One of the resultant UV absorber-containing ETFE films was subjected to examination with respect to light transmittance. That is, as for the UV absorber-containing
25 ETFE film, an about 10 μ m thick specimen (i) was sliced off

from the side thereof having been exposed to the vapor of the UV absorber, and another about 10 μm thick specimen (ii) was sliced off from the remaining side thereof. And the light transmittance of each of the specimens (i) and 5 (ii) was measured by means of the spectrophotometer for ultraviolet and visible region U-4000 (produced by Hitachi, Ltd.) using light having a wavelength of 350 nm.

Herein, there was provided another stretched ethylene-tetrafluoroethylene copolymer (ETFE) film of 50 μm 10 in thickness as a reference standard. And an about 10 μm thick specimen (i') was sliced off from a give side thereof, and another about 10 μm thick specimen (ii') was sliced off from the remaining side thereof. As for each of the specimens (i') and (ii') of the reference standard ETFE 15 film, the light transmittance was measured in the same manner as in the above.

The measured result for the specimen (i) was compared with that for the specimen (i'). As a results, it was found that the transmittance of the specimen (i) is 0.2 in a 20 relative value to that of the specimen (i'). Similarly, the measured result for the specimen (ii) was compared with that for the specimen (ii'). As a results, it was found that the transmittance of the specimen (ii) is 0.8 in a relative value to that of the specimen (ii').

25 From the observed results obtained in the above, the

foregoing UV absorber-containing ETFE film was found to have a varied concentration distribution of the UV absorber which is enhanced on the side of the face having been exposed to the vapor of the UV absorber and is reduced on
5 the side of the face having been masked by the shield.

As for each of the remaining UV absorber-containing ETFE films used for the preparation of the solar cell module sample, a face of thereof to be contacted with the EVA film as the surface side filler was subjected to the
10 surface treatment by means of the corona discharging, prior to laminating on the EVA film, as above described.

Comparative Example 1

The procedures of Example 1 were repeated, except that no UV absorber was incorporated into the ETFE film, to
15 thereby obtain seventy solar cell module samples.

As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in
Table 1.

20 Comparative Example 2

The procedures of Example 2 were repeated, except that no UV absorber was incorporated into the PCTFE film, to thereby obtain seventy solar cell module samples.

As for the solar cell module samples obtained,
25 evaluation was conducted in the same manner as in Example

1. The evaluated results obtained are collectively shown in Table 1.

Comparative Example 3

The procedures of Example 1 were repeated, except
5 that the UV absorber-containing ETFE film used as the surface protective layer was replaced by a 50 μ m thick polyvinyl fluoride film containing a UV absorber (trademark name: TEDLAR, produced by Du Pont Company), to thereby obtain seventy solar cell module samples.

10 As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in Table 1.

Comparative Example 4

15 The procedures of Example 1 were repeated, except that no UV absorber was incorporated into the ETFE film as the surface protective layer and the UV absorber-containing EVA film as the surface side filler was replaced by a film of a chlorotrifluoroethylene-vinyl ether copolymer resin
20 composition prepared in a manner as will be described below, to thereby obtain seventy solar cell module samples.

As for the solar cell module samples obtained, evaluation was conducted in the same manner as in Example 1. The evaluated results obtained are collectively shown in
25 Table 1.

The chlorotrifluoroethylene-vinyl ether copolymer resin composition film was prepared in the following manner. That is, there was provided chlorotrifluoroethylene-vinyl ether copolymer resin (trademark name: LUMIFLON LF400, produced by Asahi Glass Co., Ltd.). To 100 parts by weight of the copolymer resin, there were added 3 parts by weight of 2,5-dimethyl-2,5-bis(t-butylperoxy)hexane as a crosslinking agent, 2 parts by weight of triallylcyanurate as a crosslinking assistant, 0.3 part by weight of γ -methacryloxypropyltrimethoxysilane as a coupling agent, 0.3 part by weight of 2-(2-hydroxy-5-t-octylphenyl)benzotriazole as a UV absorber, 0.1 part by weight of bis(2,2,6,6-tetramethyl-4-piperidyl)sebacate as a light stabilizer, and 0.2 part by weight of tris(monononylphenyl)phosphate as an antioxidant while stirring, whereby a mixture was obtained. The mixture was fused at 100 °C, followed by subjecting to T-die extrusion whereby obtaining an about 400 μm thick film. The resultant film was used as the surface side filler.

Based on the results shown in Table 1, it is understood that any of the solar cell modules in which the surface protective layer is constituted by a specific, highly transparent fluoro-resin incorporated with a UV absorber obtained in Examples 1 to 7 belonging to the present invention is surpassing the comparative solar cell

modules obtained in Comparative Examples 1 to 4.

Particularly, it is understood that any of the solar cell
modules according to ^{an embodiment of} the present invention is absolutely

free from the occurrence of yellowing or clouding in the

5 constituent resin materials and also, absolutely free from
the occurrence of a removal between the surface side filler
and the surface protective layer and also between the
surface side filler and the photovoltaic element in the
tests of light resistance and weatherability and thus,

10 markedly excels in light resistance and weatherability. It

is also understood that any of the solar cell modules
according to ^{an embodiment of} the present invention is good enough in the

endurance tests and pressure cooker test under severer

conditions. It is further understood that any of the solar

15 cell modules according to ^{an embodiment of} the present invention is

excellent or good enough in initial photoelectric

conversion efficiency and is hardly deteriorated in terms

of the photoelectric conversion efficiency over a long

period of time. Therefore, it is understood that any of the

20 solar cell modules according to ^{an embodiment of} the present invention is

satisfactorily usable as a power generation source in

outdoors under severe environments.

On the other hand, as for the comparative solar cell
modules obtained in Comparative Examples 1 to 4, it is

25 understood that they are apparently inferior to any of the



solar cell modules obtained in Examples 1 to 7.

Particularly, the comparative solar cell modules obtained in Comparative Examples 1 and 2 are inferior in the light resistance, weatherability and endurance against changes in
5 environmental temperature and humidity. In fact, as apparent from Table 1, the surface side filler of any of them was yellowed or/and clouded in the test of light resistance, and any of them suffered from a removal between the surface side filler and the surface protective layer
10 not only in the test of weatherability but also in the test of endurance against changes in environmental temperature and humidity.

The comparative solar cell module obtained in Comparative Example 3 is inferior in the initial
15 photoelectric conversion efficiency, heat resistance, endurance against changes in environmental temperature and resistance to moisture invasion. In fact, its surface protective layer was deformed in the test of heat resistance, the test of endurance against changes in
20 environmental temperature and the pressure cooker test, because of the deformation temperature thereof being low.

The comparative solar cell module obtained in Comparative Example 4 is apparently inferior in the resistance to moisture invasion. In fact, this comparative
25 solar cell module suffered from a removal between the

surface side filler and the photovoltaic element in the
pressure cooker test.



27 4 95 1700

Table 1

| | initial photoelectric conversion efficiency (with the value in Example 1 being set at 1) | lightresistance | | weatherability | heat resistance | endurance against changes in environmental temperature | endurance against changes in environmental temperature and humidity | resistance to moisture invasion | total evaluation |
|-----------------------|--|---|---|--------------------|-----------------------------------|--|---|-----------------------------------|------------------|
| | | exterior appearance | photoelectric conversion efficiency after test (with the value in Example 1 being set at 1) | | | | | | |
| Example 1 | 1. 0 | ○ | 1. 0 | ○ | ○ | ○ | ○ | ○ | ○ |
| Example 2 | 0. 99 | ○ | 1. 0 | ○ | ○ | ○ | ○ | ○ | ○ |
| Example 3 | 0. 97 | ○ | 1. 0 | ○ | ○ | ○ | ○ | ○ | ○ |
| Example 4 | 1. 0 | ○ | 1. 0 | ○ | ○ | ○ | ○ | ○ | ○ |
| Example 5 | 1. 0 | ○ | 1. 0 | ○ | ○ | ○ | ○ | ○ | ○ |
| Example 6 | 1. 0 | ○ | 1. 0 | ○ | ○ | ○ | ○ | ○ | ○ |
| Example 7 | 1. 0 | ○ | 1. 0 | ○ | ○ | ○ | ○ | ○ | ○ |
| Comparative Example 1 | 1. 0 | surface side filler yellowed or clouded | 0. 85 | removal occurred*1 | ○ | ○ | removal occurred*1 | ○ | × |
| Comparative Example 2 | 1. 0 | surface side filler yellowed or clouded | 0. 90 | removal occurred*1 | ○ | ○ | removal occurred*1 | ○ | × |
| Comparative Example 3 | 0. 95 | ○ | 0. 95 | ○ | surface protective layer deformed | surface protective layer deformed | ○ | surface protective layer deformed | × |
| Comparative Example 4 | 1. 0 | ○ | 1. 0 | ○ | ○ | ○ | ○ | removal occurred*2 | △ |

note) *1-removal occurred between surface protective layer and surface side filler.

*2-removal occurred between surface side filler and photovoltaic element.

The claims defining the invention are as follows:

1. A solar cell module comprising (a) a photovoltaic element, (b) a transparent resin filler layer, (c) a transparent surface layer, and (d) a reinforcing member, said transparent resin filler layer (b) and said transparent surface layer (c) being disposed in the named order on a light receiving face of said photovoltaic element, and said reinforcing member (d) being disposed on the rear face of said photovoltaic element, wherein:

10 said transparent surface layer comprises a film composed of a fluoro-resin with a high fluorine content selected from the group consisting of ethylene-tetrafluoroethylene copolymer, poly(chlorotrifluoroethylene) resin, ethylene-chlorotrifluoroethylene copolymer, 15 tetrafluoroethylene-perfluoroalkylvinylether copolymer and tetrafluoroethylene-hexafluoropropylene copolymer and which contains a ultraviolet absorber dispersed therein and said filler layer (b) comprises a resin selected from the group consisting of polyolefinic resins, butyral resins, urethane 20 resins, and silicone resins.

2. A solar cell module according to claim 1, wherein the ultraviolet absorber-containing fluoro-resin film as the surface protective layer has an improved ultraviolet-screening function.

25 3. A solar cell module according to claim 1, wherein the ultraviolet absorber-containing fluoro-resin film as the surface protective layer has a light transmittance which is



of 0.8 or less in a relative value to the transmittance of a reference standard fluoro-resin film containing no ultraviolet absorber at a wavelength of 300 to 350 nm for light used for the measurement and has a light transmittance which is of 0.9 or more in a relative value to the transmittance of a reference standard fluoro-resin film containing no ultraviolet absorber at a wavelength of 400 to 1000 nm for light used for the measurement.

4. A solar cell module according to claim 1, wherein the ultraviolet absorber-containing fluoro-resin film as the surface protective layer has a deformation temperature of 70 °C or above at a pressure of 4.6 kg/cm².

5. A solar cell module according to claim 1, wherein the ultraviolet absorber contained in the ultraviolet absorber-containing fluoro-resin film as the surface protective layer is a benzophenone series compound having a molecular weight of 300 or more.

6. A solar cell module according to claim 1, wherein the ultraviolet absorber contained in the ultraviolet absorber-containing fluoro-resin film as the surface protective layer is a benzotriazole series compound having a molecular weight of 300 or more.

7. A solar cell module according to claim 1, wherein the ultraviolet absorber-containing fluoro-resin film as the surface protective layer comprises a film formed by a



manner comprising the steps of (a) providing a film of a fluoro-resin selected from the group consisting of ethylene-tetrafluoroethylene copolymer, poly(chlorotrifluoroethylene) resin, ethylene-chlorotrifluoroethylene copolymer, tetrafluoroethylene-perfluoroalkylvinylether copolymer, and tetrafluoroethylene-hexafluoropropylene copolymer, (b) immersing said fluoro-resin film in an organic solvent containing a ultraviolet absorber dissolved therein, and (c) drying the resultant obtained in the step (b) at a desired temperature to volatilize the organic solvent.

8. A solar cell module according to claim 1, wherein the ultraviolet absorber-containing fluoro-resin film as the surface protective layer comprises a film formed by a manner comprising the steps of providing a film of a fluoro-resin selected from the group consisting of ethylene-tetrafluoroethylene copolymer, poly(chlorotrifluoroethylene) resin, ethylene-chlorotrifluoroethylene copolymer, tetrafluoroethylene-perfluoroalkylvinylether copolymer, and tetrafluoroethylene-hexafluoropropylene copolymer, and exposing said fluoro-resin film to a vapor of a ultraviolet absorber.



9. A solar cell module according to claim 1, wherein the polyolefinic resin of the filler layer series is selected from the group consisting of ethylene-vinyl acetate copolymer, ethylene-methyl acrylate copolymer, and ethylene-ethyl acrylate copolymer.

10. A solar cell module according to claim 1, wherein the transparent resin filler layer contains a ultraviolet absorber.

11. A solar cell module according to claim 1, wherein the photovoltaic element comprises a photoelectric conversion layer and a transparent and conductive layer disposed in the named order on an electrically conductive substrate.

12. A solar cell module according to claim 11, wherein the photoelectric conversion layer comprises a non-single crystal semiconductor film.

13. A solar cell module according to claim 12, wherein the non-single crystal semiconductor film is an amorphous silicon semiconductor film.

14. A solar cell module, substantially as herein described with reference to Fig. 1.

15. A solar cell module, substantially as herein described with reference to Figs. 2(a) and 2(b).

16. A solar cell module, substantially as herein described with reference to Fig. 3.

DATED this Twenty-eighth Day of November 1996

Canon Kabushiki Kaisha

Patent Attorneys for the Applicant


SPRUSON & FERGUSON



Solar Cell Module having a Surface Protective Member Composed of a Fluororesin Containing a Ultraviolet Absorber Dispersed Therein

Abstract

A solar cell module comprising (a) a photovoltaic element (101), (b) a transparent resin filler layer (102), (c) a transparent surface layer (103), and (d) a reinforcing member (106), said transparent resin filler layer (b) and said transparent surface layer (c) being disposed in the named order on a light receiving face of said photovoltaic element, and said reinforcing member (d) being disposed on the rear face of said photovoltaic element, characterized in that said transparent surface layer comprises a film composed of a fluororesin with a high fluorine content selected from the group consisting of ethylene-tetrafluoroethylene copolymer, poly(chlorotrifluoroethylene) resin, ethylene-chlorotrifluoroethylene copolymer, tetrafluoroethyleperfluoroalkylvinylether copolymer, and tetrafluoroethylene-hexafluoropropylene copolymer and which contains a ultraviolet absorber dispersed therein.



17698/95

FIG. 1

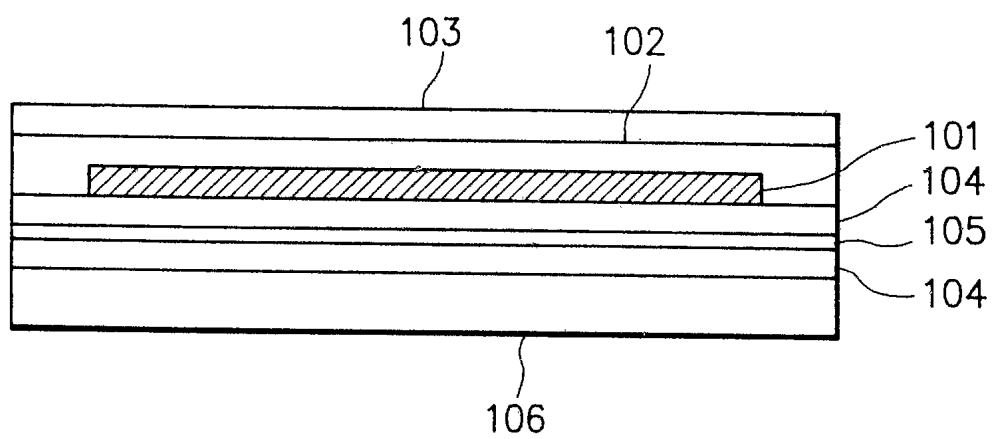


FIG. 2(a)

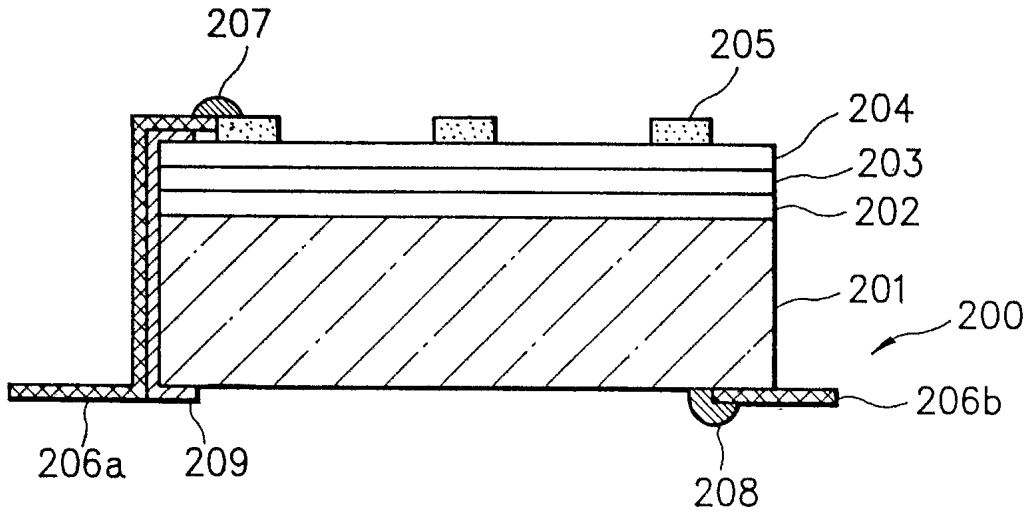


FIG. 2(b)

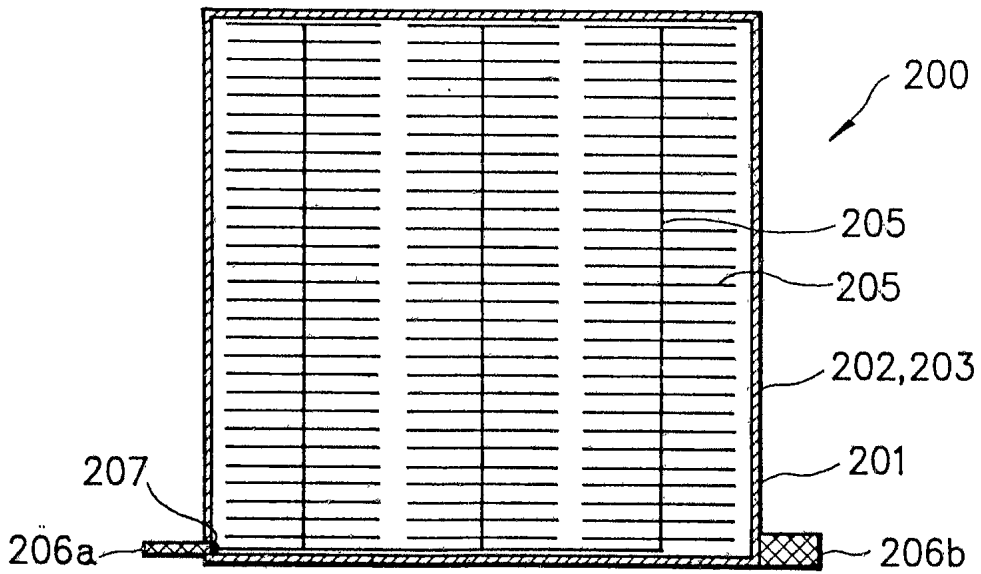


FIG. 3

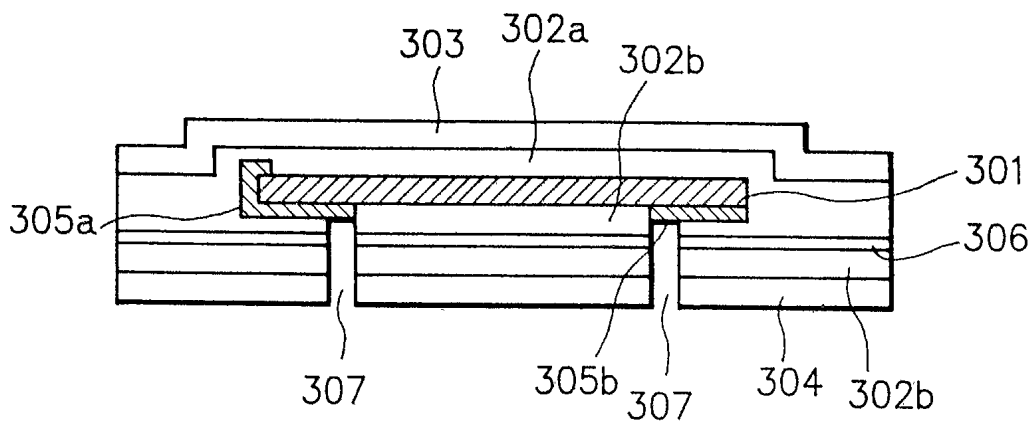


FIG. 4

