



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
24.03.2021 Bulletin 2021/12

(51) Int Cl.:
A24F 40/10 (2020.01) A24F 40/42 (2020.01)

(21) Application number: **19198555.5**

(22) Date of filing: **20.09.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
 Designated Extension States:
BA ME
 Designated Validation States:
KH MA MD TN

(71) Applicant: **NERUDIA LIMITED**
Liverpool Merseyside L24 9HP (GB)
 (72) Inventor: **The designation of the inventor has not yet been filed**
 (74) Representative: **Mewburn Ellis LLP**
Aurora Building
Counterslip
Bristol BS1 6BX (GB)

(54) **SMOKING SUBSTITUTE APPARATUS**

(57) A smoking substitute apparatus for generating an aerosol, comprising: a housing; an air inlet and an outlet formed at the housing; a passage extending between the air inlet and outlet, air flowing in use along the passage for inhalation by a user drawing on the apparatus; and an aerosol generation chamber containing an aerosol generator being operable to generate an aerosol from an aerosol precursor; wherein the aerosol generator

is in fluid communication with a downstream portion of the passage for allowing the aerosol to entrain into an airflow along the passage; wherein the downstream portion of the passage comprises a flow converging section having a curved sidewall tapered towards the outlet, and wherein an upstream end of the flow converging section substantially conforms to a cross sectional profile of the aerosol generation chamber.

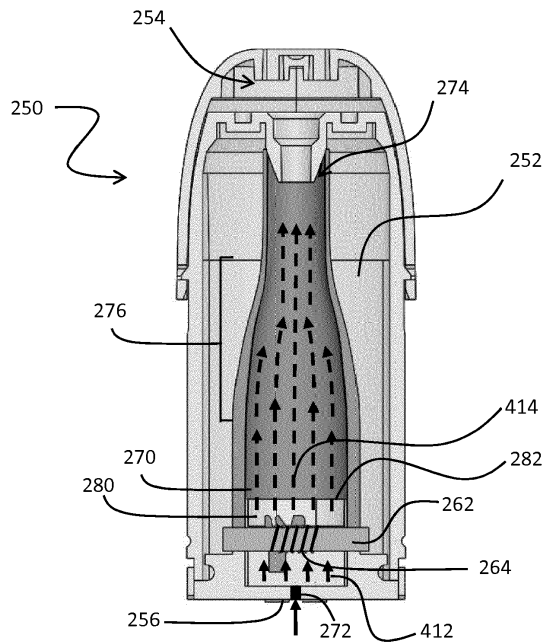


FIG. 21

Description**Field of the Invention**

5 [0001] The present invention relates to a smoking substitute apparatus and, in particular, a smoking substitute apparatus that is able to reduce fluid leakage during use, as well as to deliver nicotine to a user in an effective manner.

Background

10 [0002] The smoking of tobacco is generally considered to expose a smoker to potentially harmful substances. It is thought that a significant amount of the potentially harmful substances are generated through the burning and/or combustion of the tobacco and the constituents of the burnt tobacco in the tobacco smoke itself.

[0003] Low temperature combustion of organic material such as tobacco is known to produce tar and other potentially harmful by-products. There have been proposed various smoking substitute systems in which the conventional smoking of tobacco is avoided.

15 [0004] Such smoking substitute systems can form part of nicotine replacement therapies aimed at people who wish to stop smoking and overcome a dependence on nicotine.

[0005] Known smoking substitute systems include electronic systems that permit a user to simulate the act of smoking by producing an aerosol (also referred to as a "vapour") that is drawn into the lungs through the mouth (inhaled) and then exhaled. The inhaled aerosol typically bears nicotine and/or a flavourant without, or with fewer of, the health risks associated with conventional smoking.

[0006] In general, smoking substitute systems are intended to provide a substitute for the rituals of smoking, whilst providing the user with a similar, or improved, experience and satisfaction to those experienced with conventional smoking and with combustible tobacco products.

25 [0007] The popularity and use of smoking substitute systems has grown rapidly in the past few years. Although originally marketed as an aid to assist habitual smokers wishing to quit tobacco smoking, consumers are increasingly viewing smoking substitute systems as desirable lifestyle accessories. There are a number of different categories of smoking substitute systems, each utilising a different smoking substitute approach. Some smoking substitute systems are designed to resemble a conventional cigarette and are cylindrical in form with a mouthpiece at one end. Other smoking substitute devices do not generally resemble a cigarette (for example, the smoking substitute device may have a generally box-like form, in whole or in part).

[0008] One approach is the so-called "vaping" approach, in which a vaporisable liquid, or an aerosol former or aerosol precursor, sometimes typically referred to herein as "e-liquid", is heated by a heating device (sometimes referred to herein as an electronic cigarette or "e-cigarette" device) to produce an aerosol vapour which is inhaled by a user. The e-liquid typically includes a base liquid, nicotine and may include a flavourant. The resulting vapour therefore also typically contains nicotine and/or a flavourant. The base liquid may include propylene glycol and/or vegetable glycerine.

35 [0009] A typical e-cigarette device includes a mouthpiece, a power source (typically a battery), a tank for containing e-liquid and a heating device. In use, electrical energy is supplied from the power source to the heating device, which heats the e-liquid to produce an aerosol (or "vapour") which is inhaled by a user through the mouthpiece.

40 [0010] E-cigarettes can be configured in a variety of ways. For example, there are "closed system" vaping smoking substitute systems, which typically have a sealed tank and heating element. The tank is prefilled with e-liquid and is not intended to be refilled by an end user. One subset of closed system vaping smoking substitute systems include a main body which includes the power source, wherein the main body is configured to be physically and electrically coupleable to a consumable including the tank and the heating element. In this way, when the tank of a consumable has been emptied of e-liquid, that consumable is removed from the main body and disposed of. The main body can then be reused by connecting it to a new, replacement, consumable. Another subset of closed system vaping smoking substitute systems are completely disposable, and intended for one-use only.

[0011] There are also "open system" vaping smoking substitute systems which typically have a tank that is configured to be refilled by a user. In this way the entire device can be used multiple times.

50 [0012] An example vaping smoking substitute system is the myblu™ e-cigarette. The myblu™ e-cigarette is a closed system which includes a main body and a consumable. The main body and consumable are physically and electrically coupled together by pushing the consumable into the main body. The main body includes a rechargeable battery. The consumable includes a mouthpiece and a sealed tank which contains e-liquid. The consumable having an air inlet which is fluidly connected to an outlet at the mouthpiece by an air flow channel. The consumable further includes a heater, which for this device is a heating filament coiled around a portion of a wick positioned across the width of the air flow passage. The wick is partially immersed in the e-liquid, and conveys e-liquid from the tank to the heating filament. The system is controlled by a microprocessor on board the main body. The system includes a sensor for detecting when a user is inhaling through the mouthpiece, the microprocessor then activating the device in response. When the system

is activated, electrical energy is supplied from the power source to the heating device, which heats e-liquid from the tank to produce a vapour, which promptly condenses to form an aerosol as it is cooled by an airflow passing through the air flow passage. A user may therefore inhale the generated aerosol through the mouthpiece.

5 **Summary of the Invention**

10 **[0013]** For a smoking substitute system it is desirable to deliver nicotine into the user's lungs, where it can be absorbed into the bloodstream. However, the present disclosure is based in part on a realisation that some prior art smoking substitute systems, such delivery of nicotine is not efficient. In some prior art systems, the aerosol droplets have a size distribution that is not suitable for delivering nicotine to the lungs. Aerosol droplets of a large particle size tend to be deposited in the mouth and/or upper respiratory tract. Aerosol particles of a small (e.g. sub-micron) particle size can be inhaled into the lungs but may be exhaled without delivering nicotine to the lungs. As a result the user would require drawing a longer puff, more puffs, or vaporising e-liquid with a higher nicotine concentration in order to achieve the desired experience.

15 **[0014]** Accordingly, there is a need for improvement in the delivery of nicotine to a user.

[0015] The present disclosure has been devised in the light of the above considerations.

20 **[0016]** In a general aspect, the present invention provides a smooth, curved transition for flow of aerosol from the aerosol generation chamber to the outlet of a smoking substitute apparatus. As such, the smoking substitute apparatus may allow an aerosol to converge from the aerosol generation chamber towards the outlet with reduced turbulence in comparison to prior art consumable, and therefore it may lead to larger aerosol droplets to be drawn out at the outlet.

[0017] According to a first preferred aspect there is provided a smoking substitute apparatus for generating an aerosol, comprising:

a housing;

25 an air inlet and an outlet formed at the housing;

a passage extending between the air inlet and outlet, air flowing in use along the passage for inhalation by a user drawing on the apparatus; and

30 an aerosol generation chamber containing an aerosol generator being operable to generate an aerosol from an aerosol precursor; wherein the aerosol generator is in fluid communication with a downstream portion of the passage for allowing the aerosol to entrain into an air flow along the passage;

wherein the downstream portion of the passage comprises a flow converging section having a curved sidewall tapered towards the outlet, and wherein an upstream end of the flow converging section substantially conforms to a cross sectional profile of the aerosol generation chamber.

35 **[0018]** The aerosol generation chamber may be provided at or towards a first end of the housing. The outlet may open at a second end of the housing opposite to the first end, the second end of the housing may comprise a mouthpiece onto which a user may puff onto for drawing out an aerosol through the outlet. Said first end of the housing may be engageable with a main body of a smoking substitute system. The aerosol generator inside the aerosol generation chamber may be fluidly connected to the outlet via a downstream portion of the passage extending along a longitudinal axis of the housing. In use, the aerosol generator may vaporise an aerosol precursor to form a vapour. Said vapour may cool and condense to form an aerosol in the aerosol generation chamber and discharge along the downstream portion towards the outlet.

40 **[0019]** As set out above, the passage comprises a flow converging section having curved sidewall tapered towards the outlet. The curved sidewall may extend along a part and/or all of the downstream portion of the passage. More specifically, the flow converging section may reduce in cross sectional area, or hydraulic diameter, from an upstream end towards the outlet in the direction of aerosol flow. The phrase "upstream" and "downstream" refers to the direction of aerosol flow towards the outlet. Furthermore, the curved sidewall may have a curvature along a longitudinal cross section of the passage. Therefore with the curved sidewall, the flow converging section of the passage may differ to a cone in that the cross section area along said converging section may reduce in a non-linear manner along its length.

50 For example, such flow converging section may resemble a champagne flute or one half of an hourglass.

[0020] The upstream end of the flow converging section may substantially conform to a cross sectional profile of the aerosol generation chamber. For example, the upstream end, or the widest end, of the flow converging section may have the same shape and hydraulic diameter as the aerosol generation chamber downstream of the aerosol generator. Therefore the upstream end of the flow converging section may have a cross sectional area that is substantially equal to that of a downstream end of the aerosol generation chamber. In some embodiment, the downstream end of the aerosol generation chamber may be adjacent and seamlessly connected to the upstream end of the flow converging section along the longitudinal axis of the housing.

55 **[0021]** Advantageously, such arrangement may allow the aerosol formed in the aerosol generation chamber to gradually

converge towards a narrower outlet, and thereby minimising the amount of turbulence and shear in the aerosol flow that may otherwise cause a reduction in aerosol droplet size. As explained above, aerosol particles of a small (e.g. sub-micron) particle size are undesirable as they can be inhaled into the lungs but may be exhaled without delivering nicotine to the lungs. The d_{50} particle size of the aerosol particles is preferably at least 1 micron or more preferably at least 2 microns. Typically, the d_{50} particle size is not more than 10 microns, preferably not more than 9 microns, not more than 8 microns, not more than 7 microns, not more than 6 microns, not more than 5 microns, not more than 4 microns or not more than 3 microns. It is considered that providing aerosol particle sizes in such ranges permits improved interaction between the aerosol particles and the user's lungs.

[0022] The aerosol precursor may comprise a liquid aerosol precursor. The aerosol generator may comprise a heater configured to generate the aerosol by vaporising the liquid aerosol precursor. The liquid aerosol precursor may be an e-liquid and may comprise nicotine and a base liquid such as propylene glycol and/or vegetable glycerine and may include a flavourant. The aerosol generator may be a heater such as a heater coil wound around a wick.

[0023] Optionally, the curved sidewall of the flow converging section comprises a sigmoidal profile, or an S-shaped profile, along the longitudinal axis of the downstream portion of the passage. Advantageously, such arrangement may allow gradual reduction of cross sectional area along the flow converging section.

[0024] Optionally, a maximum angle subtended by an internal surface of a sidewall of the downstream portion of the passage is less than 30 degree from a longitudinal axis of said downstream portion, said angle measured in a plane including the longitudinal axis. Optionally, a maximum angle subtended by an internal surface of a sidewall of the downstream portion of the passage is less than 20 degrees from a longitudinal axis of said downstream portion, said angle measured in a plane including the longitudinal axis. Optionally, a maximum angle subtended by an internal surface of a sidewall of the downstream portion of the passage is less than 10 degree from a longitudinal axis of said downstream portion, said angle measured in a plane including the longitudinal axis. Said sidewall of downstream portion may encompass the curved sidewall of the converging section, as well as the remaining sidewall along the downstream portion. For example, the sidewall of the downstream portion may be free of any abrupt change in direction, therefore advantageously such arrangement may result in a smooth aerosol flow path and therefore reduces the amount of turbulence therein.

[0025] Optionally, the passage extends longitudinally through the aerosol generation chamber so as to allow an airflow to pass over the aerosol generator. For example, the aerosol generation chamber may form part of the passage. In the case of where the aerosol generator is a heat, such arrangement may advantageously allow the airflow to cool the vapour as it is being generated at the heater, and thereby allowing aerosol droplets to form more effectively.

[0026] Optionally, a chamber inlet is opened at a base of the aerosol generation chamber, wherein the passage extends through said chamber inlet. For example, such arrangement may allow the air flow to sweep through the aerosol generation chamber. Thereby advantageously, such arrangement may reduce the likelihood of aerosol condensation formation along the sidewall of the aerosol generation chamber.

[0027] Optionally, the downstream portion of the passage extends without discontinuity, or seamlessly, from the aerosol generation chamber towards the outlet. For example, the connection or intersection between the aerosol generation chamber and the downstream portion of the passage may be substantially free of protrusion and/or indentation that may induce turbulence and/or a change in direction in the aerosol flow.

[0028] In some embodiments, an upstream portion of the passage extends externally to the aerosol generation chamber. Said upstream portion of the passage may be configured to allow some or all of the air flow entering the housing through the air inlet to bypass the aerosol generation chamber. For example, the upstream portion of the passage may coaxially extend alongside the aerosol generation chamber. In some embodiments, the upstream portion of the passage and the aerosol generation chamber may share the sidewall of the aerosol generation chamber. In such embodiments, the air flow may not directly pass over the aerosol generator but may only come into contact with the vapour and/or aerosol once it is formed.

[0029] Therefore, the aerosol generator may be positioned in a stagnant cavity of the aerosol generation chamber, the stagnant cavity being substantially free of the airflow, in use. For example, because the airflow does not pass through the internal volume of the aerosol generation chamber, said internal volume may form the stagnant cavity during a user puff. "Stagnant" may not necessarily mean a complete lack of convection, e.g. a degree of convection may result from vapour and/or aerosol generated during vaporisation. For example, as the aerosol precursor is being vaporised in the aerosol generation chamber, the vaporised aerosol precursor, or the vapour, may expand in the aerosol generation chamber and thereby it may increase the internal pressure at the aerosol generation chamber. Such elevated internal pressure may advantageously aid the convection of the vapour and/or aerosol towards the downstream portion of the passage. In comparison to prior art consumables, such arrangement may significantly reduce the turbulence in the vicinity of the heater. Advantageously, such reduction in turbulence may allow an aerosol with larger droplets to be formed.

[0030] In such embodiments, the aerosol generation chamber may resemble an open end container or a cup. An open end of the aerosol generation chamber may open towards the outlet at the second end of the housing. More specifically, the open end of the aerosol generation chamber may direct towards an upward direction during use. Advantageously,

this may help containing any excess aerosol precursor and coalesced aerosol droplets formed in the aerosol generation chamber.

5 **[0031]** Optionally, a junction is provided along the passage to fluidly connect the upper portion and the downstream portion of the passage with the aerosol generation chamber, the junction is configured to allow the aerosol in the aerosol generation chamber to entrain with the airflow passing across the junction. For example, the junction may locate at an intersection between a chamber outlet of the aerosol generation chamber and the downstream portion of passage, as such the aerosol discharging through the chamber outlet may entrain with the airflow passing from the upstream portion to the downstream portion of the passage through the junction.

10 **[0032]** Optionally, the smoking substitute apparatus is configured to generate an aerosol having a droplet size, d_{50} , of at least 1 μm . Optionally, the smoking substitute apparatus is configured to generate an aerosol having a droplet size, d_{50} , ranged between 1 μm to 4 μm . Optionally, the smoking substitute apparatus is configured to generate an aerosol having a droplet size, d_{50} , ranged between 2 μm to 3 μm . Advantageously, aerosol having droplets in such size ranges may improve delivery of nicotine into the user's lung, by reducing the likelihood of nicotine deposition in the mouth and/or upper respiratory tract, e.g. in the case of oversized aerosol droplets, or not being absorbed at all, e.g. in the case of undersized aerosol droplets.

15 **[0033]** Optionally, the aerosol generation chamber comprises a sealed base for preventing fluid leakage through said base. More specifically, the base of the aerosol generation chamber may be completely closed or it may comprise sealed apertures for allowing electrical contact to extending therethrough. Advantageously, such arrangement may prevent excess aerosol precursor and coalesced aerosol droplets in the aerosol generation chamber to leak through the base of the apparatus.

20 **[0034]** Optionally, the aerosol generator is adjacent to the base of the aerosol generation chamber. Advantageously, such arrangement may allow the heater to be located at a position furthest away from the junction, and therefore it may limit the turbulence in the vicinity of the heater. Further, such arrangement may increase the residence time of the vapour in the aerosol generation chamber and thus it may allow some aerosol droplets to form and even coalesce before being entrained in the airflow. Additionally in the case where the aerosol generator is a heater, at such location, the wick of the heater may absorb excess aerosol precursor that is collected at the base of aerosol generation chamber, and subsequently allowing it to be vaporised.

25 **[0035]** Optionally, the aerosol generation chamber is configured to have a uniform cross sectional profile along its length. For example, the aerosol flow path along the length of the aerosol generation chamber may have the same cross-sectional area. Advantageously, this may reduce turbulence, as well as fluctuation in pressure along the aerosol flow path and thereby such arrangement may lead to an increase in the size of aerosol droplets.

30 **[0036]** Optionally, one or more electrical contacts are provided on the first end of the housing and electrically connected with the aerosol generator, wherein the one or more electrical contacts are configured to engage with corresponding electrical terminals on a main body of a smoking substitute system. For example, electrical connectors may extend from the aerosol generator, through respective sealed apertures at the base of the aerosol generation chamber, to establish electrical connection with the one or more electrical contacts. Advantageously, such arrangement may allow electrical connection between the main body and the aerosol generator to establish by biasing the housing towards the main body.

35 **[0037]** The smoking substitute apparatus may be in the form of a consumable. The consumable may be configured for engagement with a main body. When the consumable is engaged with the main body, the combination of the consumable and the main body may form a smoking substitute system such as a closed smoking substitute system. For example, the consumable may comprise components of the system that are disposable, and the main body may comprise non-disposable or non-consumable components (e.g. power supply, controller, sensor, etc.) that facilitate the generation and/or delivery of aerosol by the consumable. In such an embodiment, the aerosol precursor (e.g. e-liquid) may be replenished by replacing a used consumable with an unused consumable.

40 **[0038]** Alternatively, the smoking substitute apparatus may be a non-consumable apparatus (e.g. that is in the form of an open smoking substitute system). In such embodiments an aerosol precursor (e.g. e-liquid) of the system may be replenished by re-filling, e.g. a reservoir of the smoking substitute apparatus, with the aerosol precursor (rather than replacing a consumable component of the apparatus).

45 **[0039]** In light of this, it should be appreciated that some of the features described herein as being part of the smoking substitute apparatus may alternatively form part of a main body for engagement with the smoking substitute apparatus. This may be the case in particular when the smoking substitute apparatus is in the form of a consumable.

50 **[0040]** Where the smoking substitute apparatus is in the form of a consumable, the main body and the consumable may be configured to be physically coupled together. For example, the consumable may be at least partially received in a recess of the main body, such that there is an interference fit between the main body and the consumable. Alternatively, the main body and the consumable may be physically coupled together by screwing one onto the other, or through a bayonet fitting, or the like.

55 **[0041]** Thus, the smoking substitute apparatus may comprise one or more engagement portions for engaging with a main body. In this way, one end of the smoking substitute apparatus may be coupled with the main body, whilst an

opposing end of the smoking substitute apparatus may define a mouthpiece of the smoking substitute system.

[0042] The smoking substitute apparatus may comprise a reservoir configured to store an aerosol precursor, such as an e-liquid. The e-liquid may, for example, comprise a base liquid. The e-liquid may further comprise nicotine. The base liquid may include propylene glycol and/or vegetable glycerine. The e-liquid may be substantially flavourless. That is, the e-liquid may not contain any deliberately added additional flavourant and may consist solely of a base liquid of propylene glycol and/or vegetable glycerine and nicotine.

[0043] The reservoir may be in the form of a tank. At least a portion of the tank may be light-transmissive. For example, the tank may comprise a window to allow a user to visually assess the quantity of e-liquid in the tank. A housing of the smoking substitute apparatus may comprise a corresponding aperture (or slot) or window that may be aligned with a light-transmissive portion (e.g. window) of the tank. The reservoir may be referred to as a "clearomizer" if it includes a window, or a "cartomizer" if it does not.

[0044] As set out above, the smoking substitute apparatus comprises a passage for fluid flow therethrough. The passage extends through (at least a portion of) the smoking substitute apparatus, between openings that define an air inlet and an outlet of the passage. The outlet may be at a mouthpiece of the smoking substitute apparatus. In this respect, a user may draw fluid (e.g. air) into and through the passage by inhaling at the outlet (i.e. using the mouthpiece). The passage may be at least partially defined by the tank. The tank may substantially (or fully) define the passage, for at least a part of the length of the passage. In this respect, the tank may surround the passage, e.g. in an annular arrangement around the passage.

[0045] The aerosol generator may comprise a wick. The aerosol generator may further comprise a heater. The wick may comprise a porous material, capable of wicking the aerosol precursor. A portion of the wick may be exposed to air flow in the passage. The wick may also comprise one or more portions in contact with liquid stored in the reservoir. For example, opposing ends of the wick may protrude into the reservoir and an intermediate portion (between the ends) may extend across the passage so as to be exposed to air flow in the passage. Thus, liquid may be drawn (e.g. by capillary action) along the wick, from the reservoir to the portion of the wick exposed to air flow.

[0046] The heater may comprise a heating element, which may be in the form of a filament wound about the wick (e.g. the filament may extend helically about the wick in a coil configuration). The heating element may be wound about the intermediate portion of the wick that is exposed to air flow in the passage. The heating element may be electrically connected (or connectable) to a power source. Thus, in operation, the power source may apply a voltage across the heating element so as to heat the heating element by resistive heating. This may cause liquid stored in the wick (i.e. drawn from the tank) to be heated so as to form a vapour and become entrained in air flowing through the passage. This vapour may subsequently cool to form an aerosol in the passage, typically downstream from the heating element.

[0047] The aerosol generation chamber (sometimes called a vaporisation chamber in this disclosure) may form part of the passage in which the heater is located. The aerosol generation chamber may be arranged to be in fluid communication with the air inlet and outlet of the passage. For example the passage may pass through the chamber inlet and chamber outlet of the aerosol generation chamber. The aerosol generation chamber may be an enlarged portion of the passage, subject to the features set out above with respect to the shape of the passage. In this respect, the air as drawn in by the user may entrain the generated vapour in a flow away from heater. The entrained vapour may form an aerosol in the aerosol generation chamber, or it may form the aerosol further downstream along the passage. The aerosol generation chamber may be at least partially defined by the tank. The tank may substantially (or fully) define the aerosol generation chamber. In this respect, the tank may surround the aerosol generation chamber, e.g. in an annular arrangement around the aerosol generation chamber.

[0048] In use, the user may puff on a mouthpiece of the smoking substitute apparatus, i.e. draw on the smoking substitute apparatus by inhaling, to draw in an air stream therethrough. A portion, or all, of the air stream (also referred to as a "main air flow") may pass through the aerosol generation chamber so as to entrain the vapour generated at the heater. That is, such a main air flow may be heated by the heater (although typically only to a limited extent) as it passes through the aerosol generation chamber. Alternatively or in addition, a portion of the air stream (also referred to as a "dilution air flow" or "bypass air flow") may bypass the aerosol generation chamber and be directed to mix with the generated aerosol downstream from the aerosol generation chamber. That is, the dilution air flow may be an air stream at an ambient temperature and may not be directly heated at all by the heater. The dilution air flow may combine with the main air flow for diluting the aerosol contained therein. The dilution air flow may merge with the main air flow along the passage downstream from the aerosol generation chamber. Alternatively, the dilution air flow may be directly inhaled by the user without passing through the passage of the smoking substitute apparatus.

[0049] As a user puffs on the mouthpiece, vaporised e-liquid entrained in the passing air flow may be drawn towards the outlet of passage. The vapour may cool, and thereby nucleate and/or condense along the passage to form a plurality of aerosol droplets, e.g. nicotine-containing aerosol droplets. A portion of these aerosol droplets may be delivered to and be absorbed at a target delivery site, e.g. a user's lung, whilst a portion of the aerosol droplets may instead adhere onto other parts of the user's respiratory tract, e.g. the user's oral cavity and/or throat. Typically, in some known smoking substitute apparatuses, the aerosol droplets as measured at the outlet of the passage, e.g. at the mouthpiece, may have

a median droplet size, d_{50} , of less than $1\mu\text{m}$.

[0050] The median particle droplet size, d_{50} , of an aerosol may be measured by a laser diffraction technique. For example, the stream of aerosol output from the outlet of the passage may be drawn through a Malvern Spraytec laser diffraction system, where the intensity and pattern of scattered laser light are analysed to calculate the size and size distribution of aerosol droplets. As will be readily understood, the particle size distribution may be expressed in terms of d_{10} , d_{50} and d_{90} , for example. Considering a cumulative plot of the volume of the particles measured by the laser diffraction technique, the d_{10} particle size is the particle size below which 10% by volume of the sample lies. The d_{50} particle size is the particle size below which 50% by volume of the sample lies. The d_{90} particle size is the particle size below which 90% by volume of the sample lies. Unless otherwise indicated herein, the particle size measurements are volume-based particle size measurements, rather than number-based or mass-based particle size measurements.

[0051] The smoking substitute apparatus (or main body engaged with the smoking substitute apparatus) may comprise a power source. The power source may be electrically connected (or connectable) to a heater of the smoking substitute apparatus (e.g. when the smoking substitute apparatus is engaged with the main body). The power source may be a battery (e.g. a rechargeable battery). A connector in the form of e.g. a USB port may be provided for recharging this battery.

[0052] When the smoking substitute apparatus is in the form of a consumable, the smoking substitute apparatus may comprise an electrical interface for interfacing with a corresponding electrical interface of the main body. One or both of the electrical interfaces may include one or more electrical contacts. Thus, when the main body is engaged with the consumable, the electrical interface of the main body may be configured to transfer electrical power from the power source to a heater of the consumable via the electrical interface of the consumable.

[0053] The electrical interface of the smoking substitute apparatus may also be used to identify the smoking substitute apparatus (in the form of a consumable) from a list of known types. For example, the consumable may have a certain concentration of nicotine and the electrical interface may be used to identify this. The electrical interface may additionally or alternatively be used to identify when a consumable is connected to the main body.

[0054] Again, where the smoking substitute apparatus is in the form of a consumable, the main body may comprise an identification means, which may, for example, be in the form of an RFID reader, a barcode or QR code reader. This identification means may be able to identify a characteristic (e.g. a type) of a consumable engaged with the main body. In this respect, the consumable may include any one or more of an RFID chip, a barcode or QR code, or memory within which is an identifier and which can be interrogated via the identification means.

[0055] The smoking substitute apparatus or main body may comprise a controller, which may include a microprocessor. The controller may be configured to control the supply of power from the power source to the heater of the smoking substitute apparatus (e.g. via the electrical contacts). A memory may be provided and may be operatively connected to the controller. The memory may include non-volatile memory. The memory may include instructions which, when implemented, cause the controller to perform certain tasks or steps of a method.

[0056] The main body or smoking substitute apparatus may comprise a wireless interface, which may be configured to communicate wirelessly with another device, for example a mobile device, e.g. via Bluetooth®. To this end, the wireless interface could include a Bluetooth® antenna. Other wireless communication interfaces, e.g. WiFi®, are also possible. The wireless interface may also be configured to communicate wirelessly with a remote server.

[0057] A puff sensor may be provided that is configured to detect a puff (i.e. inhalation from a user). The puff sensor may be operatively connected to the controller so as to be able to provide a signal to the controller that is indicative of a puff state (i.e. puffing or not puffing). The puff sensor may, for example, be in the form of a pressure sensor or an acoustic sensor. That is, the controller may control power supply to the heater of the consumable in response to a puff detection by the sensor. The control may be in the form of activation of the heater in response to a detected puff. That is, the smoking substitute apparatus may be configured to be activated when a puff is detected by the puff sensor. When the smoking substitute apparatus is in the form of a consumable, the puff sensor may be provided in the consumable or alternatively may be provided in the main body.

[0058] The term "flavourant" is used to describe a compound or combination of compounds that provide flavour and/or aroma. For example, the flavourant may be configured to interact with a sensory receptor of a user (such as an olfactory or taste receptor). The flavourant may include one or more volatile substances.

[0059] The flavourant may be provided in solid or liquid form. The flavourant may be natural or synthetic. For example, the flavourant may include menthol, liquorice, chocolate, fruit flavour (including e.g. citrus, cherry etc.), vanilla, spice (e.g. ginger, cinnamon) and tobacco flavour. The flavourant may be evenly dispersed or may be provided in isolated locations and/or varying concentrations.

[0060] According to a second aspect there is provided a smoking substitute system for generating an aerosol, comprising:

- i) the smoking substitute apparatus of the first aspect; and
- ii) a main body configured to engage with the smoking substitute apparatus; wherein the main body comprises a

controller and a power source configured to energise the aerosol generator.

[0061] According to a third aspect there is provided a method of using the smoking substitute apparatus of the first aspect, comprising:

i) generating the aerosol with the aerosol generator;

ii) drawing on the apparatus to induce an air flow along the passage for entraining the generated aerosol.

[0062] The present inventors consider that a flow rate of 1.3 L min^{-1} is towards the lower end of a typical user expectation of flow rate through a conventional cigarette and therefore through a user-acceptable smoking substitute apparatus. The present inventors further consider that a flow rate of 2.0 L min^{-1} is towards the higher end of a typical user expectation of flow rate through a conventional cigarette and therefore through a user-acceptable smoking substitute apparatus. Embodiments of the present invention therefore provide an aerosol with advantageous particle size characteristics across a range of flow rates of air through the apparatus.

[0063] The aerosol may have a Dv50 of at least $1.1 \mu\text{m}$, at least $1.2 \mu\text{m}$, at least $1.3 \mu\text{m}$, at least $1.4 \mu\text{m}$, at least $1.5 \mu\text{m}$, at least $1.6 \mu\text{m}$, at least $1.7 \mu\text{m}$, at least $1.8 \mu\text{m}$, at least $1.9 \mu\text{m}$ or at least $2.0 \mu\text{m}$.

[0064] The aerosol may have a Dv50 of not more than $4.9 \mu\text{m}$, not more than $4.8 \mu\text{m}$, not more than $4.7 \mu\text{m}$, not more than $4.6 \mu\text{m}$, not more than $4.5 \mu\text{m}$, not more than $4.4 \mu\text{m}$, not more than $4.3 \mu\text{m}$, not more than $4.2 \mu\text{m}$, not more than $4.1 \mu\text{m}$, not more than $4.0 \mu\text{m}$, not more than $3.9 \mu\text{m}$, not more than $3.8 \mu\text{m}$, not more than $3.7 \mu\text{m}$, not more than $3.6 \mu\text{m}$, not more than $3.5 \mu\text{m}$, not more than $3.4 \mu\text{m}$, not more than $3.3 \mu\text{m}$, not more than $3.2 \mu\text{m}$, not more than $3.1 \mu\text{m}$ or not more than $3.0 \mu\text{m}$.

[0065] A particularly preferred range for Dv50 of the aerosol is in the range $2\text{-}3 \mu\text{m}$.

[0066] The air inlet, flow passage, outlet and the vaporisation chamber may be configured so that, when the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the average magnitude of velocity of air in the vaporisation chamber is in the range $0\text{-}1.3 \text{ ms}^{-1}$. The average magnitude velocity of air may be calculated based on knowledge of the geometry of the vaporisation chamber and the flow rate.

[0067] When the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the average magnitude of velocity of air in the vaporisation chamber may be at least 0.001 ms^{-1} , or at least 0.005 ms^{-1} , or at least 0.01 ms^{-1} , or at least 0.05 ms^{-1} .

[0068] When the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the average magnitude of velocity of air in the vaporisation chamber may be at most 1.2 ms^{-1} , at most 1.1 ms^{-1} , at most 1.0 ms^{-1} , at most 0.9 ms^{-1} , at most 0.8 ms^{-1} , at most 0.7 ms^{-1} or at most 0.6 ms^{-1} .

[0069] The air inlet, flow passage, outlet and the vaporisation chamber may be configured so that, when the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the average magnitude of velocity of air in the vaporisation chamber is in the range $0\text{-}1.3 \text{ ms}^{-1}$. The average magnitude velocity of air may be calculated based on knowledge of the geometry of the vaporisation chamber and the flow rate.

[0070] When the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the average magnitude of velocity of air in the vaporisation chamber may be at least 0.001 ms^{-1} , or at least 0.005 ms^{-1} , or at least 0.01 ms^{-1} , or at least 0.05 ms^{-1} .

[0071] When the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the average magnitude of velocity of air in the vaporisation chamber may be at most 1.2 ms^{-1} , at most 1.1 ms^{-1} , at most 1.0 ms^{-1} , at most 0.9 ms^{-1} , at most 0.8 ms^{-1} , at most 0.7 ms^{-1} or at most 0.6 ms^{-1} .

[0072] When the calculated average magnitude of velocity of air in the vaporisation chamber is in the ranges specified, it is considered that the resultant aerosol particle size is advantageously controlled to be in a desirable range. It is further considered that the configuration of the apparatus can be selected so that the average magnitude of velocity of air in the vaporisation chamber can be brought within the ranges specified, at the exemplary flow rate of 1.3 L min^{-1} and/or the exemplary flow rate of 2.0 L min^{-1} .

[0073] The aerosol generator may comprise a vaporiser element loaded with aerosol precursor, the vaporiser element being heatable by a heater and presenting a vaporiser element surface to air in the vaporisation chamber. A vaporiser element region may be defined as a volume extending outwardly from the vaporiser element surface to a distance of 1 mm from the vaporiser element surface.

[0074] The air inlet, flow passage, outlet and the vaporisation chamber may be configured so that, when the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the average magnitude of velocity of air in the vaporiser element region is in the range $0\text{-}1.2 \text{ ms}^{-1}$. The average magnitude of velocity of air in the vaporiser element region may be calculated using computational fluid dynamics.

[0075] When the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the average magnitude of velocity of air in the vaporiser element region may be at least 0.001 ms^{-1} , or at least 0.005 ms^{-1} , or at least 0.01 ms^{-1} ,

or at least 0.05 ms^{-1} .

[0076] When the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the average magnitude of velocity of air in the vaporiser element region may be at most 1.1 ms^{-1} , at most 1.0 ms^{-1} , at most 0.9 ms^{-1} , at most 0.8 ms^{-1} , at most 0.7 ms^{-1} or at most 0.6 ms^{-1} .

[0077] The air inlet, flow passage, outlet and the vaporisation chamber may be configured so that, when the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the average magnitude of velocity of air in the vaporiser element region is in the range $0\text{-}1.2 \text{ ms}^{-1}$. The average magnitude of velocity of air in the vaporiser element region may be calculated using computational fluid dynamics.

[0078] When the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the average magnitude of velocity of air in the vaporiser element region may be at least 0.001 ms^{-1} , or at least 0.005 ms^{-1} , or at least 0.01 ms^{-1} , or at least 0.05 ms^{-1} .

[0079] When the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the average magnitude of velocity of air in the vaporiser element region may be at most 1.1 ms^{-1} , at most 1.0 ms^{-1} , at most 0.9 ms^{-1} , at most 0.8 ms^{-1} , at most 0.7 ms^{-1} or at most 0.6 ms^{-1} .

[0080] When the average magnitude of velocity of air in the vaporiser element region is in the ranges specified, it is considered that the resultant aerosol particle size is advantageously controlled to be in a desirable range. It is further considered that the velocity of air in the vaporiser element region is more relevant to the resultant particle size characteristics than consideration of the velocity in the vaporisation chamber as a whole. This is in view of the significant effect of the velocity of air in the vaporiser element region on the cooling of the vapour emitted from the vaporiser element surface.

[0081] Additionally or alternatively it is relevant to consider the maximum magnitude of velocity of air in the vaporiser element region.

[0082] Therefore, the air inlet, flow passage, outlet and the vaporisation chamber may be configured so that, when the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the maximum magnitude of velocity of air in the vaporiser element region is in the range $0\text{-}2.0 \text{ ms}^{-1}$.

[0083] When the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the maximum magnitude of velocity of air in the vaporiser element region may be at least 0.001 ms^{-1} , or at least 0.005 ms^{-1} , or at least 0.01 ms^{-1} , or at least 0.05 ms^{-1} .

[0084] When the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the maximum magnitude of velocity of air in the vaporiser element region may be at most 1.9 ms^{-1} , at most 1.8 ms^{-1} , at most 1.7 ms^{-1} , at most 1.6 ms^{-1} , at most 1.5 ms^{-1} , at most 1.4 ms^{-1} , at most 1.3 ms^{-1} or at most 1.2 ms^{-1} .

[0085] The air inlet, flow passage, outlet and the vaporisation chamber may be configured so that, when the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the maximum magnitude of velocity of air in the vaporiser element region is in the range $0\text{-}2.0 \text{ ms}^{-1}$.

[0086] When the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the maximum magnitude of velocity of air in the vaporiser element region may be at least 0.001 ms^{-1} , or at least 0.005 ms^{-1} , or at least 0.01 ms^{-1} , or at least 0.05 ms^{-1} .

[0087] When the air flow rate inhaled by the user through the apparatus is 2.0 L min^{-1} , the maximum magnitude of velocity of air in the vaporiser element region may be at most 1.9 ms^{-1} , at most 1.8 ms^{-1} , at most 1.7 ms^{-1} , at most 1.6 ms^{-1} , at most 1.5 ms^{-1} , at most 1.4 ms^{-1} , at most 1.3 ms^{-1} or at most 1.2 ms^{-1} .

[0088] It is considered that configuring the apparatus in a manner to permit such control of velocity of the airflow at the vaporiser permits the generation of aerosols with particularly advantageous particle size characteristics, including $Dv50$ values.

[0089] Additionally or alternatively it is relevant to consider the turbulence intensity in the vaporiser chamber in view of the effect of turbulence on the particle size of the generated aerosol. For example, the air inlet, flow passage, outlet and the vaporisation chamber may be configured so that, when the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the turbulence intensity in the vaporiser element region is not more than 1%.

[0090] When the air flow rate inhaled by the user through the apparatus is 1.3 L min^{-1} , the turbulence intensity in the vaporiser element region may be not more than 0.95%, not more than 0.9%, not more than 0.85%, not more than 0.8%, not more than 0.75%, not more than 0.7%, not more than 0.65% or not more than 0.6%.

[0091] It is considered that configuring the apparatus in a manner to permit such control of the turbulence intensity in the vaporiser element region permits the generation of aerosols with particularly advantageous particle size characteristics, including $Dv50$ values.

[0092] Following detailed investigations, the inventors consider, without wishing to be bound by theory, that the particle size characteristics of the generated aerosol may be determined by the cooling rate experienced by the vapour after emission from the vaporiser element (e.g. wick). In particular, it appears that imposing a relatively slow cooling rate on the vapour has the effect of generating aerosols with a relatively large particle size. The parameters discussed above (velocity and turbulence intensity) are considered to be mechanisms for implementing a particular cooling dynamic to the vapour.

[0093] More generally, it is considered that the air inlet, flow passage, outlet and the vaporisation chamber may be configured so that a desired cooling rate is imposed on the vapour. The particular cooling rate to be used depends of course on the nature of the aerosol precursor and other conditions. However, for a particular aerosol precursor it is possible to define a set of testing conditions in order to define the cooling rate, and by extension this imposes limitations on the configuration of the apparatus to permit such cooling rates as are shown to result in advantageous aerosols. Accordingly, the air inlet, flow passage, outlet and the vaporisation chamber may be configured so that the cooling rate of the vapour is such that the time taken to cool to 50 °C is not less than 16 ms, when tested according to the following protocol. The aerosol precursor is an e-liquid consisting of 1.6% freebase nicotine and the remainder a 65:35 propylene glycol and vegetable glycerine mixture, the e-liquid having a boiling point of 209 °C. Air is drawn into the air inlet at a temperature of 25 °C. The vaporiser is operated to release a vapour of total particulate mass 5 mg over a 3 second duration from the vaporiser element surface in an air flow rate between the air inlet and outlet of 1.3 L min⁻¹.

[0094] Additionally or alternatively, the air inlet, flow passage, outlet and the vaporisation chamber may be configured so that the cooling rate of the vapour is such that the time taken to cool to 50 °C is not less than 16 ms, when tested according to the following protocol. The aerosol precursor is an e-liquid consisting of 1.6% freebase nicotine and the remainder a 65:35 propylene glycol and vegetable glycerine mixture, the e-liquid having a boiling point of 209 °C. Air is drawn into the air inlet at a temperature of 25 °C. The vaporiser is operated to release a vapour of total particulate mass 5 mg over a 3 second duration from the vaporiser element surface in an air flow rate between the air inlet and outlet of 2.0 L min⁻¹.

[0095] Cooling of the vapour such that the time taken to cool to 50 °C is not less than 16 ms corresponds to an equivalent linear cooling rate of not more than 10 °C/ms.

[0096] The equivalent linear cooling rate of the vapour to 50 °C may be not more than 9 °C/ms, not more than 8 °C/ms, not more than 7 °C/ms, not more than 6 °C/ms or not more than 5 °C/ms.

[0097] Cooling of the vapour such that the time taken to cool to 50 °C is not less than 32 ms corresponds to an equivalent linear cooling rate of not more than 5 °C/ms.

[0098] The testing protocol set out above considers the cooling of the vapour (and subsequent aerosol) to a temperature of 50 °C. This is a temperature which can be considered to be suitable for an aerosol to exit the apparatus for inhalation by a user without causing significant discomfort. It is also possible to consider cooling of the vapour (and subsequent aerosol) to a temperature of 75 °C. Although this temperature is possibly too high for comfortable inhalation, it is considered that the particle size characteristics of the aerosol are substantially settled by the time the aerosol cools to this temperature (and they may be settled at still higher temperature).

[0099] Accordingly, the air inlet, flow passage, outlet and the vaporisation chamber may be configured so that the cooling rate of the vapour is such that the time taken to cool to 75 °C is not less than 4.5 ms, when tested according to the following protocol. The aerosol precursor is an e-liquid consisting of 1.6% freebase nicotine and the remainder a 65:35 propylene glycol and vegetable glycerine mixture, the e-liquid having a boiling point of 209 °C. Air is drawn into the air inlet at a temperature of 25 °C. The vaporiser is operated to release a vapour of total particulate mass 5 mg over a 3 second duration from the vaporiser element surface in an air flow rate between the air inlet and outlet of 1.3 L min⁻¹.

[0100] Additionally or alternatively, the air inlet, flow passage, outlet and the vaporisation chamber may be configured so that the cooling rate of the vapour is such that the time taken to cool to 75 °C is not less than 4.5 ms, when tested according to the following protocol. The aerosol precursor is an e-liquid consisting of 1.6% freebase nicotine and the remainder a 65:35 propylene glycol and vegetable glycerine mixture, the e-liquid having a boiling point of 209 °C. Air is drawn into the air inlet at a temperature of 25 °C. The vaporiser is operated to release a vapour of total particulate mass 5 mg over a 3 second duration from the vaporiser element surface in an air flow rate between the air inlet and outlet of 2.0 L min⁻¹.

[0101] Cooling of the vapour such that the time taken to cool to 75 °C is not less than 4.5 ms corresponds to an equivalent linear cooling rate of not more than 30 °C/ms.

[0102] The equivalent linear cooling rate of the vapour to 75 °C may be not more than 29 °C/ms, not more than 28 °C/ms, not more than 27 °C/ms, not more than 26 °C/ms, not more than 25 °C/ms, not more than 24 °C/ms, not more than 23 °C/ms, not more than 22 °C/ms, not more than 21 °C/ms, not more than 20 °C/ms, not more than 19 °C/ms, not more than 18 °C/ms, not more than 17 °C/ms, not more than 16 °C/ms, not more than 15 °C/ms, not more than 14 °C/ms, not more than 13 °C/ms, not more than 12 °C/ms, not more than 11 °C/ms or not more than 10 °C/ms.

[0103] Cooling of the vapour such that the time taken to cool to 75 °C is not less than 13 ms corresponds to an equivalent linear cooling rate of not more than 10 °C/ms.

[0104] It is considered that configuring the apparatus in a manner to permit such control of the cooling rate of the vapour permits the generation of aerosols with particularly advantageous particle size characteristics, including Dv50 values.

[0105] The invention includes the combination of the aspects and preferred features described except where such a combination is clearly impermissible or expressly avoided.

Summary of the Figures

[0106] So that the invention may be understood, and so that further aspects and features thereof may be appreciated, embodiments illustrating the principles of the invention will now be discussed in further detail with reference to the accompanying figures, in which:

Figure 1 illustrates a set of rectangular tubes for use in experiments to assess the effect of flow and cooling conditions at the wick on aerosol properties. Each tube has the same depth and length but different width.

Figure 2 shows a schematic perspective longitudinal cross sectional view of an example rectangular tube with a wick and heater coil installed.

Figure 3 shows a schematic transverse cross sectional view an example rectangular tube with a wick and heater coil installed. In this example, the internal width of the tube is 12 mm.

Figures 4A-4D show air flow streamlines in the four devices used in a turbulence study.

Figure 5 shows the experimental set up to investigate the influence of inflow air temperature on aerosol particle size, in order to investigate the effect of vapour cooling rate on aerosol generation.

Figure 6 shows a schematic longitudinal cross sectional view of a first smoking substitute apparatus (pod 1) used to assess influence of inflow air temperature on aerosol particle size.

Figure 7 shows a schematic longitudinal cross sectional view of a second smoking substitute apparatus (pod 2) used to assess influence of inflow air temperature on aerosol particle size.

Figure 8A shows a schematic longitudinal cross sectional view of a third smoking substitute apparatus (pod 3) used to assess influence of inflow air temperature on aerosol particle size. Figure 8B shows a schematic longitudinal cross sectional view of the same third smoking substitute apparatus (pod 3) in a direction orthogonal to the view taken in Figure 8A.

Figure 9 shows a plot of aerosol particle size (Dv50) experimental results against calculated air velocity.

Figure 10 shows a plot of aerosol particle size (Dv50) experimental results against the flow rate through the apparatus for a calculated air velocity of 1 m/s.

Figure 11 shows a plot of aerosol particle size (Dv50) experimental results against the average magnitude of the velocity in the vaporiser surface region, as obtained from CFD modelling.

Figure 12 shows a plot of aerosol particle size (Dv50) experimental results against the maximum magnitude of the velocity in the vaporiser surface region, as obtained from CFD modelling.

Figure 13 shows a plot of aerosol particle size (Dv50) experimental results against the turbulence intensity.

Figure 14 shows a plot of aerosol particle size (Dv50) experimental results dependent on the temperature of the air and the heating state of the apparatus.

Figure 15 shows a plot of aerosol particle size (Dv50) experimental results against vapour cooling rate to 50°C.

Figure 16 shows a plot of aerosol particle size (Dv50) experimental results against vapour cooling rate to 75°C.

Figure 17 is a schematic front view of a smoking substitute system, according to a first reference arrangement, in an engaged position;

Figure 18 is a schematic front view of the smoking substitute system of the first reference arrangement in a disengaged position;

Figure 19 is a schematic longitudinal cross sectional view of a smoking substitute apparatus of the first reference

arrangement; and

Figure 20 is an enlarged schematic cross sectional view of part of the air passage and aerosol generation chamber of the first reference arrangement;

Figure 21 is a schematic cross sectional view of a smoking substitute apparatus of a first embodiment;

Figure 22 is a computational fluid dynamics (CFD) plot of flow simulation in the smoking substitute apparatus of Figure 21; and

Figure 23 is a schematic cross sectional view of a smoking substitute system of a second embodiment.

Detailed Description of the Invention

[0107] Further background to the present invention and further aspects and embodiments of the present invention will now be discussed with reference to the accompanying figures. Further aspects and embodiments will be apparent to those skilled in the art. The contents of all documents mentioned in this text are incorporated herein by reference in their entirety.

[0108] Figures 17 and 18 illustrate a smoking substitute system in the form of an e-cigarette system 110. The system 110 comprises a main body 120 of the system 110, and a smoking substitute apparatus in the form of an e-cigarette consumable (or "pod") 150. In the illustrated embodiment the consumable 150 (sometimes referred to herein as a smoking substitute apparatus) is removable from the main body 120, so as to be a replaceable component of the system 110. The e-cigarette system 110 is a closed system in the sense that it is not intended that the consumable should be refillable with e-liquid by a user.

[0109] As is apparent from Figures 17 and 18, the consumable 150 is configured to engage the main body 120. Figure 17 shows the main body 120 and the consumable 150 in an engaged state, whilst Figure 18 shows the main body 120 and the consumable 150 in a disengaged state. When engaged, a portion of the consumable 150 is received in a cavity of corresponding shape in the main body 120 and is retained in the engaged position by way of a snap-engagement mechanism. In other embodiments, the main body 120 and consumable 150 may be engaged by screwing one into (or onto) the other, or through a bayonet fitting, or by way of an interference fit.

[0110] The system 110 is configured to vaporise an aerosol precursor, which in the illustrated embodiment is in the form of a nicotine-based e-liquid 160. The e-liquid 160 comprises nicotine and a base liquid including propylene glycol and/or vegetable glycerine. In the present embodiment, the e-liquid 160 is flavoured by a flavourant. In other embodiments, the e-liquid 160 may be flavourless and thus may not include any added flavourant.

[0111] Figure 19 shows a schematic longitudinal cross sectional view of a smoking substitute apparatus according to a reference arrangement that is configured to form part of the smoking substitute system shown in Figures 17 and 18. The smoking substitute apparatus, or consumable 150 as shown in Figure 19 is provided as a reference arrangement to illustrate the features of a consumable 150 and its interaction with the main body 120. In Figure 19, the e-liquid 160 is stored within a reservoir in the form of a tank 152 that forms part of the consumable 150. In the illustrated embodiment, the consumable 150 is a "single-use" consumable 150. That is, upon exhausting the e-liquid 160 in the tank 152, the intention is that the user disposes of the entire consumable 150. The term "single-use" does not necessarily mean the consumable is designed to be disposed of after a single smoking session. Rather, it defines the consumable 150 is not arranged to be refilled after the e-liquid contained in the tank 152 is depleted. The tank may include a vent (not shown) to allow ingress of air to replace e-liquid that has been used from the tank. The consumable 150 preferably includes a window 158 (see Figures 1 and 2), so that the amount of e-liquid in the tank 152 can be visually assessed. The main body 120 includes a slot 157 so that the window 158 of the consumable 150 can be seen whilst the rest of the tank 152 is obscured from view when the consumable 150 is received in the cavity of the main body 120. The consumable 150 may be referred to as a "clearomizer" when it includes a window 158, or a "cartomizer" when it does not.

[0112] In other embodiments, the e-liquid (i.e. aerosol precursor) may be the only part of the system that is truly "single-use". That is, the tank may be refillable with e-liquid or the e-liquid may be stored in a non-consumable component of the system. For example, in such other embodiments, the e-liquid may be stored in a tank located in the main body or stored in another component that is itself not single-use (e.g. a refillable cartomizer).

[0113] The external wall of tank 152 is provided by a casing of the consumable 150. The tank 152 annularly surrounds, and thus defines a portion of, a passage 170 that extends between a vaporiser inlet 172 and an outlet 174 at opposing ends of the consumable 150. In this respect, the passage 170 comprises an upstream end at the end of the consumable 150 that engages with the main body 120, and a downstream end at an opposing end of the consumable 150 that comprises a mouthpiece 154 of the system 110.

[0114] When the consumable 150 is received in the cavity of the main body 120 as shown in Figure 19, a plurality of

device air inlets 176 are formed at the boundary between the casing of the consumable and the casing of the main body. The device air inlets 176 are in fluid communication with the vaporiser inlet 172 through an inlet flow channel 178 formed in the cavity of the main body which is of corresponding shape to receive a part of the consumable 150. Air from outside of the system 110 can therefore be drawn into the passage 170 through the device air inlets 176 and the inlet flow channels 178.

[0115] When the consumable 150 is engaged with the main body 120, a user can inhale (i.e. take a puff) via the mouthpiece 154 so as to draw air through the passage 170, and so as to form an airflow (indicated by the dashed arrows in Figure 19) in a direction from the vaporiser inlet 172 to the outlet 174. Although not illustrated, the passage 170 may be partially defined by a tube (e.g. a metal tube) extending through the consumable 150. In Figure 19, for simplicity, the passage 170 is shown with a substantially circular cross-sectional profile with a constant diameter along its length. In other arrangements and in some embodiments, the passage may have other cross-sectional profiles, such as oval shaped or polygonal shaped profiles. Further, in other arrangements and some embodiments, the cross sectional profile and the diameter (or hydraulic diameter) of the passage may vary along its longitudinal axis.

[0116] The smoking substitute system 110 is configured to vaporise the e-liquid 160 for inhalation by a user. To provide this operability, the consumable 150 comprises an aerosol generator such as a heater, said heater having a porous wick 162 and a resistive heating element in the form of a heating filament 164 that is helically wound (in the form of a coil) around a portion of the porous wick 162. The porous wick 162 extends across the passage 170 (i.e. transverse to a longitudinal axis of the passage 170 and thus also transverse to the air flow along the passage 170 during use) and opposing ends of the wick 162 extend into the tank 152 (so as to be immersed in the e-liquid 160). In this way, e-liquid 160 contained in the tank 152 is conveyed from the opposing ends of the porous wick 162 to a central portion of the porous wick 162 so as to be exposed to the airflow in the passage 170.

[0117] The helical filament 164 is wound about the exposed central portion of the porous wick 162 and is electrically connected to an electrical interface in the form of electrical contacts 156 mounted at the end of the consumable that is proximate the main body 120 (when the consumable and the main body are engaged). When the consumable 150 is engaged with the main body 120, electrical contacts 156 make contact with corresponding electrical contacts (not shown) of the main body 120. The main body electrical contacts are electrically connectable to a power source (not shown) of the main body 120, such that (in the engaged position) the filament 164 is electrically connectable to the power source. In this way, power can be supplied by the main body 120 to the filament 164 in order to heat the filament 164. This heats the porous wick 162 which causes e-liquid 160 conveyed by the porous wick 162 to vaporise and thus to be released from the porous wick 162. The vaporised e-liquid becomes entrained in the airflow and, as it cools in the airflow (between the heated wick and the outlet 174 of the passage 170), condenses to form an aerosol. This aerosol is then inhaled, via the mouthpiece 154, by a user of the system 110. As e-liquid is lost from the heated portion of the wick, further e-liquid is drawn along the wick from the tank to replace the e-liquid lost from the heated portion of the wick.

[0118] The filament 164 and the exposed central portion of the porous wick 162 are positioned across the passage 170. More specifically, the part of passage that contains the filament 164 and the exposed portion of the porous wick 162 forms a vaporisation chamber, or aerosol generation chamber. In the illustrated example, the aerosol generation chamber has the same cross-sectional diameter as the passage 170. However, in other embodiments the aerosol generation chamber may have a different cross sectional profile as the passage 170. For example, the aerosol generation chamber may have a larger cross sectional diameter than at least some of the downstream part of the passage 170 so as to enable a longer residence time for the air inside the aerosol generation chamber.

[0119] Figure 20 illustrates in more detail the aerosol generation chamber of the reference arrangement as shown in Figure 19 and therefore the region of the consumable 150 around the wick 162 and filament 164. The helical filament 164 is wound around a central portion of the porous wick 162. The porous wick extends across passage 170. E-liquid 160 contained within the tank 152 is conveyed as illustrated schematically by arrows 401, i.e. from the tank and towards the central portion of the porous wick 162.

[0120] When the user inhales, air is drawn from through the air inlets 176 shown in Figure 19, along inlet flow channel 178 to aerosol generation chamber inlet 172 and into the aerosol generation chamber containing porous wick 162. The porous wick 162 extends substantially transverse to the airflow direction. The airflow passes around the porous wick, at least a portion of the airflow substantially following the surface of the porous wick 162. In examples where the porous wick has a cylindrical cross-sectional profile, the airflow may follow a curved path around an outer periphery of the porous wick 162.

[0121] At substantially the same time as the airflow passes around the porous wick 162, the filament 164 is heated so as to vaporise the e-liquid which has been wicked into the porous wick. The airflow passing around the porous wick 162 picks up this vaporised e-liquid, and the vapour-containing airflow is drawn in direction 403 further down passage 170.

[0122] The power source of the main body 120 may be in the form of a battery (e.g. a rechargeable battery such as a lithium ion battery). The main body 120 may comprise a connector in the form of e.g. a USB port for recharging this battery. The main body 120 may also comprise a controller that controls the supply of power from the power source to the main body electrical contacts (and thus to the filament 164). That is, the controller may be configured to control a

voltage applied across the main body electrical contacts, and thus the voltage applied across the filament 164. In this way, the filament 164 may only be heated under certain conditions (e.g. during a puff and/or only when the system is in an active state). In this respect, the main body 120 may include a puff sensor (not shown) that is configured to detect a puff (i.e. inhalation). The puff sensor may be operatively connected to the controller so as to be able to provide a signal, to the controller, which is indicative of a puff state (i.e. puffing or not puffing). The puff sensor may, for example, be in the form of a pressure sensor or an acoustic sensor.

[0123] Although not shown, the main body 120 and consumable 150 may comprise a further interface which may, for example, be in the form of an RFID reader, a barcode or QR code reader. This interface may be able to identify a characteristic (e.g. a type) of a consumable 150 engaged with the main body 120. In this respect, the consumable 150 may include any one or more of an RFID chip, a barcode or QR code, or memory within which is an identifier and which can be interrogated via the interface.

[0124] Figure 21 illustrates a longitudinal cross sectional view of a smoking substitute apparatus according to the first embodiment of the present disclosure. More specifically, the consumable 250 is configured to engage and disengage with the main body 120 and is interchangeable with the reference arrangement 150 as shown in Figures 19 and 20. Furthermore, the consumable 250 is configured to interact with the main body 120 in the same manner as the reference arrangement 150 and the user may operate the consumable 250 in the same manner as the reference arrangement 150.

[0125] The consumable 250 comprises a housing which defines an aerosol generation chamber 280 at a first end of the consumable 250. Said first end of the consumable 250 is configured to be received in a cavity of the main body 120. The aerosol generation chamber 280 comprises a heater extending across the aerosol generation chamber 280. The heater comprises a porous wick 262 and a heating filament 264 helically wound around a portion of the porous wick 262. The end portions of the porous wick 262 is configured to be in fluid communication with a tank 252 surrounding the aerosol generation chamber 280 and thereby allow aerosol precursor stored in the tank to be wicked towards the porous wick 262. In use, the heating element is energised and thereby vaporises aerosol precursor in the porous wick 262 to form a vapour. The vapour may promptly cool in the vicinity of the heater and thereby condenses to form an aerosol. The flow path of the aerosol and/or aerosol 414 is shown as dashed arrows in Figure 21.

[0126] As shown in Figure 21, the aerosol generation chamber 280 comprises a chamber inlet 272 opened through a base of the aerosol generation chamber 280. The chamber inlet 272 is opened in between a pair of electrical contacts 256. The base of the aerosol generation chamber 280 also forms part of the housing, therefore the chamber inlet 272 also form the air inlet 272 of the housing. The air inlet 272 is opened at the centre of the base and directs towards the heater. In use, an airflow, substantially at an ambient temperature, enters the aerosol generation chamber 280 and spreads across the aerosol generation chamber 280. The airflow then passes over the surface of the wick 262 to cool and condense the vapour generated thereat. In some embodiments, a plurality of air inlets may be provided and may be distributed throughout the base of the aerosol generation chamber 280 in order to aid the distribution of airflow. The air inlet 272 is in fluid communication with an outlet 274 through a passage extending between the two.

[0127] The aerosol generation chamber 280 further comprises a chamber outlet 282. Said chamber outlet 282 opens towards the outlet 274 at the second end of the housing opposite the first end. The second end of the consumable 250 comprises a mouthpiece 254 on which a user may puff in order to draw the airflow through the chamber inlet 272 and into aerosol generation chamber 280. The airflow then entrains the aerosol formed in the aerosol generation chamber 280 before being drawn through a downstream portion of the passage 270 towards the outlet 274. The flow path 412 of the airflow is shown as solid arrows in Figure 5. The downstream portion of the passage 270 extends without discontinuity (e.g. seamlessly) from the aerosol generation chamber 280 towards the outlet 274. For example, the connection or intersection between the aerosol generation chamber 280 and the downstream portion of the passage 270 may be substantially free of protrusion and/or indentation that may induce turbulence and/or a sharp change in direction in the aerosol flow.

[0128] In the illustrated embodiment, the chamber outlet 282 is configured to be wider than the outlet 274, e.g. the chamber outlet 282 has a larger hydraulic diameter than the outlet 274. The downstream portion of the passage 270b comprises a flow converging section 276 for converging the aerosol flow from the wider chamber outlet 282 towards the narrower outlet 274. The flow converging section 276 comprises a curved sidewalls tapered towards the outlet. That is, the cross sectional area of the flow converging section 276 reduces in a non-linear manner along the along its longitudinal axis. As shown in Figure 5, the curved sidewalls are curved along the longitudinal axis of the passage and may resemble a champagne flute. More specifically, the curved sidewalls comprises a sigmoidal profile, or an S-shaped profile, along the longitudinal axis of the passage.

[0129] The flow converging section 276 comprises an upstream end and a downstream end in the direction of the airflow. More specifically, the upstream end refers to an end of the flow converging section 276 directed towards the heater and the downstream end refers to an end of the flow converging section 276 directed towards the outlet 274. As shown in Figure 21, the upstream end of the flow converging section 276 substantially conforms to the cross sectional profile of the aerosol generation chamber 280. In other words, the widest point along the flow converging section 276 has the same shape and hydraulic diameter, and therefore the same cross sectional area, as the chamber outlet 282

downstream of the heater. This advantageously results in a smooth flow path along the direction of aerosol flow.

[0130] In the illustrated embodiment, the flow converging portion 276 is spaced from the chamber outlet 282 along the downstream portion of the passage 270. Such arrangement provides a buffering region for the formation of aerosol droplets, as well as allowing the aerosol flow to stabilise prior to entering the flow converging section 276. For example, the flow of aerosol entering the flow converging section 276 and/or in the flow converging section 276 may be laminar or transitional. In some other embodiments, the upstream end of the flow converging portion is immediately adjacent to the chamber outlet. That is, the downstream portion of the passage comprises curved sidewall extending from the chamber outlet.

[0131] The flow path or airflow and entrained aerosol is best illustrated in a Computational Fluid Dynamic (CFD) plot as shown in Figure 22. The CFD plot as shown in Figure 22 is generated by simulating a user puff taken in the smoking substitute apparatus 250, at a volumetric flowrate of 1.3L/min. The CFD plot illustrates the airflow and the flow of aerosol in streamline, where the structural details of the apparatus 250 are omitted.

[0132] In Figure 22, an airflow 412 enters the first end of the consumable and entrains generated aerosol as it passes through the aerosol generation chamber 280. The aerosol then stabilises along the downstream portion of passage 270. For example, the streamline plot indicates the amount of turbulence, or chaotic flow, gradually reduces along the downstream portion of the passage 270. As the aerosol enters the upstream end of the flow converging portion 276, a laminar flow pattern, e.g. a lack of movement or mixing in a direction orthogonal to the flow, is established. Such laminar flow pattern in the aerosol flow continues along the flow converging portion 276 where the aerosol flow gradually converges towards the outlet 274. As a result, aerosol with larger droplet size may be discharged from the outlet due to a substantial reduction in turbulence along the aerosol flow path.

[0133] The mouthpiece 254 as illustrated in Figure 21 covers the first end of the housing. That is, the mouthpiece comprises an aperture fluidly connected to the outlet 274. The aperture may have the same cross sectional profile as the outlet 274, or it may have a different profile to the outlet 274, e.g. the aperture at the mouthpiece may have a smaller or a larger cross sectional area to the outlet 274. In some embodiments, the mouthpiece may be omitted altogether and therefore the user may puff directly on the outlet of the housing.

[0134] Figure 23 illustrates a longitudinal cross sectional view of a smoking substitute apparatus 350 according to the second embodiment of the present disclosure. More specifically, the consumable 350 is configured to engage and disengage with the main body 120 and is interchangeable with the reference arrangement 150 as shown in Figures 19 and 20. Furthermore, the consumable 350 is configured to interact with the main body 120 in the same manner as the reference arrangement 150 and the user may operate the consumable 250 in the same manner as the reference arrangement 150.

[0135] The consumable 350 of the second embodiment is structurally similar to the consumable 250 as shown in Figure 21. For example, the consumable 350 comprises a downstream portion of a passage 370b having a flow converging section 376 with curved sidewalls tapered towards the outlet 374. The consumable 350 differs to the consumable 250 in that the passage further comprises a pair of upstream portions 370a that bypasses the heater in the aerosol generation chamber 380. That is, in this embodiment, the heater is located in a stagnant cavity of the aerosol generation chamber 380 that is substantially free of airflow.

[0136] As shown in Figure 23, the consumable 350 comprises a pair of air inlets 372 opened at the first end of the housing. Through the upstream portions of the passage 370a, the air inlets 372 are in fluid communication with respective chamber inlets 378 opened on either sides of the aerosol generation chamber 380 adjacent to the chamber outlet 382. For example, the chamber inlets 378 are configured to allow an airflow 412 to orthogonally emerge into the aerosol flow 414. As such the aerosol at the chamber outlet 382 may entrain with the airflow towards the downstream portion of the passage 370b. In other words, a junction is provided along the passage to fluidly connect the upper portion 370a and the downstream portion 370b of the passage with the chamber outlet 382 of the aerosol generation chamber 380, the junction is configured to allow the aerosol in the aerosol generation chamber 380 to entrain with the airflow passing across the junction.

[0137] In contrast with the consumable 250 as shown in Figure 21 where the airflow passes over the heater, the flow path 412 of the airflow through the consumable 350 of the present invention is spaced from the heater. Since the airflow enters through the chamber inlets 378 at a sidewall, it enters the aerosol generation chamber 380 in a direction orthogonal to the longitudinal axis of the housing, e.g. in a radial direction and parallel to the heater, the resulting airflow path does not directly impinge upon the heater. Such arrangement reduces the turbulence in the vicinity of the heater and thereby allows aerosol precursor to be vaporised in absence of a direct airflow. Therefore, the vicinity of the heater may be considered to be a "stagnant" volume. For example, volumetric flowrate of vapour and/or aerosol in the vicinity of the heater may be less than 0.1 litre per minute. The vaporised aerosol precursor, or vapour, may cool and therefore condenses in the vicinity of the heater to form an aerosol, which is subsequently merged or entrained with the airflow. In addition, a portion of the vaporised aerosol precursor may not immediately condense in the vicinity of the heater but may cool to form an aerosol as it entrains into the airflow passing through the junction. With the absence of, or much reduced, airflow in the vicinity of the heater, the aerosol as generated by the illustrated embodiment has an averaged

droplet size d_{50} of at least $1\ \mu\text{m}$. More preferably, the aerosol as generated by the illustrated embodiment has an averaged droplet size d_{50} of ranged between $2\ \mu\text{m}$ to $3\ \mu\text{m}$.

[0138] In the illustrated embodiment, the heater is spaced from the chamber inlets 372. Such arrangement may reduce the amount of airflow that may interact with the heater, and therefore it may minimise the amount of turbulence in the vicinity of the heater. Furthermore, such arrangement may increase the residence time of vapour in the stagnant aerosol generation chamber 380 for the vapour to cool and condense, and thereby it may result in the formation of larger aerosol droplets.

[0139] In some other embodiments, the heater may be positioned adjacent to, or immediately upstream of, the chamber inlets along the longitudinal axis of the housing, and therefore that the flow path of aerosol from the heater to merge with the airflow may be shortened. This may allow aerosol to entrain with the airflow in a more efficient manner.

[0140] Referring back to Figure 23, the base of aerosol generation chamber 380 is sealed. This differs to the consumable 250 which comprises a chamber inlet 272 formed at the base of the aerosol generation chamber 280. The heating filament 364 in the illustrated embodiment is electrically connected to electrical contacts 356 through sealed apertures at the base of the aerosol generation chamber 380. Such arrangement prevents air ingress, as well as fluid leakage, through the base of the aerosol generation chamber 380.

[0141] In each of the embodiments shown in Figures 21 and 23, when the first end of the consumable 250,350 is received into the main body 120, the electrical contacts 256, 356 contact corresponding electrical contacts in the cavity of the main body 120. As such, the heater is put in electrical connection with the power source in the main body 120.

[0142] The electrical contacts 256, 356 have an electrically conductive surface provided at the external surface of base of consumable 250, 350 and extends orthogonally to the longitudinal axis of the housing. Similarly, the corresponding electrical contacts at the main body have an electrically conductive surface provided at the internal surface of cavity of the main body and extends orthogonally to the longitudinal axis of the main body. One, or both, of the electrical contacts 256, 356 and the corresponding electrical contacts of the main body 120 may be resiliently movable in the axial direction. For example, the electrical contacts 256,356 and corresponding electrical contacts 259 of the main body 120 may comprise a cantilever spring or coil spring. The resilient movement may help to ensure a secure electrical connection. The electrical contacts 256, 356 may have the same configuration as corresponding electrical contacts 259.

[0143] In a further embodiment, not illustrated, features of the embodiments of Figures 21 and 23 may be combined. For example, there may be an airflow provided over through the aerosol generation chamber (as in Figure 21) and in addition there may be provided a bypass airflow, bypassing the aerosol generation chamber (as in Figure 23). This can provide a satisfactory compromise between the technical benefits of particle size control and aerosol entrainment in the airflow to the outlet seen in the embodiments of Figures 21 and 23.

[0144] There now follows a disclosure of certain experimental work undertaken to determine the effects of certain conditions in the smoking substitute apparatus on the particle size of the generated aerosol.

[0145] This experimental work supports the observation that control over the flow conditions at the heated wick can have a significant effect on the particle size of the generated aerosol, and therefore provides insight into the implementation and advantages associated with the embodiments illustrated in Figures 21 and 23.

1. Introduction

[0146] Aerosol droplet size is a considered to be an important characteristic for smoking substitution devices. Droplets in the range of $2\text{-}5\ \mu\text{m}$ are preferred in order to achieve improved nicotine delivery efficiency and to minimise the hazard of second-hand smoking. However, at the time of writing (September 2019), commercial EVP devices typically deliver aerosols with droplet size averaged around $0.5\ \mu\text{m}$, and to the knowledge of the inventors not a single commercially available device can deliver an aerosol with an average particle size exceeding $1\ \mu\text{m}$.

[0147] The present inventors speculate, without themselves wishing to be bound by theory, that there has to date been a lack of understanding in the mechanisms of e-liquid evaporation, nucleation and droplet growth in the context of aerosol generation in smoking substitute devices. The present inventors have therefore studied these issues in order to provide insight into mechanisms for the generation of aerosols with larger particles. The present inventors have carried out experimental and modelling work alongside theoretical investigations, leading to significant achievements as now reported.

[0148] This disclosure considers the roles of air velocity, air turbulence and vapour cooling rate in affecting aerosol particle size.

2. Experiments

[0149] In this work, a Malvern PANalytical Spraytec laser diffraction system was employed for the particle size measurement. In order to limit the number of variables, the same coil and wick ($1.5\ \text{ohms Ni-Cr}$ coil, $1.8\ \text{mm Y07}$ cotton wick), the same e-liquid (1.6% freebase nicotine, $65:35$ propylene glycol (PG)/vegetable glycerine (VG) ratio, no added flavour)

and the same input power (10W) were used in all experiments. Y07 represents the grade of cotton wick, meaning that the cotton has a linear density of 0.7 grams per meter.

[0150] Particle sizes were measured in accordance with ISO 13320:2009(E), which is an international standard on laser diffraction methods for particle size analysis. This is particularly well suited to aerosols, because there is an assumption in this standard that the particles are spherical (which is a good assumption for liquid-based aerosols). The standard is stated to be suitable for particle sizes in the range 0.1 micron to 3 mm.

[0151] The results presented here concentrate on the volume-based median particle size $Dv50$. This is to be taken to be the same as the parameter d_{50} used above.

2.1. Rectangular tube testing

[0152] The work reported here based on the inventors' insight that aerosol particle size might be related to: 1) air velocity; 2) flow rate; and 3) Reynolds number. In a given EVP device, these three parameters are interlinked to each other, making it difficult to draw conclusions on the roles of each individual factor. In order to decouple these factors, experiments were carried out using a set of rectangular tubes having different dimensions. These were manufactured by 3D printing. The rectangular tubes were 3D printed in an MJP 2500 3D printer. Figure 1 illustrates the set of rectangular tubes. Each tube has the same depth and length but different width. Each tube has an integral end plate in order to provide a seal against air flow outside the tube. Each tube also has holes formed in opposing side walls in order to accommodate a wick.

[0153] Figure 2 shows a schematic perspective longitudinal cross sectional view of an example rectangular tube 1170 with a wick 1162 and heater coil 1164 installed. The location of the wick is about half way along the length of the tube. This is intended to allow the flow of air along the tube to settle before reaching the wick.

[0154] Figure 3 shows a schematic transverse cross sectional view an example rectangular tube 1170 with a wick 1162 and heater coil 1164 installed. In this example, the internal width of the tube is 12 mm

The rectangular tubes were manufactured to have same internal depth of 6 mm in order to accommodate the standardized coil and wick, however the tube internal width varied from 4.5 mm to 50 mm. In this disclosure, the "tube size" is referred to as the internal width of rectangular tubes.

[0155] The rectangular tubes with different dimensions were used to generate aerosols that were tested for particle size in a Malvern PANalytical Spraytec laser diffraction system. An external digital power supply was dialled to 2.6A constant current to supply 10W power to the heater coil in all experiments. Between two runs, the wick was saturated manually by applying one drop of e-liquid on each side of the wick.

[0156] Three groups of experiments were carried out in this study:

1. 1.3 lpm (litres per minute, $L \text{ min}^{-1}$ or LPM) constant flow rate on different size tubes

2. 2.0 lpm constant flow rate on different size tubes

3. 1 m/s constant air velocity on 3 tubes: i) 5mm tube at 1.4 lpm flow rate; ii) 8mm tube at 2.8 lpm flow rate; and iii) 20mm tube at 8.6 lpm flow rate.

[0157] Table 1 shows a list of experiments in this study. The values in "calculated air velocity" column were obtained by simply dividing the flow rate by the intersection area at the centre plane of wick. Reynolds numbers (Re) were calculated through the following equation:

$$Re = \frac{\rho v L}{\mu}$$

where: ρ is the density of air (1.225 kg/m^3); v is the calculated air velocity in table 1; μ is the viscosity of air ($1.48 \times 10^{-5} \text{ m}^2/\text{s}$); L is the characteristic length calculated by:

$$L = \frac{4P}{A}$$

where: P is the perimeter of the flow path's intersection, and A is the area of the flow path's intersection.

Table 1. List of experiments in the rectangular tube study

	Tube size [mm]	Flow rate [lpm]	Reynolds number	Calculated air velocity [m/s]
1.3 lpm constant flow rate	4.5	1.3	153	1.17
	6	1.3	142	0.71
	7	1.3	136	0.56
	8	1.3	130	0.47
	10	1.3	120	0.35
	12	1.3	111	0.28
	20	1.3	86	0.15
	50	1.3	47	0.06
2.0 lpm constant flow rate	4.5	2.0	236	1.81
	5	2.0	230	1.48
	6	2.0	219	1.09
	8	2.0	200	0.72
	12	2.0	171	0.42
	20	2.0	132	0.23
	50	2.0	72	0.09
1.0 m/s constant air velocity	5.0	1.4	155	1.00
	8	2.8	279	1.00
	20	8.6	566	1.00

[0158] Five repetition runs were carried out for each tube size and flow rate combination. Between adjacent runs there were at least 5 minutes wait time for the Spraytec system to be purged. In each run, real time particle size distributions were measured in the Spraytec laser diffraction system at a sampling rate of 2500 per second, the volume distribution median (Dv50) was averaged over a puff duration of 4 seconds. Measurement results were averaged and the standard deviations were calculated to indicate errors as shown in section 4 below.

2.2. Turbulence tube testing

[0159] The Reynolds numbers in Table 1 are all well below 1000, therefore, it is considered fair to assume all the experiments in section 2.1 would be under conditions of laminar flow. Further experiments were carried out and reported in this section to investigate the role of turbulence.

[0160] Turbulence intensity was introduced as a quantitative parameter to assess the level of turbulence. The definition and simulation of turbulence intensity is discussed below (see section 3.2).

[0161] Different device designs were considered in order to introduce turbulence. In the experiments reported here, jetting panels were added in the existing 12mm rectangular tubes upstream of the wick. This approach enables direct comparison between different devices as they all have highly similar geometry, with turbulence intensity being the only variable.

[0162] Figures 4A-4D show air flow streamlines in the four devices used in this turbulence study. Figure 4A is a standard 12mm rectangular tube with wick and coil installed as explained in the previous section, with no jetting panel. Figure 4B has a jetting panel located 10mm below (upstream from) the wick. Figure 4C has the same jetting panel 5mm below the wick. Figure 4D has the same jetting panel 2.5mm below the wick. As can be seen from Figures 4B-4D, the jetting panel has an arrangement of apertures shaped and directed in order to promote jetting from the downstream face of the panel and therefore to promote turbulent flow. Accordingly, the jetting panel can introduce turbulence downstream, and the panel causes higher level of turbulence near the wick when it is positioned closer to the wick. As shown in Figures 4A-4D, the four geometries gave turbulence intensities of 0.55%, 0.77%, 1.06% and 1.34%, respectively, with Figure 4A being the least turbulent, and Figure 4D being the most turbulent.

[0163] For each of Figures 4A-4D, there are shown three modelling images. The image on the left shows the original image (colour in the original), the central image shows a greyscale version of the image and the right hand image shows a black and white version of the image. As will be appreciated, each version of the image highlights slightly different features of the flow. Together, they give a reasonable picture of the flow conditions at the wick.

[0164] These four devices were operated to generate aerosols following the procedure explained above (section 2.1) using a flow rate of 1.3 lpm and the generated aerosols were tested for particle size in the Spraytec laser diffraction system.

2.3. High temperature testing

[0165] This experiment aimed to investigate the influence of inflow air temperature on aerosol particle size, in order to investigate the effect of vapour cooling rate on aerosol generation.

[0166] The experimental set up is shown in Figure 5. The testing used a Carbolite Gero EHA 12300B tube furnace 3210 with a quartz tube 3220 to heat up the air. Hot air in the tube furnace was then led into a transparent housing 3158 that contains the EVP device 3150 to be tested. A thermocouple meter 3410 was used to assess the temperature of the air pulled into the EVP device. Once the EVP device was activated, the aerosol was pulled into the Spraytec laser diffraction system 3310 via a silicone connector 3320 for particle size measurement.

[0167] Three smoking substitute apparatuses (referred to as "pods") were tested in the study: pod 1 is the commercially available "myblu optimised" pod (Figure 6); pod 2 is a pod featuring an extended inflow path upstream of the wick (Figure 7); and pod 3 is pod with the wick located in a stagnant vaporisation chamber and the inlet air bypassing the vaporisation chamber but entraining the vapour from an outlet of the vaporisation chamber (Figures 8A and 8B).

[0168] Pod 1, shown in longitudinal cross sectional view (in the width plane) in Figure 6, has a main housing that defines a tank 160x holding an e-liquid aerosol precursor. Mouthpiece 154x is formed at the upper part of the pod. Electrical contacts 156x are formed at the lower end of the pod. Wick 162x is held in a vaporisation chamber. The air flow direction is shown using arrows.

[0169] Pod 2, shown in longitudinal cross sectional view (in the width plane) in Figure 7, has a main housing that defines a tank 160y holding an e-liquid aerosol precursor. Mouthpiece 154y is formed at the upper part of the pod. Electrical contacts 156y are formed at the lower end of the pod. Wick 162y is held in a vaporisation chamber. The air flow direction is shown using arrows. Pod 2 has an extended inflow path (plenum chamber 157y) with a flow conditioning element 159y, configured to promote reduced turbulence at the wick 162y.

[0170] Figure 8A shows a schematic longitudinal cross sectional view of pod 3. Figure 8B shows a schematic longitudinal cross sectional view of the same pod 3 in a direction orthogonal to the view taken in Figure 8A. Pod 3 has a main housing that defines a tank 160z holding an e-liquid aerosol precursor. Mouthpiece 154z is formed at the upper part of the pod. Electrical contacts 156z are formed at the lower end of the pod. Wick 162z is held in a vaporisation chamber. The air flow direction is shown using arrows. Pod 3 uses a stagnant vaporiser chamber, with the air inlets bypassing the wick and picking up the vapour/aerosol downstream of the wick.

[0171] All three pods were filled with the same e-liquid (1.6% freebase nicotine, 65:35 PG/VG ratio, no added flavour). Three experiments were carried out for each pod: 1) standard measurement in ambient temperature; 2) only the inlet air was heated to 50 °C; and 3) both the inlet air and the pods were heated to 50 °C. Five repetition runs were carried out for each experiment and the $Dv50$ results were taken and averaged.

3. Modelling work

[0172] In this study, modelling work was performed using COMSOL Multiphysics 5.4, engaged physics include: 1) laminar single-phase flow; 2) turbulent single-phase flow; 3) laminar two-phase flow; 4) heat transfer in fluids; and (5) particle tracing. Data analysis and data visualisation were mostly completed in MATLAB R2019a.

3.1. Velocity modelling

[0173] Air velocity in the vicinity of the wick is believed to play an important role in affecting particle size. In section 2.1, the air velocity was calculated by dividing the flow rate by the intersection area, which is referred to as "calculated velocity" in this work. This involves a very crude simplification that assumes velocity distribution to be homogeneous across the intersection area.

[0174] In order to increase reliability of the work, computational fluid dynamics (CFD) modelling was performed to obtain more accurate velocity values:

- 1) The average velocity in the vicinity of the wick (defined as a volume from the wick surface to 1mm away from the wick surface)

2) The maximum velocity in the vicinity of the wick (defined as a volume from the wick surface to 1mm away from the wick surface)

5 *Table 2. Average and maximum velocity in the vicinity of wick surface obtained from CFD modelling*

	Tube size [mm]	Flow rate [lpm]	Calculated velocity* [m/s]	Average velocity** [m/s]	Maximum Velocity** [m/s]
10 1.3 lpm constant flow rate	4.5	1.3	1.17	0.99	1.80
	6	1.3	0.71	0.66	1.22
	7	1.3	0.56	0.54	1.01
	8	1.3	0.47	0.46	0.86
15	10	1.3	0.35	0.35	0.66
	12	1.3	0.28	0.27	0.54
	20	1.3	0.15	0.15	0.32
	50	1.3	0.06	0.05	0.12
20 2.0 lpm constant flow rate	4.5	2.0	1.81	1.52	2.73
	5	2.0	1.48	1.31	2.39
	6	2.0	1.09	1.02	1.87
	8	2.0	0.72	0.71	1.31
	12	2.0	0.42	0.44	0.83
	20	2.0	0.23	0.24	0.49
	50	2.0	0.09	0.08	0.19
* Calculated by dividing flow rate with intersection area					
** Obtained from CFD modelling					

35 **[0175]** The CFD model uses a laminar single-phase flow setup. For each experiment, the outlet was configured to a corresponding flowrate, the inlet was configured to be pressure-controlled, the wall conditions were set as "no slip". A 1 mm wide ring-shaped domain (wick vicinity) was created around the wick surface, and domain probes were implemented to assess the average and maximum magnitudes of velocity in this ring-shaped wick vicinity domain.

40 **[0176]** The CFD model outputs the average velocity and maximum velocity in the vicinity of the wick for each set of experiments carried out in section 2.1. The outcomes are reported in Table 2.

3.2. Turbulence modelling

45 **[0177]** Turbulence intensity (I) is a quantitative value that represents the level of turbulence in a fluid flow system. It is defined as the ratio between the root-mean-square of velocity fluctuations, u' , and the Reynolds-averaged mean flow velocity, U:

$$50 \quad I = \frac{u'}{U} = \frac{\sqrt{\frac{1}{3}(u_x'^2 + u_y'^2 + u_z'^2)}}{\sqrt{\bar{u}_x^2 + \bar{u}_y^2 + \bar{u}_z^2}} = \frac{\sqrt{\frac{1}{3}[(u_x - \bar{u}_x)^2 + (u_y - \bar{u}_y)^2 + (u_z - \bar{u}_z)^2]}}{\sqrt{\bar{u}_x^2 + \bar{u}_y^2 + \bar{u}_z^2}}$$

55 where u_x , u_y and u_z are the x-, y- and z-components of the velocity vector, \bar{u}_x , \bar{u}_y , and \bar{u}_z represent the average velocities along three directions.

[0178] Higher turbulence intensity values represent higher levels of turbulence. As a rule of thumb, turbulence intensity

below 1% represents a low-turbulence case, turbulence intensity between 1% and 5% represents a medium-turbulence case, and turbulence intensity above 5% represents a high-turbulence case.

[0179] In this study, turbulence intensity was obtained from CFD simulation using turbulent single-phase setup in COMSOL Multiphysics. For each of the four experiments explained in section 2.2, the outlet was set to 1.3 lpm, the inlet was set to be pressure-controlled, and all wall conditions were set to be "no slip".

[0180] Turbulence intensity was assessed within the volume up to 1 mm away from the wick surface (defined as the wick vicinity domain). For the four experiments explained in section 2.2, the turbulence intensities are 0.55%, 0.77%, 1.06% and 1.34%, respectively, as also shown in Figures 4A-4D.

3.3. Cooling rate modelling

[0181] The cooling rate modelling involves three coupling models in COMSOL Multiphysics: 1) laminar two-phase flow; 2) heat transfer in fluids, and 3) particle tracing. The model is setup in three steps:

1) Set up two phase flow model

[0182] Laminar mixture flow physics was selected in this study. The outlet was configured in the same way as in section 3.1. However, this model includes two fluid phases released from two separate inlets: the first one is the vapour released from wick surface, at an initial velocity of 2.84 cm/s (calculated based on 5 mg total particulate mass over 3 seconds puff duration) with initial velocity direction normal to the wick surface; the second inlet is air influx from the base of tube, the rate of which is pressure-controlled.

2) Set up two-way coupling with heat transfer physics

[0183] The inflow and outflow settings in heat transfer physics was configured in the same way as in the two-phase flow model. The air inflow was set to 25 °C, and the vapour inflow was set to 209 °C (boiling temperature of the e-liquid formulation). In the end, the heat transfer physics is configured to be two-way coupled with the laminar mixture flow physics. The above model reaches steady state after approximately 0.2 second with a step size of 0.001 second.

3) Set up particle tracing

[0184] A wave of 2000 particles were release from wick surface at t = 0.3 second after the two-phase flow and heat transfer model has stabilised. The particle tracing physics has one-way coupling with the previous model, which means the fluid flow exerts dragging force on the particles, whereas the particles do not exert counterforce on the fluid flow. Therefore, the particles function as moving probes to output vapour temperature at each timestep.

[0185] The model outputs average vapour temperature at each time steps. A MATLAB script was then created to find the time step when the vapour cools to a target temperature (50°C or 75°C), based on which the vapour cooling rates were obtained (Table 3).

Table 3. Average vapour cooling rate obtained from Multiphysics modelling

	Tube size [mm]	Flow rate [lpm]	Cooling rate to 50°C [°C/ms]	Cooling rate to 75°C [°C/ms]
1.3 lpm constant flow rate	4.5	1.3	11.4	44.7
	6	1.3	5.48	14.9
	7	1.3	3.46	7.88
	8	1.3	2.24	5.15
	10	1.3	1.31	2.85
	12	1.3	0.841	1.81
	20	1.3	0*	0.536
	50	1.3	0	0

(continued)

	Tube size [mm]	Flow rate [lpm]	Cooling rate to 50°C [°C/ms]	Cooling rate to 75°C [°C/ms]
2.0 lpm constant flow rate	4.5	2.0	19.9	670
	5	2.0	13.3	67
	6	2.0	8.83	26.8
	8	2.0	3.61	8.93
	12	2.0	1.45	3.19
	20	2.0	0.395	0.761
	50	2.0	0	0
* Zero cooling rate when the average vapour temperature is still above target temperature after 0.5 second				

4. Results and discussions

[0186] Particle size measurement results for the rectangular tube testing are shown in Table 4. For every tube size and flow rate combination, five repetition runs were carried out in the Spraytec laser diffraction system. The Dv50 values from five repetition runs were averaged, and the standard deviations were calculated to indicate errors, as shown in Table 4.

[0187] In this section, the roles of different factors affecting aerosol particle size will be discussed based on experimental and modelling results.

Table 4. Particle size measurement results for the rectangular tube testing

	Tube size [mm]	Flow rate [lpm]	Dv50 average [μm]	Dv50 standard deviation [μm]
1.3 lpm constant flow rate	4.5	1.3	0.971	0.125
	6	1.3	1.697	0.341
	7	1.3	2.570	0.237
	8	1.3	2.705	0.207
	10	1.3	2.783	0.184
	12	1.3	3.051	0.325
	20	1.3	3.116	0.354
	50	1.3	3.161	0.157
2.0 lpm constant flow rate	4.5	2.0	0.568	0.039
	5	2.0	0.967	0.315
	6	2.0	1.541	0.272
	8	2.0	1.646	0.363
	12	2.0	3.062	0.153
	20	2.0	3.566	0.260
	50	2.0	3.082	0.440
1.0 m/s constant air velocity	5.0	1.4	1.302	0.187
	8	2.8	1.303	0.468
	20	8.6	1.463	0.413

4.1. Decouple the factors affecting particle size

[0188] The particle size (Dv50) experimental results are plotted against calculated air velocity in Figure 9. The graph shows a strong correlation between particle size and air velocity.

[0189] Different size tubes were tested at two flow rates: 1.3 lpm and 2.0 lpm. Both groups of data show the same trend that slower air velocity leads to larger particle size. The conclusion was made more convincing by the fact that these two groups of data overlap well in Figure 9: for example, the 6mm tube delivered an average Dv50 of 1.697 μm when tested at 1.3 lpm flow rate, and the 8mm tube delivered a highly similar average Dv50 of 1.646 μm when tested at 2.0 lpm flow rate, as they have similar air velocity of 0.71 and 0.72 m/s, respectively.

[0190] In addition, Figure 10 shows the results of three experiments with highly different setup arrangements: 1) 5mm tube measured at 1.4 lpm flow rate with Reynolds number of 155; 2) 8mm tube measured at 2.8 lpm flow rate with Reynolds number of 279; and 3) 20mm tube measured at 8.6 lpm flow rate with Reynolds number of 566. It is relevant that these setup arrangements have one similarity: the air velocities are all calculated to be 1 m/s. Figure 10 shows that, although these three sets of experiments have different tube sizes, flow rates and Reynolds numbers, they all delivered similar particle sizes, as the air velocity was kept constant. These three data points were also plotted out in Figure 9 (1 m/s data with star marks) and they tie in nicely into particle size-air velocity trendline.

[0191] The above results lead to a strong conclusion that air velocity is an important factor affecting the particle size of EVP devices. Relatively large particles are generated when the air travels with slower velocity around the wick. It can also be concluded that flow rate, tube size and Reynolds number are not necessarily independently relevant to particle size, providing the air velocity is controlled in the vicinity of the wick.

4.2. Further consideration of velocity

[0192] In Figure 9 the "calculated velocity" was obtained by dividing the flow rate by the intersection area, which is a crude simplification that assumes a uniform velocity field. In order to increase reliability of the work, CFD modelling has been performed to assess the average and maximum velocities in the vicinity of the wick. In this study, the "vicinity" was defined as a volume from the wick surface up to 1 mm away from the wick surface.

[0193] The particle size measurement data were plotted against the average velocity (Figure 11) and maximum velocity (Figure 12) in the vicinity of the wick, as obtained from CFD modelling.

[0194] The data in these two graphs indicates that in order to obtain an aerosol with Dv50 larger than 1 μm , the average velocity should be less than or equal to 1.2 m/s in the vicinity of the wick and the maximum velocity should be less than or equal to 2.0 m/s in the vicinity of the wick.

[0195] Furthermore, in order to obtain an aerosol with Dv50 of 2 μm or larger, the average velocity should be less than or equal to 0.6 m/s in the vicinity of the wick and the maximum velocity should be less than or equal to 1.2 m/s in the vicinity of the wick.

[0196] It is considered that typical commercial EVP devices deliver aerosols with Dv50 around 0.5 μm , and there is no commercially available device that can deliver aerosol with Dv50 exceeding 1 μm . It is considered that typical commercial EVP devices have average velocity of 1.5-2.0 m/s in the vicinity of the wick.

4.3. The role of turbulence

[0197] The role of turbulence has been investigated in terms of turbulence intensity, which is a quantitative characteristic that indicates the level of turbulence. In this work, four tubes of different turbulence intensities were used to generate aerosols which were measured in the Spraytec laser diffraction system. The particle size (Dv50) experimental results are plotted against turbulence intensity in Figure 13.

[0198] The graph suggests a correlation between particle size and turbulence intensity, that lower turbulence intensity is beneficial for obtaining larger particle size. It is noted that when turbulence intensity is above 1% (medium-turbulence case), there are relatively large measurement fluctuations. In Figure 13, the tube with a jetting panel 10mm below the wick has the largest error bar, because air jets become unpredictable near the wick after traveling through a long distance.

[0199] The results clearly indicate that laminar air flow is favourable for the generation of aerosols with larger particles, and that the generation of large particle sizes is jeopardised by introducing turbulence. In Figure 13, the 12mm standard rectangular tube (without jetting panel) delivers above 3 μm particle size (Dv50). The particle size values reduced by at least a half when jetting panels were added to introduce turbulence.

4.4. Vapour cooling rate

[0200] Figure 14 shows the high temperature testing results. Larger particle sizes were observed from all 3 pods when the temperature of inlet air increased from room temperature (23°C) to 50 °C. When the pods were heated as well, two

of the three pods saw even larger particle size measurement results, while pod 2 was unable to be measured due to significant amount of leakage.

[0201] Without wishing to be bound by theory, the results are in line with the inventors' insight that control over the vapour cooling rate provides an important degree of control over the particle size of the aerosol. As reported above, the use of a slow air velocity can have the result of the formation of an aerosol with large Dv_{50} . It is considered that this is due to slower air velocity allowing a slower cooling rate of the vapour.

[0202] Another conclusion related to laminar flow can also be explained by a cooling rate theory: laminar flow allows slow and gradual mixing between cold air and hot vapour, which means the vapour can cool down in slower rate when the airflow is laminar, resulting in larger particle size.

[0203] The results in Figure 14 further validate this cooling rate theory: when the inlet air has higher temperature, the temperature difference between hot vapour and cold air becomes smaller, which allows the vapour to cool down at a slower rate, resulting in larger particle size; when the pods were heated as well, this mechanism was exaggerated even more, leading to an even slower cooling rate and an even larger particle size.

4.5. Further consideration of vapour cooling rate

[0204] In section 3.3, the vapour cooling rates for each tube size and flow rate combination were obtained via multi-physics simulation. In Figure 15 and Figure 16, the particle size measurement results were plotted against vapour cooling rate to 50°C and 75°C, respectively.

[0205] The data in these graphs indicates that in order to obtain an aerosol with Dv_{50} larger than 1 μm , the apparatus should be operable to require more than 16 ms for the vapour to cool to 50°C, or an equivalent (simplified to an assumed linear) cooling rate being slower than 10 °C/ms. From an alternative viewpoint, in order to obtain an aerosol with Dv_{50} larger than 1 μm , the apparatus should be operable to require more than 4.5 ms for the vapour to cool to 75°C, or an equivalent (simplified to an assumed linear) cooling rate slower than 30 °C/ms.

[0206] Furthermore, in order to obtain an aerosol with Dv_{50} of 2 μm or larger, the apparatus should be operable to require more than 32 ms for the vapour to cool to 50°C, or an equivalent (simplified to an assumed linear) cooling rate being slower than 5 °C/ms. From an alternative viewpoint, in order to obtain an aerosol with Dv_{50} of 2 μm or larger, the apparatus should be operable to require more than 13 ms for the vapour to cool to 75°C, or an equivalent (simplified to an assumed linear) cooling rate slower than 10 °C/ms.

5. Conclusions of particle size experimental work

[0207] In this work, particle size (Dv_{50}) of aerosols generated in a set of rectangular tubes was studied in order to decouple different factors (flow rate, air velocity, Reynolds number, tube size) affecting aerosol particle size. It is considered that air velocity is an important factor affecting particle size - slower air velocity leads to larger particle size. When air velocity was kept constant, the other factors (flow rate, Reynolds number, tube size) has low influence on particle size.

[0208] The role of turbulence was also investigated. It is considered that laminar air flow favours generation of large particles, and introducing turbulence deteriorates (reduces) the particle size.

[0209] Modelling methods were used to simulate the average air velocity, the maximum air velocity, and the turbulence intensity in the vicinity of the wick. A COMSOL model with three coupled physics has also been developed to obtain the vapour cooling rate.

[0210] All experimental and modelling results support a cooling rate theory that slower vapour cooling rate is a significant factor in ensuring larger particle size. Slower air velocity, laminar air flow and higher inlet air temperature lead to larger particle size, because they all allow vapour to cool down at slower rates.

[0211] The features disclosed in the foregoing description, or in the following claims, or in the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for obtaining the disclosed results, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

[0212] While the invention has been described in conjunction with the exemplary embodiments described above, many equivalent modifications and variations will be apparent to those skilled in the art when given this disclosure. Accordingly, the exemplary embodiments of the invention set forth above are considered to be illustrative and not limiting. Various changes to the described embodiments may be made without departing from the spirit and scope of the invention.

[0213] For the avoidance of any doubt, any theoretical explanations provided herein are provided for the purposes of improving the understanding of a reader. The inventors do not wish to be bound by any of these theoretical explanations.

[0214] Any section headings used herein are for organizational purposes only and are not to be construed as limiting the subject matter described.

[0215] Throughout this specification, including the claims which follow, unless the context requires otherwise, the

words "have", "comprise", and "include", and variations such as "having", "comprises", "comprising", and "including" will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

5 [0216] It must be noted that, as used in the specification and the appended claims, the singular forms "a," "an," and "the" include plural referents unless the context clearly dictates otherwise. Ranges may be expressed herein as from "about" one particular value, and/or to "about" another particular value. When such a range is expressed, another embodiment includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by the use of the antecedent "about," it will be understood that the particular value forms another embodiment. The term "about" in relation to a numerical value is optional and means, for example, +/- 10%.

10 [0217] The words "preferred" and "preferably" are used herein refer to embodiments of the invention that may provide certain benefits under some circumstances. It is to be appreciated, however, that other embodiments may also be preferred under the same or different circumstances. The recitation of one or more preferred embodiments therefore does not mean or imply that other embodiments are not useful, and is not intended to exclude other embodiments from the scope of the disclosure, or from the scope of the claims.

Claims

- 20 1. A smoking substitute apparatus for generating an aerosol, comprising:
- a housing;
 - an air inlet and an outlet formed at the housing;
 - a passage extending between the air inlet and outlet, air flowing in use along the passage for inhalation by a user drawing air through the apparatus; and
 - 25 an aerosol generation chamber containing an aerosol generator being operable to generate an aerosol from an aerosol precursor; wherein the aerosol generator is in fluid communication with a downstream portion of the passage for allowing the aerosol to entrain into an air flow along the passage;
 - wherein the downstream portion of the passage comprises a flow converging section having a curved sidewall tapered towards the outlet, and wherein an upstream end of the flow converging section substantially conforms
 - 30 to a cross sectional profile of the aerosol generation chamber.
- 35 2. The smoking substitute apparatus of claim 1, wherein the passage extends longitudinally through the aerosol generation chamber so as to allow an air flow to pass over the aerosol generator.
- 40 3. The smoking substitute apparatus of claim 1 or claim 2, wherein the downstream portion of the passage extends without discontinuity from the aerosol generation chamber towards the outlet.
- 45 4. The smoking substitute apparatus of any one of the preceding claims, wherein a chamber inlet is opened at a base of the aerosol generation chamber, wherein the passage extends through said chamber inlet.
- 50 5. The smoking substitute apparatus of claim 1, wherein an upstream portion of the passage extends externally to the aerosol generation chamber, and wherein said upstream portion of the passage is configured to allow some or all of the air flow entering the housing through the air inlet to bypass the aerosol generation chamber.
- 55 6. The smoking substitute apparatus of claim 5, wherein a junction is provided along the passage to fluidly connect the upstream portion and the downstream portion of the passage with the aerosol generation chamber, the junction is configured to allow the aerosol in the aerosol generation chamber to entrain with the air flow across the junction.
7. The smoking substitute apparatus of claim 5 or claim 6, wherein the aerosol generator is positioned in a stagnant cavity of the aerosol generation chamber, when the stagnant cavity is substantially free of the air flow.
8. The smoking substitute apparatus of any one of the preceding claims, wherein the curved sidewall of the flow converging section comprises a sigmoidal profile along a longitudinal axis of the downstream portion of the passage.
9. The smoking substitute apparatus of any one of the preceding claims, wherein a maximum angle subtended by an internal surface of a sidewall of the downstream portion of the passage is less than any one of 30 degrees, 20 degrees or 10 degrees from a longitudinal axis of said downstream portion, said angle measured in a plane including the longitudinal axis.

EP 3 794 969 A1

10. The smoking substitute apparatus of any one of the preceding claims, wherein the aerosol precursor comprises a liquid aerosol precursor, and wherein the aerosol generator comprises a heater configured to generate the aerosol by vaporising the liquid aerosol precursor.

5 11. The smoking substitute apparatus of any one of the preceding claims, wherein the smoking substitute apparatus is configured to generate an aerosol having a droplet size, d_{50} , of at least 1 μm .

12. A smoking substitute system for generating an aerosol, comprising:

10 i) the smoking substitute apparatus of any one of the preceding claims; and
ii) a main body configured to engage with the smoking substitute apparatus; wherein the main body comprises a controller and a power source configured to energise the aerosol generator.

13. A method of using the smoking substitute apparatus according to any one of the claims 1 to 11, comprising:

15 i) generating the aerosol with the aerosol generator;
ii) drawing on the apparatus to induce an air flow along the passage for entraining the generated aerosol.

20

25

30

35

40

45

50

55

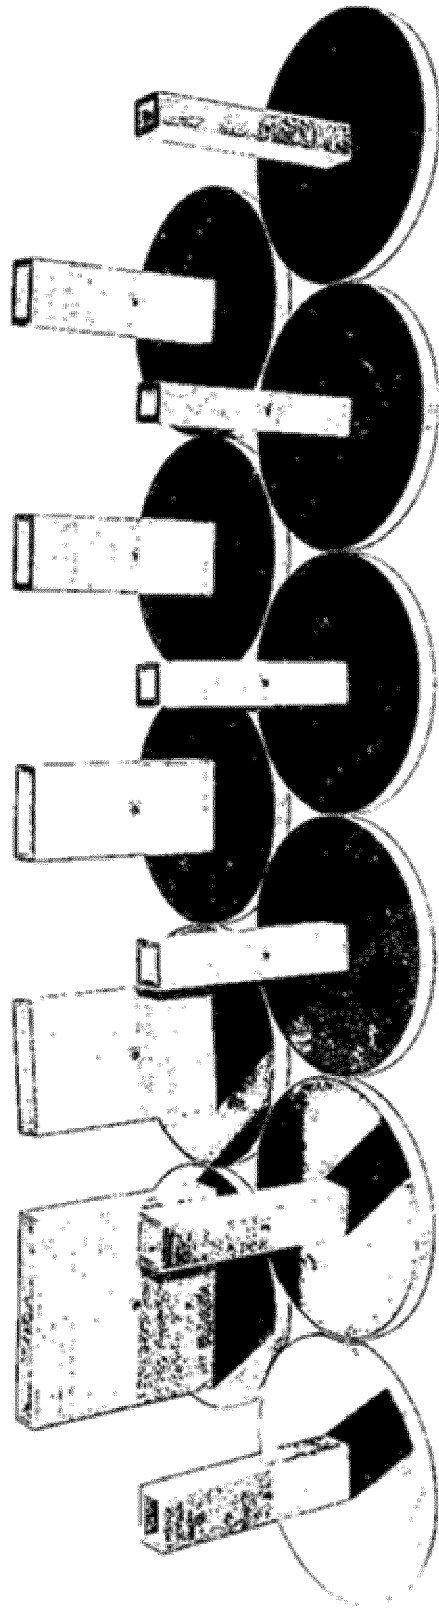


FIG. 1

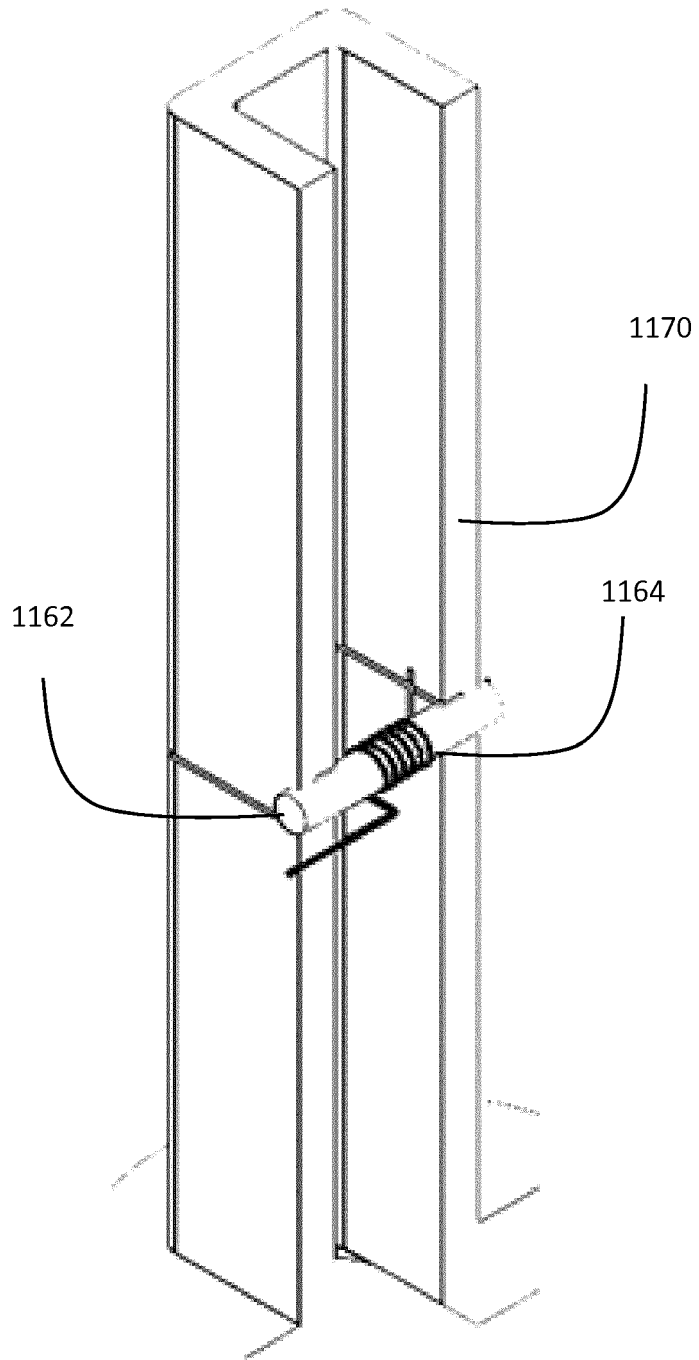


FIG. 2



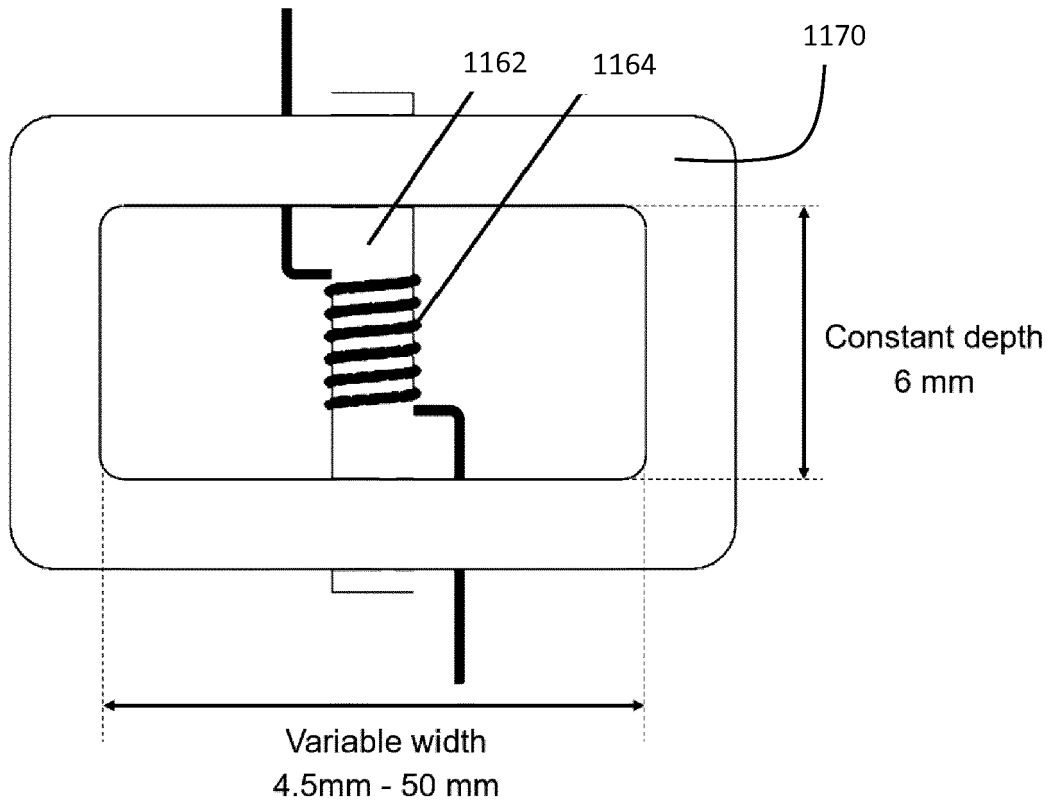



FIG. 3

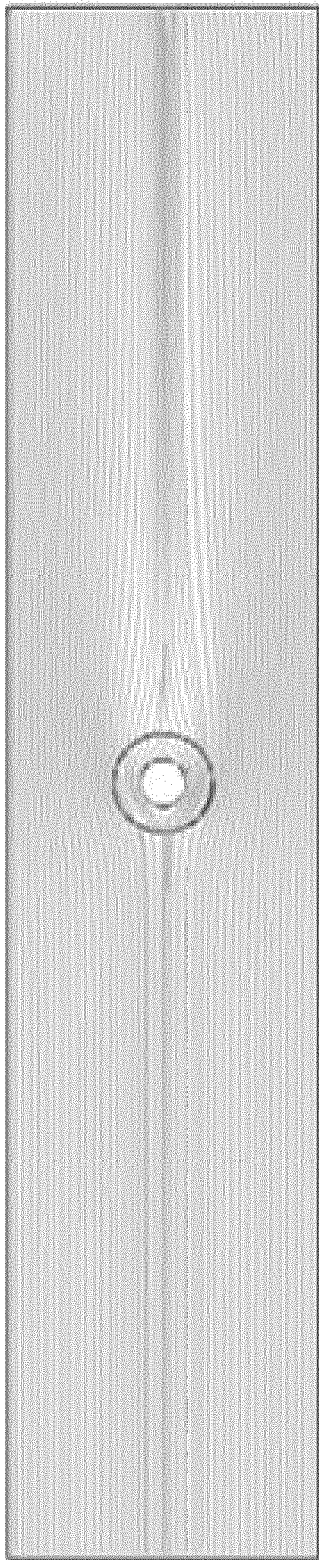

$I = 0.55 \%$

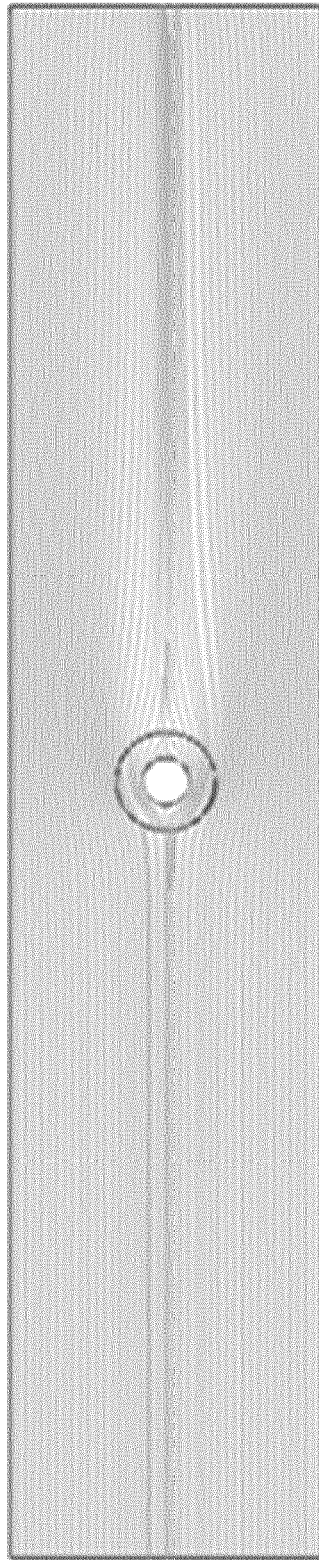

$I = 0.55 \%$

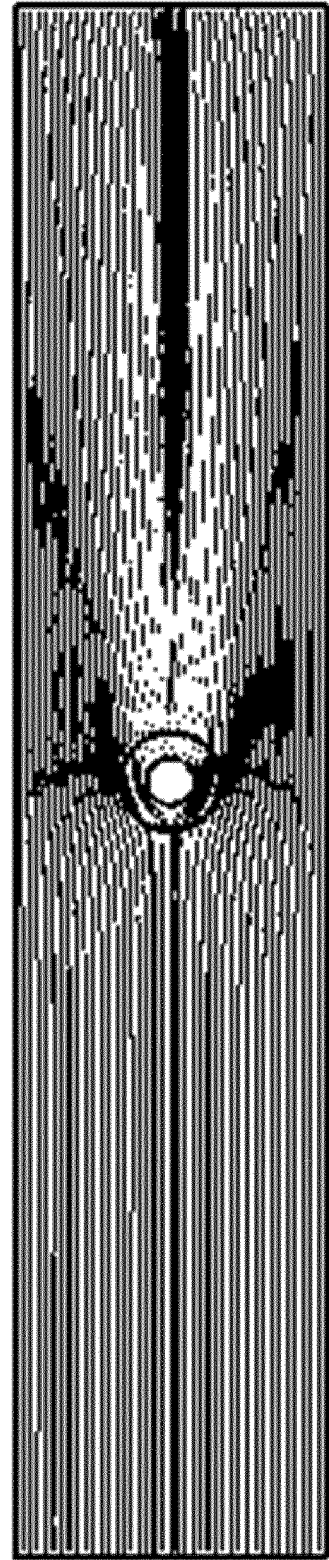

$I = 0.55 \%$

FIG. 4A


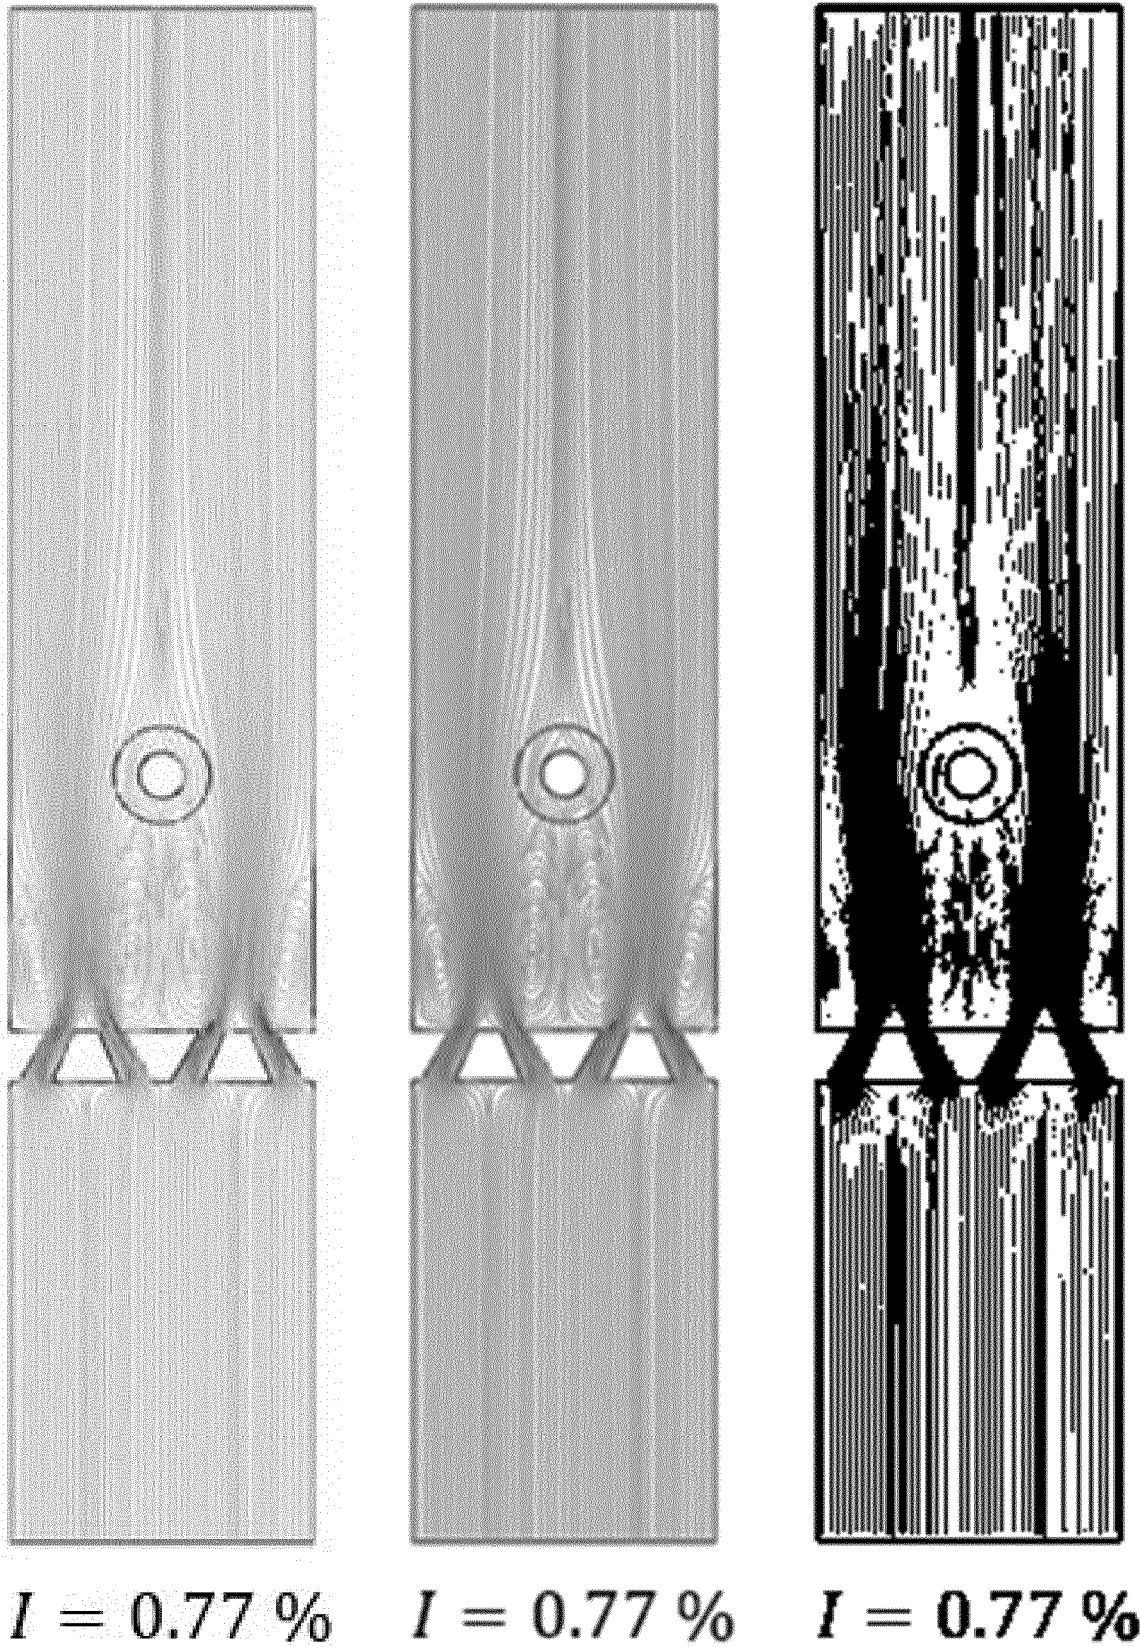


FIG. 4B

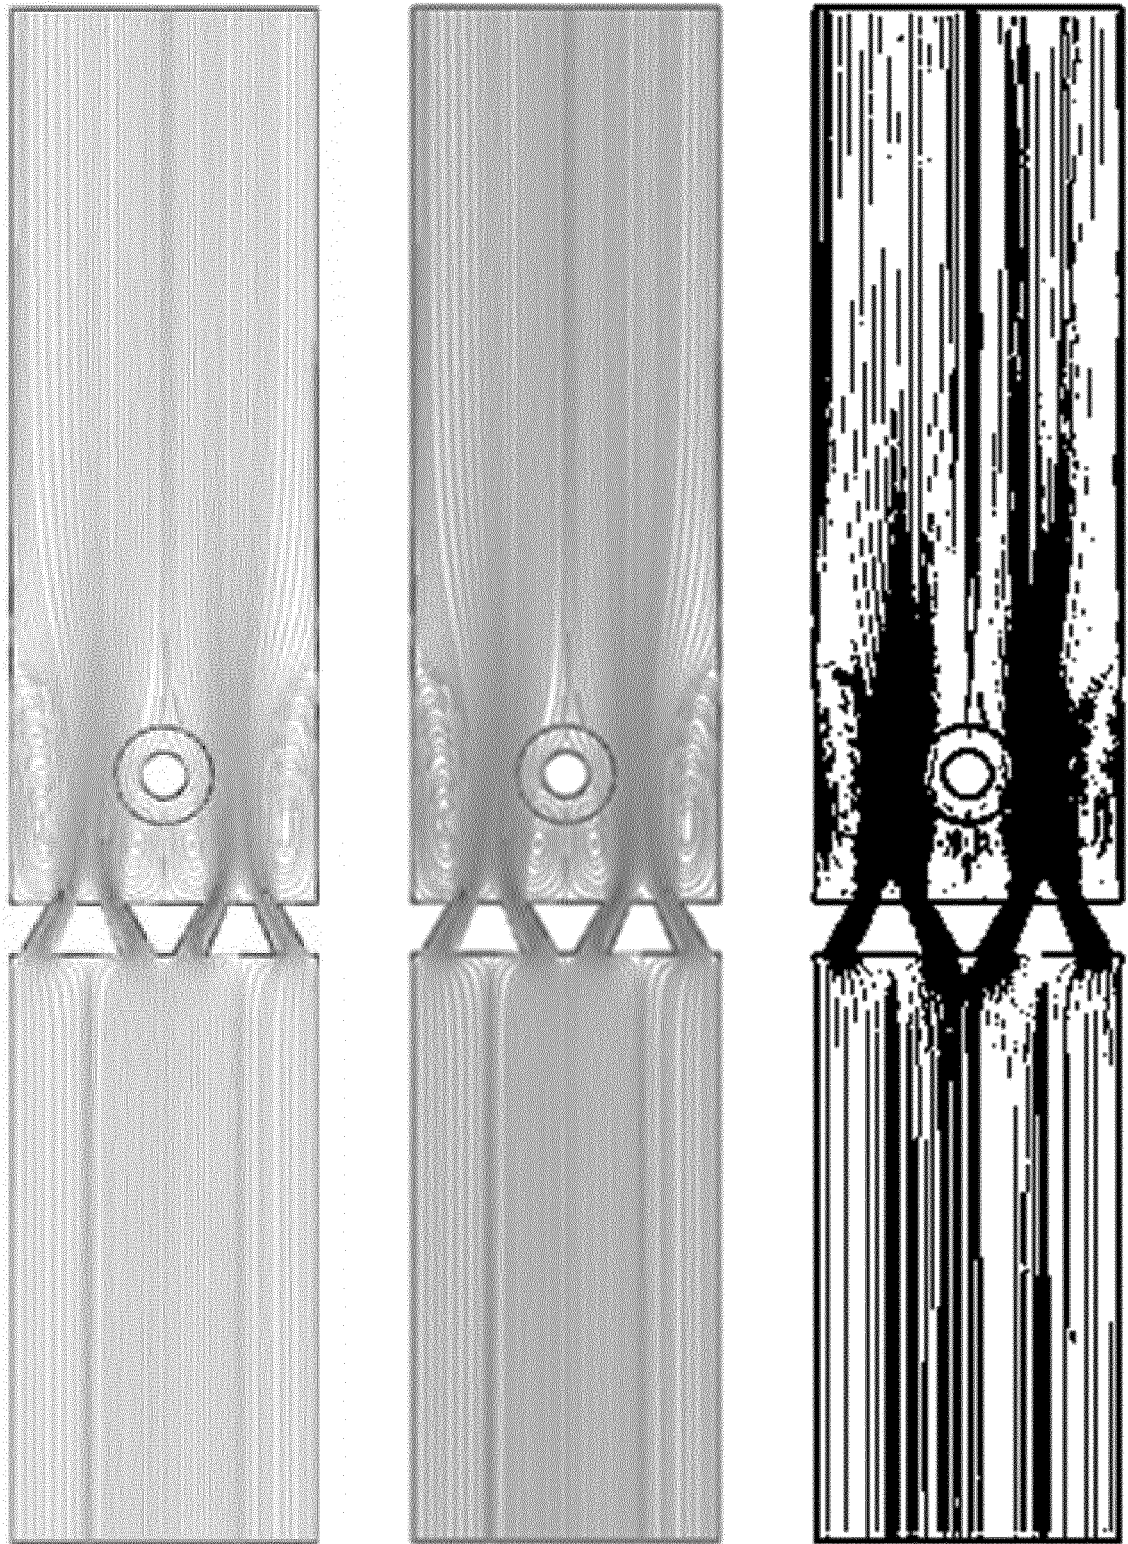

$I = 1.06 \%$

$I = 1.06 \%$

$I = 1.06 \%$

FIG. 4C

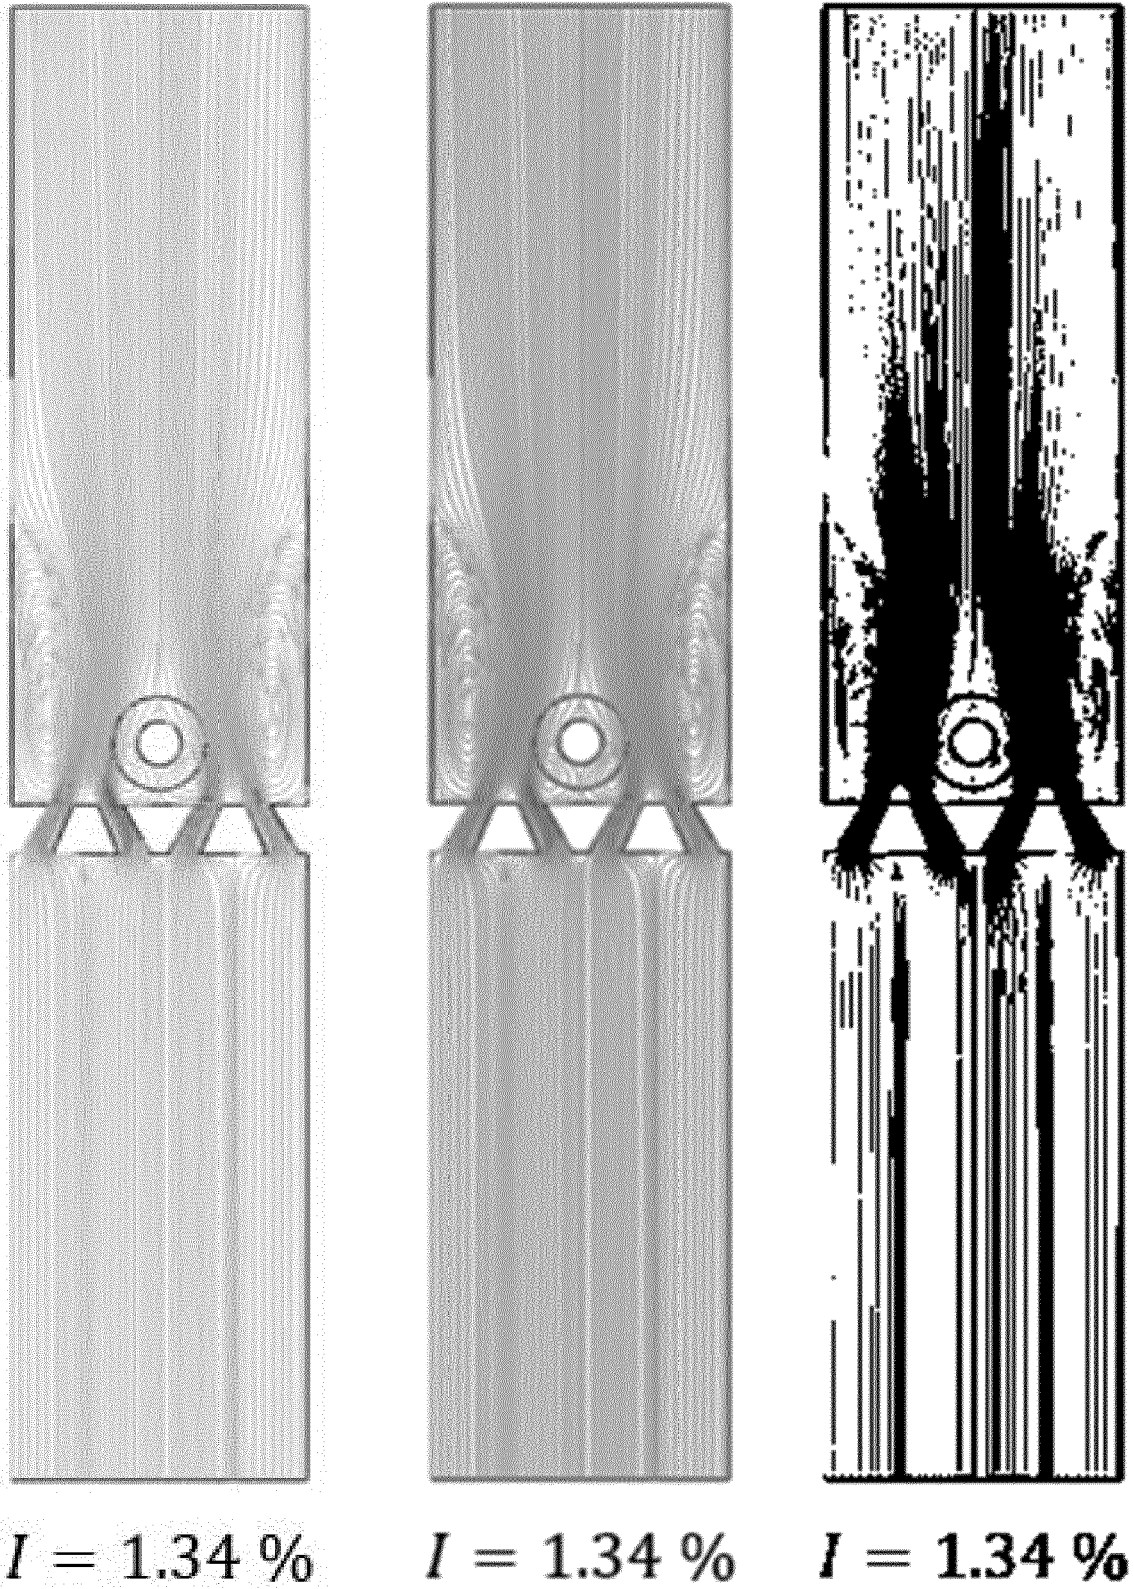


FIG. 4D

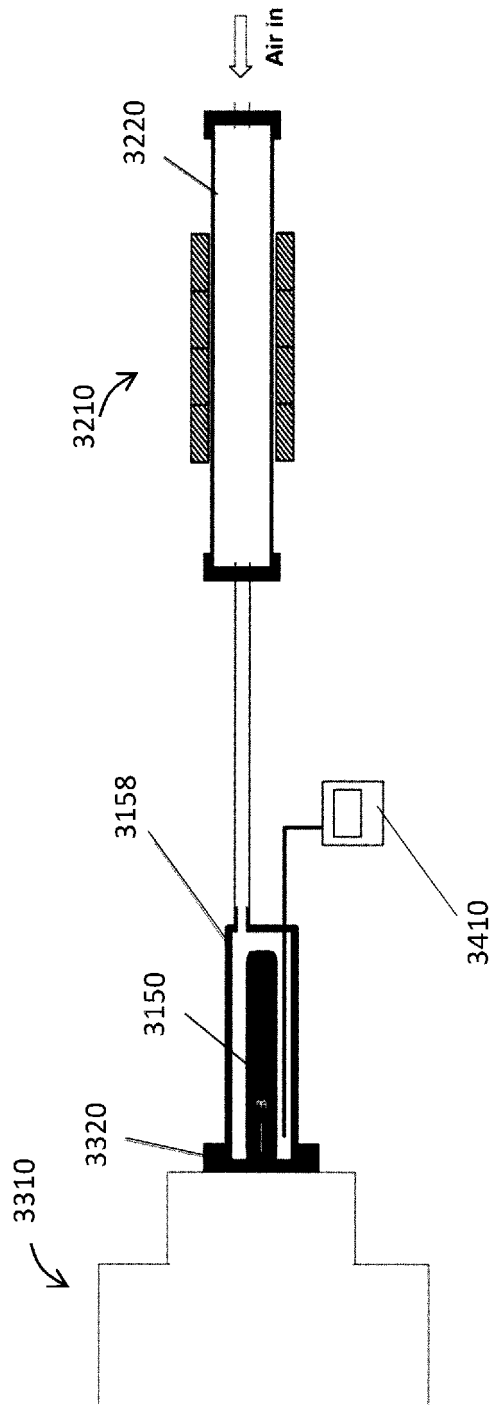


FIG. 5

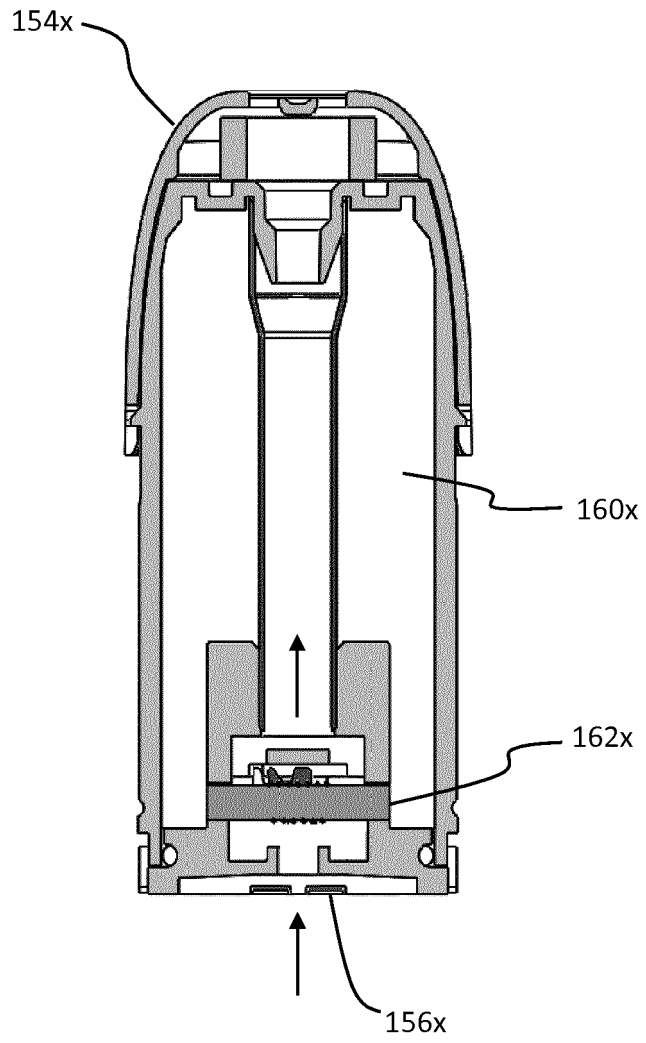


FIG. 6

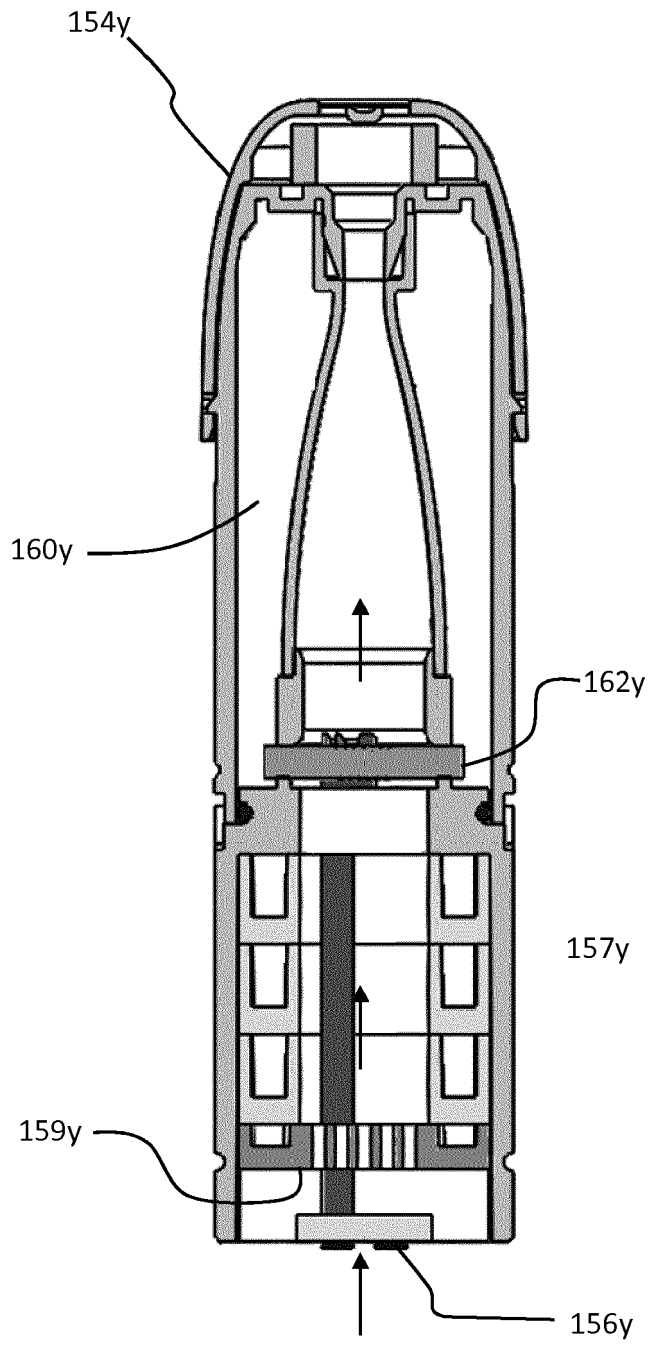


FIG. 7

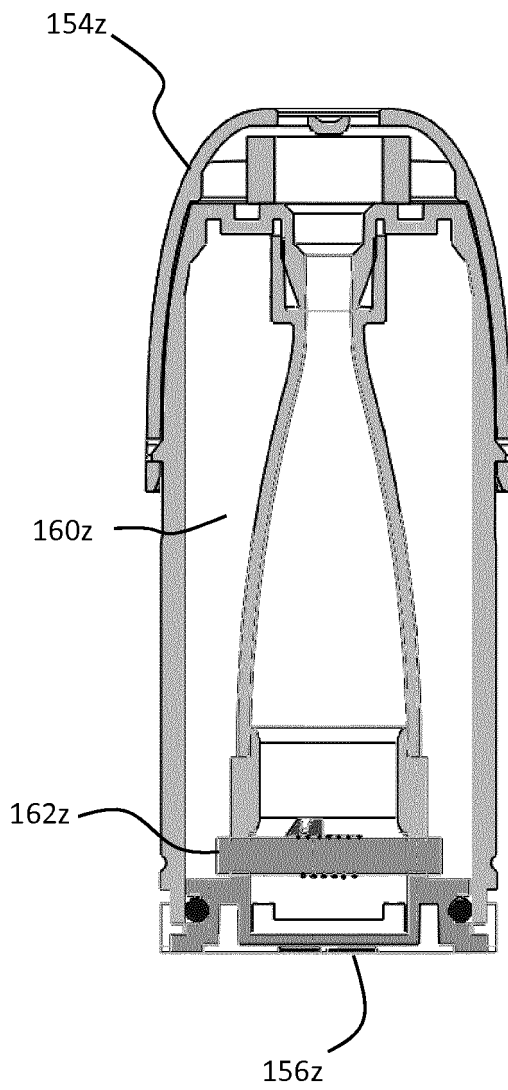


FIG. 8A

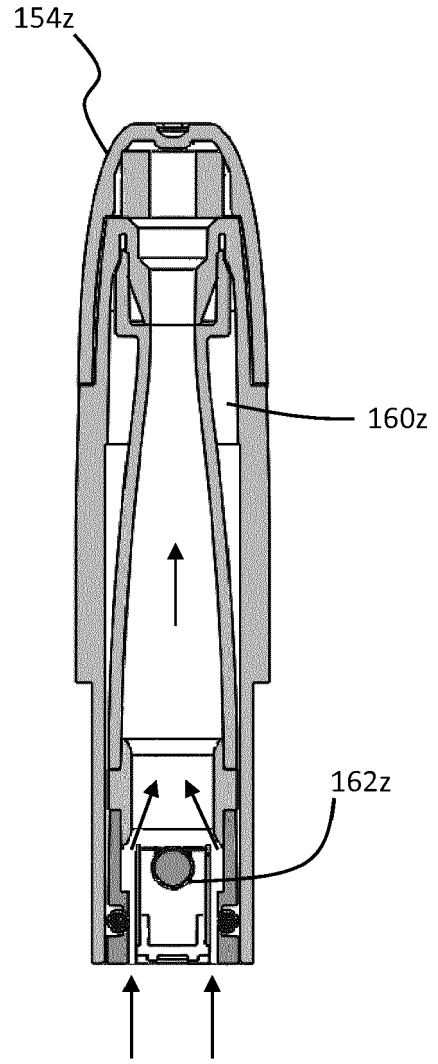


FIG. 8B

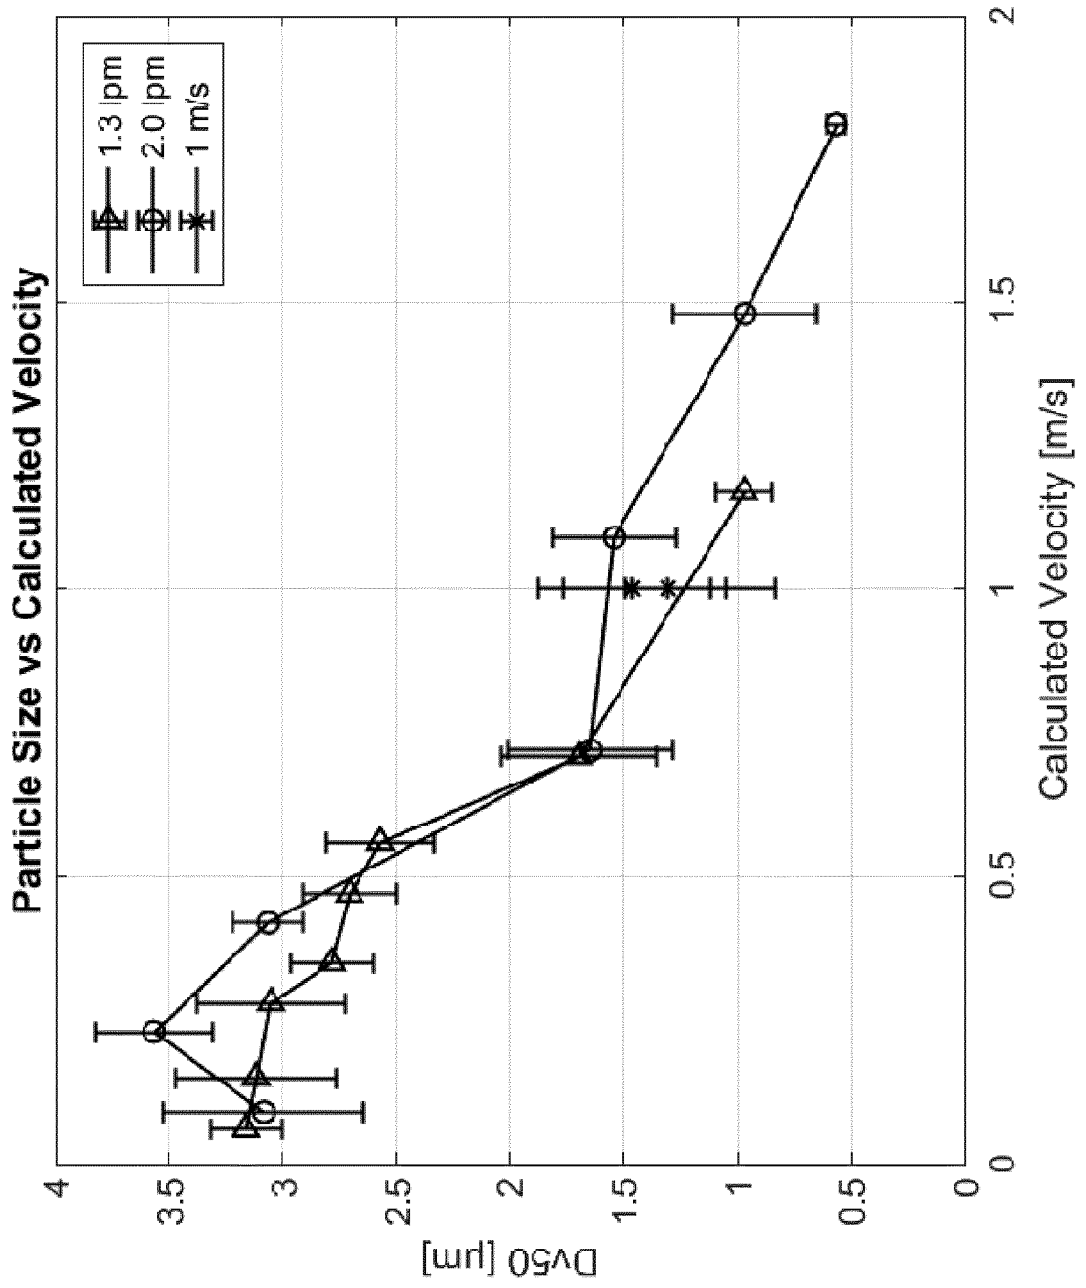


FIG. 9

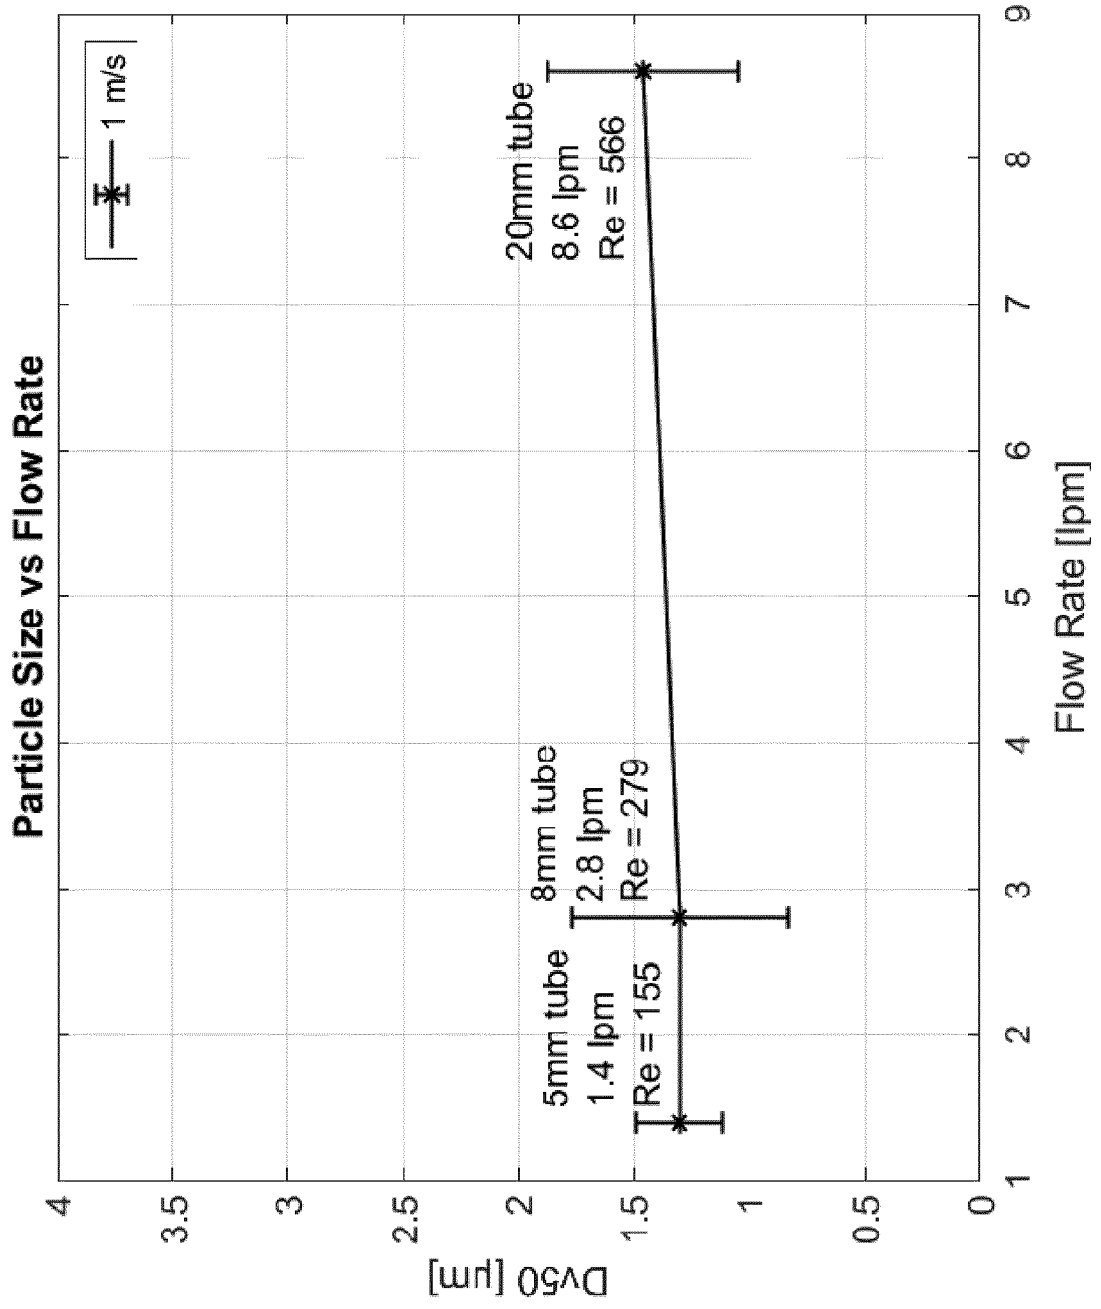


FIG. 10

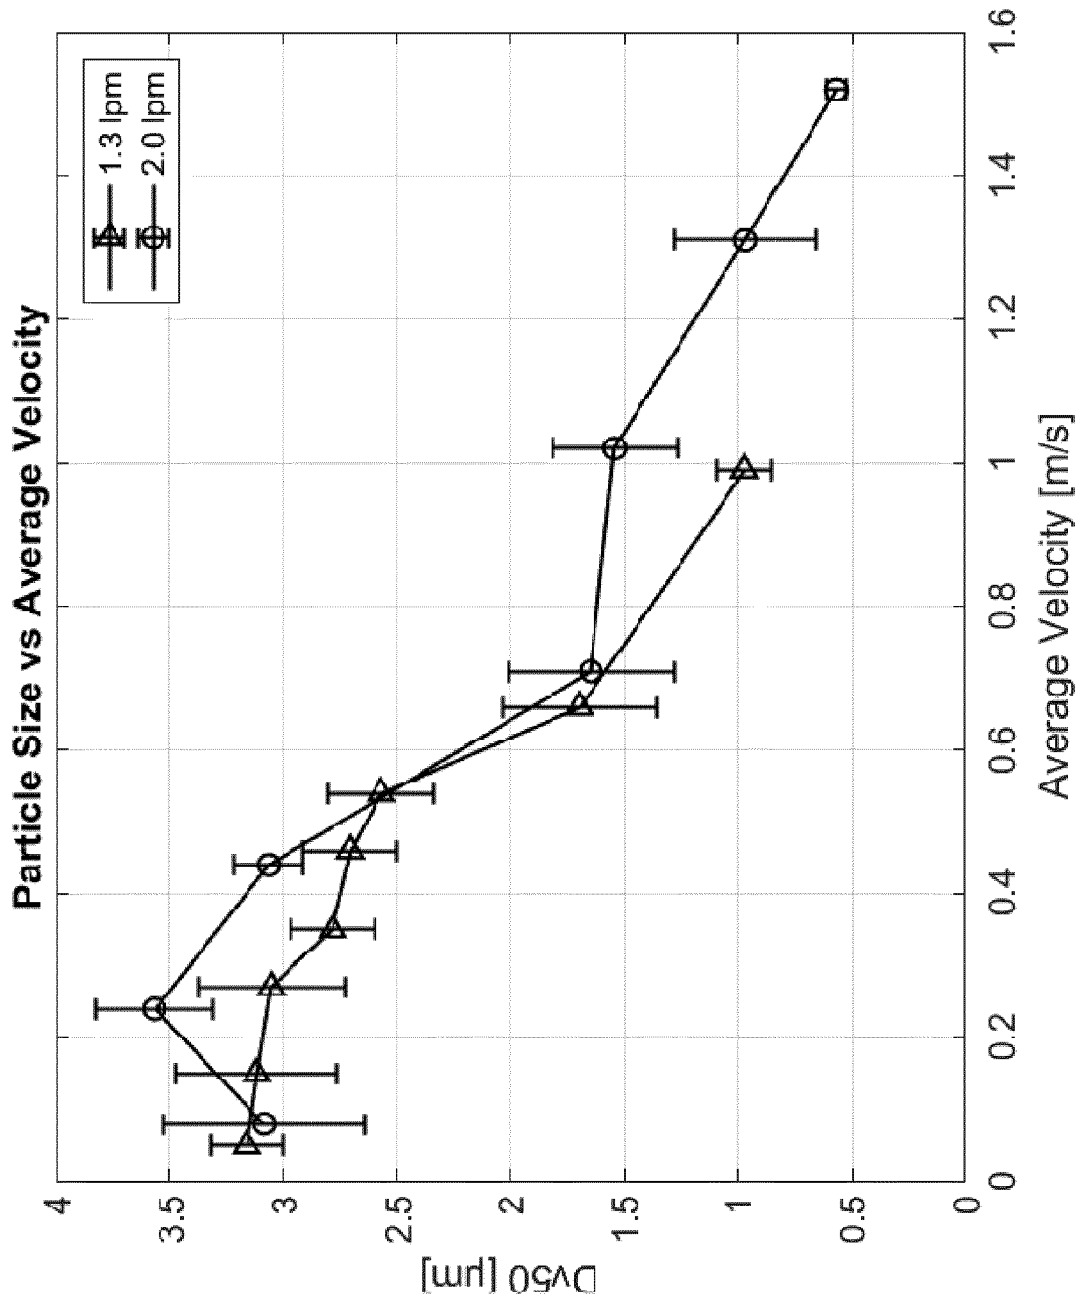


FIG. 11

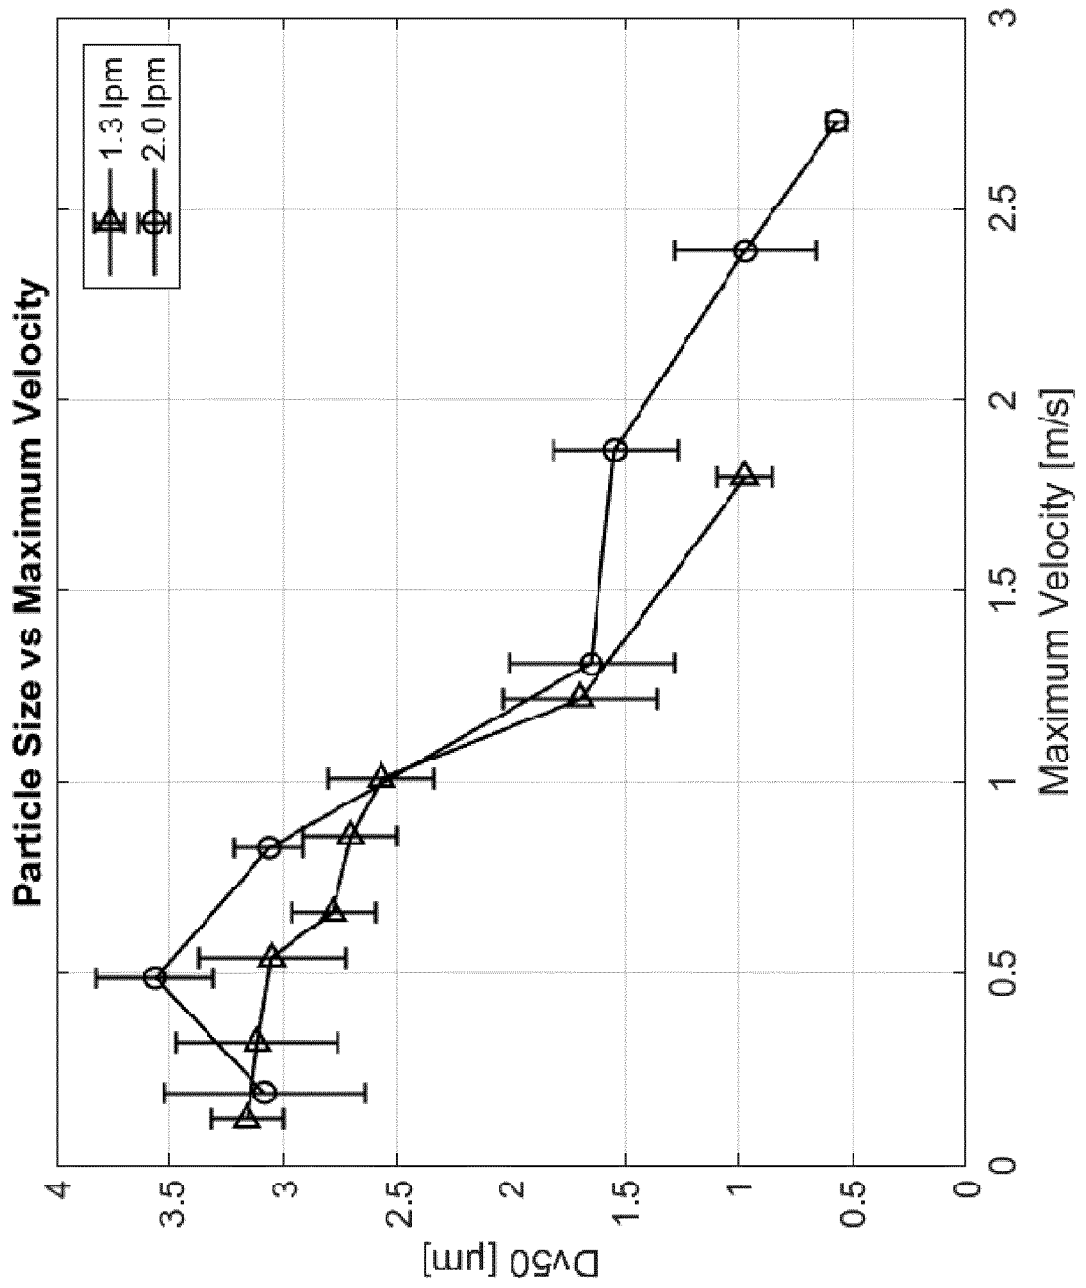


FIG. 12

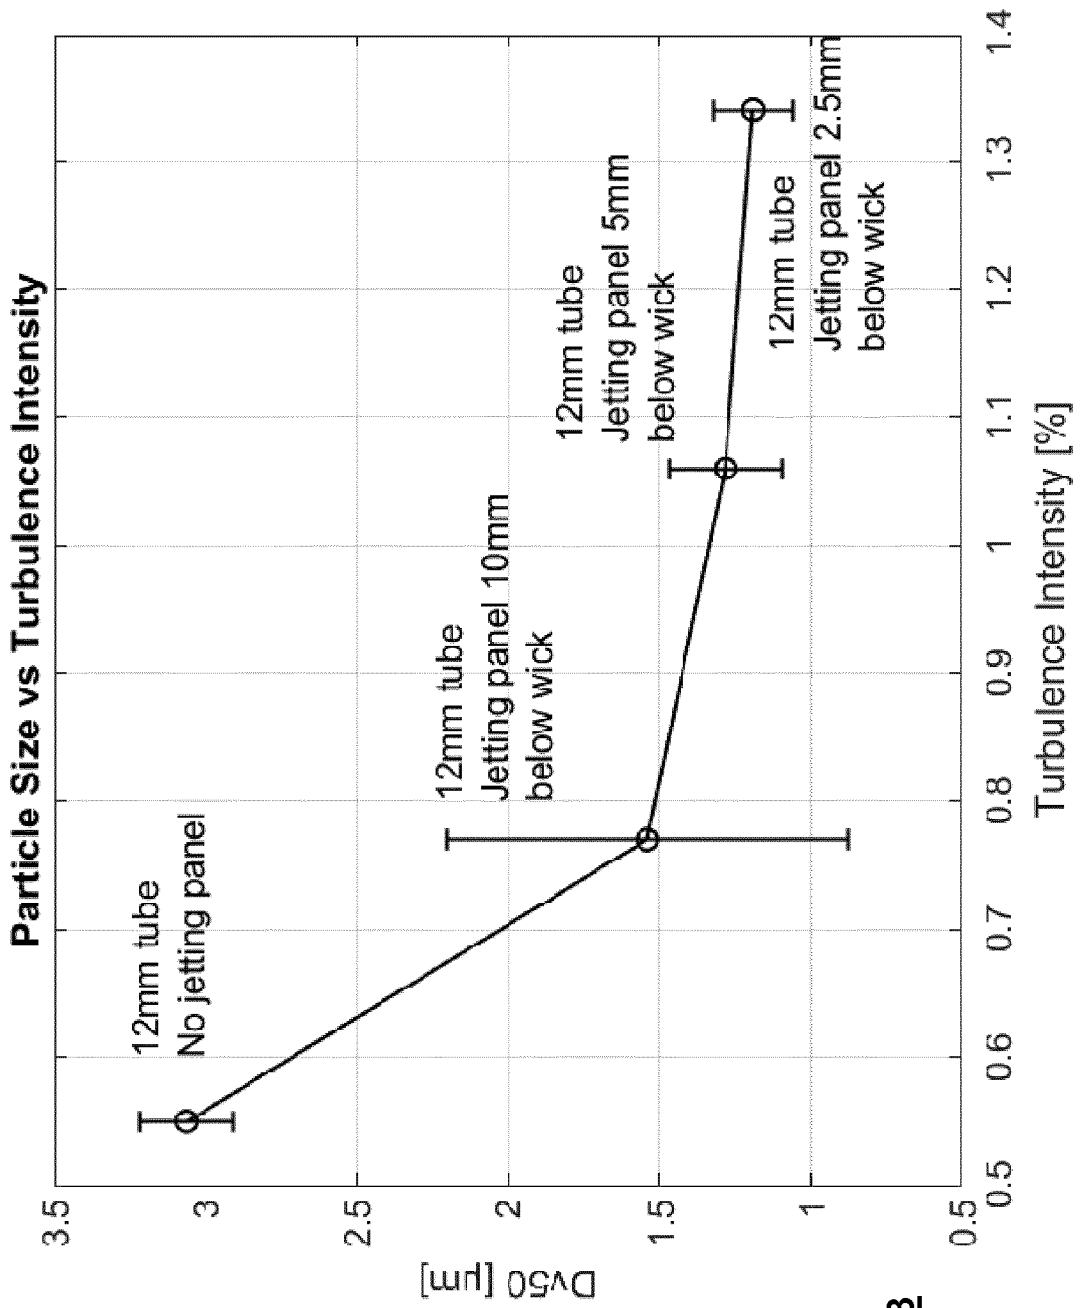


FIG. 13

High temperature testing

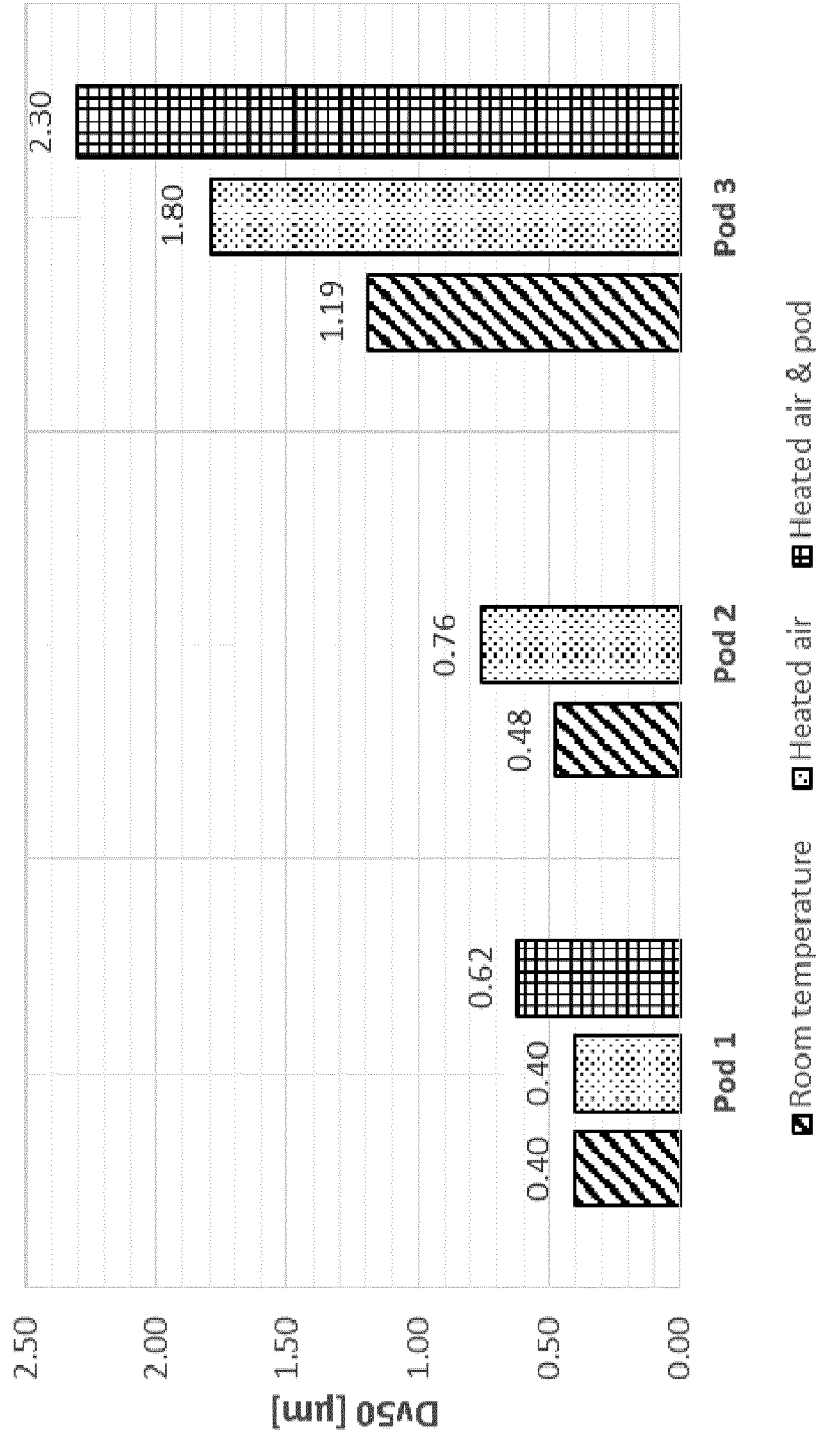


FIG. 14

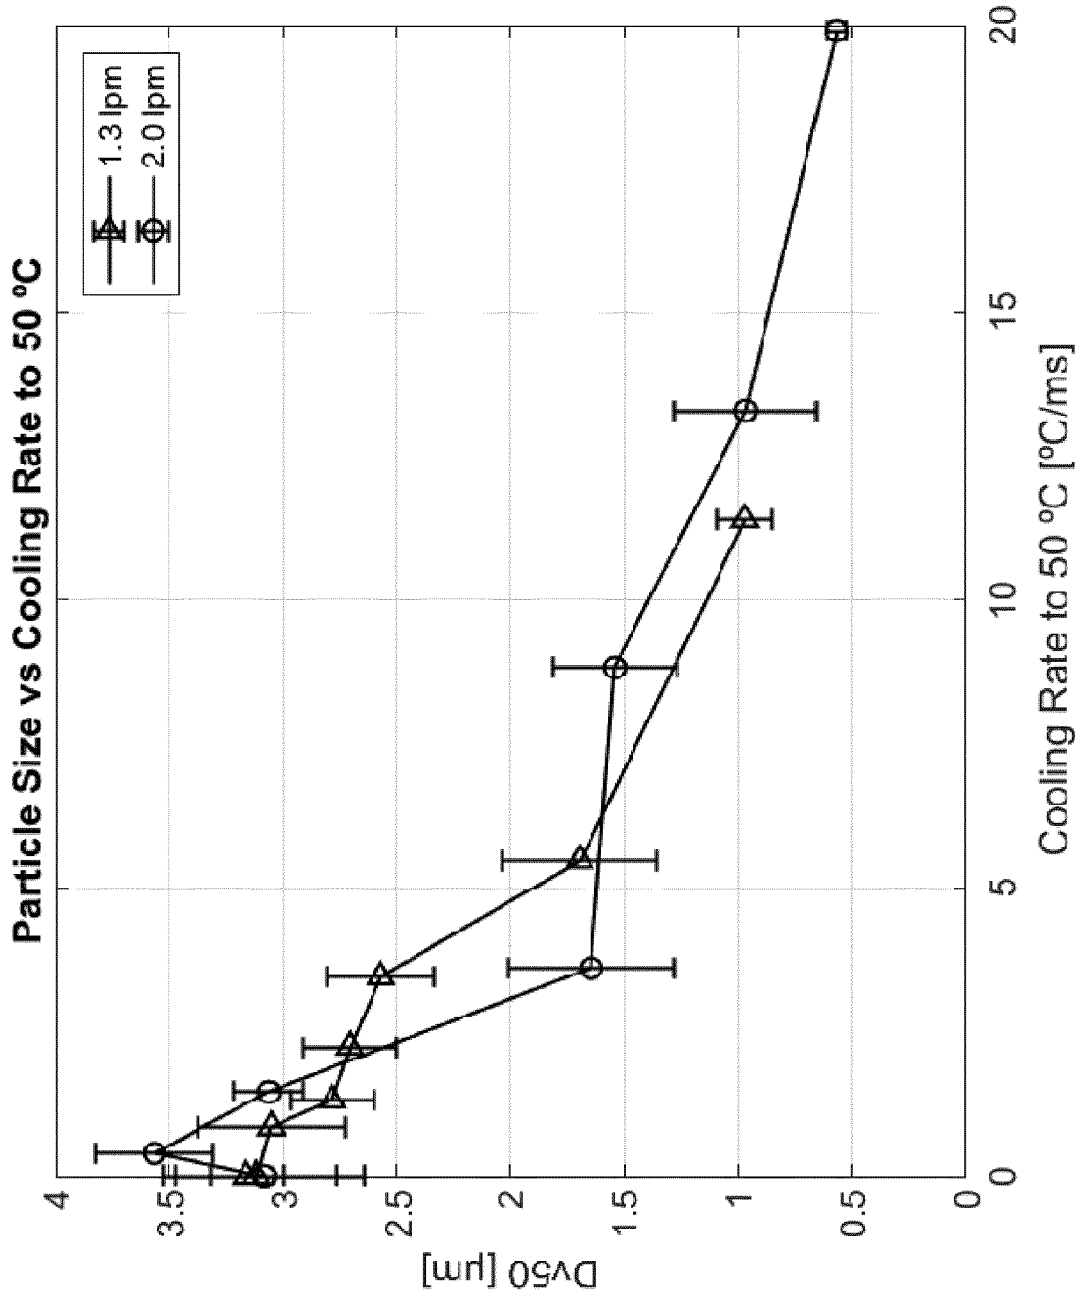


FIG. 15

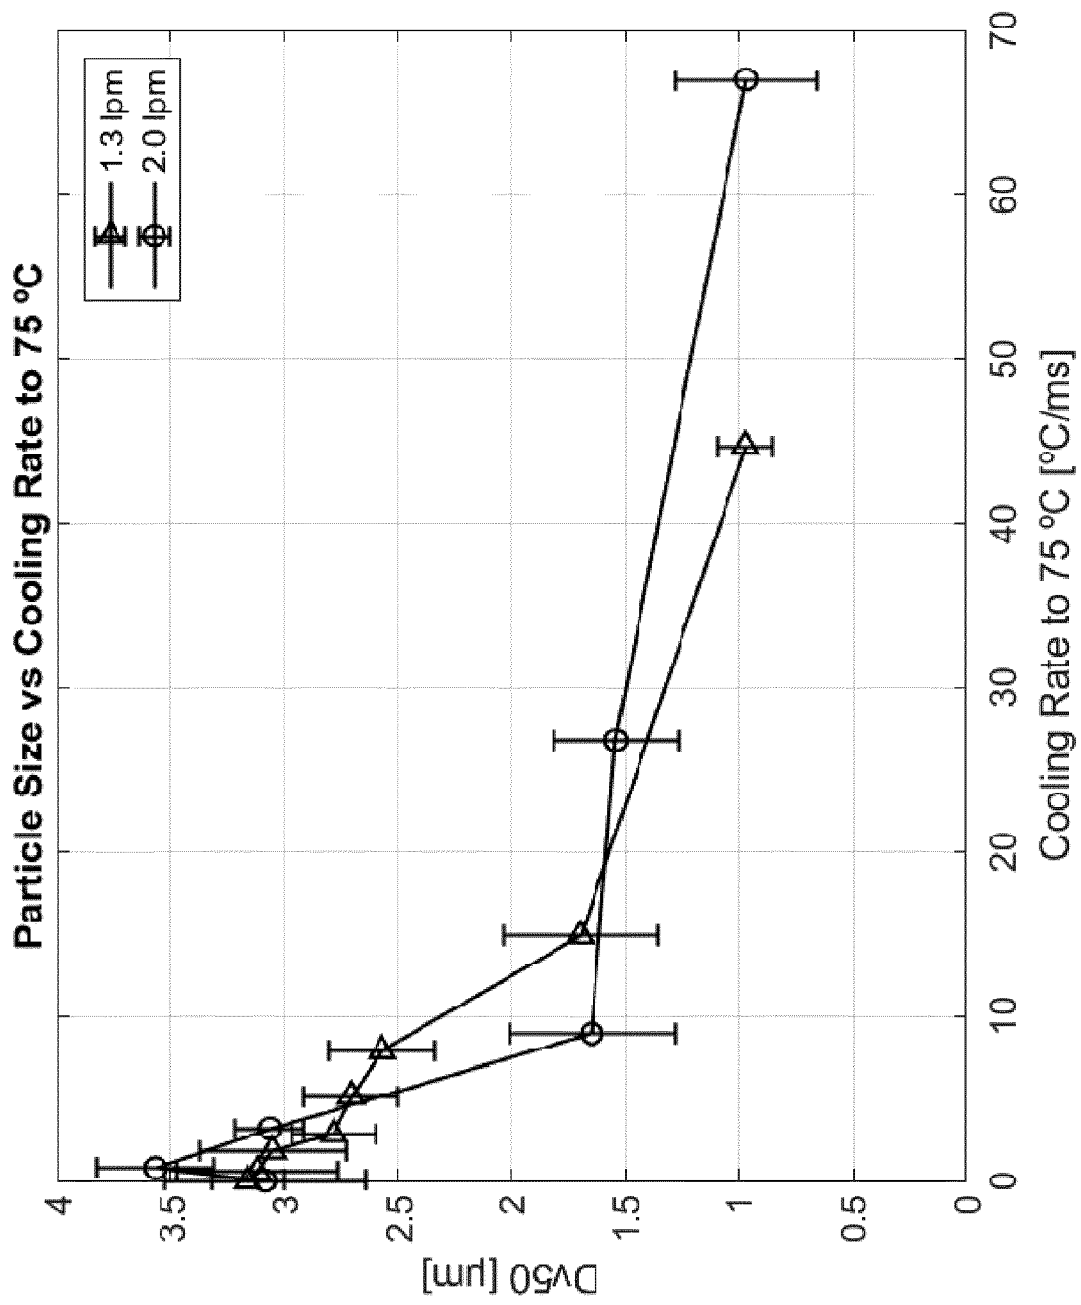


FIG. 16

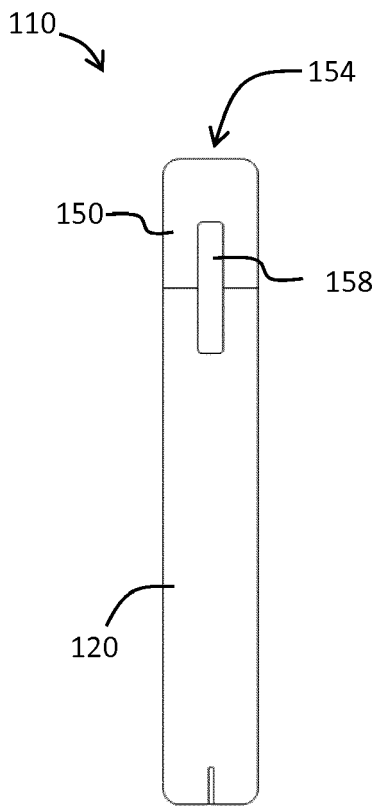


FIG. 17

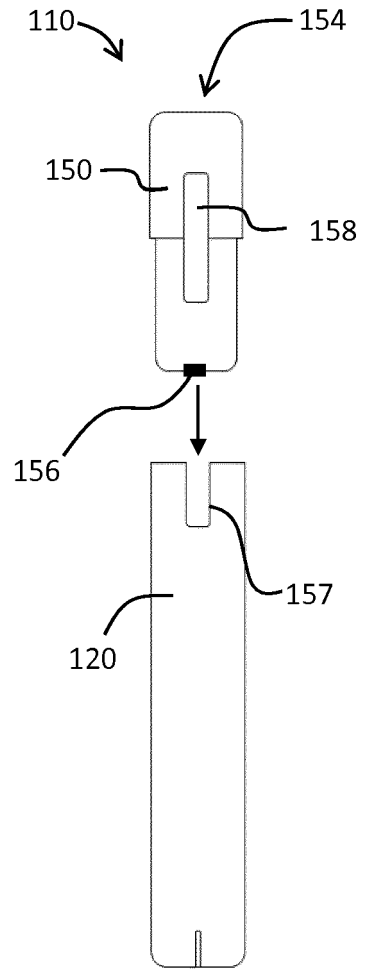


FIG. 18

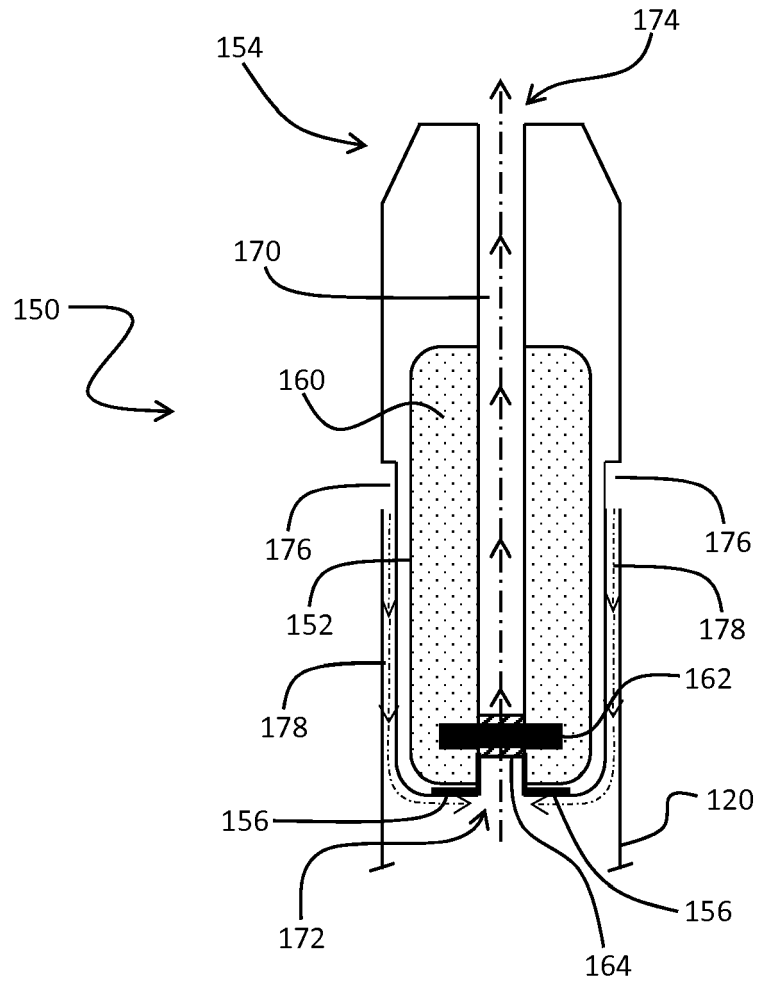


FIG. 19

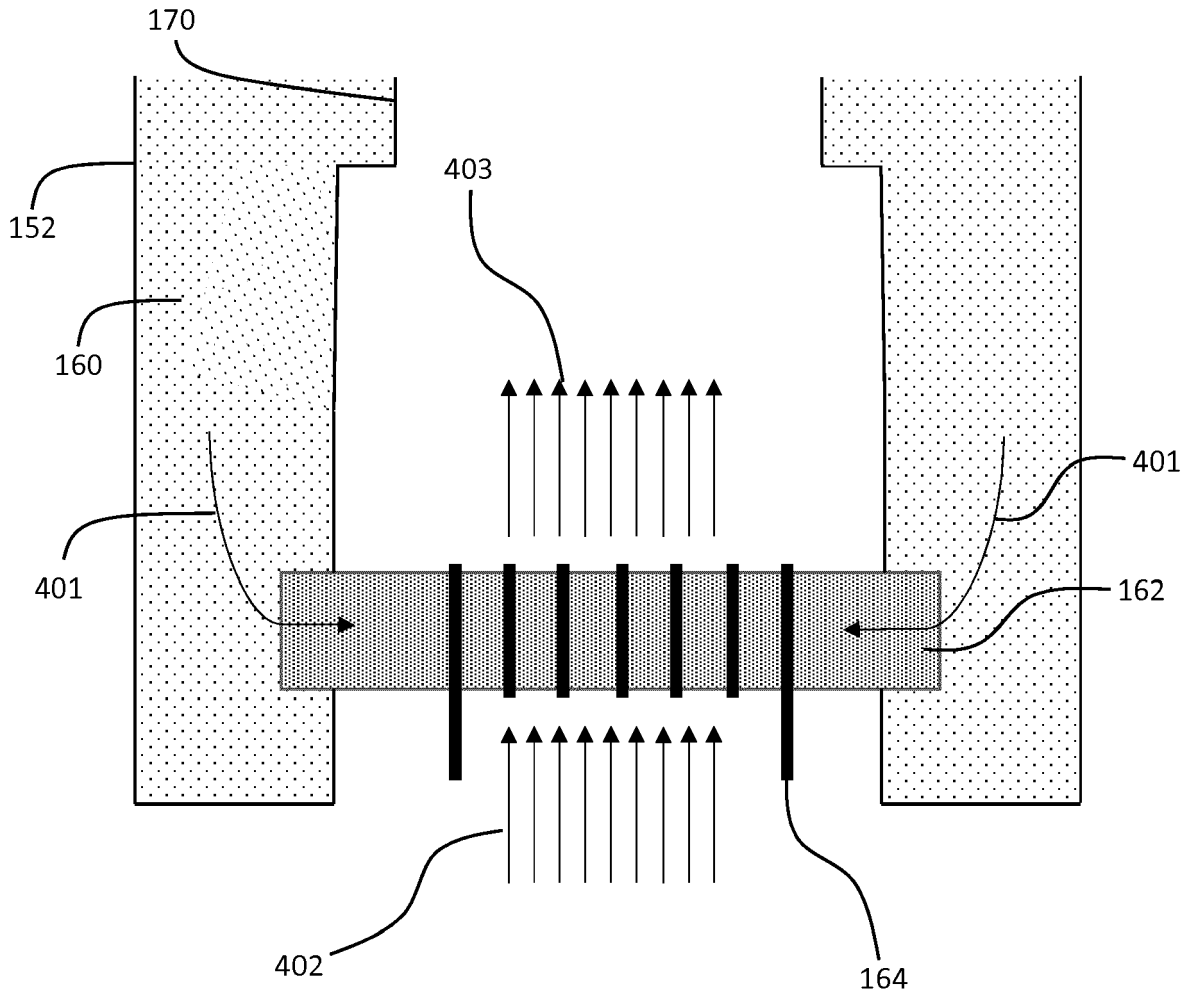


FIG. 20

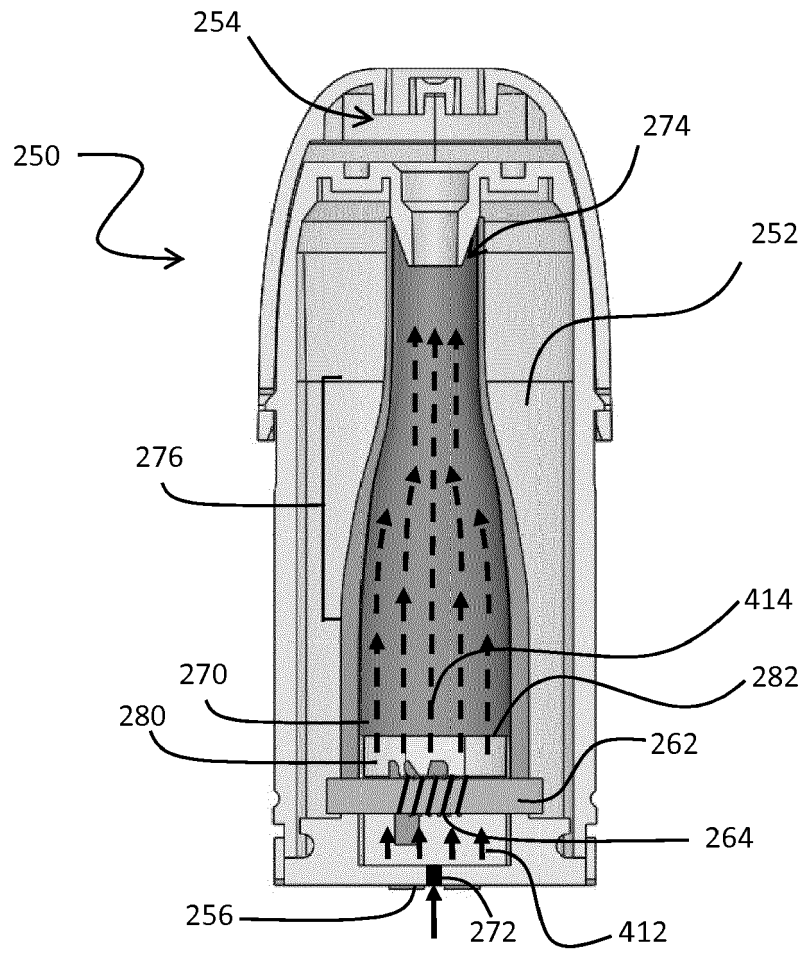


FIG. 21

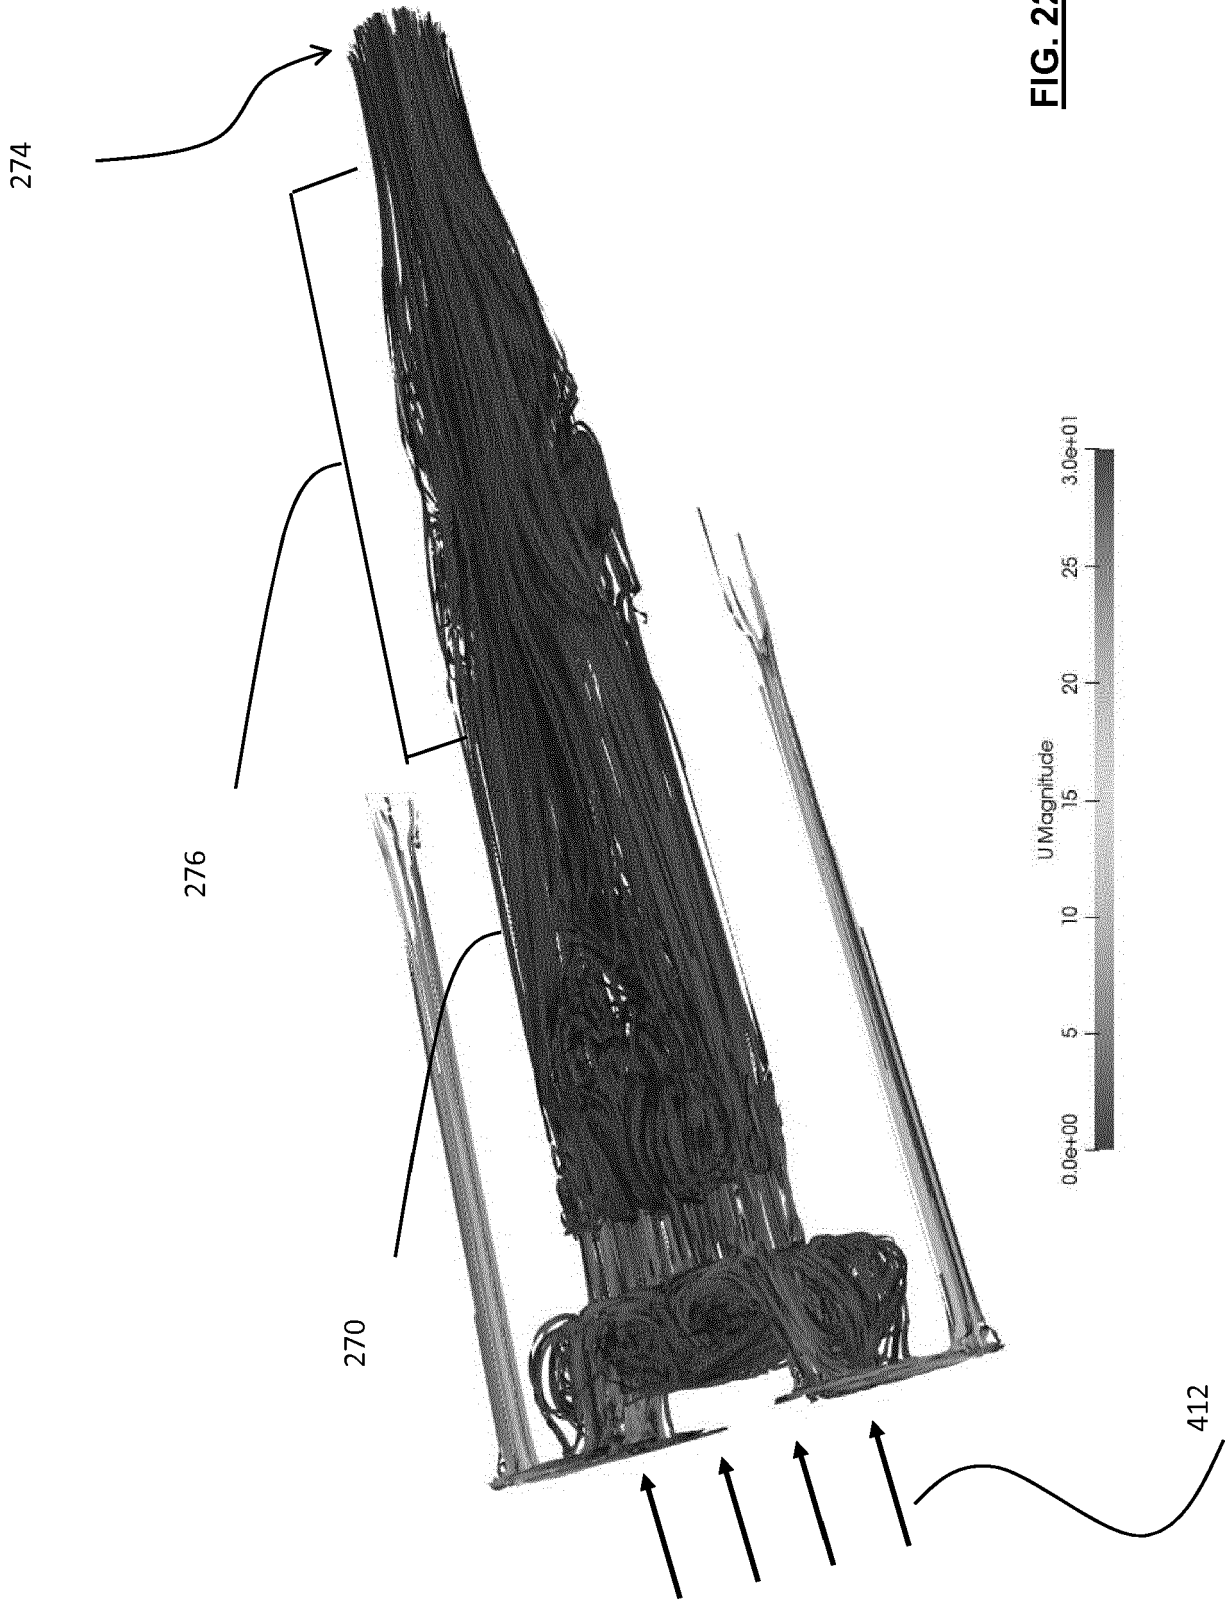


FIG. 22

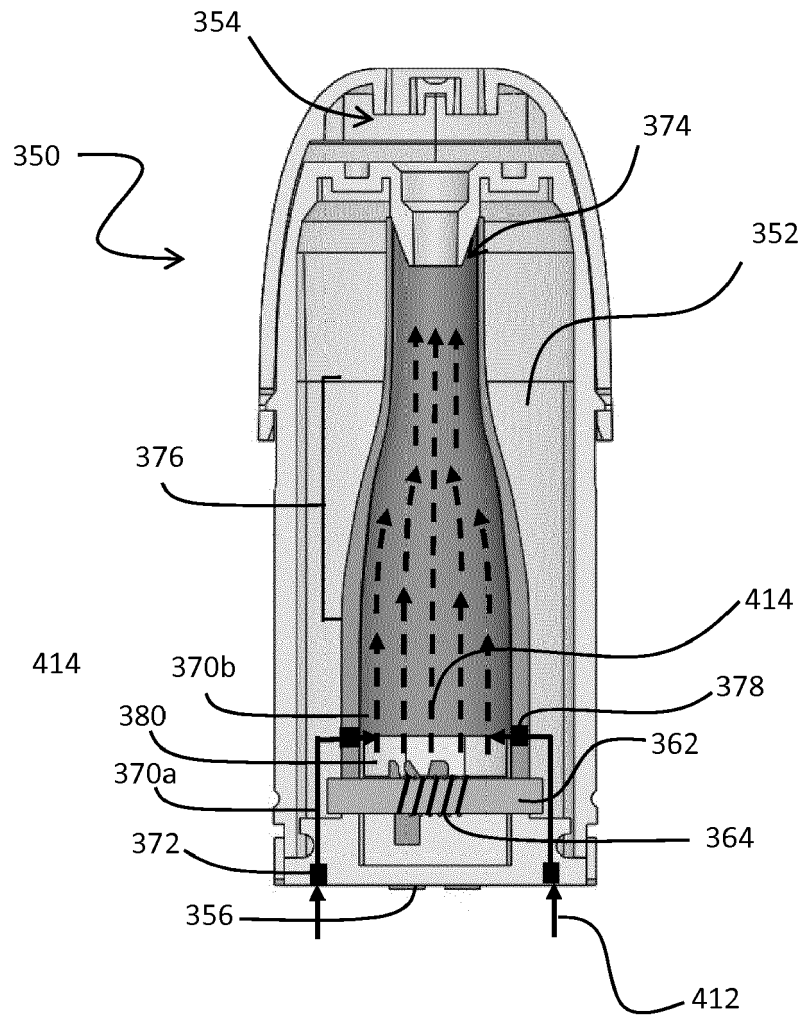


FIG. 23



EUROPEAN SEARCH REPORT

Application Number
EP 19 19 8555

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2018/177958 A1 (WILDER ROBIN [US] ET AL) 28 June 2018 (2018-06-28) * paragraphs [0038] - [0041] * -----	1, 3, 10-13	INV. A24F40/10 A24F40/42
X	WO 2016/050244 A1 (FERTIN PHARMA AS [DK]) 7 April 2016 (2016-04-07) * page 1, line 30 - page 6, line 23 * * page 31, line 18 - line 23 * * page 34, line 18 - line 25 * -----	1-4,9-13	
X	WO 2018/211390 A1 (RAI STRATEGIC HOLDINGS INC [US]) 22 November 2018 (2018-11-22) * page 16, line 20 - line 24; figure 4 * -----	1-4,9-13	
X	EP 3 292 772 A1 (JAPAN TOBACCO INC [JP]) 14 March 2018 (2018-03-14) * figure 7 * -----	1-4,9-13	
X	GB 2 566 766 A (NERUDIA LTD [GB]) 27 March 2019 (2019-03-27) * page 24, line 37 - page 25, line 16 * -----	1,5-7, 9-13	
A		8	TECHNICAL FIELDS SEARCHED (IPC) A24F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 2 April 2020	Examiner Coniglio, Carlo
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 19 8555

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-04-2020

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2018177958 A1	28-06-2018	EP 3558039 A1	30-10-2019
		US 2018177958 A1	28-06-2018
		WO 2018119031 A1	28-06-2018

WO 2016050244 A1	07-04-2016	EP 3200631 A1	09-08-2017
		US 2017251727 A1	07-09-2017
		WO 2016050244 A1	07-04-2016

WO 2018211390 A1	22-11-2018	CA 3063520 A1	22-11-2018
		CN 110944533 A	31-03-2020
		EP 3624620 A1	25-03-2020
		KR 20200007906 A	22-01-2020
		WO 2018211390 A1	22-11-2018

EP 3292772 A1	14-03-2018	EP 3292772 A1	14-03-2018
		JP 6391818 B2	19-09-2018
		JP WO2016194076 A1	26-10-2017
		TW 201641029 A	01-12-2016
		US 2018078718 A1	22-03-2018
		WO 2016194076 A1	08-12-2016

GB 2566766 A	27-03-2019	CA 3076288 A1	28-03-2019
		GB 2566766 A	27-03-2019
		GB 2566767 A	27-03-2019
		GB 2566768 A	27-03-2019
		GB 2566769 A	27-03-2019
		GB 2566770 A	27-03-2019
		GB 2566771 A	27-03-2019
		GB 2566772 A	27-03-2019
		GB 2566773 A	27-03-2019
		GB 2566774 A	27-03-2019
		GB 2569202 A	12-06-2019
		WO 2019057939 A1	28-03-2019
