



(51) International Patent Classification:

B41M 5/50 (2006.01) B44C 5/04 (2006.01)
B41M 5/52 (2006.01)

(21) International Application Number:

PCT/IB2018/054239

(22) International Filing Date:

12 June 2018 (12.06.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17176082.0 14 June 2017 (14.06.2017) EP

(71) Applicant: UNILIN, BVBA [BE/BE]; Ooigemstraat 3,
B-8710 Wielsbeke (BE).

(72) Inventors: CLEMENT, Benjamin; Truweelstraat 4,
B-8790 Waregem (BE). IDE, Matthias; Drieleienstraat
44, B-9031 Drongen (BE). LEDEGEN, Sam; Sint-Salva-
torstraat 89, B-9000 Gent (BE).

(74) Agent: SCHACHT, Benny et al.; Ooigemstraat 3, B-8710
Wielsbeke (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: METHOD FOR MANUFACTURING INKJET PRINTABLE PAPER OR FOIL FOR USE AS A DECOR PAPER OR FOIL

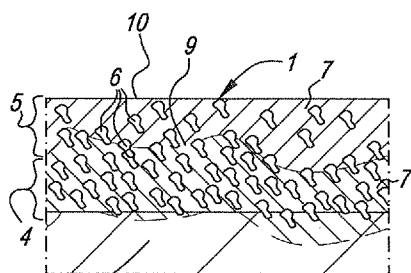


Fig. 3

(57) Abstract: Method for manufacturing paper or thermoplastic foil or vitrimeric foil printable with an inkjet printer for use as a decor paper, respectively decor foil in a laminate or laminated panel, wherein the method at least comprises the following steps: - the step of providing a paper layer (1), respectively a foil; - the step of coating at least one side of said paper layer (1), respectively of said foil, with an inkjet receiver coating (3) comprising at least pigment (6) and binder (7); characterized in that said inkjet receiver coating (3) further comprises an ink reactive compound. The invention also relates to the papers and foils obtained, as well as to method of manufacturing panels wherein the paper (1) or foil is provided with a printed pattern and used as a decor in the panels.



Method for manufacturing inkjet printable paper or foil for use as a decor paper or foil.

5 The present invention relates to a method for manufacturing panels having a decorative surface, or, so-called decorative panels. The invention also relates to a method for manufacturing paper or foil printable with inkjet for use as a decor paper or decor foil in such panels and to the paper or foil obtainable with such method. According to a variant the obtained decor paper or decor foil may be used in a laminated assembly other than a panel, such as in so-called CPL (compact laminate) or in room-wide heterogenous vinyl
10 flooring.

More particularly the invention is related to a method for manufacturing laminate panels, wherein said panels at least comprise a substrate material and a provided thereon top layer with a printed decor. According to a first possibility, the method could be used
15 for manufacturing panels, the top layer of which is formed from thermosetting resin and one or more paper layers, wherein said paper layers comprise a decor paper having a printed pattern. According to a second possibility, the method could be used for manufacturing panels, the top layer of which is formed from thermoplastic material, such as PVC, including at least one thermoplastic decor foil having a printed pattern.
20 The panels of the invention may relate to furniture panels, ceiling panels, flooring panels or similar, wherein these panels preferably comprise a wood based substrate, such as an MDF or HDF substrate (Medium or High Density Fiberboard) or a substrate material consisting of or essentially made of wood particleboard. According to an alternative embodiment, which is of particular interest in combination with the above
25 second possibility, the panels comprise a filled synthetic composite material substrate or a mineral based substrate. These latter panels are also referred to as LVT panels (Luxury Vinyl Tiles).

Traditionally, the decor or pattern of such panels is printed on paper or thermoplastic
30 foil by means of offset or rotogravure printing. The obtained paper or foil is taken up as a decorative paper or decor foil in a so called laminate panel or LVT panel. For

manufacturing the panels of the above mentioned first possibility the DPL process can be practiced. According to the DPL process (Direct Pressure Laminate) the already printed paper or decorative paper is provided with melamine resin to form a decorative layer. Afterwards a stack is formed comprising at least a plate shaped substrate, said decorative layer and possibly a protective layer on top of said decorative layer, wherein
5 said protective layer or overlay is based on resin and/or paper as well. Said stack is pressed and the press treatment results in a mutual connection or adherence of the decorative paper, the substrate and the protective layer, as well as in a hardening of the resin present in the stack. As a result of the pressing operation a decorative panel is
10 obtained having a melamine surface, which can be highly wear resistant. At the bottom side of the plate shaped substrate a counter layer or balancing layer can be applied, or as an alternative a decorative layer might be attached to the bottom side as well, especially in the case of laminate panels for furniture. Such a counter layer or balancing layer or any other layer at the bottom side of the laminate panel restricts or prevents possible
15 bending of the decorative panel, and is applied in the same press treatment, for example by the provision of a resin carrying paper layer as the lowermost layer of the stack, at the side of the stack opposite said decorative layer. For examples of a DPL process reference is made to EP 1 290 290, from which it is further known to provide a relief in said melamine surface during the same press treatment or pressing operation, namely by
20 bringing said melamine surface in contact with a structured press element, for example a structured press plate. For manufacturing the panels of the above mentioned second possibility, preferably also at least a lamination of the decor foil and a transparent thermoplastic wear layer is carried out in order to form the top layer of the panel. The mutual connection or adherence of the decor foil and the transparent wear layer is
25 preferably obtained through a thermal lamination process, e.g. by using one or more heated press rollers. The obtained top layer may then be glued or thermally laminated to the substrate. In order to possibly form a relief in the top layer a press treatment or pressing operation may be used. Namely by bringing the thermoplastic top layer in contact with a structured press element, for example a structured press roller. The press
30 element is preferably cooled, while the thermoplastic top layer is presented to the roller in a heated condition, such that the thermoplastic top layer may be cooled down and

frozen while in contact with the press element, thereby taking over the negative of the structure of the press element.

5 The printing of paper or thermoplastic foil by means of an analog printing process, such as by rotogravure or offset printing, at affordable prices inevitably leads to large minimal order quantities of a particular decorative paper or foil and restricts the attainable flexibility. A change of decor or pattern necessitates a standstill of the printing equipment of about 24 hours. This standstill time is needed for exchange of the printing rollers, the cleaning of the printing equipment and for adjusting the colors of
10 the new decor or pattern to be printed.

Instead of analog printing techniques, digital printing techniques, especially inkjet printing techniques, are becoming increasingly popular for the creation of decors or patterns, be it on paper, on foil or directly on a plate-shaped substrate possibly with the intermediary of preparatory layers. Such digital techniques can enhance the flexibility in
15 the printing of decors significantly. Reference is amongst others made to the EP 1 872 959, WO 2011/124503, EP 1 857 511, EP 2 431 190, EP 2 293 946, WO 2014/084787, WO 2015/140682 and the WO 2015/118451, where such techniques are disclosed.

20 EP 2 132 041 discloses a method at least comprising the step of providing a paper layer with thermosetting resin and the step of providing said resin provided paper layer with at least a portion of said printed pattern. Preferably multi color printed patterns are applied for the realization of a decor, e.g. representing a wood pattern, on the
25 abovementioned paper layer. Such decor extends over the majority, or even over the totality of the resin provided paper layer. In EP 2 132 041, a digital printer, more particularly an inkjet printer is applied. It has however been very difficult to reliably further process such printed paper for manufacturing laminate panels, such as in a DPL process, since pressing defects may originate in the resin surface and milling, drilling or
30 sawing through the laminate surface or at the edge thereof often leads to splitting in the top layer. Furthermore, the inks or dyes of the EP'041 may overly wet the paper layer

and cause wrinkling effects or bleeding upon further handling of the printed paper, leading to an instable and/or slow production process. To solve this issue the EP'041 propose to immediately dry the printed paper layer.

5 EP 1 044 822, EP 1 749 676 and EP 2 274 485 disclose the use of an inkjet receiver coating to enhance the printing quality on a raw decor paper. Such inkjet receiver coating comprises pigments and a polymer such as polyvinyl alcohol. Although enhanced, the obtained color density of the print on such treated paper is still inferior to that of analog prints.

10

As recognized in WO 2015/118451 the use of paper treated with an inkjet receiver coating may lead to malfunctioning of the printing equipment. Dust may release from the inkjet receiver coating and bring about all sorts of malicious effects to the critical parts of an inkjet printer. The dust may for example clog one or more of the nozzles and
15 lead to printing faults. WO 2015/118451 proposes to avoid too large a bent in the paper in the printing equipment to minimize the release of dust.

During private research, the inventor has also encountered problems with subsequent impregnation of dust releasing paper layers, even in the cases where the paper layers
20 were already printed upon. The released dust may pollute the resin bath, the rollers, camera's and other equipment in, or in the immediate vicinity of, the impregnation channel, leading to defects in the final product or of the equipment used.

WO 2015/140682 discloses priming substances that alleviate problems occurring in the
25 lamination of digitally printed thermoplastic decor foils with transparent thermoplastic wear layers, e.g. when applied over the print. The digital print may be provided on the decor foil with the intermediate of an inkjet receiver coating. WO 2014/084787 discloses an inkjet receiver coating for a plastic foil, wherein the inkjet receiver coating essentially comprises an aqueous solution of a metal salt, like NaCl or CaCl₂.

30

The present invention aims in the first place at an alternative method for manufacturing panels having a decorative surface or paper, respectively thermoplastic foil, for use in such panels, and seeks, in accordance with several of its preferred embodiments, to solve one or more of the problems arising in the state of the art.

5

Therefore the present invention, in accordance with its first independent aspect, relates to a method for manufacturing paper or thermoplastic foil or vitrimeric foil printable with an inkjet printer for use as a decor paper, respectively decor foil, in a laminate panel, wherein the method at least comprises the following steps:

- 10 - the step of providing a paper layer, respectively a thermoplastic or vitrimeric foil;
- the step of coating at least one side of said paper layer, respectively of said foil, with an inkjet receiver coating comprising at least pigment and binder;
- with as a characteristic that said inkjet receiver coating further comprises an ink reactive
- 15 compound.

Pigments of inkjet inks are stabilized to attain a good dispersion in the ink vehicle and to avoid coagulation of the pigments, in particular to avoid clogging of the nozzles in the inkjet heads. This stabilization is in inkjet inks obtained by means of electrosteric

20 effect between the pigments. The ink reactive compound preferably is a substance that breaks up the stabilization of the pigments in the jetted droplets, or in other word an ink destabilizing agent. The inventors have found that the addition of such an ink reactive compound to an inkjet receiver coating based on a pigment and binder mixture tremendously enhances the obtainable printing quality, more particularly the attainable

25 color density, of a print on a paper layer or foil. The ink reactive compound captures the ink, more particularly the pigments, upon the first interaction with it. By interfering or breaking up the electrosteric functions on the pigments, such that the pigments quickly precipitate from the ink mixture and are only minimally driven deeper into the coating together with the inks vehicle. This immediate immobilization of the pigment leads to a

30 superior color density of the print. The pigment and binder system of the ink receiver coating absorbs the vehicle of the ink, thereby also preventing bleeding, particularly

while printing on paper, or smearing of the ink, particularly while printing on foils, which also in itself may lead to an enhanced printing quality.

Preferably, in the method of the invention, the paper or foil is intended to be printed
5 using water-based inks or UV curing inks. In the first place the papers and foils obtained through the method of the first aspect are intended to be printed upon using inkjet printing equipment. However, the inventors have also found enhanced printing quality with the use of thus treated papers and foils in analog printing equipment.

10 According to the invention, the ink reactive compound may be chosen as one or more from several possibilities, of which here below the most important possibilities are listed.

According to a first possibility, said ink reactive compound comprises a polyionic
15 polymer, preferably polyDADMAC (Polydiallyldimethylammonium chloride). An ionic polymer wholly or partly neutralizes the electrosteric function of the pigment in the ink, thereby quickly precipitating the pigment.

According to a second possibility, said ink reactive compound comprises a substance
20 altering, more particularly lowering, the pH of said inkjet receiver coating. Preferably the pH of the inkjet receiver coating composition is lowered to pH 3 or lower, by selecting the amount and type of said substance, which selection is within the ambit of the skilled man. Preferably said substance is chosen from the list consisting of formic acid, tartaric acid, acetic acid, hydrochloric acid, citric acid, phosphoric acid, sulfuric
25 acid, AlCl_3 and boronic acid. An adjusted, more particularly lowered pH, preferably to pH 3 or less, increases the chemical affinity of the inkjet receiver coating with the ink and will interfere with the electrosteric stabilization function on the pigment, such that the dispersion of the pigments in the ink will become destabilized quickly.

30 According to a third possibility, said ink reactive compound comprises a metal salt, preferably a cationic metal salt. Preferably said metal salt is chosen from the list

consisting of CaCl_2 , MgCl_2 , CaBr_2 , MgBr_2 , CMA (Calcium Magnesium Acetate), NH_4Cl , Calcium Acetate, ZrCl_4 and Magnesium Acetate. The positive ion of the dissolved metal salt will tend to neutralize the electrosteric stabilization function of the pigment. The most preferred cationic metal salts are CaCl_2 , MgCl_2 , CMA, Calcium
5 Acetate and Magnesium Acetate, as the inventors have obtained the best results with these ink reactive compounds.

According to a fourth possibility, said ink reactive compound comprises a flocculating agent. Preferably said flocculating agent is chosen from the list consisting of
10 sodialuminate, a double sulphate salt such as alum, polyaluminumchloride, polyacrylate, dicyandiamide (e.g. Floquat DI5 from SNF) and polyacrylamide. The flocculating agent pulls the ink pigments out of the ink dispersion. Thereby the pigments are prevented from penetration to far down into the ink receiver coating. Mainly the vehicle of the ink, e.g. the water in the case of waterbased inks, is absorbed
15 deeper down into the ink receiver coating.

Preferably, said paper or foil is provided with 0.2 to 10 g/m^2 , and preferably between 0.5 and 5 g/m^2 , dry coating weight of ink reactive compound, more particularly ink destabilizing agent, in said inkjet receiver coating.

20 Preferably, said paper or foil is provided with 0.2 to 10 g/m^2 , and preferably between 0.5 and 5 g/m^2 , dry coating weight of a hygroscopic compound or pigment in said inkjet receiver coating. Preferably said pigment has a BET surface area between 10 and 1600 m^2/g , and preferably between 15 and 500 m^2/g . Preferably, the coating is such that the
25 pigments create a surface of 100 m^2 to 16000 m^2 per m^2 surface area of paper or foil, or even better between 150 and 5000 m^2 of pigment surface per m^2 of paper or foil surface.

According to the most preferred embodiment, for the pigment of said inkjet receiver coating at least or mainly silica particles are used. Preferably the silica particles are
30 silane treated. Silane treatment of the pigments, in general, enhances dust release properties of the attained inkjet receiver coating and the thus treated paper or

thermoplastic foil. The silane treatment may relate to a treatment with a coupling agent such as amino-organo-silanes, hydroxysilanes, dipodal silanes and/or other silanes. Preferably, the coupling agent is chosen such that the risk of yellowing upon aging of the attained inkjet receiver coating is low. Preferably, the coupling agent forms 0.1 to 5 10% of the total wet weight of the inkjet receiver coating.

According to variants, for the pigment of said inkjet receiver coating at least or mainly particles are used chosen from the list consisting of calcium carbonate, silica, alumina, aluminosilicates, ordered mesoporous materials, modified silica, organosilica, modified 10 organosilica, organoalumina, modified alumina, aluminates, modified aluminates, organoaluminates, modified organoaluminates, zeolites, metal organic frameworks and porous polar polymers.

Preferably, said paper or foil is provided with 0.2 to 10 g/m², and preferably between 15 0.5 and 5 g/m², dry coating weight of a binder in said inkjet receiver coating. According to the most preferred embodiment, for the binder in said inkjet receiver coating at least or mainly polyvinyl alcohols are used.

According to variants, the inkjet receiver coating includes, as a binder, a polymer 20 selected from the group consisting of hydroxyethyl cellulose; hydroxypropyl cellulose; hydroxyethylmethyl cellulose; hydroxypropyl methyl cellulose; hydroxybutylmethyl cellulose; methyl cellulose; sodium carboxymethyl cellulose; sodium carboxymethylhydroxyethyl cellulose; water soluble ethylhydroxyethyl cellulose; cellulose sulfate; vinylalcohol copolymers; polyvinyl acetate; polyvinyl acetal; 25 polyvinyl pyrrolidone; polyacrylamide; acrylamide/acrylic acid copolymer; polystyrene, styrene copolymers; acrylic or methacrylic polymers; styrene/acrylic copolymers; ethylene-vinylacetate copolymer; vinyl-methyl ether/maleic acid copolymer; poly(2-acrylamido-2-methyl propane sulfonic acid); poly(diethylene triamine-co-adipic acid); polyvinyl pyridine; polyvinyl imidazole; polyethylene imine epichlorohydrin modified; 30 polyethylene imine ethoxylated; ether bond-containing polymers such as polyethylene oxide (PEO), polypropylene oxide (PPO), polyethylene glycol (PEG) and polyvinyl

ether (PVE); polyurethane; melamine resins; gelatin; carrageenan; dextran; gum arabic; casein; pectin; albumin; chitins; chitosans; starch; collagen derivatives; collodion and agar-agar. The most preferred variants for the binder are polyvinyl acetates, ethylvinylacetates, block copolymers based on polyvinylacetate, block copolymers based on polyvinylalcohol, acrylates, latexes, polyvinyl derivatives, VCVAC derivatives, polyurethanes based on polyols and isocyanates, polyurethanes based on polycarbamates and polyaldehydes, e.g. both as a watery dispersion/emulsion or a watery or solvent solution.

As stated above preferred binders for the inkjet receiving layer include polyvinyl alcohol (PVA), but according to variants a vinylalcohol copolymer or modified polyvinyl alcohol may be applied. The modified polyvinyl alcohol may be a cationic type polyvinyl alcohol, such as the cationic polyvinyl alcohol grades from Kuraray, such as POVAL C506, POVAL C118 from Nippon Goshei.

Preferably, said inkjet receiver coating has, globally seen, a pigment to binder ratio between 0/1 or 0.01/1 and 25/1, preferably between 0/1 or 0.01/1 and 20/1. It is not excluded that the inkjet receiver coating is non uniform and shows layerwise or areawise differences in composition, in which case the above values are average values for the totality of the inkjet receiver coating.

The inkjet receiver coating further preferably comprises one or more of the following agents:

- Crosslinking agents: between 0.05 and 5 g/m², preferably between 0.2 and 2 g/m², e.g. chosen from the list consisting of aldehydes, polyaldehydes, dialdehydes, alcohols, boronic acid, borax, polyalcohols, carbamates, polycarbamates, carbonic acids, glyoxal based agent, zirconium based agents and polycarbonic acids.
- Particle surface modifying agents or coupling agents: between 0.05 and 5 g/m², preferably between 0.2 and 2 g/m², e.g. chosen from the non-limiting list consisting of amino silanes, ureido silanes, aldehyde silanes,

5 tetraethylorthosilicate, siliazanes, organically modified silanes, organically modified siliazanes, chlorosilanes, organically modified chlorosilanes, bissilanes, organobissilanes, silsesquioxanes, polysilsesquioxanes, silane oligomers, organically modified silane oligomers, bissilane oligomers, organically modified bissilane oligomers, oligomeric silsesquioxanes, and oligomeric polysilsesquioxanes.

- 10 - Additives: wetting agent between 0.005 and 2 g/m², preferably between 0.05 and 1 g/m²; and/or defoaming agent between 0.005 and 2 g/m², preferably between 0.05 and 1 g/m²; and/or fungicide between 0.005 and 2 g/m², preferably between 0.05 and 1 g/m².

15 Preferably the paper layer or thermoplastic foil onto which the inkjet receiver coating is applied has a base weight of 50 to 100 grams per square meter, e.g. between 60 and 80 grams per square meter.

20 Preferably, in the case of a paper layer, the side of the paper layer onto which the inkjet receiver coating is to be applied has been smoothed (German: *geglättet*), preferably during its production. The smoothing diminishes the amount of binder penetrating the paper's core, such that the pigments contained therein can be better bound by the available binder substance and variations in absorption may be less. Preferably, the paper obtained using the method of the invention, i.e. including the inkjet receiver coating, has a Gurley value of between 30 and 120 seconds, and preferably between 30 and 80 seconds. Such paper layer results in an excellent printing quality, since the deposited inks tend to bleed less into the paper, and the position accordance, or so-called register, between printed patterns applied with different inkjet heads is more easily attained and maintained. Indeed, a relatively high Gurley value leads to more dimensionally stable paper, since it is less prone to water absorptance. When dealing with the impregnation with thermosetting resin of such a high Gurley value paper one could consider tuning down the speed of the impregnation channel, the use of pressurized impregnation techniques and the lowering of the viscosity of the impregnating resin.

25

30

According to the most preferred embodiment said inkjet receiver coating is applied in at least two partial steps, wherein respectively a first layer with a first composition and, subsequently, a second layer is applied with a second composition, both compositions at least comprising said binder.

The inventor has witnessed that the application of the inkjet receiver coating in two partial steps leads to a better incorporation or binding of the pigment. The risk of dust releasing from the paper is reduced as compared to a situation where the same amount of pigment is applied in only one coating step. According to the inventor this surprising effect is to be attributed to the first layer forming a kind of barrier for the binder of the second layer against penetration in the paper layer. The binder of the second layer is better effective in binding pigments that would otherwise be loose or badly bound on the surface of the paper. The better embedded pigments lead to a significant reduction of dust release from the paper upon further handling, e.g. printing, impregnation with resin, thereof.

The application of the inkjet receiver coating in two steps may further lead to a more even application of the entirety of the inkjet receiver coating. Where the first composition may be partly absorbed in the paper layer in a non-uniform manner, and therefor may lead to an uneven first layer having less effective portions, the second composition levels out the possible unevenness at least to some extent.

The application of the inkjet receiver coating in at least two steps allows for creating gradients of certain components of the coating through its thickness, since the first and second composition may have different components or may both have components that are present in a different concentration, as will be explained further. The application of the inkjet receiver coating in at least two steps further allows to create coating layers of different thickness.

The method of the invention and especially those embodiments where the inkjet receiver coating is applied in two partial steps, is especially interesting when it is started from paper layers the mean air resistance of which is low, e.g. with a Gurley value of 30 seconds or below, e.g. 25 seconds or below. In such cases the binder contained in the first layer tends to be largely absorbed in the paper mass, leaving the pigment content largely unbound on the surface. Preferably the paper layer is a standard printing base paper or another untreated paper layer having a mean air resistance as expressed by Gurley value of 30 seconds or lower. It is of course not to be excluded that in the method of the invention, according to an alternative embodiment, it is started from a paper treated with thermosetting resin prior to the application of said inkjet receiving coating. Preferably, in this latter case, the resin provided paper layer has a mean air resistance with a Gurley value of 100 seconds or lower. Also in such case the application of an inkjet receiver coating in two partial steps has significant advantages, e.g. regarding dust release, the minimization of bleeding of jetted inks, the uniform application of the inkjet receiver coating.

In general, the method of the invention, in the cases where the inkjet receiver coating is applied in two partial steps, allows to apply an inkjet receiver coating with a higher pigment content and, therefore, a higher capability, or higher speed, of absorbing the vehicle of the applied inks, e.g. water in the case of aqueous pigmented inks, while maintaining or even reducing dust release from the treated printable surface. The higher capability or speed of absorbing the vehicle may lead to a higher print definition. Since the vehicle is absorbed essentially vertically into the inkjet receiving coating, i.e. without substantial sideways bleeding, the pigments are maintained on the spot where the ink was applied, i.e. the pigments are not driven sidewardly along with the vehicle of the ink. As stated above, any bleeding still available may manifest itself in a more even manner due to the application of the second layer of the inkjet receiver coating levelling out partially or wholly the first layer. The availability of the ink reactive compound in the inkjet receiver coating assists in the immediate capture of the ink pigment at the surface of the treated paper or foil.

Preferably, in the case where the inkjet receiver coating is applied in two partial steps, said first layer and said second layer differ in that they show one or more of the following properties:

1. - the property that said first layer as well as said second layer comprise pigment and binder, albeit in a different pigment to binder ratio;
2. - the property that the dry weight of material applied for said first layer and said second layer is different;
3. - the property that said first layer as well as said second layer comprise pigment and binder, wherein the average particle size of the pigments contained in said first layer is larger than the average particle size contained in said second layer;
4. - the property that said first layer as well as said second layer comprise an ink reactive compound, albeit in a different composition;
5. - the property that said first layer at least comprises pigment and binder, while the second layer is free from pigments, or at least comprises less pigment than said first layer, or comprises less than 10% of the pigment content of said first layer.

Regarding the first mentioned property, preferably said first composition has a pigment to binder ratio which is larger than the pigment to binder ratio of said second composition. In this way the binder of the second layer primarily binds the pigments of the first layer and levels out unevenness in the first layer.

Preferably the pigment to binder ratio in said second composition is lower than 2:1, and preferably lays between 0:1 and 2:1. When the ratio in the second composition is below 1.5:1 an extremely low dust release has been witnessed. As expressed above, it is not excluded that, in some embodiments, said second composition is free from pigments.

Whether or not in combination with the mentioned preferred second composition, the pigment to binder ratio in said first composition may be chosen between 1:1 and 25:1 or

between 2:1 and 10:1, and is preferably 3.5:1 or larger than 3.5:1, and even better 5.5:1 or larger than 5.5:1, though preferably smaller than 10:1.

A good combination of the first and second composition is reached when the ratio pigment to binder in the second composition is between 0:1 and 2:1 and the ratio pigment to binder in the first composition is between and including 3.5:1 and 10:1. It is clear, however, that within the scope of the present invention, the pigment to binder ratio of the first and second composition may be equal or substantially equal.

10 Regarding the second mentioned property, it is of course not excluded that for both layers the same dry weight would be applied. In such case, however, preferably a different pigment to binder ratio is applied in the first and second composition. Preferably for each of said both layers a dry weight of between 0,5 and 5 grams per square meter of material is applied to the paper layer, and even better between 0,8 and 15 4,5 grams per square meter. In the cases where the dry weight of material applied for said first layer and said second layer is different, preferably the first layer includes the highest dry weight of material, e.g. at least 20% more than the second layer. The composition of each layer preferably comprises between 12 and 20% by weight of solid matter, such that, in terms of wet weight of the layers, preferably between 4 and 20 20 grams per square meter of wet coating material is applied to the paper layer.

Regarding the third mentioned property, the larger pigment particles are preferably contained in said first composition. The use of large particles in the first layer provides for an excellent absorption of the inks vehicle, while the use of small particles in the 25 second layer provides for a levelling out effect and a good reduction of dust release at the surface of the paper layer. Preferably, in such case, the pigment particles in said first composition have an average particle size between 1 and 20 micrometer. Preferably the pigment particles in said second composition have an average particle size between 100 nanometer and 1 micrometer. It is in general, of course, not excluded that the first and 30 second composition would comprise pigment particles with a similar or same average particle size.

Regarding the fourth mentioned property, preferably said second layer comprises a higher amount of said ink reactive compound than said first layer. The availability of the ink reactive compound at the upper layer of the coating leads to an effective
5 interaction with the pigments of the jetted ink drops. The ink reactive compound preferably comprises a flocculating agent or another ink destabilizing agent, such as a cationic metal salt.

The binder used in the invention in general, or, the binder comprised in the first and/or
10 the second composition, may also be formed by a mixture of the above listed possibilities for such binder. According to a special embodiment a mixture of polyvinyl alcohol with ethylene vinyl acetate (EVA) and/or polyvinyl acetate (PVAc) is used as a binder, wherein preferably the main constituent of the binder is polyvinyl alcohol and, e.g. at least 5% by weight of EVA and/or PVAc is used. The inventor has recorded an
15 increased flexibility of the thus treated papers or treated foils as compared to papers or foils where the binder is essentially polyvinyl alcohol. An increased flexibility with diminished dust release is advantageous in further handling of the thus treated paper and foils, e.g. in the printing equipment.

20 Preferably, the binder in the first and the second composition is the same, or, at least the main constituent of the binder is the same. As stated before, the main constituent is preferably polyvinyl alcohol.

As a pigment used in the invention in general, or as a pigment in the first and/or second
25 composition, any inorganic pigment and most preferably a porous inorganic pigment may in fact be used. Mixtures of two or more pigments may also be used. The pigment used is preferably an inorganic pigment, which can be chosen from neutral, anionic and cationic pigment types. Useful pigments include e.g. silica, organosilica, talc, clay, hydrotalcite, kaolin, diatomaceous earth, calcium carbonate, magnesium carbonate,
30 basic magnesium carbonate, aluminosilicate, aluminum trihydroxide, aluminum oxide (alumina), titanium oxide, zinc oxide, barium sulfate, calcium sulfate, zinc sulfide, satin

white, alumina hydrate such as boehmite, zirconium oxide or mixed oxides. The inorganic pigment is preferably selected from the group consisting of alumina hydrates, aluminum oxides, aluminum hydroxides, aluminum silicates, and silicas. Particularly preferred inorganic pigments are silica particles, colloidal silica, alumina particles and pseudo-boehmite, as they form better porous structures. When used herein, the particles may be primary particles directly used as they are, or they may form secondary particles. A preferred type of alumina hydrate is crystalline boehmite, or γ -AlO(OH). Useful types of boehmite include DISPERAL HP14, DISPERAL 40, DISPAL 23N4-20, DISPAL 14N-25 and DISPERAL AL25 from Sasol; and MARTOXIN VPP2000-2 and GL-3 from Martinswerk GmbH. Useful cationic aluminum oxide (alumina) types include α -Al₂O₃ types, such as NORTON E700, available from Saint-Gobain Ceramics & Plastics, Inc, and γ -Al₂O₃ types, such as ALUMINUM OXID C from Degussa. Other useful inorganic pigments include aluminum trihydroxides such as Bayerite, or α -Al(OH)₃, such as PLURAL BT, available from Sasol, and Gibbsite, or γ -Al(OH)₃, such as MARTINAL grades and MARTIFIN grades from Martinswerk GmbH, MICRAL grades from JM Huber company; HIGILITE grades from Showa Denka K.K. As stated before, the preferred type of inorganic pigment is silica which can be used as such, in its anionic form or after cationic modification. The silica can be chosen from different types, such as crystalline silica, amorphous silica, precipitated silica, fumed silica, silica gel, spherical and non-spherical silica. The silica may contain minor amounts of metal oxides from the group Al, Zr, Ti. Generally depending on their production method, silica particles are grouped into two types, wet-process particles and dry-process (vapour phase-process or fumed) particles. In the wet process, two types of reactions can be used to make these precipitated silica materials. The first is a process where sodium silicate is treated with mineral acids to give the precipitated silicas. In the second process pure silica materials are made by the polycondensation of alkoxy or halosilanes. A vapour-phase process includes two types; one includes high-temperature vapour-phase hydrolysis of silicon halide to obtain anhydrous silica (flame hydrolysis), and the other includes thermal reduction vaporization of quartz sand and coke in an electric furnace followed by oxidizing it in air to also obtain anhydrous silica (arc

process). The "fumed silica" means to indicate anhydrous silica particles obtained in the vapour-phase process.

For the silica particles preferably used in the inkjet receiving layer of the invention, especially preferred are the precipitated silica particles. The precipitated silica differs from fumed silica in point of the density of the surface silanol group and of the presence or absence of pores therein, and the two different types of silica have different properties. The inventors surprisingly noted that the use of precipitated silica as pigment in an inkjet receiver coating, in comparison with fumed silica, led to a higher color density of the print performed on such coating, and, a better adherence is achieved with transparent layers later to be laminated on top of the print. The inventors think that the higher smoothness of an inkjet receiver coating with fumed silica gives rise to the lower color density and lamination strength.

Alternatively, organic pigments may be used in the inkjet receiver coating, preferably chosen from the list consisting of polystyrene, polymethyl methacrylate, silicones, melamine-formaldehyde condensation polymers, urea-formaldehyde condensation polymers, polyesters and polyamides. Mixtures of inorganic and organic pigments can be used. Also, hybrid pigments can be used such as organosilica materials. However, most preferably the pigment is an inorganic pigment.

Preferably the pigments included in the inkjet receiver coating have an average particle size of 100 nm to 20 μm , wherein 1-12 μm , and even better 2 to 7 μm is ideal. Small particle size pigments can be easily bound to the paper or foil, while large particle size pigments show great water absorbency, thereby leading to a good printing quality. The optimum average particle size is in the range between 1 and 12 μm , preferably 2 to 7 μm .

Preferably, the pigments included in the inkjet receiving layer have an average surface area of 20 to 1600 m^2/g and preferably between 250 and 1600 m^2/g , in order to obtain a good absorbency of the ink vehicle.

Preferably, the pigments included in the inkjet receiving layer have an average pore volume of 0.2 to 3 ml/g, preferably between 1 and 3 ml/g.

- 5 Pigments having an average particle size between 2 and 7 μ m, an average surface area of 300 to 800 m²/g and an average pore volume between 1 and 2 ml/g give an ideal combination of absorbing capability, print quality and binding, i.e. the lack of dust release from the treated paper.
- 10 Preferably, the inkjet receiver coating in general, or either in said first composition or in said second composition, or in both the first and the second composition, further comprises a cross-linking agent, preferably chosen from the list consisting of aldehydes, aziridines, isocyanates, epoxides and borates. Such cross-linker further binds the pigments in the inkjet receiver coating and further limits dust release from the thus
- 15 printed paper or thermoplastic foil. The availability of cross-linker in either of the compositions further increases the pot life of the relevant composition significantly. Preferably the first and/or the second composition comprise cross-linkers in an amount making up 0.1 to 25% of the total wet weight of the first and/or second composition.
- 20 The inkjet receiver coating in general, or said first and/or second composition, may further comprise additives other than cross-linking agents in a total amount making up 0.1 to 2% of the total wet weight of the first and second composition respectively. Such additives may be one or more of fungicide, anti-foaming agent, levelling agent, wetting agent such as alkyl phenol ethoxylates, thickeners such as hydroxyl ethyl cellulose or
- 25 xanthane gum.

For the levelling agent use could be made of APEO (alkyl phenol ethoxylates).

- For the preservative use could be made of BIT or MIT (benzothiazolinone or
- 30 methylisothiazolinone).

For the antifoaming agent use could be made of polyether siloxane copolymer.

Preferably, a paper obtained with the method of the invention is provided with thermosetting resin, such as melamine resin, preferably after providing it with a printed
5 pattern by means of inkjet printing. For this reason, preferably the paper layer is only provided with an inkjet receiver coating at one side thereof, namely at the side provided to be printed upon. The other, opposite side, is preferably untreated, such that this opposite side shows the original porosity of the paper layer from which it is started. The resin may then be provided substantially from the bottom side into the papers core. To
10 allow sufficient impregnation of the paper having the inkjet receiving coating, the speed of the impregnation channel may be tuned down, the resin may be made less viscous, the impregnation may be pressurized and/or the resin may be heated, e.g. to between 45 and 100°C.

15 Generally, it is noted that, although the paper and foil obtained with the method of the invention is printable with an inkjet printer, it is not excluded that the paper or foil eventually is printed using other techniques, such as rotogravure or offset printing. Also in such case, the diminished dust release and the potentially better printing quality is of interest. This is especially the case when aqueous inks are being used.

20 Preferably, said inkjet receiving coating is a liquid substance which is deposited on said paper layer, and which is preferably forcibly dried e.g. in a hot air oven or by means of infrared or near infrared light or by means of microwave drying. In the case such inkjet receiver coating is applied in at least two partial steps, preferably at least such a drying
25 operation takes place in between said partial steps of the first aspect of the invention. Preferably the liquid substance is a water based suspension of at least said binder, and possibly said pigments. Preferably the first composition has a dry matter content of 8 to 25 percent by weight of the liquid substance. Preferably the second composition has a dry matter content of 4 to 20 percent by weight of the liquid substance. Preferably the
30 dry matter content as expressed by weight percentage is higher in the first composition than in the second composition.

The deposition of said liquid substance of the inkjet receiver coating can be obtained in any way, possibly by means of printing, e.g. inkjet printing, but preferably by means of coating techniques, such as roller coating, e.g. by means of one or more gravure rollers, spraying, metering rollers, bead coating, scattering, slot die coating. With the latter techniques preferably a coating is obtained that covers at least 80% of the surface of the paper layer or foil. Preferably an excess of the liquid substance is firstly applied to the paper layer, and afterwards the excess material is taken off again, e.g. squeezed off, until the desired weight is obtained. Inline measurement systems may be desirable to steer and control the weight of the inkjet receiver coating. Such technique brings down the risk of obtaining uncoated areas of the paper, which could lead to local flaws in the printed pattern. A preferred equipment for application of the liquid substance is a coating device comprising reverse metering rollers. Such rollers may create a smooth coating surface.

15

The deposition of the liquid substance for the ink receiving coating may be performed in an impregnation channel or, alternatively, on the printing equipment, immediately before the printing operation. This last case solves any possible issues with limited shelf life of the inkjet receiver coating. Preferably the deposition of the liquid substance is performed while the paper or foil is still in an “endless” shape, namely taken from the roll without cutting. Such techniques allow for a more uniform application of the inkjet receiver coating. In the case the coating is wholly or partially done on the printing equipment, the printing equipment is preferably a roll-to-roll or a roll-to-sheet printer, comprising a coating device upstream of the print heads, for example a roller coater and/or additional printing heads suitable for printing the liquid substance for the respective sublayer of the inkjet receiver coating. Such additional printing heads, for example an additional row of printing heads, may have nozzles with a larger diameter than those used for the actual printing of the pattern. A resolution of 1 to 100, or even 1 to 25 dots per inch may suffice for these nozzles. The larger diameter allows for the jetting of more viscous substances. According to a special embodiment, said first layer is applied to the paper or foil using rollers, while the second layer is applied using such

30

additional printing heads. Such an embodiment is especially interesting when the pigment to binder ratio in said second composition is low, i.e. below 2:1. In such case the liquid substance for said second layer will be more easy to apply with said additional print heads.

5

Said liquid substance for said inkjet receiver coating preferably shows a viscosity of 10 to 75 seconds Din cup 4 at 20°C. Such property allows for a straightforward application of the liquid substance to the surface of the paper layer or foil. In experiments, a solid content of about 12% and viscosity of about 24 seconds yielded a sufficiently uniform
10 coating on a previously untreated paper layer, e.g. when applied by means of a roller coater.

It is clear that, instead of a paper layer, a thermoplastic foil, such as polyvinylchloride (PVC) foil, polypropylene (PP) foil, polyethylene (PE) foil, polyethylene-terephthalate
15 (PET) foil or thermoplastic polyurethane (TPU) foil is treated with an inkjet receiver coating in accordance with the first aspect.

The preferred binder for use on such foils is polyurethane based, acrylate based or polyvinyl acetate based. Further, in the case where the inkjet receiver coating is applied
20 in at least two partial steps, the binder content in the first composition may be somewhat reduced as compared to the treatment of paper layers since less absorption into the core of the layer is expected. Preferably the pigment to binder ratio in the first composition is in such case between 1:1 and 6:1.

25 It is noted that the use of an inkjet receiver coating having a pH of 3 or lower forms in itself a particular independent inventive aspect of the present invention, whether or not such pH has been obtained in accordance with the second possibility for the ink reactive compound mentioned above, and independently from any other possible components of the inkjet receiver coating. This particular inventive aspect may be defined as a method
30 for manufacturing paper or thermoplastic foil or vitrimeric foil printable with an inkjet

printer for use as a decor paper, respectively decor foil, in a laminate panel, wherein the method at least comprises the following steps:

- the step of providing a paper layer, respectively a thermoplastic or vitrimeric foil;
- 5 - the step of coating at least one side of said paper layer, respectively of said foil, with a composition to form an inkjet receiver coating;

with as a characteristic that said composition has a pH of 3 or lower. As explained above the low pH of the composition and the resulting coating has a high tendency of breaking up the electrosterically stabilized pigments in inkjet inks, thereby leading to a high printing quality. It is clear that such composition may be obtained in accordance
10 with the second possibility described above, and that, the present particular independent aspect may have preferred embodiments corresponding to the preferred embodiments listed above of the aforementioned first independent aspect of the invention, possibly but not necessarily containing one or more of the ink reactive compounds, binders or pigments listed above. Preferably the said composition at least comprises a binder, such
15 as PVA, and a substance lowering the pH to 3 or less.

It is clear that the present invention also relates to paper layers and thermoplastic foils that are obtained using the methods of the first aspect of the present invention. With the
20 same aim as in said first aspect, according to a second independent aspect, the invention also relates to a paper or thermoplastic foil or vitrimeric foil for inkjet printing, wherein said paper or foil at least at one side is provided with an inkjet receiver coating comprising at least pigment and binder, with as a characteristic that said inkjet receiver coating further comprises an ink reactive compound and in that said inkjet receiver
25 coating preferably has a pigment to binder ratio between 0/1 or 0.01/1 and 25/1, preferably between 0/1 or 0.01/1 and 20/1. Preferably said paper or foil comprises from 0.2 to 10 g/m², and even better between 0.5 and 5 g/m², dry coating weight of said ink reactive compound. Said ink reactive compound preferably at least comprises a flocculating agent.

Further said paper or foil preferably comprises from 0.2 to 10 g/m² dry coating weight of pigment. More preferably, said paper comprises preferably from 0.2 to 10 g/m², and preferably between 0.5 and 5 g/m², of binder.

- 5 Further, said paper or foil may further show one or more of the following properties:
- said paper or foil is, at its surface, substantially formed by said binder and/or said ink reactive compound;
 - said paper or foil is provided with pigment in an amount having a particle surface area between 100 and 16000 m² surface of pigment / m² surface of paper or foil, and preferably between 150 and 5000 m²/m²;
 - 10 - said paper or foil comprises from 0.05 to 5 g/m², preferably between 0.2 and 2 g/m², dry coating weight of a crosslinking agent;
 - said paper or foil comprises from 0.05 to 5 g/m², preferably between 0.2 and 2 g/m², dry coating weight of a surface modifying agent;
 - 15 - said paper or foil comprises from 0.005 to 2 g/m², preferably between 0.05 and 1 g/m², dry coating weight of a wetting agent;
 - said paper or foil comprises from 0.005 to 2 g/m², preferably between 0.05 and 1 g/m², dry coating weight of a defoaming agent;
 - said paper or foil comprises from 0.005 to 2 g/m², preferably between 0.05 and 20 1 g/m², dry coating weight of a fungicide.

The invention further, in accordance with its third independent aspect, relates to a method for manufacturing a laminate panel, wherein said panel at least comprises a substrate material and a provided thereon top layer with a printed decor, wherein said top layer is substantially formed from thermosetting resin and one or more paper layers, wherein said paper layers comprise a decor paper on the basis of a paper for inkjet printing in accordance with the second independent aspect and/or obtained by means of a method in accordance with the first independent aspect and/or the preferred embodiments of these aspects. In accordance with its fourth independent aspect, the invention also relates to a method for manufacturing a laminate or laminated panel, wherein said laminate or laminated panel at least comprises a carrier, such as a non

woven textile sheet, or a substrate material and a provided thereon top layer with a printed decor, wherein said top layer is substantially formed from thermoplastic material including one or more thermoplastic foils, wherein said thermoplastic foils comprise a decor foil on the basis of a thermoplastic foil for inkjet printing obtained by means of a method in accordance with the first independent aspect and/or the preferred 5 embodiments of this first aspect, in as far as they relate to the treatment of thermoplastic foils.

Preferably, in said third aspect, the paper for inkjet printing is printed by means of an inkjet printer, is impregnated with an amount of said thermosetting resin and is attached 10 to said substrate material by means of a hot pressing treatment. Preferably, in said fourth aspect, the thermoplastic foil for inkjet printing is printed by means of an inkjet printer and is attached to said substrate material by means of a hot pressing treatment. Preferably, said inkjet printer operates on the basis of water-based inks, wherein, more 15 particularly, an inkjet printer of the single-pass type and/or an inkjet printer operated in single-pass mode is preferred.

Clearly, the paper layer having the inkjet receiving layer of the invention may be used in a method for manufacturing panels having a decorative surface, wherein said panels at 20 least comprise a substrate and a top layer comprising thermosetting resin, wherein said top layer comprises a paper layer having a printed pattern, with as a characteristic that for providing said portion of said printed pattern use is made of pigment containing inks deposited on said paper layer by means of a digital inkjet printer, and in that the dry weight of the total volume of said pigment containing inks deposited on said paper layer 25 is 9 grams per square meter or lower, preferably 3 to 4 grams per square meter or lower, wherein for said pigment containing ink use is made of a water based or so-called aqueous ink. The limitation of the dry weight of the applied ink leads to a layer of ink that lowers the risk of pressing defects and splitting in the top layer. Indeed, possible interference between the ink layer and the thermosetting resin during the pressing 30 operation is limited. Because the ink load is limited to a maximum of 9 grams per square meter, wrinkling or expansion of the paper due to the ink can be brought to an

acceptable level, which assures stable further processing. Preferably for said pigment containing ink use is made of organic pigments. Organic pigments are known to be more stable when exposed to sunlight, or other sources of UV radiation. Preferably said pigments of said pigment containing ink have an average particle size of less than 250
5 nanometer. Preferably said dry weight of deposited pigmented ink is 5 grams per square meter or less, for example 4 or 3 grams per square meter or less. Preferably the printed pattern is entirely, or at least essentially, made up of such pigmented ink, wherein the printed pattern covers the majority, and preferably 80 percent or more of the surface of said paper layer. Preferably said total volume of deposited pigment containing ink is
10 less than 15 milliliter, or even better less than 10 milliliter or still less, e.g. 5 milliliter or less.

Preferably, the paper layer of the invention is opaque and/or contains titanium oxide as a whitening agent.

15

Preferably the printed pattern applied to the paper layer of the invention, covers the majority, and preferably 80 percent or more of the surface of said paper layer

Preferably said paper layer is, before or after printing, and before or after application of
20 the inkjet receiver coating, provided with an amount of thermosetting resin equaling 40 to 250% dry weight of resin as compared to weight of the paper. Experiments have shown that this range of applied resin provides for a sufficient impregnation of the paper, that avoids splitting to a large extent, and that stabilizes the dimension of the paper to a high degree.

25

Preferably the paper layer is, before or after printing, and before or after application of the inkjet receiver coating, provided with such an amount of thermosetting resin, that at least the paper core is satisfied with the resin. Such satisfaction can be reached when an amount of resin is provided that corresponds to at least 1.5 or at least 2 times the paper
30 weight. It should be clear that the resin which is provided on the paper layer, is not necessarily only available in the core of the paper, but may form surface layers on both

flat sides of the paper. The inkjet receiver coating may then be present on the surface of the paper with the intermediary of such a surface layer of thermosetting resin. According to a special embodiment, the paper layer is firstly impregnated through or satisfied, and, afterwards, at least at the side thereof to be printed, resin is partially removed and possibly said inkjet receiver coating is provided.

Preferably, the obtained resin provided paper layer, i.e. after provision of the thermosetting resin, has a relative humidity lower than 15%, and still better of 10% by weight or lower.

10

In general, the paper and inkjet receiver coating, whether provided with resin or not, has a relative humidity lower than 15%, and still better of 10% by weight or lower while printing.

Preferably the step of providing said paper layer with thermosetting resin involves applying a mixture of water and the resin on said paper layer. The application of said mixture might involve immersion of the paper layer in a bath of said mixture and/or spraying, jetting or otherwise coating said mixture on said paper. Preferably the resin is provided in a dosed manner, for example by using one or more squeezing rollers and/or doctor blades to set the amount of resin added to the paper layer.

20

Preferably said thermosetting resin is a melamine based resin, more particularly a melamine formaldehyde resin with a formaldehyde to melamine ratio of 1.4 to 2. Such melamine based resin is a resin that polycondensates while exposed to heat in a pressing operation. The polycondensation reaction creates water as a by-product. It is particularly with these kinds of thermosetting resins, namely those creating water as a by-product, that the present invention is of interest. The created water, as well as any water residue in the thermosetting resin before the pressing, must leave the hardening resin layer to a large extent before being trapped and leading to a loss of transparency in the hardened layer. The available ink layer can hinder the diffusion of the vapor bubbles to the surface, however the present invention provides measures for limiting such hindrance.

30

The inkjet receiver coating is beneficial in this regard as it may provide for an additional buffer for capturing such escaping vapor. When making use of an inkjet receiver coating which is porous and/or hydrophilic, which is the case when using e.g. silica and/or polyvinyl alcohol, some of the water vapor originating upon curing the thermosetting resin of the paper layer in the press may be taken up by this coating, such that the process is less prone to the origination of pressing defects, such as locked in water vapor bubbles. Other examples of such thermosetting resins leading to a similar polycondensation reaction include ureum-formaldehyde based resins and phenol-formaldehyde based resins.

10

Preferably the paper layer is only impregnated with resin after application of the inkjet receiver coating and after printing. In this way the inkjet receiver coating is not at all effected by the water contained in the water-resin mixture applied for impregnation purposes.

15

As is clear from the above, the method of the third aspect of the invention preferably comprises the step of hot pressing the printed and resin provided paper layer, at least to cure the resin of the obtained resin provided decor paper. Preferably the method of the invention forms part of a DPL process as above described, wherein the printed resin provided paper layer of the invention is taken up in the stack to be pressed as the decorative layer. It is of course not excluded that the method of the invention would form part of a CPL (Compact Laminate) or an HPL (High Pressure Laminate) process in which the decorative layer is hot pressed at least with a plurality of resin impregnated core paper layers, e.g. of so called Kraft paper, forming a substrate underneath the decorative layer, and wherein the obtained pressed and cured laminate layer, or laminate board is, in the case of an HPL, glued to a further substrate, such as to a particle board or an MDF or HDF board.

20

25

Preferably a further resin layer is applied above the printed pattern after printing, e.g. by way of an overlay, i.e. a resin provided carrier layer, or a liquid coating, preferably

30

while the decor layer is laying on the substrate, either loosely or already connected or adhered thereto.

The paper layer or foil of the invention may be a colored, pigmented and/or dyed base paper or foil. The use of a colored and/or dyed base layer enables further limiting the dry weight of deposited ink for attaining a particular pattern or color. In the case of paper, preferably the dye or pigment is added to the pulp before the paper sheet is formed. According to an alternative the ink receiving layer on said paper layer or foil to be printed is colored or pigmented with colored pigments. In accordance with the general disclosure, however, the pigments contained in the inkjet receiver coating are preferably colorless or white.

Preferably for printing the paper layer or foil of the invention, a digital inkjet printer is applied that allows to jet ink droplets with a volume of less than 50 picoliters. The inventors have found that working with droplets having a volume of 15 picoliters or less, for example of 10 picoliters, brings considerable advantages regarding the limitation of dry weight of deposited inks. Preferably a digital inkjet printer is applied that allows to work with ink droplets of several volumes in one and the same print, or with so-called halftone or gray scale. The possibility of half tone or gray scale printing enables further limitation of the dry weight of deposited ink while maintaining an excellent print definition. Preferably a digital inkjet printer is applied that allows to attain a definition of at least 200 dpi, or even better at least 300 dpi (dots per inch). Preferably said digital inkjet printer is of the single pass type, wherein the paper layer or foil is provided with said printed pattern in a single continuous relative movement of the paper layer with respect to the printer or print heads. It is not excluded that other digital inkjet printers are used to put the invention into practice, such as so called multi-pass or plotter type printers. With printers of the single pass type, as well as with printers of the multi pass type the print heads preferably extend over the entire width of the paper to be printed. This is not the case with a plotter arrangement, wherein the print heads need to perform a scanning motion in the width direction of the paper layer. Such printers are however not excluded from being applied in the method of the invention. It is noted that

printers of the multi-pass type have the advantage that any failing nozzle can be hidden by the print of a subsequent pass. In this type of printers the nozzles can be shifted somewhat in between passes, such that on a particular location of the paper dots are printed by several nozzles. With a multi-pass equipment, or even with a plotter it is possible to perform automatic maintenance or cleaning in between subsequent passes, when needed. The issue with failing nozzles is especially relevant when water based or so-called aqueous pigment containing inks are being used. Indeed, nozzles can get clogged by the ink pigment because the water has dried up. The risks of failing nozzles is lower e.g. with UV curable inks. Also, when an inkjet receiver coating is used, normally, the risk of failing nozzles may rise. However the dual layer application of the inkjet receiver coating in accordance with the first aspect of the present invention enhances the time of autonomous production due to a diminished dust release.

It is clear that, according to the most preferred embodiment of the present invention, the paper layer, while printing, is still flexible and that the paper layer is only attached or put on the plate shaped substrate after printing. According to a variant the paper layer is already attached or loosely laid on the plate shaped substrate while printing. The possible attachment with the substrate can be reached by means of urea based, phenol based, melamine based, polyurethane based glues and similar adhesives. Such attachment can be attained by means of a pressing treatment, whether or not a heated press treatment.

Preferably, the method of the third aspect of the invention further comprises the step of applying a counter layer or balancing layer at the surface of the substrate opposite the printed paper layer. The case of a paper based decor layer, the counter layer or balancing layer preferably comprises a paper layer and thermosetting resin, preferably the same resin as the top layer.

Preferably the mutual adherence of the plate-shaped substrate, the possible counter layer and the possible transparent or translucent layer is obtained in one and the same press

treatment. According to the most preferred embodiment of the third aspect, these steps are taken up in a DPL process.

According to the most important example of the invention, a standard printing paper,
5 like the one used for rotogravure, having a weight between 60 and 90 grams per square
meter is provided with an inkjet receiver coating in accordance with the first aspect of
the invention, and is printed with a wood pattern using a digital inkjet printer with
aqueous pigmented inks. Subsequently the printed paper layer is provided with
10 melamine resin by means of a standard impregnation channel; namely by means of
roller, immersion, jetting and/or spraying equipment. The resin provided paper layer is
then dried until a residual humidity of less than 10%, preferably about 7%, is reached. A
stack is formed of a resin provided counter layer, a plate shaped substrate, the printed
resin provided paper layer and a resin provided paper layer forming a so-called overlay.
15 The stack is then pressed during less than 30 seconds at a temperature of about 180-
210°C and a pressure of more than 20 bar, for example 38 bar. While pressing the
surface of the stack contacts a structured press element, such as a structured press plate,
and a relief is formed in the top layer of the obtained laminate panel. Possibly the
obtained relief can be formed in register with the printed pattern of the resin provided
paper layer.

20

It is further clear that the paper or thermoplastic foil obtained in the first aspect of the
invention is suitable for use as a decor paper, respectively decor foil, in a method for
manufacturing floor panels, furniture panels, ceiling panels and/or wall panels.

25 It is clear that the printed pattern, the plate-shaped substrates, the paper layers and
thermoplastic layers mentioned above may have to be divided during the methods of the
invention for obtaining their respective final dimensions. The panels obtained by means
of a DPL press treatment or similar are preferably sawn or otherwise divided. Other
treatments of the obtained panels are of course not excluded.

30

The base paper of the decor paper produced by means of the method of the invention preferably has a base paper weight, i.e. without ink receiving coating, higher than 20 grams per square meter, wherein, in the case of floor panels, a weight between 55 and 95 grams per square meters is obtained.

5

The base foil of the decor foil or the base paper of the decor paper, produced by means of the method of the invention preferably has a thickness of 0,05 millimeter or more, wherein a thickness between 0,05 and 0,5 millimeter is preferred.

10 With the intention of better showing the characteristics according to the invention, in the following, as an example without limitative character, an embodiment is described, with reference to the accompanying drawings, wherein:

15 figure 1 schematically shows an embodiment of a paper layer that has been provided with an inkjet receiving coating in accordance with a preferred embodiment of the method of the first aspect of the invention;

figure 2 and 3 on a larger scale provide a view on the area F3 illustrated in figure 1, wherein, in the case of figure 2, only a first layer of a dual layer inkjet receiver coating has been applied to the paper layer;

20 figure 4 shows some steps in a method in accordance with the third aspect of the invention;

figure 5 shows in perspective a panel obtained by means of the method of figure 4;

figure 6 shows a view according to the line VI-VI indicated on figure 5;

25 figure 7 shows a piece of equipment for use amongst others in the first aspect of the invention;

figure 8 schematically shows a top view on a printer operated in single-pass mode;

30 figure 9 contains a plot of obtained color densities with the treated papers of the invention in comparison to papers not pertaining to the invention.

Figure 1 schematically illustrates a treated paper layer 1 that is printable with an inkjet printer. The printable paper layer 1 comprises a paper sheet 2 provided with an inkjet receiver coating 3, that comprises a first layer 4 with a first composition and a second layer 5 with a second composition. The paper sheet 2 is, in this case, a base printing paper having a weight of about 70 grams per square meter and with a mean air resistance as expressed by Gurley value of below 30 seconds.

It is generally noted that the dimensions of the represented paper sheet 2 and the layers 4-5 is, in the figures, drawn out of scale in order to better illustrate the invention.

10

Figures 2 and 3 show that the inkjet receiver coating 3 comprises pigments 6 and binder 7. The composition of the first layer 4, as well as the composition of the second layer 5 both comprise binder. The inkjet receiver coating 3, more particularly at least the second layer 5 thereof, further comprises an ink reactive compound, more particularly a flocculating agent, such in accordance with the first aspect of the invention. It is clear however that the figures are also illustrative for many aspects of the present invention in the cases where a ink reactive compound, more specifically an ink destabilizing agent, other than a flocculating agent has been applied, such as for example a cationic metal salt.

20

Figure 2 illustrates a halfproduct 8 wherein only the first layer 4 has been applied to the paper sheet 2. The binder 7 is partially absorbed into the paper sheet 2, and such in a non-uniform manner. At the surface 9 loose and/or badly bound pigments 6 are present. Such pigments 6 give rise to dust release upon further processing of such halfproduct 8. The obtained surface 9 of the first layer 4 also suffers from unevenness.

25

Figure 3 shows the paper layer 1 wherein also the second layer 5 has been applied on top of the first layer 4. Figure 3 shows that the second layer 5 evens out the surface 9, leading to a more uniform surface 10 of the second layer and of the paper layer 1. The composition of the second layer 5 has in this case a lower pigment to binder ratio than the composition of the first layer 4, and in addition comprises the ink reactive

30

compound. It is clear that it is not excluded that the first layer 4 may also comprise an ink reactive compound, either the same or different as the ink reactive compound of the second layer 5 and possibly in different concentrations.

5 It is noted that figure 3 is an example of a paper layer, wherein at the surface of the treated paper layer less than 10 weight percent of the total pigment 6 is unbound or free and wherein the surface 10 of the second layer is essentially, and in this case completely, formed by binder 7.

10 Figure 4 illustrates a method for manufacturing laminate panels 11 of the type shown in figures 5 and 6. The method forms an illustration of the third independent aspect of the invention as described in the introduction of the present patent application. The obtained decorative panels 11 at least comprise a substrate 12 and a top layer 13. The top layer 13 comprises a paper layer 1, manufactured in accordance with the first aspect, and
15 provided with a printed pattern or a digitally printed ink layer 14 representing a wood pattern, as is the case here. The method of the example embodiment comprises at least the step S1 of providing said paper layer 1 having the inkjet receiving layer and the printed pattern with thermosetting resin 15. Hereto the paper layer 1 is taken from a roll 16 and transported to a first impregnation station 17 where said paper layer is immersed
20 in a bath 18 of said resin 15, more particularly a mixture of water and resin 15. The paper layer 1 is then allowed to rest while in this case being transported upwards. The resting allows for the resin 15 to penetrate the paper core. The paper layer 1 then comes into a second impregnation station 19 where the paper layer 1 is, in this case, again immersed in a bath 18 of resin 15, more particularly a mixture of water and resin 15. A
25 set of squeezing rollers 20 allows to dose the amount of resin 15 applied to the paper layer 1.

In the example several doctor blades 21 are available for partially removing resin at the surface of the resin provided paper layer 1.

In a second step S2 the resin provided paper layer 1 is dried and its residual humidity level is brought to below 10%. In the example hot air ovens 22 are used, but alternatively other heating equipment can be used, such as microwave or infrared drying equipment.

5

Figure 4 also illustrates that the continuous paper layer 2 is cut to sheets 23 and stacked.

Figure 4 further illustrates that in a subsequent step S3 the obtained sheets 23 or the paper layer 1 is taken up in a stack to be pressed in a short daylight press 24 between
10 upper and lower press plates 25-26. Said stack comprises from bottom to top a counter layer 27, a plate shaped substrate 12, the abovementioned paper layer 1 and a protective layer 28, wherein the counter layer 27 and the protective layer 28 both comprise a paper sheet 2 and resin 15. The stack is then pressed and the press treatment results in a mutual connection between the constituent layers 1-12-27-28, including the substrate
15 12, of the stack, as well as in a hardening or curing of the available resin 15. More particularly here a polycondensation reaction of the melamineformaldehyde resin 15 takes place, having water as a by-product.

The upper press plate 25 is a structured press plates that provides a relief in the
20 melamine surface of the panel 1 during the same press treatment of the step S3, by bringing the structured surface 29 of the upper press plate 25 into contact with the melamine of the protective layer 28.

Figure 5 and 6 illustrate that the obtained decorative panel or laminate panel 11 can
25 have the shape of a rectangular and oblong laminate floor panel, with a pair of long sides 30 and a pair of short sides 31 and having an HDF or MDF substrate 12. In this case the panel 11 is at long at least the long sides 30 with coupling means 32 allowing to lock the respective sides 30 together with the sides of a similar panel both in a direction R1 perpendicular to the plane of the coupled panels, as in a direction R2
30 perpendicular to the coupled sides and in the plane of the coupled panels. As illustrated in figure 6 such coupling means or coupling parts can basically have the shape of a

tongue 33 and a groove 34, provided with additional cooperating locking means 35 allowing for said locking in the direction R2.

Figure 7 shows that, in accordance with a preferred embodiment, at least one of the first
5 layer 4 and the second layer 5 of the inkjet receiver coating 3, may be obtained by coating in one of said two partial steps a liquid substance 36 to the paper sheet 2. In this case, the application of the first layer is illustrated. A device 37 comprising reverse metering rollers 38 is applied. Such device 37 may initially apply an excess of the liquid substance 36, which is squeezed off to the desired weight by means of the rollers 38,
10 which also may provide for a smooth coating surface. Preferably, the obtained halfproduct 8 is then dried, e.g. by means of a hot air oven, to reach a residual humidity level of preferably below 10%, or of about 7%. The obtained treated paper is then further treated by applying the second layer 5 of the inkjet receiver coating 3. Such is here not illustrated, but this may be executed in a fairly similar way. It is clear that as an
15 alternative to the device 37, other application techniques may be used, such as application by one or more gravure rollers, possibly also running in reverse.

Figure 8 illustrates that the paper layer 1 having the inkjet receiver coating of the first aspect of the invention may be printed by means of an inkjet printer 39, which, in this
20 example comprises several rows 40 of print heads that extend over the area of the paper layer 1 to be printed. The printer 39, in this example, relates to a printer of the single pass type, wherein the provision of the printed pattern involves a relative motion of said inkjet printer 39, more particularly the rows 40, and said paper layer 1 during printing in a printing direction D. In this case, the rows 40 and the print heads are at standstill,
25 while the paper layer 1 moves during ejection of inks onto the paper layer 1, more precisely onto the inkjet receiver coating 3 applied to the paper sheet. The paper layer 1 gets printed during a single continuous movement of the paper layer 1 relative the printer 39 or the rows 40 of print heads. The obtained printed pattern 14 comprises, in the example, a wood motif having wood nerves 41 extending generally in the printing
30 direction D. Preferably a drying station 42 is provided downstream of the printer 39.

After drying the inks, the printed paper layer is preferably rolled up and used in the method illustrated in figure 4 as the roll 16.

5 With the intention of further illustrating the invention, here below, without any limitative character, some more exemplary embodiments are listed, with reference to figure 9.

Example C:

10 6 kg of commercially available amorphous silica (Syloid ED5) was dispersed in 41 kg of water and heated to a temperature of 80°C. To this mixture 2.7 kg of a silane (Dynasilan), acting as a particle surface modifying agent or coupling agent, was added and let stir with for 30 minutes. Then 2.3 kg of glyoxal 40% (BASF), as a crosslinking agent, was mixed and let stir for another 30 minutes. Then 0.5 kg of boronic acid, also
15 functioning as crosslinking agent, was added and let stir for 10 minutes.

Separately 2.5 kg of polyvinylalcohol (mowiol 20/98 Kuraray) was dissolved in 26.4 kg of water at 90°C and left stirring until this was completely dissolved (2 hours).

20 Hereafter the silica dispersion was added to the mowiol solution and stirred thoroughly. To this mixture 0.04 kg of leveling agent, 0.04 kg of antifoam and 0.03 kg of fungicide was added and stirred for another 5 minutes before the coating was bottled and cooled down. The obtained coating composition is free from any ink reactive compound or ink destabilizing agent. In particular the availability of the boronic acid is not in an amount
25 capable of lowering the pH of the ink receiver composition to pH 3 or below.

The pigment to binder ratio was 2.4/1 and the solids content was 13.5% by weight.

The coating was brought to the correct viscosity for coating with a reverse gravure roller
30 (30 seconds din cup 4 at 23°C) by adding water. The solids content went to 10% by weight.

On a blank paper (Technocel MPK 3723) 20g/m² of the coating was applied by means of a reverse gravure roller and dried.

Example D:

5

6 kg of commercially available amorphous silica (Syloid ED5) was dispersed in 41 kg of water and heated to a temperature of 80°C. To this mixture 2.7 kg of a silane (Dynasilan), acting as a particle surface modifying agent or coupling agent, was added and let stir with for 30 minutes. Then 2.3 kg of glyoxal 40% (BASF), acting as a
10 crosslinking agent, was mixed and let stir for another 30 minutes. Then 0.5 kg of boronic acid, also acting as a crosslinking agent, was added and let stir for 10 minutes. After this 5 kg of a 40% aqueous solution of polyDADMAC (polyquat40U05 by Katpol) was added and let stir for another 10 minutes. The polyDADMAC is a polyionic polymer that functions as an ink destabilizing agent in accordance with the
15 invention.

Separately 2.5 kg of mowiol 20/98 (Kuraray) was dissolved in 26.4 kg of water at 90°C and left stirring until this was completely dissolved (2 hours).

20 Hereafter the silica dispersion was added to the mowiol solution and stirred thoroughly. To this mixture 0.04 kg of leveling agent, 0.04 kg of antifoam and 0.03 kg of fungicide was added and stirred for another 5 minutes before the coating was bottled and cooled down.

25 The pigment to binder ratio was 2.4/1 and the solids content was 18.5% by weight.

The coating was brought to the correct viscosity for coating with a reverse gravure roller (30 seconds din cup 4 at 23°C) by adding water. The solid content went to 15% by weight.

30

On a blank paper (Technocel MPK 3723) 20g/m² of the coating was applied by means of a reverse gravure roller and dried.

Example E:

5

Two coating compositions were made.

First coating composition:

10 13.4 kg of commercially available amorphous silica (Syloid ED5) was dispersed in 41 kg of water and heated to a temperature of 80°C. To this mixture 6 kg of a silane (Dynasilan) was added and let stir with for 30 minutes. Then 5.2 kg of glyoxal 40% (BASF) was mixed and let stir for another 30 minutes. Then 0.5 kg of boronic acid was added and let stir for 10 minutes. After this 5 kg of polyquat40U05 (by Katpol) was added and let stir for another 10 minutes.

15

Separately 2.5 kg of mowiol 20/98 (Kuraray) was dissolved in 26.4 kg of water at 90°C and left stirring until this was completely dissolved (2 hours).

18 Hereafter the silica dispersion was added to the mowiol solution and stirred thoroughly.
20 To this mixture 0.04 kg of leveling agent, 0.04 kg of antifoam and 0.03 kg of fungicide was added and stirred for another 5 minutes before the coating was bottled and cooled down.

The pigment to binder ratio was 5.5/1 and the solids content was 26% by weight.

25

Second coating composition:

46 kg of the first coating composition was mixed with 54 kg of an 8% mixture of mowiol 20/98 in water.

30 The pigment to binder ratio of the second coating composition was 0.95/1 and the solids content was 17% by weight.

Both coating compositions were brought to the correct viscosity for application by means of reverse gravure rollers (30 seconds din cup 4 at 23°C) by adding water. The solids content of the first coating composition was 20% by weight and the second
5 coating composition had 11% by weight solids content.

On a blank paper (Technocel MPK 3723) the inkjet receiver coating was applied in two partial steps, wherein respectively a first layer with 12g/m² of the first coating composition was applied by a reverse gravure roller and then dried, and, subsequently,
10 a second layer was applied there upon with 12g/m² of the second coating composition, also by means of a reverse gravure roller and then dried.

Print proofing:

A premetered application method was used to apply ink on the treated papers of
15 examples C to E, as well as on untreated base paper (Technocel MPK 3723), labelled as paper A, and a commercially available inkjet quality paper, labelled as paper B. The high absorption of the papers excluded Mayer bar coating. For this reason, the K printing proofer by RK printcoat instruments was used with the 100 lines/inch printing plate and a water based red digital printing ink.

20

The prints were then analysed by a Byk Spectro guide to measure the L, a and b value. Then the CD (color density) value was calculated by multiplying a with b and dividing this by L. All papers A to E were then ranked according to CD value, this is depicted in
25 figure 9. The abscissa contains the different tested papers, where A is the untreated base paper, B is the commercially available inkjet quality paper and C to E correspond to the treated papers of examples C to E. The ordinate gives the CD values obtained with each of the papers. A higher CD value means a better optical density and means a better image quality. This simplified color density (CD) value allows to quickly assess and rank the coatings.

30

From figure 9 it can be seen that the use of ink destabilizing agents in an inkjet receiver coating has a significant effect on the obtained color density. In the preferred embodiment where the inkjet receiver coating is applied in two steps with different coating compositions a notably high color density was reached.

5

The present invention is in no way limited to the above described embodiments, but such methods, paper layers, thermoplastic foils and vitrimeric foils may be realized according to several variants without leaving the scope of the invention.

Claims

- 1.- Method for manufacturing paper or thermoplastic foil or vitrimeric foil printable
5 with an inkjet printer for use as a decor paper, respectively decor foil in a laminate panel, wherein the method at least comprises the following steps:
- the step of providing a paper layer (1), respectively a thermoplastic or vitrimeric foil;
 - the step of coating at least one side of said paper layer, respectively of said foil,
10 with an inkjet receiver coating (3) comprising at least pigment (6) and binder (7);
- characterized in that said inkjet receiver coating (3) further comprises an ink reactive compound, more particularly an ink destabilizing agent.
- 15 2.- Method according to claim 1, characterized in that said ink reactive compound comprises a polyionic polymer, preferably polyDADMAC
- 3.- Method according to claim 1 or 2, characterized in that said ink reactive compound comprises a substance altering the pH of said inkjet receiver coating (3), preferably such
20 that the ink receiver coating composition has a pH 3 or lower.
- 4.- Method according to claim 3, characterized in that said substance is chosen from the list consisting of formic acid, tartaric acid, acetic acid, hydrochloric acid, citric acid, phosphoric acid, sulfuric acid, AlCl_3 and boronic acid.
- 25 5.- Method according to any of the preceding claims, characterized in that said ink reactive compound comprises a metal salt, preferably a cationic metal salt.
- 6.- Method according to claim 5, characterized in that said metal salt is chosen from the
30 list consisting of CaCl_2 , MgCl_2 , CaBr , MgBr_2 , CMA (calcium magnesium acetate), NH_4Cl , Calcium Acetate, ZrCl_4 and magnesium acetate.

7.- Method according to any of the preceding claims, characterized in that said ink reactive compound comprises a flocculating agent.

5 8.- Method according to claim 7, characterized in that said flocculating agent is chosen from the list consisting of sodiualuminate, a double sulphate salt such as alum, polyaluminumchloride, polyacrylate, dicyandiamide and polyacrylamide.

9.- Method according to any of the preceding claims, characterized in that said inkjet receiver coating (3) is applied in at least two partial steps, wherein respectively a first layer (4) with a first composition and, subsequently, a second layer (5) is applied with a second composition, both compositions at least comprising said binder (7).

10.- Method according to claim 9, characterized in that said first layer (4) and said second layer (5) differ in that they show one or more of the following properties:

- the property that said first layer (4) as well as said second layer (5) comprise pigment (6) and binder (7), albeit in a different pigment to binder ratio; preferably said first composition has a pigment to binder ratio which is larger than the pigment to binder ratio of said second composition;
- 20 - the property that the dry weight of material applied for said first layer (4) and said second layer (5) is different;
- the property that said first layer (4) as well as said second layer (5) comprise pigment (6) and binder (7), wherein the average particle size of the pigments contained in said first layer (4) is larger than the average particle size contained in said second layer (5);
- 25 - the property that said first layer (4) as well as said second layer (5) comprise an ink reactive compound, albeit in a different composition;
- the property that said second layer (5) comprises a higher amount of said ink reactive compound than said first layer (4);
- 30 - the property that said first layer (4) at least comprises pigment (6) and binder (7), while the second layer (5) is free from pigments (6), or at least comprises

less pigment (6) than said first layer (4), or comprises less than 10% of the pigment content of said first layer (4).

11.- Method for manufacturing paper or thermoplastic foil or vitrimeric foil printable
5 with an inkjet printer for use as a decor paper, respectively decor foil, in a laminate panel, wherein the method at least comprises the following steps:

- the step of providing a paper layer (1), respectively a thermoplastic or vitrimeric foil;
- the step of coating at least one side of said paper layer, respectively of said foil,
10 with a composition to form an inkjet receiver coating (3);

characterized in that said composition has a pH of 3 or lower.

12.- Paper or foil for inkjet printing, wherein said paper (1) or foil at least at one side is provided with an inkjet receiver coating (3) comprising at least pigment (6) and binder
15 (7), characterized in that said inkjet receiver coating (3) further comprises an ink reactive compound and in that said inkjet receiver coating (3) preferably has a pigment to binder ratio between 0.1/1 and 25/1, preferably between 1/1 and 20/1.





13.- Paper according to claim 12, characterized in that said paper (1) or foil comprises
20 from 0.2 to 10 g/m², and preferably between 0.5 and 5 g/m², dry coating weight of ink reactive compound.

14.- Paper according to claim 12 or 13, characterized in that said paper (1) or foil from
25 0.2 to 10 g/m² dry coating weight of pigment, and in that said paper comprises preferably from 0.2 to 10 g/m², and preferably between 0.5 and 5 g/m², of binder.

15.- Paper according to any of claims 12 to 14, characterized in that said paper (1) or foil further shows one or more of the following properties:

- said paper(1) or foil is, at its surface, substantially formed by said binder (7)
30 and/or said ink reactive compound;

- said paper (1) or foil is provided with pigment (6) in an amount having a particle surface area between 100 and 16000 m² surface of pigment / m² surface of paper or foil, and preferably between 150 and 5000 m²/m²;
- said paper (1) or foil comprises from 0.05 to 5 g/m², preferably between 0.2 and 2 g/m², dry coating weight of a crosslinking agent;
- said paper (1) or foil comprises from 0.05 to 5 g/m², preferably between 0.2 and 2 g/m², dry coating weight of a particle surface modifying agent;
- said paper (1) or foil comprises from 0.005 to 2 g/m², preferably between 0.05 and 1 g/m², dry coating weight of a wetting agent;
- said paper (1) or foil comprises from 0.005 to 2 g/m², preferably between 0.05 and 1 g/m², dry coating weight of a defoaming agent;
- said paper (1) or foil comprises from 0.005 to 2 g/m², preferably between 0.05 and 1 g/m², dry coating weight of a fungicide.

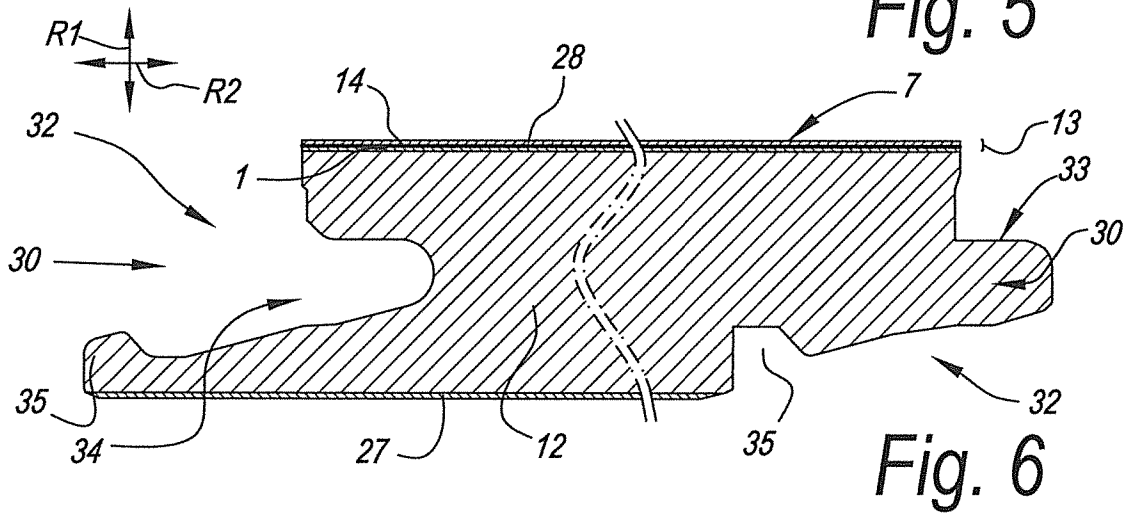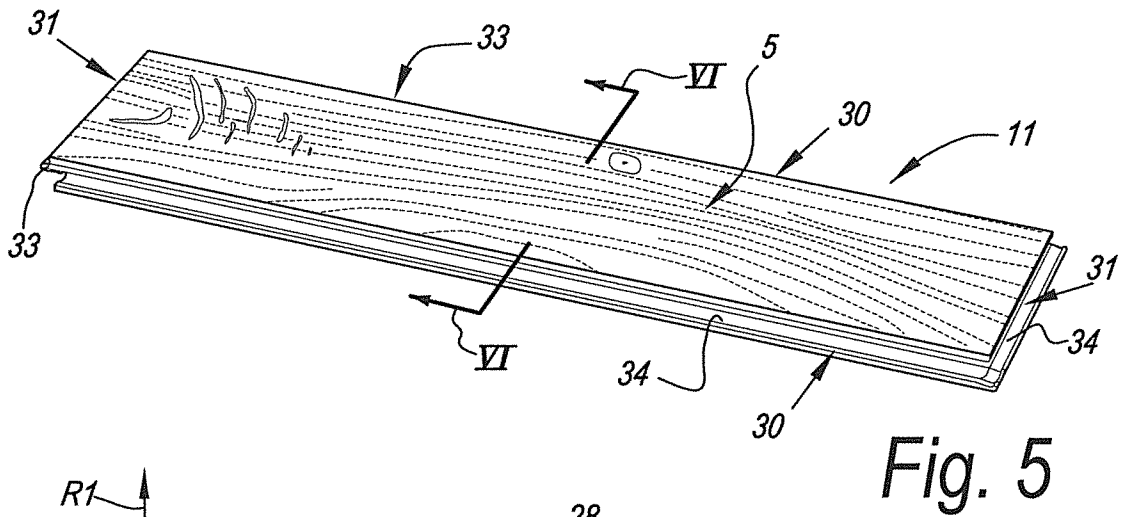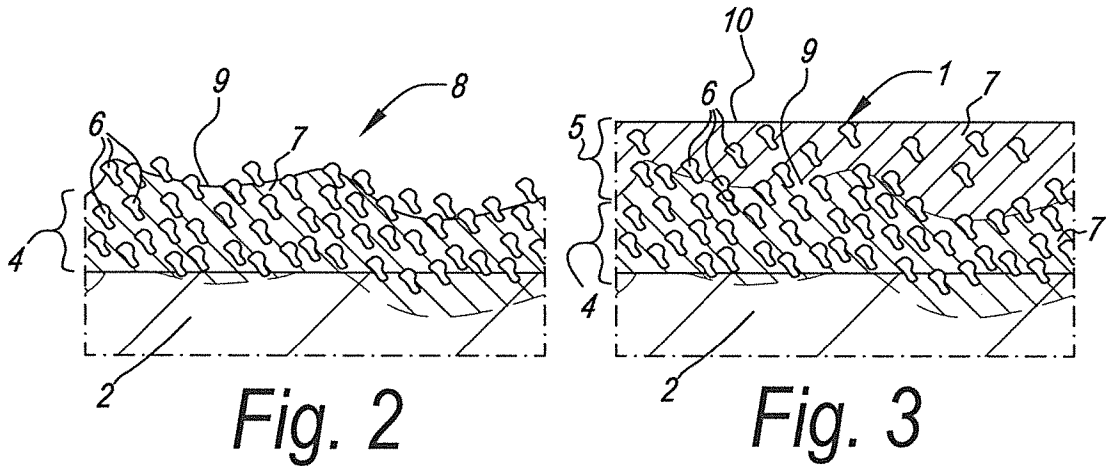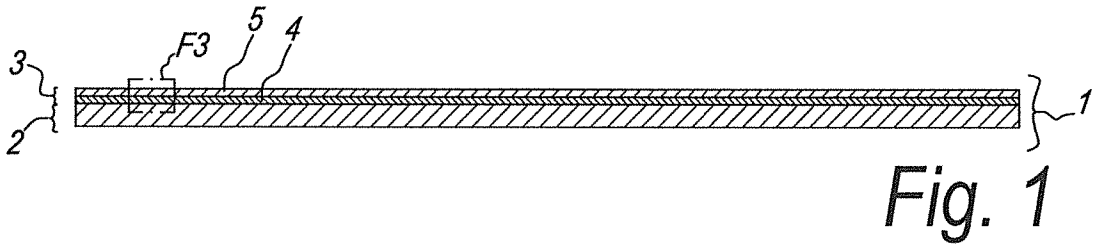

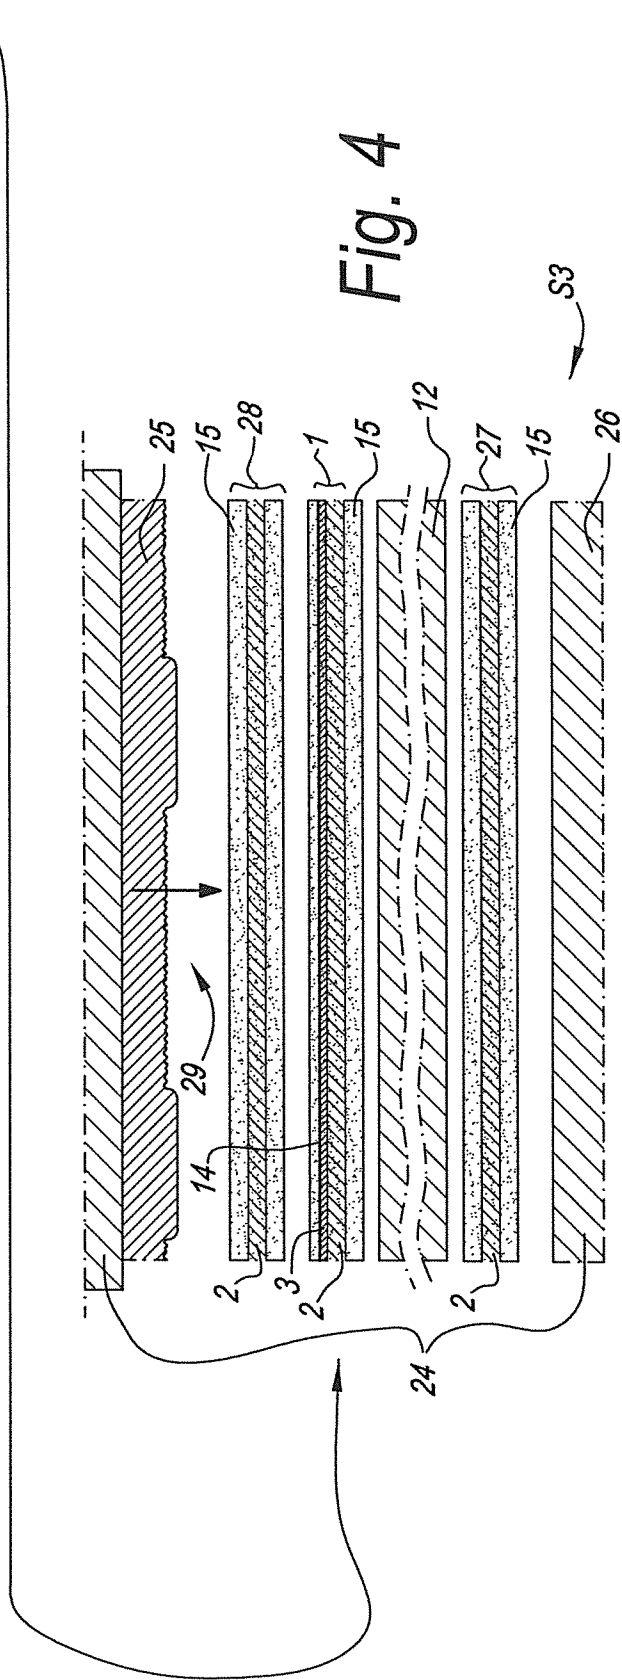
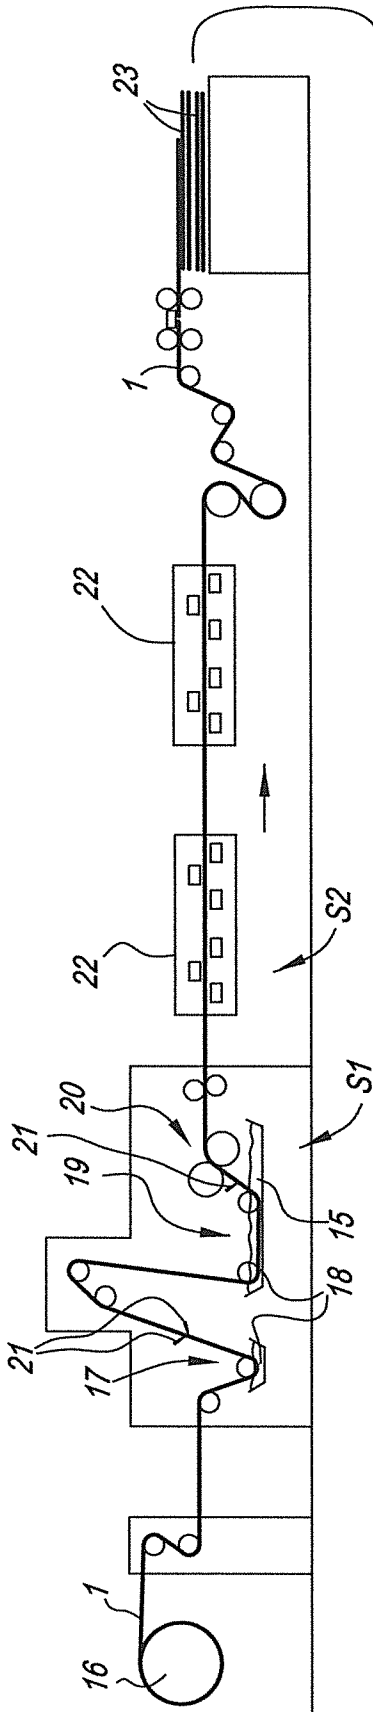


Fig. 4

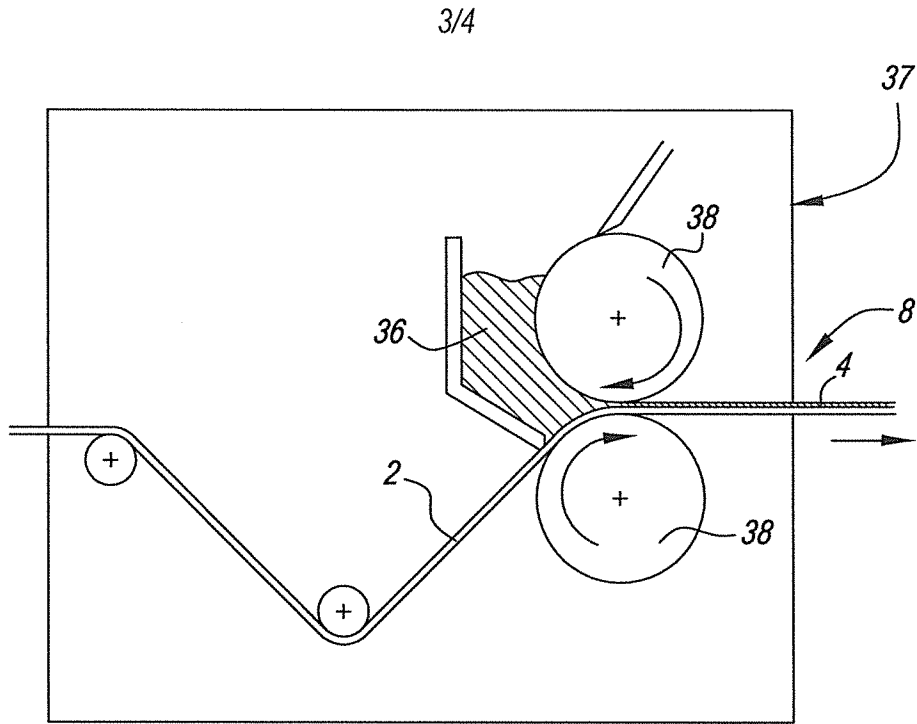


Fig. 7

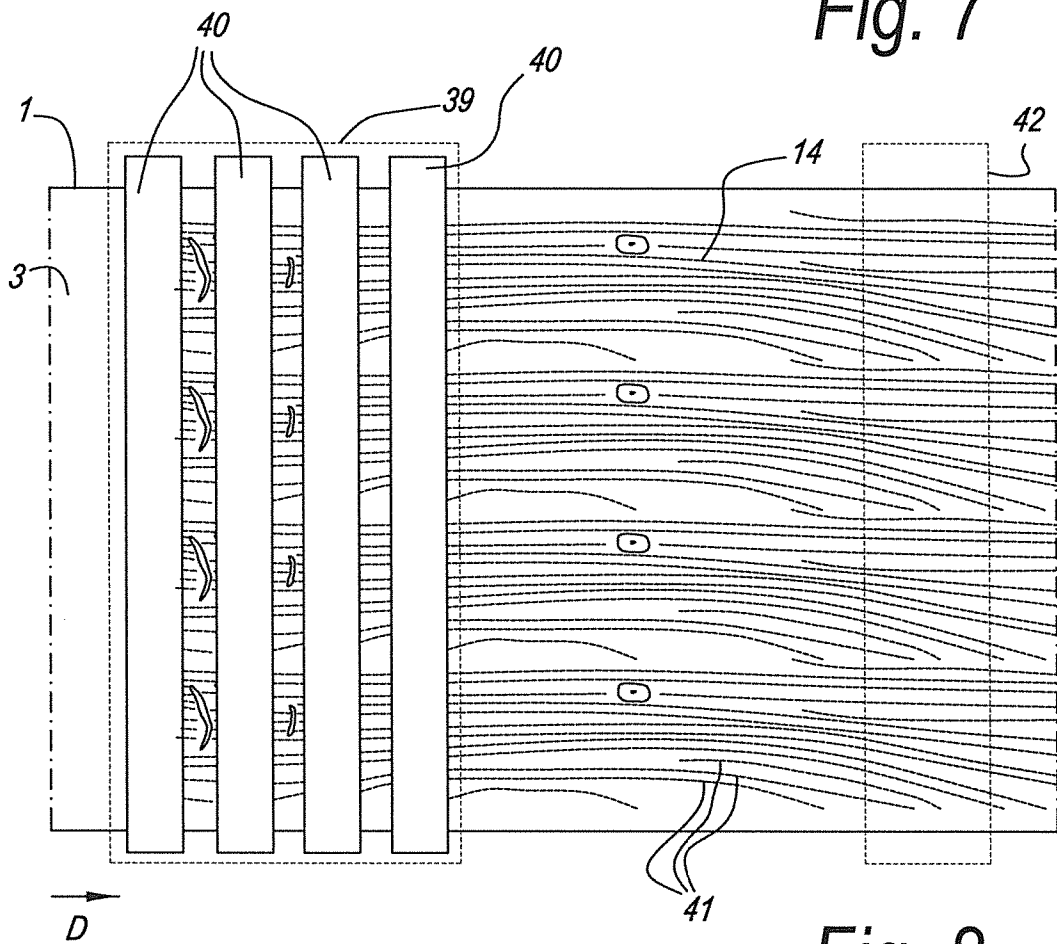


Fig. 8

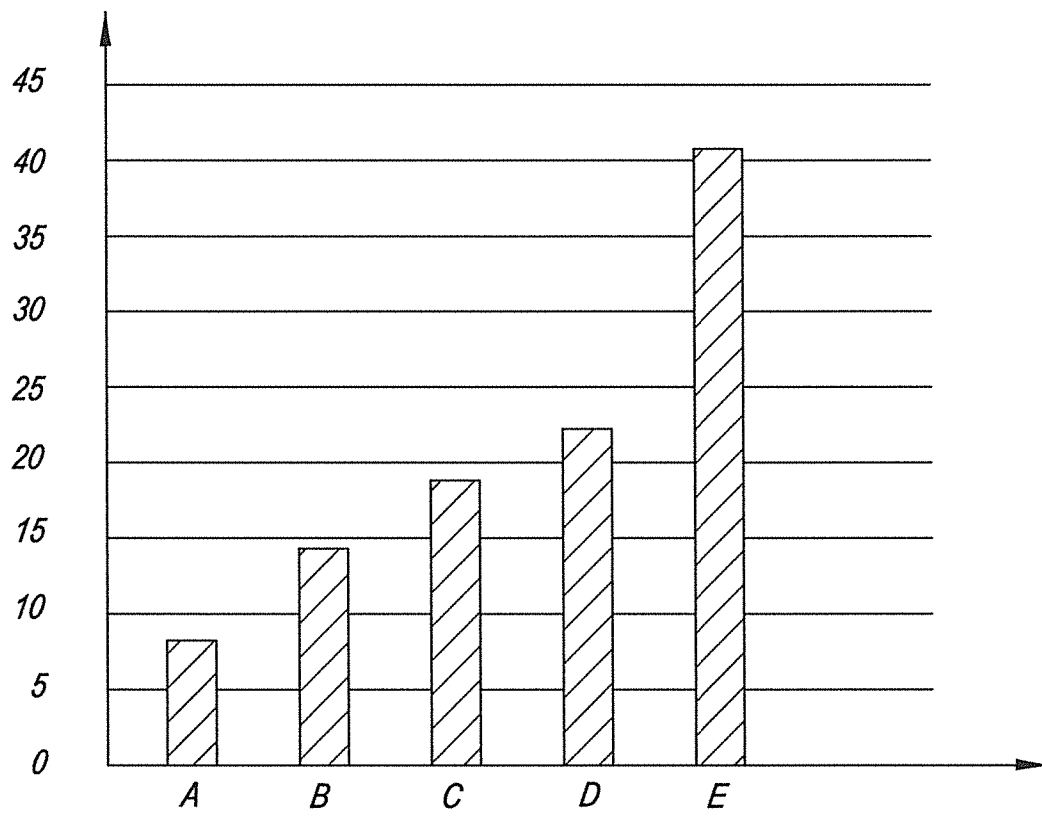


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2018/054239

A. CLASSIFICATION OF SUBJECT MATTER INV. B41M5/50 B41M5/52 ADD. B44C5/04		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) B41M B44C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 2 894 047 A1 (UNILIN BVBA [BE]) 15 July 2015 (2015-07-15) paragraph [0003] - paragraph [0101]; figures 1-5 -----	1,2,7,8, 12-15 3-6
X A	US 2010/282407 A1 (VAN DER ZWAN RIJK [DE] ET AL) 11 November 2010 (2010-11-11) paragraphs [0001], [0007] - paragraph [0068] -----	1,2,7, 12-15 3-6,8
X	US 2005/233097 A1 (TOJO KAORU [JP] ET AL) 20 October 2005 (2005-10-20) paragraphs [0006], [0051] - paragraph [0411] -----	1-8, 12-15
----- -/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.		<input checked="" type="checkbox"/> See patent family annex.
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance	"E" earlier application or patent but published on or after the international filing date	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"O" document referring to an oral disclosure, use, exhibition or other means	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"P" document published prior to the international filing date but later than the priority date claimed		"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
		"&" document member of the same patent family
Date of the actual completion of the international search <p style="text-align: center;">12 September 2018</p>	Date of mailing of the international search report <p style="text-align: center;">12/11/2018</p>	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center;">Patosuo, Susanna</p>	

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2018/054239

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 3 034 572 A1 (AGFA GRAPHICS NV [BE]) 22 June 2016 (2016-06-22) paragraph [0009] - paragraph [0212]; figures 1-4 -----	1-8, 12-15
A	WO 02/081228 A1 (INT PAPER CO [US]) 17 October 2002 (2002-10-17) paragraph [0001] - paragraph [0026] -----	1-8, 12-15
A	US 2014/144583 A1 (HAKANSSON NICLAS [SE] ET AL) 29 May 2014 (2014-05-29) paragraph [0003] - paragraph [0161]; figures 1-5 -----	1-8, 12-15

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2018/054239

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-8, 12-15

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/IB2018/054239

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 2894047	A1	15-07-2015	CN 105899371 A	24-08-2016
			EP 2894047 A1	15-07-2015
			EP 3092133 A1	16-11-2016
			RU 2016132632 A	14-02-2018
			US 2016332479 A1	17-11-2016
			US 2017355219 A1	14-12-2017
			WO 2015104652 A1	16-07-2015

US 2010282407	A1	11-11-2010	AU 2008337508 A1	25-06-2009
			BR PI0820120 A2	12-05-2015
			CA 2709822 A1	25-06-2009
			CN 101925705 A	22-12-2010
			EP 2222922 A1	01-09-2010
			ES 2641738 T3	13-11-2017
			JP 5161319 B2	13-03-2013
			JP 2011508682 A	17-03-2011
			PL 2222922 T3	30-11-2017
			PT 2222922 T	11-09-2017
			US 2010282407 A1	11-11-2010
			WO 2009077561 A1	25-06-2009

US 2005233097	A1	20-10-2005	NONE	

EP 3034572	A1	22-06-2016	CN 107001831 A	01-08-2017
			EP 3034572 A1	22-06-2016
			ES 2685005 T3	05-10-2018
			US 2017342287 A1	30-11-2017
			WO 2016096527 A1	23-06-2016

WO 02081228	A1	17-10-2002	AT 353771 T	15-03-2007
			DE 60218140 T2	22-11-2007
			EP 1372976 A1	02-01-2004
			US 2002146545 A1	10-10-2002
			WO 02081228 A1	17-10-2002

US 2014144583	A1	29-05-2014	NONE	

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-8, 12-15

Claim 1 defines a method for manufacturing paper or thermoplastic foil or vitrimeric foil printable with an inkjet printer for use as a decor paper, respectively decor foil in a laminate panel, wherein the method at least comprises the following steps:

- the step of providing a paper layer, respectively a thermoplastic or vitrimeric foil;
- the step of coating at least one side of said paper layer, respectively of said foil, with an inkjet receiver coating comprising at least pigment and binder; characterized in that said inkjet receiver coating further comprises an ink reactive compound.

Claim 12 defines a paper or foil for inkjet printing, wherein said paper or foil at least at one side is provided with an inkjet receiver coating comprising at least pigment and binder, characterized in that said inkjet receiver coating further comprises an ink reactive compound.

2. claims: 9, 10

Claim 9 defines a method, characterized in that an inkjet receiver coating is applied in at least two partial steps, wherein respectively a first layer with a first composition and, subsequently, a second layer is applied with a second composition, both compositions at least comprising a binder.

3. claim: 11

Claim 11 defines a method for manufacturing paper or thermoplastic foil or vitrimeric foil printable with an inkjet printer for use as a decor paper, respectively decor foil, in a laminate panel, wherein the method at least comprises the following steps:

- the step of providing a paper layer, respectively a thermoplastic or vitrimeric foil;
- the step of coating at least one side of said paper layer, respectively of said foil, with a composition to form an inkjet receiver coating; characterized in that said composition has a pH of 3 or lower.
