

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2008254448 B2**

(54) Title
Lotion composition for personal use

(51) International Patent Classification(s)
A61K 8/34 (2006.01) **A61K 8/894** (2006.01)
A61K 8/891 (2006.01) **A61K 9/00** (2006.01)
A61K 8/892 (2006.01) **A61Q 19/00** (2006.01)

(21) Application No: **2008254448** (22) Date of Filing: **2008.02.08**

(87) WIPO No: **WO08/144084**

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/889,068	2007.02.09	US

(43) Publication Date: **2008.11.27**

(44) Accepted Journal Date: **2013.03.14**

(71) Applicant(s)
McNeil-PPC, Inc.

(72) Inventor(s)
Jacobs, Thomas E.;Maxon, Bartley D.;Ahmad, Nawaz;Joyce, Michael

(74) Agent / Attorney
Shelston IP, L 21 60 Margaret St, Sydney, NSW, 2000

(56) Related Art
US 6632420 B1
US 6060546 A
US 6139848 A
US 4981686 A
US 2004/138074 A1

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 November 2008 (27.11.2008)

PCT

(10) International Publication Number
WO 2008/144084 A2

(51) International Patent Classification:

A61K 8/34 (2006.01) A61K 8/894 (2006.01)
A61K 8/891 (2006.01) A61Q 19/00 (2006.01)
A61K 8/892 (2006.01)

(74) Agent: JOHNSON, Philip S.; One Johnson & Johnson
Plaza, New Brunswick, Nj, New Jersey 08933 (US).

(21) International Application Number:

PCT/US2008/053453

(22) International Filing Date: 8 February 2008 (08.02.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/889,068 9 February 2007 (09.02.2007) US

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(71) Applicant (for all designated States except US): McNeil-
PPC, Inc. [US/US]; 199 Grandview Road, Skillman, New
Jersey 08558 (US).

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): AHMAD, Nawaz
[US/US]; 26 Joseph Court, Monmouth Junction, New Jer-
sey 08852 (US). JOYCE, Michael [US/US]; 59 Beech
Road, Randolph, New Jersey 07869 (US). MAXON, Bart-
ley D. [US/US]; 226 Giddings Place, St. Louis, Michigan
48880 (US). JACOBS, Thomas E. [US/US]; 150 Salzburg
Road, Bay City, Michigan 48706 (US).

Published:

- without international search report and to be republished
upon receipt of that report
- with information concerning request for restoration of the
right of priority in respect of one or more priority claims



WO 2008/144084 A2

(54) Title: LOTION COMPOSITION FOR PERSONAL USE

(57) Abstract: This invention relates to emulsion compositions that can warm on contact with ambient moisture and can be used as lubricants on the skin of a person. They may be formulated in the form of a lotion.

- 1 -

LOTION COMPOSITION FOR PERSONAL USE**Field of the Invention**

5 This invention relates to personal care emulsion compositions that may be utilized as personal lubricants prior to or during sexual intercourse as well as massage or moisturizing compositions.

Background of the Invention

10 In recent years, personal lubricant compositions have been increasingly utilized in the realm of enhancing intimate relationships and assisting couples in the pursuit of intimate activities, including sexual intercourse. Recently, personal lubricant products that
15 are warming and non-irritating were introduced to the market and have been used not only to provide lubrication so as to enable comfortable sexual intercourse, but to enhance the experience associated therewith. They have also been used as massage compositions to help couples
20 connect intimately and set the mood for intimate experiences.

While the warming attribute of personal lubricants such as those described in U.S. Patent No. 7,005,408 is a positive, desirable one, most warming personal lubricants
25 are clear gels or liquids. As the warming phenomenon is related to exposing a substantially anhydrous composition to ambient moisture, these products are composed almost entirely of one phase which is essentially water-soluble.

- 2 -

Many traditional skin massage compositions are oil products. They promote the distribution of oils to the skin of the individual receiving a massage so as to ease the process of massaging. They may also be in the form of lotions or emulsions that contain both aqueous and oil phases.

Emulsion-based body lotions and massage lotions form a huge segment of the skin care and personal care market. Although the number of such products is quite large, they are primarily designed to function as moisturizers. They are not intended nor designed to be used as personal lubricants. As these emulsions contain, for the most part, an aqueous phase, they are initially cold to the touch and quite uncomfortable upon first application to the skin. Furthermore, many contain emulsifying agents that may be irritating to mucosal tissue and, therefore, would not be appropriate or safe for use as "personal" or vaginal lubricants.

Because emulsion-based creamy lotions are found to be aesthetically pleasing, it is desirable that a massage/personal lubricant composition be created that is in the lotion or emulsion form and will not have the disadvantage of feeling cold upon initial application.

Surprisingly, we have found that providing compositions that may be used as both massage lotions and personal lubricants may be made in the form of emulsions.

Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of common general knowledge in the field.

5 It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

SUMMARY OF THE INVENTION

According to a first aspect, the invention provides a
10 glycol-in-silicone emulsion lubricant composition comprising a discontinuous substantially anhydrous phase dispersed in a continuous oil phase, wherein said phases are mixed and homogenized, wherein the discontinuous substantially
anhydrous phase comprises less than 20 percent by weight of
15 water, wherein the continuous oil phase comprises a linear silicone polyether, wherein the linear silicone polyether has a structure selected from the group consisting of (a) a rake type structure wherein the polyoxyethylene or
polyoxyethylene-polyoxypropylene copolymeric units are
20 grafted onto a siloxane backbone, and (b) an ABA block copolymeric structure wherein A represents the polyether portion and B represents the siloxane portion of an ABA structure; wherein the continuous oil phase further
comprising silicone fluids; and wherein the discontinuous
25 substantially anhydrous phase further comprising at least one polyol, at least one salt and at least one coemulsifier wherein said composition has a lubricity of at least about
33.

Unless the context clearly requires otherwise,
30 throughout the description and the claims, the words "comprise", "comprising", and the like are to be construed in an inclusive sense as opposed to an exclusive or


exhaustive sense; that is to say, in the sense of "including, but not limited to".

This invention relates to lotion emulsion compositions that can warm on contact with ambient moisture and can be used as lubricants on the skin of a person.

As used herein, the term "emulsion" means a fluid consisting of a microscopically heterogeneous mixture of at least two normally immiscible liquid phases, in which one liquid forms minute droplets suspended in the other liquid. A phase in which the droplets are suspended is referred to as the "continuous" phase. A phase which forms minute droplets is referred to as the "discontinuous" phase. "Oil" is defined as a liquid not miscible with water, generally combustible and soluble in ether. Oils may include both hydrocarbon-based materials as well as silicone-based materials.

The compositions of this invention are preferably emulsion compositions containing at least two phases, at least one continuous phase and at least one discontinuous phase. In at least a first phase of the emulsion, the compositions contain a substantially anhydrous composition containing at least one polyol. In at least a second phase of the emulsion, the compositions contain an oil.

When the emulsion compositions of this invention are applied topically to the skin or mucosal tissue of an individual, they may generate a sensation such as warming in the individual to which they have been applied.

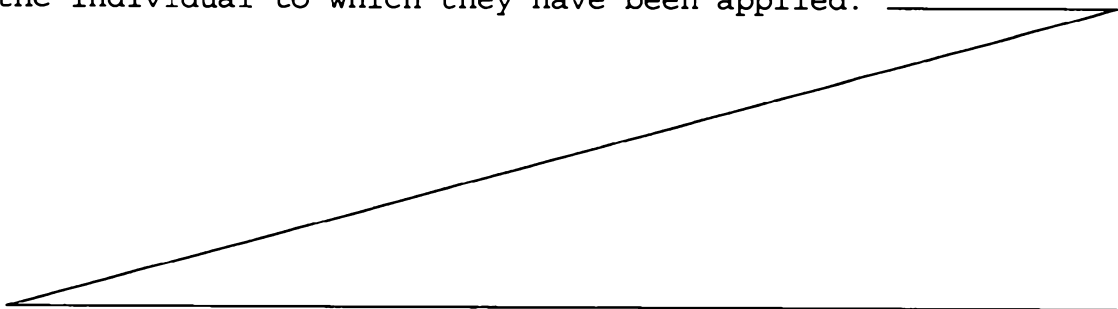

- 4 -

Surprisingly, they not only exist in the form of an emulsion, they are extremely lubricious and warm upon application to the skin or mucosa. The compositions of this invention have a lubricity as measured by the method
5 set forth in U.S. Patent No. 5,885,591 of at least about 33.

The invention is further directed to compositions such as glycol-in-oil emulsions having a discontinuous glycol phase dispersed in a continuous oil phase. The
10 continuous oil phase of the glycol-in-silicone emulsion contains a linear silicone polyether, and combination of silicone fluids and or silicone elastomers. The continuous oil phase of the glycol-in-silicone emulsion may include one or more solvents such as
15 octamethylcyclotetrasiloxane,
decamethylcyclopentasiloxane,
dodecamethylcyclohexasiloxane, hexamethyldisiloxane,
octamethyltrisiloxane, decamethyltetrasiloxane,
dodecamethylpentasiloxane, tetradecamethylhexasiloxane,
20 and hexadecamethylheptasiloxane.

These and other features of the invention will become apparent from a consideration of the detailed description.

25 **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

The compositions according to this invention contain a polyol in at least one phase of the emulsion.

- 5 -

Preferably, the compositions of this invention contain at least one polyol. Preferably, the polyol is a polyhydric alcohol, and more preferably, the compositions of this invention contain at least two polyhydric alcohols. Polyethylene glycol (hereinafter, "PEG") ethers may also be used, including PEG ethers of propylene glycol, propylene glycol stearate, propylene glycol oleate and propylene glycol cocoate and the like. Specific examples of such PEG ethers include PEG-25 propylene glycol stearate, PEG-55 propylene glycol oleate and the like. Preferably, at least one of the polyhydric alcohols of the compositions of this invention is a polyalkylene glycols or others selected from the following group: glycerine, propylene glycol, butylenes glycol, hexalene glycol or polyethylene glycol of various molecular weight and the like and/or combination thereof. More preferably, the compositions of this invention contain a polyethylene glycol; most preferably, the polyethylene glycol may be selected from the following group: polyethylene glycol 400 or polyethylene glycol 300. Polypropylene glycol of various molecular weights may also be used. PEGylated compounds such as peptide or protein derivatives obtained through PEGylation reactions may also be used. In addition, block copolymers of PEG's may be used, such as (ethylene glycol)-block-poly(propylene glycol)-block-(polyethylene glycol), poly(ethylene glycol-ran-propylene glycol) and the like. The compositions of this invention should contain

- 6 -

polyhydric alcohols in an amount from about 70% to about 98% by weight of the composition.

5 The term "substantially anhydrous" means that the pertinent phase of the composition of this invention contains less than about 20% by weight of water. More preferably, the compositions of this invention contain less than about 15% by weight of water or less than about 10% by weight of water. Most preferably, the
10 substantially anhydrous phase of the composition of this invention contains less than about 5% by weight of water.

15 Preferably, the substantially anhydrous phase of the compositions of this invention contain at least two polyols. More preferably, a first such polyol should be selected from glycerine and propylene glycol and a second such polyol should be a polyethylene glycol. Most preferably, the substantially anhydrous phase of the compositions of this invention should contain
20 propylene glycol and polyethylene glycol 400. The compositions set forth in U.S. Patent No. 7,005,408 may be used in the substantially anhydrous phases of the compositions of this invention and are hereby incorporated herein by reference. The polyol may be
25 utilized either in a continuous or a discontinuous phase and should still operate to cause warming upon topical application to a person.

Preferably, the ratio of oil to water in an oil-in-water emulsion of this invention is such that, when

- 7 -

water is in a continuous phase, it composes a much higher concentration as compared with the oil portion of the emulsion. More preferably, in oil-in-water compositions of this invention, they should contain from
5 about 20 to about 40% oil and from about 60 to about 80% water. In a water-in-oil emulsion, the reverse is true.

The type of emulsion composition of this invention (i.e., whether it is an oil-in-water or water-in-oil
10 emulsion) also depends upon the hydrophilic-lipophilic balance ("HLB") of the emulsifying surfactant utilized in the compositions of this invention. For an oil-in-water emulsion, the HLB of the surfactant is preferably between about 8 and about 16. Tween 60 (polysorbate 60),
15 for example, is approximately 15 and may be utilized (as may like emulsifying agents) in oil-in-water emulsions for emulsification and stabilization purposes. For a water-in-oil emulsion, the composition should contain a surfactant (also known as an emulsifying agent) having
20 an HLB of from about 3.5 to about 8.

Preferably, the oil phase of the compositions of this invention that constitute oil-in-water or water-in-oil compositions (as opposed to glycol-in-silicone compositions) should contain oil, or "emollient"
25 ingredients as well as emulsifying agents. Such compositions preferably contain from about 2% to about 50% of an emollient(s). As used herein, "emollients" refer to materials used for the prevention or relief of

- 8 -

dryness, as well as for the protection of the skin. A wide variety of suitable emollients are known and may be used herein. The International Cosmetic Ingredient Dictionary and Handbook, eds. Wenninger and McEwen, pp. 5 1656-61, 1626, and 1654-55 (The Cosmetic, Toiletry, and Fragrance Assoc., Washington, D.C., 7th Edition, 1997) (hereinafter "INCI Handbook") contains numerous examples of suitable materials.

10 The topical compositions useful in this invention are preferably formulated as emulsions. If the carrier is an emulsion, from about 1% to about 10% (preferably from about 2% to about 5%) of the carrier should be made up one or more emulsifiers. Emulsifiers may be nonionic, anionic or cationic. Suitable emulsifiers may 15 be found in, for example, the INCI Handbook, pp.1673-1686.

Lotions and creams may also be formulated as emulsions. Typically such lotions preferably contain from 0.5% to about 5% of an emulsifier(s). Such creams 20 would typically comprise from about 1% to about 20% (preferably from about 5% to about 10%) of an emollient(s); from about 20% to about 80% (preferably, from 30% to about 70%) of water (for oil-in-water or water-in-oil compositions); and from about 1% to about 25 10% (preferably, from about 2% to about 5%) of an emulsifier(s).

Single emulsion skin care preparations, such as lotions and creams, of the oil-in-water type and water-

- 9 -

in-oil type are well-known in the cosmetic art and are useful in the subject invention. Multiphase emulsion compositions, such as the water-in-oil-in-water type are also useful in the subject invention. In general, such
5 single or multiphase emulsions contain water, emollients, and emulsifiers as essential ingredients.

The oil ingredients that may be present in the compositions of this invention preferably include the following: fatty alcohols, glyceryl esters and non-
10 aqueous surfactant liquids that may serve as emulsifiers. Oil ingredients may, in the case of glycol-in-silicone compositions, include silicone-based fluids.

Fatty alcohols may preferably be included in the
15 compositions of this invention. Fatty alcohols are higher molecular weight, nonvolatile, primary alcohols having the general formula: RCH_2OH wherein R is a C_{8-20} alkyl. They can be produced from natural fats and oils by reduction of the fatty acid $COOH$ -- grouping to the
20 hydroxyl function. Alternatively, identical or similarly structured fatty alcohols can be produced according to conventional synthetic methods known in the art. Suitable fatty alcohols include, but are not limited to, behenyl alcohol, C_{9-11} alcohols, C_{12-13} alcohols, C_{12-15}
25 alcohols, C_{12-16} alcohols, C_{14-15} alcohols, caprylic alcohol, cetearyl alcohol, coconut alcohol, decyl alcohol, isocetyl alcohol, isostearyl alcohol, lauryl alcohol, oleyl alcohol, palm kernel alcohol, stearyl

- 10 -

alcohol, cetyl alcohol, tallow alcohol, tridecyl alcohol or myristyl alcohol. Preferably, the oil phase of the compositions of this invention contain fatty alcohols having a carbon chain from about 18 to about 20 and more preferably, having a carbon chain containing about 18 carbons, such as stearyl alcohol.

Glyceryl esters may also be preferably included in the compositions according to this invention. They comprise a subgroup of esters which are primarily fatty acid mono- and di-glycerides or triglycerides modified by reaction with other alcohols and the like. Preferred glyceryl esters are mono and diglycerides. Suitable glyceryl esters and derivatives thereof include, but are not limited to, acetylated hydrogenated tallow glyceride, glyceryl behenate, glyceryl caprate, glyceryl caprylate, glyceryl caprylate/caprate, glyceryl dilaurate, glyceryl dioleate, glyceryl erucate, glyceryl hydroxystearate, glyceryl isostearate, glyceryl lanolate, glyceryl laurate, glyceryl linoleate, glyceryl oleate, glyceryl stearate, glyceryl myristate, glyceryl distearate and mixtures thereof. More preferably, glyceryl stearate is utilized in the compositions of this invention.

Additional ingredients may be added to the oil-in-water emulsions as emulsion stabilizers. Such emulsion stabilizers may also be added to the glycol-in-silicone compositions of this invention as well. For example, cellulose derivatives, including cellulosic polymers such

- 11 -

as hydroxyalkylcelluloses may act as emulsion stabilizers and preferably reside in the glycol phase of the emulsion.

5 Preferably, such cellulosic polymers include carboxymethylcellulose, hydroxyethylcellulose, hydroxypropylcellulose and hydroxypropylmethylcellulose. The preferred emulsion stabilizing agent, however, is hydroxylpropylcellulose. Another potential emulsion
10 stabilizing agent is a crosslinked acrylic acid-based polymer such as a carbopol. A carbopol may be present in the oil-in-water compositions of this invention in an amount of from about 0.2% to about 2% by weight of the composition.

15 Suitable types of non-aqueous surfactant liquids which can be used to form the oil phase of the personal lubricant-massage compositions of this invention include the alkoxyated alcohols, ethylene oxide (EO)-propylene oxide (PO) block polymers, polyhydroxy fatty acid
20 amides, alkylpolysaccharides, and the like. Such normally liquid surfactants are those having a hydrophilic-lipophilic balance ("HLB") ranging from about 10 to about 16. "HLB" is defined as a measure of the degree to which it is hydrophilic or lipophilic, as
25 determined by calculating values for the different regions of the molecule. Most preferred of the surfactant liquids is polyethylene glycol sorbitan monostearate, other surfactants having an HLB of about

- 12 -

12 to about 15, and other surfactants having an HLB for about 15.

In one preferred embodiment of the compositions of this invention, an anhydrous polyol phase is present in
5 the composition as a continuous phase of the emulsion and an oil phase is present in the composition as the discontinuous phase.

More preferably, in this approach, the "aqueous" or substantially anhydrous polyol phase contains from about
10 10 to about 15% water is used as an aqueous phase of the emulsion and the polyol phase further contains from about 70 to about 80% of a combination of polyols. More preferably, a combination of propylene glycol and polyethylene glycol a ratio of from about 1 to about 3
15 should be present in the polyol phase. Preferably, the "oil" or lipophilic phase of the emulsion should contain from about 5 to about 10% of stearyl alcohol and from about 1 to about 5% of glyceryl stearate as the oil phase of the emulsion, from about 1 to about 3% of
20 polyethylene glycol sorbitan monostearate is used as an emulsifier, from about 0.1% to about 2% carbopol alone or in combination with from about 0.1 to about 2% of hydroxyethylcellulose may be used as emulsion stabilizers. To these, could be added 0.5 to 5% Silicone
25 Fluid, 350 cst, as a lubricant and 0.1% to 0.5% benzoic acid as a preservative. The continuous phase of these emulsions is water, propylene glycol and polyethylene glycol combination and the dispersed or the

- 13 -

discontinuous phase is the oil phase comprising stearyl alcohol and glyceryl stearate. Polysorbate 60 is preferably the emulsifier.

5 This invention is also related to compositions and methods of incorporating warming ingredients into glycol-in-silicone oil emulsions. In particular, the invention involves the use of a generally linear silicone polyether as the silicone emulsifier, in combination with other silicones and warming ingredients
10 to achieve an anhydrous warming lotion. The following sections relate more specifically to preferred compositions relating to glycol-in-silicone oil emulsions of this invention.

The Linear (i.e., Non-crosslinked, Silicone Polyether)

15 The linear (i.e., non-crosslinked, silicone polyether) used to prepare compositions according to this invention, is generally dispersible in the oil phase. It can have a rake type structure wherein the polyoxyethylene or polyoxyethylene-polyoxypropylene
20 copolymeric units are grafted onto the siloxane backbone, or the SPE can have an ABA block copolymeric structure wherein A represents the polyether portion and B the siloxane portion of an ABA structure.

Non-crosslinked silicone polyethers suitable for
25 use herein have the formula $MD_{0-1,000}D'_{1-100}M$, most preferably the formula $MD_{0-500}D'_{1-50}M$, where M represents monofunctional unit $R_3SiO_{1/2}$, D represents difunctional

- 14 -

unit $R_2SiO_{2/2}$, and D' represents difunctional unit $RR'SiO_{2/2}$. In these formulas, R is an alkyl group containing 1-6 carbon atoms or an aryl group, and R' is an oxyalkylene containing moiety. The R' groups may contain only oxyethylene (EO) units; a combination of oxyethylene (EO) and oxypropylene (PO) units; or a combination of oxyethylene (EO) units, oxypropylene (PO) units, and oxybutylene (BO) units. Preferred R' groups include oxyalkylene units in the approximate ratio of EO₃₋₁₀₀PO₀₋₁₀₀, most preferably in the ratio EO₃₋₃₀PO₁₋₃₀.

R' moieties typically include a divalent radical such as $--C_mH_{2m}--$ where m is 2-8 for connecting the oxyalkylene portion of R' to the siloxane backbone. Such moieties also contain a terminating radical for the oxyalkylene portion of R' such as hydrogen, hydroxyl, or an alkyl, aryl, alkoxy, or acetoxy group.

Non-crosslinked silicone polyethers useful herein can also be of a type having the formula $M'D_{10-1,000}D'_{0-100}M'$, most preferably the formula $M'D_{10-500}D'_{0-50}M'$, wherein M' represents monofunctional unit $R_2R'SiO_{1/2}$, D represents difunctional unit $R_2SiO_{2/2}$, and D' represents difunctional unit $RR'SiO_{2/2}$. In these formulas, R can be an alkyl group containing 1-6 carbon atoms or an aryl group, and again R' represents an oxyalkylene containing moiety. As noted previously, R' groups typically contain only oxyethylene (EO) units or combinations of oxyethylene (EO) and oxypropylene (PO) units. Such R'

- 15 -

groups include these oxyalkylene units in the ratio $EO_{3-100}PO_{0-100}$, most preferably $EO_{3-30}PO_{1-30}$.

As also noted previously, R' moieties typically include a divalent radical-- C_mH_{2m} --where m is 2-8 for connecting the oxyalkylene portions of R' to the siloxane backbone. In addition, the moiety R' contains a terminating radical for oxyalkylene portions of R' such as hydrogen, hydroxyl, an alkyl, aryl, alkoxy, or acetoxy group.

In addition, non-crosslinked silicone polyethers useful herein can have the formula $MD_{0-1,000}D'_{0-100}D''_{1-1,000}M$ wherein D'' represents difunctional unit $RR''SiO_{2/2}$, and R'' is an alkyl group containing 1-40 carbon atoms. M, D, D', and R, are the same as defined above.

Table 1 shows some representative linear, i.e., non-crosslinked, silicone polyethers conforming to these formulas which can be used in preparing emulsions according to the invention.

TABLE 1

Linear Silicone Nominal Structure of Linear, i.e., Non-Crosslinked, Silicone Polyether Polyether

$AMD_{8.6}D'_{3.6}M$ where R is-- CH_3 and R' is-- $(CH_2)_3(EO)_{12}OH$

$BMD_{108}D'_{10}M$ where R is-- CH_3 and R' is-- $(CH_2)_3(EO)_{10}(PO)$

- 16 -

4OH

CM'D' ₇₅M' where R is--CH₃ and R' is --(CH₂)₃(EO)₁₈(PO)
₁₈OAc

5

DM'D' ₅₀M' where R is--CH₃ and R' is--(CH₂)₃(EO)₁₈(PO)
₁₈OH

EM'D' ₁₃M' where R is--CH₃ and R' is--(CH₂)₃(EO)₁₂OH

10

PMD ₂₂D' ₂M where R is--CH₃ and R' is --(CH₂)₃(EO)₁₂(PO)
₁₂OH

GMD ₃₉₆D' ₄M where R is--CH₃ and R' is--(CH₂)₃(EO)₁₈(PO)
₁₈OH

15

The Volatile Silicone, i.e., The Solvent

The solvent used herein is a volatile silicone,
 generally a low molecular weight silicone oil, and most
 typically a cyclic alkyl siloxane of the formula (R'"
₂SiO)_d or a linear alkyl siloxane of the formula R'"
₃SiO(R'"₂SiO)_eSiR'"₃ in which R'" is an alkyl group
 containing 1-6 carbon atoms, d is 3-6 and e is 0-5. Most
 preferred, however, are volatile cyclic methyl siloxanes
 of the formula {(CH₃)₂SiO}_d and volatile linear methyl
 siloxanes of the formula (CH₃)₃SiO{(CH₃)₂SiO}_eSi(CH₃)₃
 and in which d is 3-6 and e is 0-5, respectively.
 Preferably, the volatile methyl siloxane has a boiling

20

25

- 17 -

point less than 250° C. and a viscosity of 0.65-5.0 centistoke (mm²/s).

Some representative linear volatile methyl siloxanes are hexamethyldisiloxane (MM) with a boiling point of 100° C., viscosity of 0.65 mm²/s, and formula Me₃SiOSiMe₃; 5 octamethyltrisiloxane (MDM) with a boiling point of 152° C., viscosity of 1.04 mm²/s, and formula Me₃SiOMe₂SiOSiMe₃; decamethyltetrasiloxane (MD₂M) with a boiling point of 194° C., viscosity of 1.53 mm²/s, and formula Me₃SiO(Me₂SiO)₂SiMe₃; 10 dodecamethylpentasiloxane (MD₃M) with a boiling point of 229° C., viscosity of 2.06 mm²/s, and formula Me₃SiO(Me₂SiO)₃SiMe₃; tetradecamethylhexasiloxane (MD₄M) with a boiling point of 245° C., viscosity of 2.63 mm²/s, and formula Me₃SiO(Me₂SiO)₄SiMe₃; 15 hexadecamethylheptasiloxane (MD₅M) with a boiling point of 270° C., viscosity of 3.24 mm²/s, and formula Me₃SiO(Me₂SiO)₅SiMe₃. Me in these and the following formulas represents the methyl group CH₃.

Some representative cyclic volatile methyl siloxanes are 20 hexamethylcyclotrisiloxane (D₃), a solid at room temperature, with a boiling point of 134° C. and formula (Me₂SiO)₃; octamethylcyclotetrasiloxane (D₄) with a boiling point of 176° C., viscosity of 2.3 mm²/s, and formula (Me₂SiO)₄; decamethylcyclopentasiloxane (D₅) 25 with a boiling point of 210° C., viscosity of 3.87 mm²/s, and formula (Me₂SiO)₅; and dodecamethylcyclohexasiloxane (D₆) with a boiling point

- 18 -

of 245° C., viscosity of 6.62 mm²/s, and formula (Me₂SiO)₆.

Non-volatile Silicone Fluids:

5 Nonvolatile silicone fluids of the present invention may include those which conform to the formula:

R₁.sub.3 SiO(R₁sub.2SiO)_n (R₁R₂SiO)_n SiR₁sub.3

R₁₃ SiO(R₁₂SiO)_n (R₁R₂SiO)_m SiR₁₃

10

where **n and m have** a value to provide polymers with a viscosity in the range of about 100-1,000 centistokes (mm² /sec).

15

R₁ and R₂ are alkyl radicals of 1-20 carbon atoms, or an aryl group such as phenyl. Typically, the value of n is about 80-375. Illustrative polysiloxanes are polydimethylsiloxane, polydiethylsiloxane,
20 polymethylethylsiloxane, polymethylphenylsiloxane, and polydiphenylsiloxane

25

These linear silicone materials may generally have viscosity values of from 5 centistokes or 10 centistokes but no more than about 100,000 centistokes, but preferably in the range of 20 centistokes to 12,500 cst, as measured under ambient conditions. Specific non

- 19 -

limiting examples of suitable nonvolatile silicone fluids include Dow Corning Q7-9120 Silicone Fluids (Dimethicone NF).

The Silicone Gum

5 The silicone gum useful in the glycol-in-silicone compositions of this invention is a high molecular weight, most typically a silanol functional polymer, but including polydimethylsiloxane gums as well. Such gums are known in the art and are readily available
10 commercially from vendors such as the Dow Corning Corporation, Midland, Mich. Such materials have a structure generally corresponding to the formula:

15
$$\text{R1.sub.1 R2.sub.2 SiO(R1.sub.2SiO)n R2R3SiO)n SiR2sub.2 (R1)sub1.}$$

$$\text{R1}_1 \text{ R2}_2 \text{ SiO (R1}_2\text{SiO)n (R2R3SiO)m SiR2}_2\text{(R1)}$$

in which **n and m are integers** of 5,000-50,000, preferably 10,000-50,000. R1 represents --OH; an alkyl group having 1-6 carbon atoms such as methyl, ethyl, or propyl; an aryl group such as phenyl or xenyl; an alkaryl group such as tolyl or xylyl; or an aralkyl group such as benzyl, phenylethyl, or 2-phenylpropyl. R2 represents an alkyl group having 1-6 carbon atoms such as methyl, ethyl, or propyl; an aryl group such as phenyl or xenyl; an alkaryl group such as tolyl or xylyl; or an aralkyl group such as benzyl, phenylethyl, or 2-phenylpropyl. Silicone gums in which R1 is an
20
25

- 20 -

alkenyl group such as vinyl can also be employed. Most preferred, however, are silicone gums in which R1 is--OH and R2 is methyl; and silicone gums in which both R1 and R2 are methyl.

5 ***α,ω-Diene Crosslinked Silicone Elastomer***

As used herein, the term *α,ω*-diene crosslinked silicone elastomer is intended to mean *α,ω*-diene crosslinked silicone elastomers having no oxyalkylene units in their structure. They have been referred to generally in the art as non-emulsifying silicone elastomers, meaning that polyoxyalkylene units are absent. Otherwise, the *α,ω*-diene crosslinked silicone elastomers suitable for use according to this invention are the compositions described in U.S. Pat. No. 5,654,362 (Aug. 5, 1997).

15 As described in detail in the '362 patent, the *α,ω*-diene crosslinked silicone elastomers are prepared by reacting (A) an $\equiv \text{Si--H}$ containing polysiloxane of the formula $\text{R}_3\text{SiO}(\text{R}'_2\text{SiO})_a(\text{R}''\text{HSiO})_b\text{SiR}_3$ and optionally an $\equiv \text{Si--H}$ containing polysiloxane of formula $\text{HR}_2\text{SiO}(\text{R}'_2\text{SiO})_c\text{SiR}_2\text{H}$ or formula $\text{HR}_2\text{SiO}(\text{R}'_2\text{SiO})_a(\text{R}''\text{HSiO})_b\text{SiR}_2\text{H}$ where R, R', and R'' are alkyl groups with 1-6 carbon atoms; a is 0-250; b is 1-250; and c is 0-250; with (B) an *α,ω*-diene of formula $\text{CH}_2=\text{CH}(\text{CH}_2)_x\text{CH}=\text{CH}_2$ where x is 1-20. The reaction is conducted in the presence of a platinum catalyst and in the presence of (C) a low molecular weight silicone oil or other solvent. The

- 21 -

reaction system is non-aqueous in contrast to the reaction system used to prepare silicone rubber powders.

5 The polydiorganosiloxane gums are well known in the art and can be obtained commercially, and which have viscosities greater than 1,000,000 cs. at 25.degree C, preferably greater than 5,000,000 cs. at 25.degree C.

10 The compositions according to the invention can be prepared mechanically, and this simply involves mixing the oil phase and the water phase together and homogenizing the phase mixture using a laboratory homogenizer or other device for applying vigorous agitation.

Additional Cosmetically Active Agents

15 In one embodiment, the compositions according to this invention may further contain one or more additional cosmetically active agent(s) as well as the above-mentioned components. What is meant by a "cosmetically active agent" is a compound, which may be a synthetic compound or a compound isolated, purified or
20 concentrated from a natural source, or a natural extract containing a mixture of compounds, that has a cosmetic or therapeutic effect on the tissue, including, but not limited to: anti-microbial agents such as anti-yeast agents, anti-fungal, and anti-bacterial agents, anti-inflammatory agents, anti-aging agents, anti-parasite
25 agents, external analgesics, antioxidants, keratolytic agents, detergents/surfactants, moisturizers, nutrients,

- 22 -

vitamins, minerals, energy enhancers, firming agents, agents for skin or mucosal conditioning, and odor-control agents such as odor masking or pH-changing agents.

5 In one embodiment, the cosmetically active agent may be selected from, but not limited to, the group consisting of hydroxy acids, benzoyl peroxide, D-panthenol, octyl methoxycinnamate, titanium dioxide, octyl salicylate, homosalate, avobenzone, carotenoids, 10 free radical scavengers, spin traps, retinoids such as retinoic acid (tretinoin) and retinoid precursors such as retinol and retinyl palmitate, vitamins such as vitamin E (alpha, beta or delta tocopherols and/or their mixtures) ceramides, polyunsaturated fatty acids, 15 essential fatty acids, enzymes, enzyme inhibitors, minerals, hormones such as progesterones, steroids such as hydrocortisone, 2-dimethylaminoethanol, metal (including but not limited to iron or zinc) salts such as copper chloride, peptides containing copper such as 20 Cu:Gly-His-Lys, coenzyme Q10, amino acids, vitamins, acetyl-coenzyme A, niacin, riboflavin, thiamin, ribose, electron transporters such as NADH and FADH₂, botanical extracts such as aloe vera, Feverfew, and Soy, and derivatives and mixtures thereof. The cosmetically 25 active agent will preferably be present in the composition of the invention in an amount of from about 0.001% to about 20% by weight of the composition, more

- 23 -

preferably, from about 0.005% to about 10% and most preferably, from about 0.01% to about 5%.

5 Examples of vitamins that may be constituents of the compositions of this invention include, but are not limited to, vitamin A, vitamin Bs such as vitamin B3, vitamin B5, and vitamin B12, vitamin C, vitamin K, vitamin E such as alpha, gamma or delta-tocopherol, and derivatives (such as salts and esters) and mixtures thereof.

10 Examples of antioxidants which may be utilized in the compositions and methods of this invention include, but are not limited to, water-soluble antioxidants such as sulfhydryl compounds and their derivatives (e.g., sodium metabisulfite and N-acetyl-cysteine), lipoic acid and dihydrolipoic acid, resveratrol, lactoferrin, and ascorbic acid and ascorbic acid derivatives (e.g., ascorbyl palmitate and ascorbyl polypeptide). Oil-soluble antioxidants suitable for use in the compositions of this invention include, but are not limited to, butylated hydroxytoluene, retinoids (e.g., retinol and retinyl palmitate), different types of tocopherols (e.g., alpha-, gamma-, and delta-tocopherols and their esters such as acetate) and their mixtures, tocotrienols, and ubiquinone. Natural extracts containing antioxidants suitable for use in the compositions of this invention, include, but are not limited to, extracts containing flavonoids, isoflavonoids, and their derivatives such as genistein

15

20

25

- 24 -

and diadzein (e.g., such as soy and clover extracts, extracts containing resveratrol and the like. Examples of such natural extracts include grape seed, green tea, pine bark, and propolis.

5 The compositions of the present invention may also comprise chelating agents (e.g., EDTA) and preservatives (e.g., parabens). Examples of suitable preservatives and chelating agents are listed in pp. 1626 and 1654-55 of the INCI Handbook. In addition, the topical compositions
10 useful herein can contain conventional cosmetic adjuvants, such as dyes, opacifiers (e.g., titanium dioxide), pigments, and fragrances.

Examples:

15 **Example 1: Oil-in-Water Emulsions**

 Oil-in-water emulsions in accordance with this invention may be made as follows: the components of the oil phase (i.e., stearyl alcohol, glyceryl stearate, and silicone fluid) are added to a mixing vessel in the
20 order listed and combined with moderate agitation while heating to 45- 65 C. The components of the water phase (i.e, propylene glycol, cetyl hydroxyethylcellulose, purified water, preservative, emulsifier, polyethylene glycol 400, and carbopol) are added to a separate mixing
25 vessel in the order listed and combined with moderate agitation while heating to about 45 to about 65 C. The oil phase is then added to the water phase with sufficient mixing and shear to completely incorporate it

- 25 -

into the water phase and form an oil-in-water emulsion having a substantially homogeneous appearance. The pH adjuster is then added and incorporated uniformly throughout the emulsion.

5

Examples of oil-in-water compositions according to this invention are as follows:

Example 1A:

10	<u>Ingredient</u>	<u>%w/w</u>
	Polyethylene glycol 400	50.00
	Propylene glycol	25.25
	Emulsifier	3.00
15	Stearyl alcohol	7.00
	Glyceryl stearate	1.00
	Silicone fluid (350 cst)	0.50
	Carbopol	0.125
	PH adjuster	0.025
20	Preservative	0.20
	Purified water	12.90
	Total	100.00

Example 1B:

25	<u>Ingredient</u>	<u>%w/w</u>
	Polyethylene glycol 400	50.00
	Propylene glycol	25.15

- 26 -

	Emulsifier	3.00
	Stearyl alcohol	7.00
	Glyceryl stearate	1.00
	Silicone fluid (350 cst)	0.50
5	Carbopol	0.125
	Cetyl Hydroxyethylcellulose	0.10
	pH adjuster	0.025
	Preservative	0.20
10	Purified water	12.90
	Total	100.00

Example 2: Glycol-in-silicone Emulsions

15 Glycol-in-silicone emulsions may be prepared as follows: the components of the silicone phase (i.e., silicone fluids, dimethiconol blend, silicone in cyclopentasiloxane, and silicone elastomer blend) are added to a mixing vessel in the order listed and combined with moderate agitation. The components of the glycol phase (i.e, propylene glycol, polyethylene glycol 20 400, hydroxypropylcellulose, carbopol and antioxidant) are added to a separate mixing vessel and combined with moderate agitation. The glycol phase is then added to the silicone phase at a rate of addition that is 25 sufficiently slow to allow the glycol phase to be completely incorporated into the silicone phase and form a glycol-in-silicone emulsion having a substantially homogeneous appearance.

- 27 -

Examples of glycol-in-silicone emulsions are as follows:

5 **Example 2A:**

	<u>Ingredient</u>	<u>%w/w</u>
	Polyethylene glycol 400	20.20
	Propylene glycol	50.80
10	Silicone fluids (20 cst, 350 cst)	1.6 to 5.6
	Dimethiconol blend	2.50
	Silicone polyether in cyclopentasiloxane	20.30
	Silicone elastomer blend	1.60
15	Lactic Acid	1.50
	Salt	0.20
	Total	100.00

20 **Example 2B:**

	<u>Ingredient</u>	<u>%w/w</u>
	Polyethylene glycol 400	22.90
	Propylene glycol	52.50
25	Silicone fluid (20, 350 cst)	1.00 to 2.50
	Dimethiconol blend	0.90
	Silicone polyether in cyclopentasiloxane	20.30

- 28 -

	Silicone elastomer blend	0.50
	Hydroxypropylcellulose	0.30
	Carbopol	0.125
	Antioxidant	0.10
5	Total	100.00

Example 2C:

	<u>Ingredient</u>	<u>%w/w</u>
	Polyethylene glycol 400	21.95
10	Propylene glycol	50.36
	Silicone fluid (20, 1000 cst)	1.33 to 4.9
	Dimethiconol blend	2.10
	Silicone polyether in cyclopentasiloxane	20.30
15	Hydroxypropylcellulose	0.29
	Antioxidant	0.10
	Total	100.00

20 **Example 3: Generation of Warmth Using Warming
Compositions of this invention**

25 The compositions set forth in Examples 1 and 2 above were tested to determine whether they generated warmth upon application to skin. The test method set forth in Example 3 of U.S. Patent No. 7,005,408 was utilized to determine expected temperature rise when combined with water. The data set forth in Table 2 were generated by mixing 20 ml of each of the compositions of

- 29 -

the examples with 20 ml of water. The initial temperature of each (Composition and water) was determined and an average of the two temperatures was calculated. Water was then added to the compositions. After the addition of water, the mixture was mixed for two minutes and the actual temperature was recorded. The Average Temperature was then subtracted from the Actual Temperature, resulting in the "Rise in Temperature".

The results set forth in Table 2 below were obtained, demonstrating that the compositions of this invention would be expected to generate warmth upon application to skin and the ambient moisture located thereon.

Table 2

Generation of Warmth Utilizing Compositions of Examples 1 and 2
(Temperature Rise When Mixed With Water)

Product Name	Temperature of the Product (°F)	Temperature of Water (°F)	Average Expected Temperature (°F)	Actual Temperature (°F)	Rise in Temperature (°F) (Expected Minus Actual)
Oil-in-Water Emulsion Compositions					
Example 1A	75.3	72.3	73.8	90.0	16.2
Example 1B	80.0	73.2	76.6	91.0	14.4
Glycol-in-Silicone Emulsion Compositions					
Example 2A	77.5	73.0	75.3	89.0	13.7
Example 2B	77.7	70.9	74.3	90.5	16.2
Example 2C	78.5	69.0	73.8	87.5	13.7

20

CLAIMS

1. A glycol-in-silicone emulsion lubricant composition comprising a discontinuous substantially anhydrous phase dispersed in a continuous oil phase, wherein said phases
5 are mixed and homogenized, wherein the discontinuous substantially anhydrous phase comprises less than 20 percent by weight of water, wherein the continuous oil phase comprises a linear silicone polyether, wherein the linear silicone polyether has a structure selected from the
10 group consisting of (a) a rake type structure wherein the polyoxyethylene or polyoxyethylene-polyoxypropylene copolymeric units are grafted onto a siloxane backbone, and (b) an ABA block copolymeric structure wherein A represents the polyether portion and B represents the siloxane portion
15 of an ABA structure; wherein the continuous oil phase further comprising silicone fluids; and wherein the discontinuous substantially anhydrous phase further comprising at least one polyol, at least one salt and at least one coemulsifier wherein said composition has a
20 lubricity of at least about 33.

2. A glycol-in-silicone emulsion lubricant composition according to claim 1 wherein the continuous oil phase comprises about 1.8 to about 3.5 percent by weight of the linear silicone polyether, about 18 to about 27 percent by
25 weight of a volatile silicone solvent, wherein said volatile silicone solvent comprises a volatile cyclic alkyl siloxane with the formula $(R'' 2SiO)_d$ or a volatile linear alkyl siloxane with the formula $R'' 3SiO (R'' 2SiO)_e SiR'' 3$ in which R'' is an alkyl group containing 1-6 carbon atoms,
30 d is 3-6 and e is 0-5.

3. A glycol-in-silicone emulsion lubricant composition according to claim 1 or claim 2 wherein the discontinuous substantially anhydrous phase comprises less than about 5% water by weight of the composition.

5 4. The glycol-in-silicone emulsion lubricant composition according to claim 3 wherein the volatile silicone solvent is selected from the group consisting of
hexamethylcyclotrisiloxane, octamethylcyclotetrasiloxane,
decamethylcyclopentasiloxane,
10 dodecamethylcyclohexasiloxane, octamethyltrisiloxane,
hexamethyldisiloxane, decamethyltetrasiloxane,
dodecamethylpentasiloxane, tetradecamethylhexasiloxane, and
hexadecamethylheptasiloxane.

15 5. A glycol-in-silicone emulsion according to any one of the preceding claims wherein said emulsion further comprises silicone gums.

6. The glycol-in-silicone emulsion lubricant composition according to claim 5 wherein the silicone fluids and/or silicone gums and/or non-emulsifying α,ω -diene crosslinked
20 silicone elastomers comprise from about 2 to about 10% by weight of the composition.

7. The glycol-in-silicone emulsion lubricant composition according to any one of the preceding claims wherein said salt is an inorganic salt soluble in the discontinuous
25 substantially anhydrous phase.

8. The glycol-in-silicone emulsion lubricant composition according to claim 7 wherein said salt is selected from the group consisting of sodium chloride, potassium chloride,

ammonium chloride, magnesium chloride, calcium bromide, sodium bromide, sodium acetate, potassium acetate, sodium citrate and combinations thereof.

9. The glycol-in-silicone emulsion lubricant composition
5 according to claim 7 or claim 8, wherein said salt comprises from about 0.1 to about 1% by weight of the composition.

10. The glycol-in-silicone emulsion lubricant composition according to any one of the preceding claims, wherein the
10 coemulsifier comprises polyoxyethylene sorbitan fatty acids selected from the group consisting of polysorbate 20, polysorbate 40, polysorbate 60, polysorbate 80 and combinations thereof.

11. The glycol-in-silicone emulsion lubricant composition
15 according to claim 10, wherein said co-emulsifier comprises from about 0.5 to about 2% by weight of the composition.

12. A glycol-in-silicone emulsion lubricant composition according to any one of the preceding claims wherein said linear silicone polyether is selected from the group
20 consisting of (i) volatile polydimethylsiloxanes selected from the group consisting of hexamethyldisiloxane, octamethyltrisiloxane, and decamethylcyclopentasiloxane; and (ii) nonvolatile polydimethylsiloxanes having a viscosity from about 5 to about 30,000 centistoke (mmz/s).

25 13. A glycol-in-silicone emulsion lubricant composition substantially as herein described with reference to any one or more of the examples but excluding comparative examples.