

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/058437 A1

(51) International Patent Classification⁷: **B23B 27/16**
// B23C 5/22

[SE/SE]; Furumovägen 16, S-806 41 Gävle (SE).
SJÖBERG, Tomas [SE/SE]; Ekostigen 13, S-811 37
Sandviken (SE).

(21) International Application Number:
PCT/SE2003/001749

(74) Agent: **TÅQUIST, Lennart**; Sandvik AB, Group Staff
Intellectual Property, S-811 81 Sandviken (SE).

(22) International Filing Date:
12 November 2003 (12.11.2003)

(81) Designated States (*national*): CN, IL, JP, KR, PL, US.

(25) Filing Language: Swedish

(84) Designated States (*regional*): Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data:
0203378-5 13 November 2002 (13.11.2002) SE

Published:
— with international search report


(71) Applicant (*for all designated States except US*): **SAND-
VIK AB** [SE/SE]; S-811 81 Sandviken (SE).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **SJÖÖ, Sture**

(54) Title: CUTTING INSERT WITH AN ASTRAL RECESS FOR RECIEVING THE CLAMP

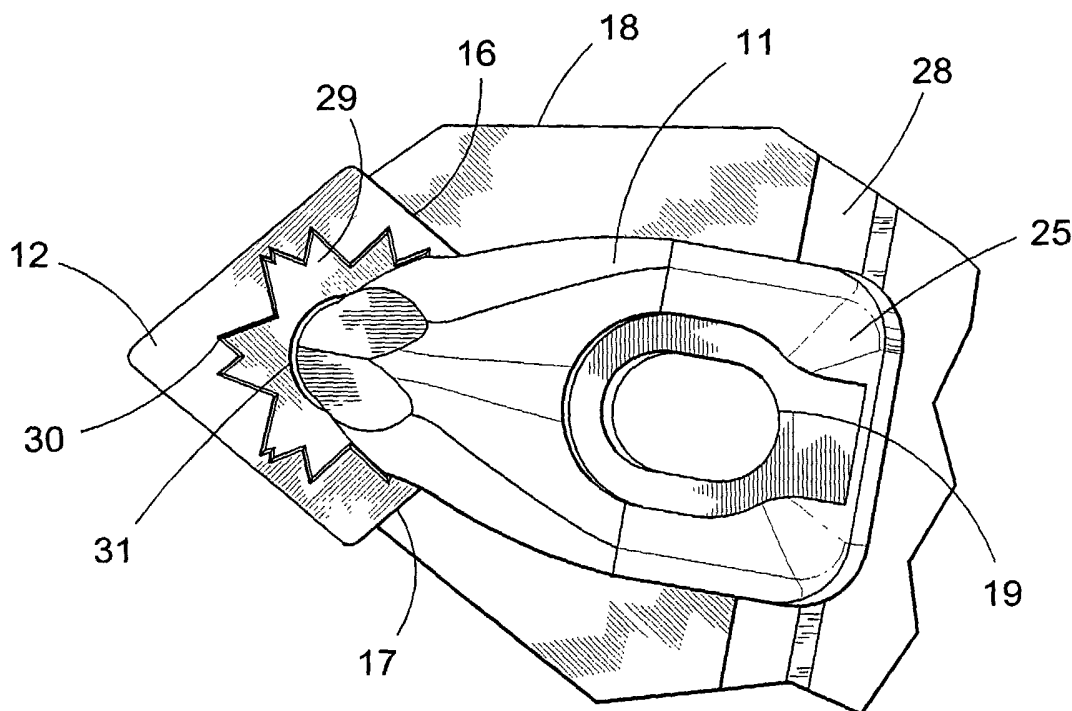

(57) Abstract: According to the invention, there is a new type of hole-provided indexable inserts, intended to be clamped in an insert holder by a clamp (11) that fixes the cutting insert both vertically and horizontally. The surface (29) of the cutting insert located around the centre hole (14) is an elevated or countersunk plane and has a star-shaped point shape having at least 6 points, adapted to constitute contact surfaces for the lower, pairwise-arranged part surfaces of the clamp upon the tightening of the tightening screw (21).

WO 2004/058437 A1

CUTTING INSERT WITH AN ASTRAL RECESS FOR RECIEVING THE CLAMP.

The present invention relates to a new type of centrally hole-provided indexable insert
5 plates, intended for chip removing machining of metallic materials.

Such indexable insert plates normally have cutting tip angles below 80° and are usually
intended for different types of copying. On the market, there is now a plurality of differ-
ent types of insert holders, which are especially adapted for such indexable insert plates,
10 such as rhombic, rhomboid or isoscelesly triangular indexable inserts. The material used
in such indexable insert plates is normally sintered cemented carbide or ceramics.

A nowadays frequently used type of indexable insert plates is provided with a so-called
wiper geometry outside in each active cutting corner. The meaning of this is a radius-
15 modified corner geometry, with the corner radius in the cutting corner being composed
of a plurality of small radii adjacent each other, with each radius portion next adjoining
another radius portion having another radius size. By this type of geometries, it has
become possible to increase the feeding of the cutting insert significantly at the same
time as a desired good surface finish can be attained of the machined workpiece. Upon
20 the use of such cutting inserts having a wiper geometry, the cutting insert is not clamped
by usual lever holders, the meaning of which is holders of, e.g., the type that is shown
and disclosed in the US patent 3,314,126. Upon use of this type of cutting inserts, it is
now desirable to have a holder system, which means that upon clamping of the cutting
insert, not only an inward-drawing force is provided but simultaneously also a down-
25 ward-pressing force. This represents in itself a certain limitation as for the choice of
geometries on top of the upper chip side of the cutting insert.

Against this background, it is an object of the present invention to provide a new insert
design, which on one hand, is adapted for an efficient locking by means of the above-
30 mentioned type of insert holders having inward-directed as well as downward-directed
tensile forces and which on the other hand leaves sufficiently large margin on the top
side of the cutting insert in order to, e.g., enable desired corner marking or another

geometric marking or which enables insertion of more advanced chip breaker geometries directly pressed into the upper chip surface.

According to the invention, the surface of the cutting insert located around the hole has
5 been made planar and has simultaneously been given a star-shaped contour having at least 6 points, the insert-clamping lower part surfaces of the clamp being arranged pairwise to, upon tightening of the clamp, which clamps the cutting insert, being brought to planar surface abutment against pairwise-arranged point portions of the above-mentioned star-shaped part of the top side of the cutting insert. In this connection, the sur-
10 face of the cutting insert located around the centre hole is preferably formed plane-parallelly to the bottom surface of the cutting insert. According to a feasible design form, the star-shapedly arranged part surface around the centre hole is formed as a countersink in the upper flat surface of the cutting insert. Alternatively, however, said star-shaped surface may be in the shape of a part surface elevated around the centre hole in relation
15 to the rest of the top surface of the cutting insert.

The invention will in the following be described closer in connection with a preferred embodiment of the invention shown in the drawings.

20 Fig. 1 shows a side view of an insert holder and an indexable insert plate according to the invention.

Fig. 2 shows a planar view of an insert holder in co-operation with an indexable insert plate according to fig. 1.

25

Fig. 3 shows a view seen from below of a clamp to the insert holder in figs. 1-2.

Fig. 4 shows a planar view of an indexable insert according to figs. 1-2, and

30 Figs. 5 a-c shows a clamp and an indexable insert according to the invention in different locking positions.

Fig. 6 shows a perspective view of an alternative insert shape according to the invention.

Fig. 7 shows a perspective view of an additional insert shape according to the invention.

5

The indexable insert 10 shown in figs. 1–2 is shown in co-operation with a holder clamp 11. The indexable insert has in this shown embodiment a rhombic basic shape and cutting tip angles below 80° . The flat surfaces 12 and 13 of the indexable insert, which are mutually parallel, form a right angle to the edge surfaces uniting them. The indexable insert 10 has a central through hole 14, the centre axis of which is oriented perpendicu-
10 larly to the flat surfaces 12 and 13 of the cutting insert. The seating, in which the indexable insert 10 is received, comprises the bottom support surface 15 and two side support surface 16 and 17 raised perpendicularly from the same. The bottom support surface 15 may either be a part surface of an insert holder 18, as in the shown embodiment, or consist of a separate shim plate in the cutting insert seating, which is clamped by means of a
15 suitable fastening means (not shown).

So as to enable clamping of the indexable insert 10 in the cutting insert seating in the insert holder, a clamp 11 is as mentioned arranged, which is manoeuvrable by means of
20 a tightening screw 21 threaded-in into an elongate recess 19 in the clamp going in a threaded boring 20 in the insert holder 18, the centre axis C_1 of which is oriented parallel to the centre axis C_2 for the insert hole 14. The front end of the clamp 11 consists of an obliquely downward-inward directed first projection 22 oriented at an oblique angle α in relation to the centre axis C_2 of the hole 14 arranged to be brought to engagement
25 with the hole wall in the insert hole 14 directed inwards towards the holder at a contact point 23 a distance down in the insert hole. Simultaneously, a part of the bottom side of the clamp 11 goes in engagement with the top side 12 of the cutting insert at a contact surface 24 at a portion near the centre hole 14 of the cutting insert. The opposite end of the clamp 11 consists of a second projection 25, which is received in a recess 26 in the
30 insert holder 18, the end surface 27 of the projection 25 being convexly formed and arranged to upon the clamping be brought to surface contact with a corresponding planar stop face 28 formed in an oblique angle to the centre axis C_1 of the tightening screw

21 in said recess 26. Alternatively, the end surface 27 may be flatly formed for contact with the planar stop face 28. The size of the angle α should be substantially the same or somewhat less than the acute angle of inclination β , with which the rear contact surface 28 in the holder is oriented.

5

According to the invention, the upper surface portion of the cutting insert around the central insert hole 14 has been formed as a planar surface 29 having a star-shaped basic shape, wherein said star shape should be radially outwardly limited by at least 6 points, the intention being that said planar surface 29 preferably should be formed as a surface
10 elevated in relation to the top surface 12. Alternatively, however, the surface 29 may in certain cases be a surface countersunk in relation to the top surface 12. The various points 30 may either be acute as is shown in fig. 2 or be smoothly rounded. The radially inner limiting line 31 of the planar surface 29 should be circular and connect to the centre hole 14 and therefore have the same radius as the centre hole.

15

The embodiment described above and shown in the drawings is, as mentioned, radially outwardly limited by at least 6 pieces of point portions 30.

The radially outer end termination of each point portion 30 comprises in the embodi-
20 ment shown in fig. 2 two tip portions 30a and 30b. At polygonally formed cutting inserts, said part portions 30a and 30b should be symmetrically formed on both sides of the bisector B in at least two of the diametrically counter-positioned corner portions of the cutting insert as is shown in fig. 4. The bisector B for the same point portions in said two counter-positioned corners should in that connection pass through the centre of the
25 insert hole 14.

Said planar substantially star-shaped surface 29 is intended to be contact surface for the part of the bottom surface of the clamp that is situated in near connection to the central insert hole 14. Closer given is the intention that the lower part of the clamp in the same
30 section should have pairwise-arranged spaced-apart part surfaces 32a and 32b, which may be arc-shaped having a tapering width, or substantially triangular in order to go in

surface contact with the correspondingly formed planar surface portions of the surface 29.

5 In a triangular embodiment, the shape thereof may be as is closer shown at 33a and 33b of the star-shaped surface 29 in fig. 4.

In figs. 5a, 5b and 5c is shown how the proposed indexable insert according to the invention can enable exposure of the acute-angled cutting corner, designated 34 in fig. 5a, as well as the obtuse-angled cutting corner, designated 35, for chip forming
10 machining with one and the same type of clamp.

In fig. 6 an alternative insert shape is shown, with the star-shaped surface 29 being composed of a number of spaced-apart heart-shaped surfaces 36a, 36b, 36c, 36d, 36e and 36f. Said surfaces are plane-parallel with the surrounding flat surface 12 as well as
15 elevated a distance in relation to the same. The inner limiting surface of each such surface is furthermore circularly curved substantially in counterpart to the curvature of the central hole 14. Each such heart-shaped surface is finished radially inwards a small distance at a distance from the opening to the hole 14.

20 In fig. 7 another alternative insert shape is shown, with the surface configuration elevated around the insert hole 14 being in the form of a number of surface segments 37a-f spaced-apart from each other in circumferential directions which each one is v-shaped. The inner limiting surface of each such surface is, as in fig. 6, circularly curved substantially in counterpart to the curvature of the central hole 14. Each such surface segment is, furthermore, terminated a small distance from the opening of the hole 14.
25

Claims

1. Cutting insert for cutting tools of the type that comprises a holder having a seating intended for receipt of the cutting insert (10), the shape of which seating partially corresponds to the shape of the cutting insert, and a clamp (11) connected with the holder via a screw (21) and with the purpose of clamping the cutting insert into the seating, the clamp (11) having a nose (4) arranged to engage a hole (14) mouthed in one of two opposite top and bottom sides (12, 13) on the cutting insert in order to upon tightening of the screw pull in the cutting insert into the seating and directly press at least one side surface on the cutting insert against a corresponding side surface (16, 17) in the seating, at the same time as the clamp having one or more lower part surfaces arranged to, upon the tightening of the tightening screw, be brought to surface contact with the surface portion of the cutting insert located between the insert hole (14) and the side support surface (16, 17), characterized in that the surface (29) of the cutting insert located around the hole (14) is planar and has a star-shaped basic shape, said star shape having at least 6 points, the lower part surfaces of the clamp being arranged pairwise to, upon the tightening of the tightening screw (21), be brought to planar surface abutment against pairwise-arranged point portions of said star-shaped surface (29).
- 20 2. Cutting insert according to claim 1, characterized in that the surface of the cutting insert located around the hole is plane-parallel with the bottom surface of the cutting insert.
3. Cutting insert according to claim 1 or 2, characterized in that the star-shapedly arranged surface (29) around the hole (14) is formed as a countersink in the upper flat surface (12) of the cutting insert.
- 25 4. Cutting insert according to claim 1 or 2 characterized in that the star-shapedly arranged surface (29) around the hole (14) is formed as an elevated plateau in relation to the other part of the upper flat surface of the cutting insert.
- 30

5. Cutting insert according to any one of claims 1–4, characterized in that the points (30) are arranged pairwise in each corner region of the cutting insert, the pairwise-arranged portions (30a, 30b) being symmetrically located on both sides of the bisector (B) at at least two diametrically counter-positioned corner portions.
- 5
6. Cutting insert according to any one of claims 1–5, characterized in that the radially inner limiting line (31) of the planar surface (29) is circular, connecting to the centre hole (14) with the same radius as the centre hole (14).
- 10 7. Cutting insert according to any one of claims 1–6, characterized in that the point portions (30) of the star-shaped surface around the hole (14) has smoothly rounded outer end terminations.
8. Cutting insert according to claim 5, characterized in that the bisector (B)
- 15 passes through the centre of the insert hole (14).
9. Cutting insert according to any one of claims 1–8 characterized in that the cutting insert is polygonal having cutting tip angles below 80° .

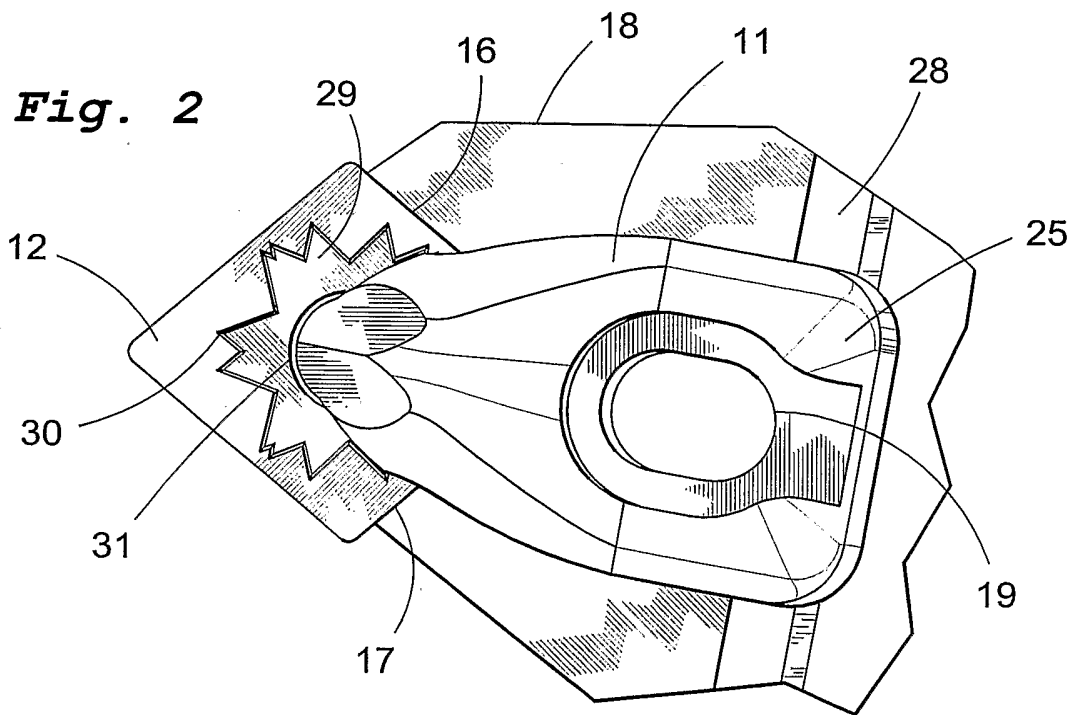
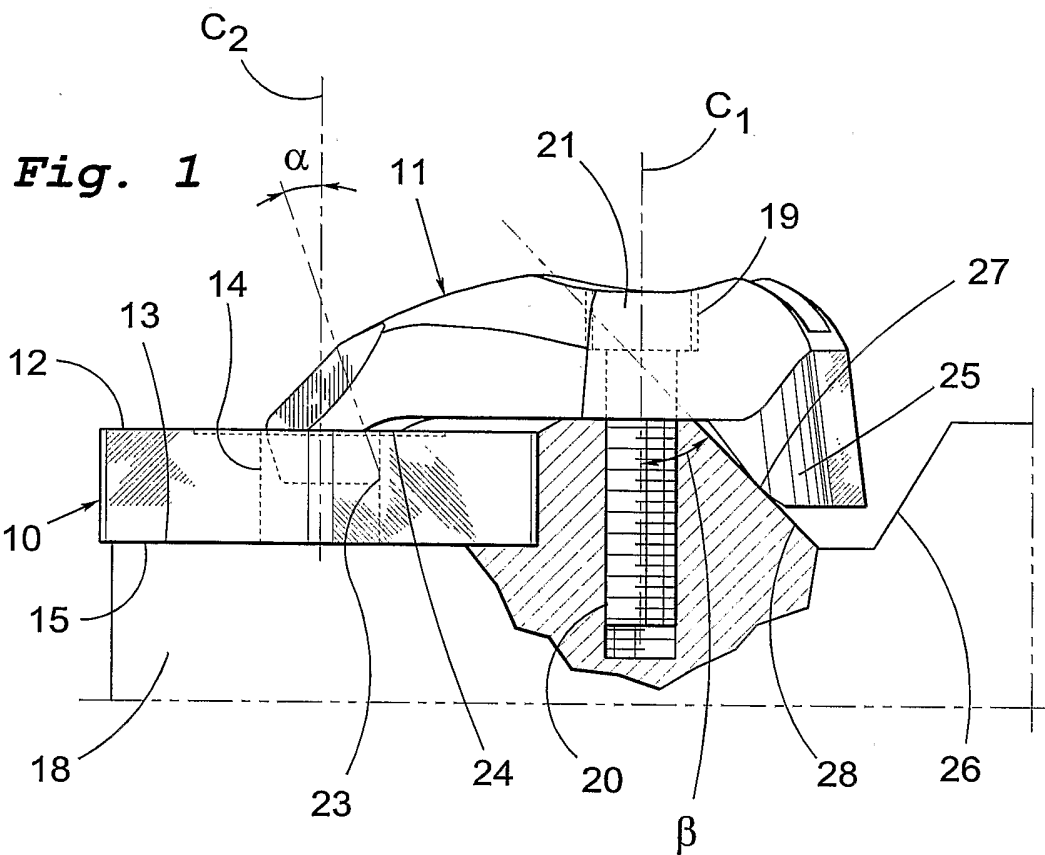


Fig. 3

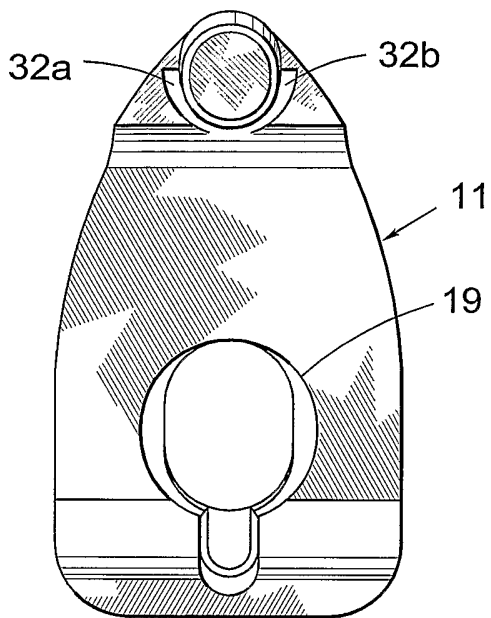


Fig. 4

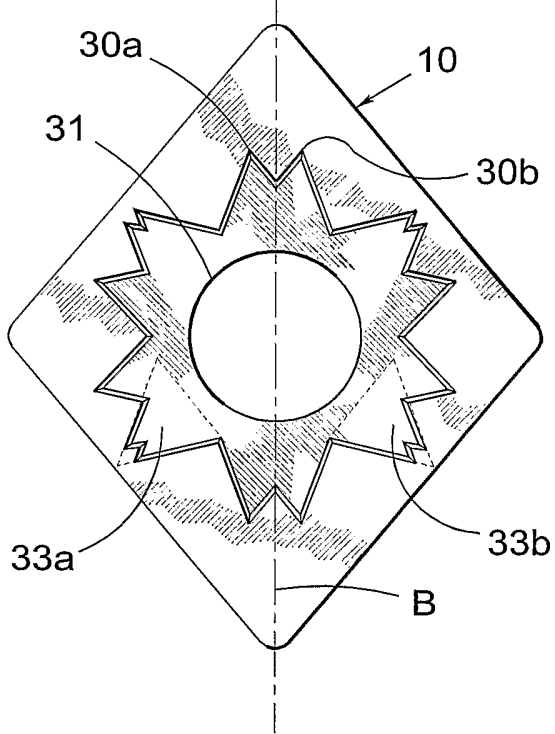


Fig. 5a

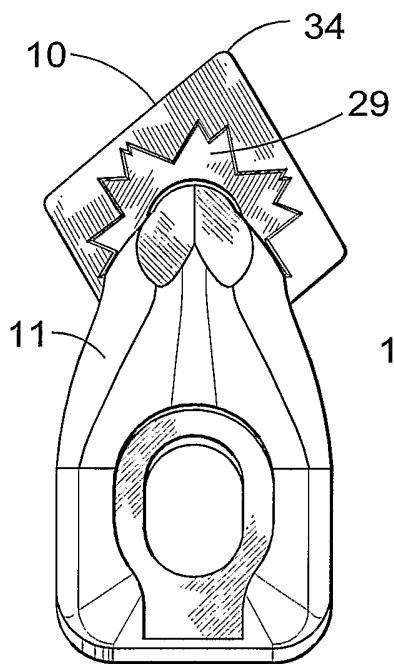


Fig. 5b

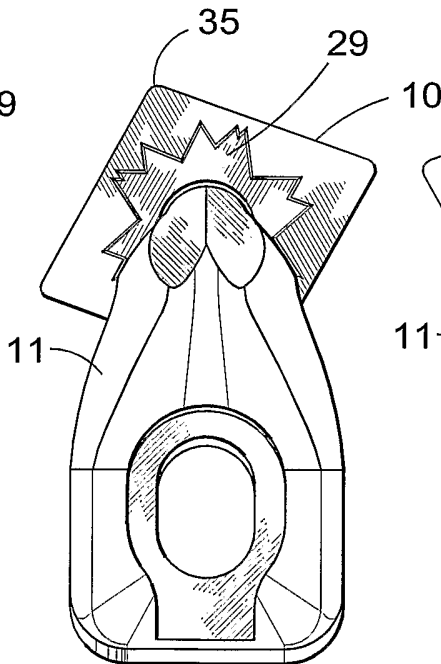


Fig. 5c

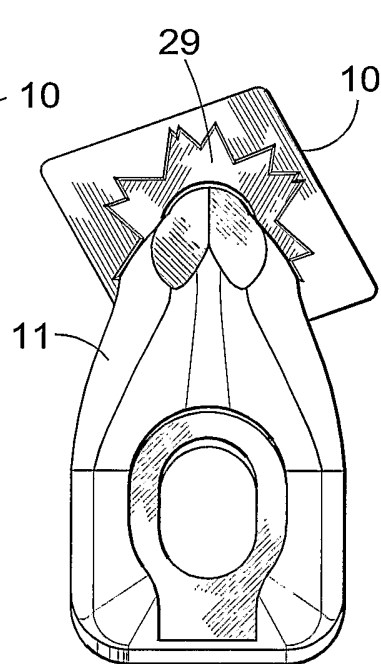


Fig. 6


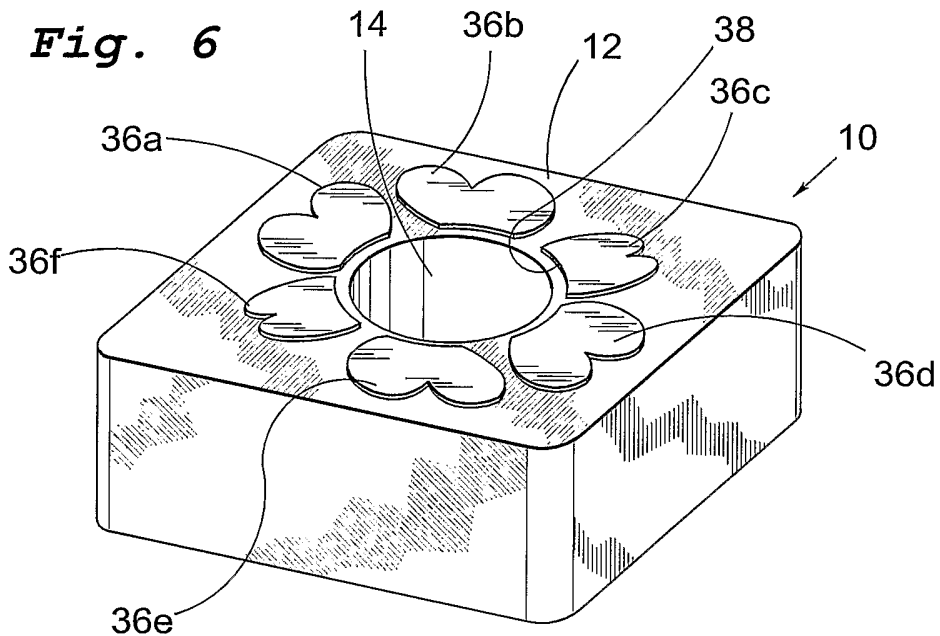


Fig. 7

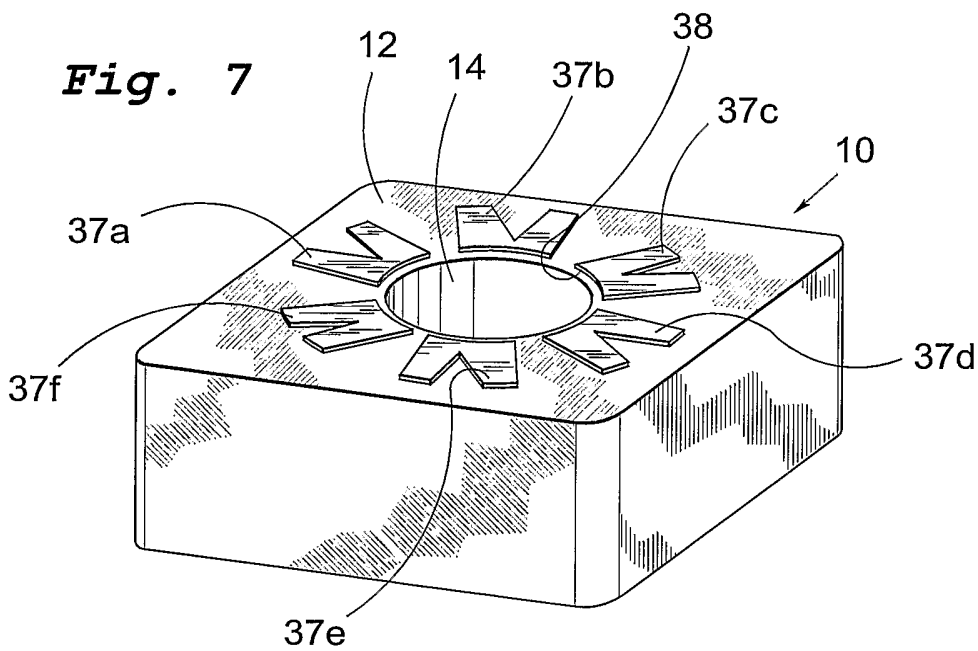

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001749

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B23B 27/16 // B23C 5/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B23B, B23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6379087 B1 (WILLIAM M. ALEXANDER, IV), 30 April 2002 (30.04.2002), figures 1,4,11,15, abstract --	1-3,5,7-9
X	US 5658100 A (SIEGFRIED DEISS ET AL), 19 August 1997 (19.08.1997), figure 7, abstract --	1-3,5,7-9
P,A	US 6641337 B1 (GERHARD ROTHBALLER), 4 November 2003 (04.11.2003), figure 3, abstract --	1-12

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 February 2004

Date of mailing of the international search report

10 -02- 2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Strand/MP
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001749

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5033916 A (CLAUS DUNKLAU), 23 July 1991 (23.07.1991), figures 4-9, abstract --	1-12
A	DE 19703848 A1 (WIDIA GMBH), 2 July 1998 (02.07.1998), figures 7,10, abstract --	1-12
A	US 4480950 A (HARALD KRAFT ET AL), 6 November 1984 (06.11.1984), figure 8, abstract -- -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

24/12/2003

International application No.

PCT/SE 2003/001749

US	6379087	B1	30/04/2002	DE	10085433	T	30/04/2003
				JP	2003522035	T	22/07/2003
				SE	0202369	A	03/10/2002
				WO	0158626	A	16/08/2001

US	5658100	A	19/08/1997	AT	175610	T	15/01/1999
				DE	4430171	A,C	29/02/1996
				DE	59504791	D	00/00/0000
				EP	0698437	A,B	28/02/1996
				SE	0698437	T3	
				ES	2126186	T	16/03/1999
				JP	8066804	A	12/03/1996

US	6641337	B1	04/11/2003	AT	219982	T	15/07/2002
				DE	29822553	U	04/03/1999
				DE	59901978	D	00/00/0000
				EP	1140408	A,B	10/10/2001
				SE	1140408	T3	
				ES	2176039	T	16/11/2002
				PT	1140408	T	29/11/2002
				WO	0037205	A	29/06/2000

US	5033916	A	23/07/1991	AT	76600	T	15/06/1992
				DE	3715338	A	24/11/1988
				DE	3871495	A	02/07/1992
				EP	0317581	A,B	31/05/1989
				SE	0317581	T3	
				JP	2501372	T	17/05/1990
				JP	2716496	B	18/02/1998
				WO	8808767	A	17/11/1988

DE	19703848	A1	02/07/1998	DE	29724599	U	13/06/2002
				EP	0954400	A	10/11/1999
				WO	9829211	A	09/07/1998

INTERNATIONAL SEARCH REPORT

Information on patent family members

24/12/2003

International application No.

PCT/SE 2003/001749

US	4480950	A	06/11/1984	AT	19015	T	15/04/1986
				DE	3136549	A	31/03/1983
				DE	3270431	D	00/00/0000
				EP	0075177	A,B	30/03/1983
				SE	0075177	T3	
				JP	58059706	A	08/04/1983
