

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 February 2009 (12.02.2009)

PCT

(10) International Publication Number  
**WO 2009/020833 A1**

- (51) International Patent Classification:  
F02B 47/02 (2006.01)
- (21) International Application Number:  
PCT/US2008/071772
- (22) International Filing Date: 31 July 2008 (31.07.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
11/890,303 3 August 2007 (03.08.2007) US
- (71) Applicant and  
(72) Inventor: RIM, Julius, J. [US/US]; C/o Intermet Ltd.,  
45429 Tournament Drive, Northville, MI 48168 (US).

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- (74) Agents: SHENDE, Fulchand, P. et al.; Carrier, Blackman & Associates, P.c., 24101 Novi Road, Suite 100, Novi, MI 48375 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

Declaration under Rule 4.17:  
— of inventorship (Rule 4.17(iv))

Published:  
— with international search report

(54) Title: HYDRATED EGR SYSTEM, METHOD AND APPARATUS FOR REDUCING HARMFUL EXHAUST EMISSIONS AND IMPROVING FUEL ECONOMY

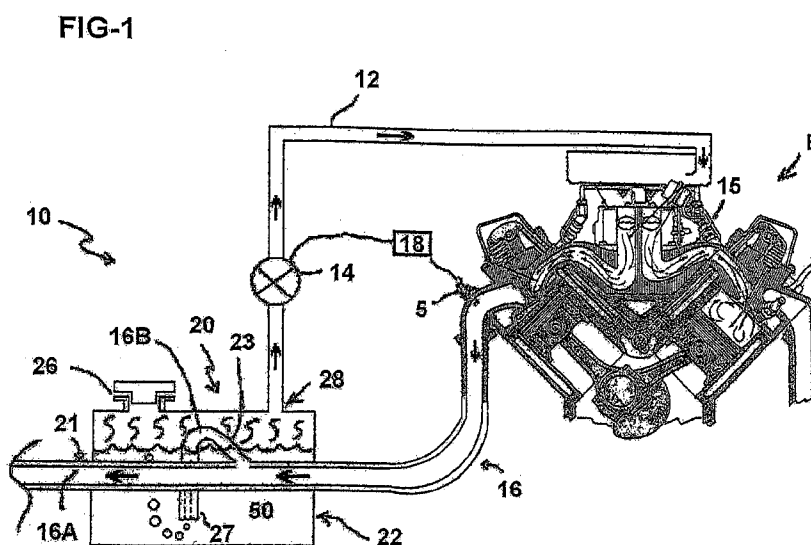

(57) Abstract: A hydrated EGR system, method and apparatus for a vehicle, in which heat from an exhaust pipe is used to heat an aqueous fluid solution in a water tank. A portion of the hot exhaust gas is diverted from the main exhaust flow, and the diverted portion is bubbled through the heated aqueous fluid solution to form a hydrated EGR mixture containing water vapor. The hydrated EGR mixture is then fed back to an intake portion of the engine, is mixed with an incoming fuel/air mixture, and is burned with the fuel air mixture inside the engine. The use of the hydrated EGR mixture, including heated water vapor, as part of the intake charge simultaneously reduces harmful exhaust emissions, improves engine performance, and improves fuel economy of the vehicle.

WO 2009/020833 A1

**HYDRATED EGR SYSTEM, METHOD AND APPARATUS FOR  
REDUCING HARMFUL EXHAUST EMISSIONS  
AND IMPROVING FUEL ECONOMY**

**BACKGROUND OF THE INVENTION**

5 1. Field of the Invention

The present invention relates to an hydrated EGR system, method and exhaust treatment apparatus for use in a vehicle having an internal combustion engine, to simultaneously reduce harmful exhaust emissions, improve engine performance and increase fuel economy. More specifically, the present invention relate to a hydrated EGR system,  
10 method and exhaust treatment apparatus in which heat from an exhaust pipe heats an aqueous fluid solution in a tank, and a portion of hot exhaust gas is bubbled through the heated aqueous fluid solution to form a hydrated EGR mixture containing water vapor. The hydrated EGR mixture is then fed to an intake portion of the engine, using pressure from the exhaust system, and the hydrated EGR mixture is burned with the air/fuel mixture as part of the  
15 combustion charge.

2. Description of the Background Art

In efforts to reduce global-warming gas emissions, energy-efficient internal combustion engines may be advantageously used. Many of the known engines today recycle part of the exhaust gas back into the intake manifold via an exhaust gas recirculation (EGR)  
20 system. The introduction of some exhaust gas into the intake charge tends to reduce oxides of nitrogen (NOx) present in exhaust gas emitted from the vehicle's tailpipe.

Another method of reducing NOx emissions in internal combustion engines is to add water into the air/fuel mixture entering the combustion chamber, to reduce the peak flame temperature. Water additive methods known in the art include 1) water-injection, 2) water-fuel emulsion, and 3) water-fumigation.  
25

Examples of patents relating to water injection methods include U.S. Patent 4,519,341, U.S. Patent 4,311,118, and U.S. Patent 4,800,848. Other patents which suggest the use of water or water vapor as a component of the combustion charge include U.S. patents 3,552,364, 3,655,169, 4,306,520, 4,337,731, 5,718,194, 6,817,348, 6,892,531, and 7,051,720.  
30

However, water-addition methods including the EGR process are not widely practiced in engine systems, partly because of concerns about possible engine wear problems caused by the potential break-down of the protective film of lubricating oil by contact with water in critical rubbing metal surfaces, such as the surfaces between piston rings and cylinder walls and valve bearings, etc.

It is therefore, desirable to develop a system for engines that further reduces emissions using a method of injecting heated water vapor into an engine.

Due to increasing fuel costs there is also a need to improve fuel efficiency. Further, there is also an ongoing need to increase engine power.

5 An improved engine system is therefore needed, which would more effectively reduce unwanted pollutants. In particular, an engine system is needed which is operable to reduce emissions of oxides of nitrogen (Nox), while simultaneously improving fuel efficiency and increasing engine power.

### SUMMARY OF INVENTION

10 The present invention provides an emissions-reduction system for internal combustion engines that are equipped with EGR.

An illustrative embodiment of the invention relates to a hydrated EGR system, method and apparatus for a vehicle, in which heat from an exhaust pipe is used to heat an aqueous fluid solution in a water tank. A portion of the hot exhaust gas is diverted from the  
15 main exhaust flow, and the diverted portion is bubbled through the heated aqueous fluid solution to form a hydrated EGR mixture containing water vapor.

The hydrated EGR mixture is then fed back to an intake portion of the engine, is mixed with an incoming fuel/air mixture, and is burned with the fuel air mixture inside the engine. The use of the hydrated EGR mixture, including heated water vapor, as part of the  
20 intake charge simultaneously reduces harmful exhaust emissions, improves engine performance, and improves fuel economy of the vehicle.

The system according to the invention may incorporate a water tank that cooperates with the exhaust system to generate hydrated EGR, and then feeds such hydrated EGR into the intake manifold to be mixed with the air-fuel mixture entering the intake manifold, to  
25 improve fuel efficiency and increase engine power. The present invention also relates to a method of using such a water tank on a vehicle for treating exhaust from the vehicle's engine.

The emissions-reduction system according to the present invention also provides an optional method of supplying water vapor and a catalyst to a engine's intake manifold, via the EGR system, to reduce NOx formation from exhaust gases, without causing an engine wear  
30 problem, while improving fuel efficiency and increasing engine power.

For a more complete understanding of the present invention, the reader is referred to the following detailed description section, which should be read in conjunction with the accompanying drawings. Throughout the following detailed description and in the drawings,

like numbers refer to like parts.

### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a simplified schematic depiction of an emissions-reducing hydrated EGR system according to an illustrative embodiment of the present invention, showing a path of exhaust gases bubbling through an aqueous solution in a water tank, and showing a path of hydrated EGR exhaust returning to the engine.

Figure 2 is a medial cross-sectional view of a water tank, which is a component of the system of Figure 1.

Figure 3 is a detail perspective view of the water tank of Figure 2, with a lid portion thereof removed for purposes of illustration.

Figure 4 is a medial cross-sectional view of a water tank according to an alternative embodiment of the present invention.

Figure 5 is a diagram showing a sequence of steps in an illustrative method according to an illustrative embodiment of the invention.

15

### DETAILED DESCRIPTION

Referring now to Figure 1 of the drawings, a hydrated EGR system according to an illustrative embodiment of the invention is shown generally at 10, for use with an internal combustion engine E. It will be understood that the emissions reducing system 10 according to the present invention is intended to be installed on a vehicle (not shown).

20

The emissions reducing system 10 according to the present invention is provided for use on an engine E, as shown schematically in the drawing. The core mechanical components of the engine E operate conventionally, using commercially available fuel in a fuel tank (not shown), which may be either diesel fuel or normal unleaded gasoline, depending on the type of engine used. As desired, the fuel may or may not be treated with a catalyst, and may be made up entirely of commercial fuel from a filling station. The engine E draws in air for combustion through its intake manifold 15.

25

The emissions reducing system 10 also includes an electronic control unit 18, which includes a microprocessor. Although many wires connecting the control unit 18 to other components of the system 10 have been omitted from the drawing, it will be understood that the control unit is connected to multiple sensors and control devices using wires. One example of a sensor that can be used with the system hereof is an exhaust pressure sensor S shown in Figure 1. Those in the art will be familiar with such sensors and control devices, since they are widely used in the automotive industry today. Optionally, the control unit 18

30

may be made part of the main engine control module (ECM) or powertrain control module (PCM) of the vehicle.

As shown generally in Figure 1, the system 10 includes an EGR conduit 12, a control valve 14 disposed in-line in the EGR conduit 12, and an EGR exhaust treatment apparatus 20. Hot exhaust gas is shown leaving the engine E and traveling through an exhaust pipe 16 until it reaches the EGR exhaust treatment apparatus 20, where the stream of exhaust gas is bifurcated into a main portion 16A and an EGR portion 16B. The main portion 16A of the exhaust gas passes through a metal exhaust transfer pipe 30 of the apparatus 20, which is at least partially immersed in an aqueous solution 50 disposed within a tank housing 22 of the exhaust treatment apparatus, in the depicted illustrative embodiment hereof. Optionally, the aqueous solution may contain one or more beneficial additives. Where used, the additives may contain one or more compounds selected from the group consisting of cerium carboxylate, copper naphthanate, copper acetate, and mixtures thereof.

The exhaust gas heats the metal exhaust transfer pipe 30, and this transfers heat from the exhaust into the aqueous solution 50, to raise the temperature thereof.

The EGR portion of the exhaust gas passes through a branch pipe 23 and exits outwardly from an open end thereof, and is then bubbled through the heated aqueous solution 50 in the tank housing 22 of the EGR exhaust treatment apparatus 20. The exhaust gas leaving the branch pipe 23 is mixed with water vapor boiled off of the solution, in an open area of the tank housing chamber 24 above the solution 50, to generate hydrated EGR. The hydrated EGR then leaves the tank 22 via an outlet port 28, and is transmitted through the EGR conduit 12 to be fed into an intake manifold 15 of the engine E.

In Figures 2 and 3, a hydrated EGR exhaust treatment apparatus for a vehicle is shown generally at 20.

The apparatus 20 includes a main tank housing 22 having a hollow tank chamber 24 formed therein. The tank housing 22 is configured and adapted to hold a fluid solution 50 (Fig. 1) in the tank chamber 24, and is therefore sealed and made generally watertight.

The main tank housing 22 has an intake port 26 therein to permit addition of the fluid solution 50 into the tank chamber 24, and also has an outlet port 28 formed therein to allow passage of a flowable hydrated EGR mixture outwardly from the tank chamber.

A main exhaust transfer pipe 30 is connected to the main tank housing 22, and is provided for connecting to an exhaust system 16 of a vehicle. In this first embodiment, the main exhaust transfer pipe 30 passes through a central portion of the tank housing 22. The main

exhaust transfer pipe 30 has a hollow passage formed therethrough, as shown, to permit the flow of exhaust gas therethrough.

An EGR branch pipe 23 branches off of the main exhaust transfer pipe 30 within the main tank housing 22. The EGR branch pipe 23 has a proximal end 25 attached to and in fluid communication with the main exhaust transfer pipe 30, and a distal end 27 opposite the proximal end and disposed in the tank chamber of the main tank housing. The distal end 27 of the EGR branch pipe 23 has an outlet which is open to the tank chamber 24, and adapted to be immersed in the fluid solution 50 during use.

The present invention also relates to a method of operating a vehicle having an internal combustion engine E therein.

The method includes a first step 40 (Figure 5) of passing hot exhaust gas which has been output from the internal combustion engine E through an exhaust treatment apparatus 20, to heat a fluid solution in the apparatus. The exhaust treatment apparatus 20 is substantially the apparatus shown in Figures 1-3, including a tank housing 22 having a hollow tank chamber 24 formed therein and an exhaust pipe 30 which is connected to the tank housing, wherein the tank chamber has a aqueous fluid solution 50 therein, whereby heat from the exhaust pipe heats the aqueous fluid solution.

The method also includes steps of 42 passing a portion of the exhaust gas through an EGR branch pipe 23 which branches off of the exhaust pipe, and 44 bubbling the exhaust gas portion through the heated aqueous fluid solution 50 in the tank chamber 24 to form a hydrated EGR mixture containing water vapor.

The next step 46 in the method involves routing the hydrated EGR mixture outwardly from the exhaust treatment apparatus 20, to an intake portion 15 of the engine E through an EGR flow pipe 12.

The method further includes a step 48 of mixing the hydrated EGR mixture with intake air and vaporized fuel flowing into the intake portion 15 of the engine. Optionally, the method may include a step 49 of burning the mixture of hydrated EGR and the air-fuel mixture in a combustion chamber of the engine E.

Although the present invention has been described herein with respect to a specific illustrative embodiment, the foregoing description is intended to be illustrative, and not restrictive. Those skilled in the art will realize that many modifications of the preferred embodiment could be made which would be operable. All such modifications, which are within the scope of the claims, are intended to be within the scope and spirit of the present invention.

I claim:

1. An exhaust treatment apparatus for a vehicle, said apparatus comprising:

A main tank housing having a hollow tank chamber formed therein, said tank housing configured and adapted to hold a fluid solution in said tank chamber, said main tank housing  
5 having an intake port therein to permit addition of said fluid solution into said tank chamber and an outlet port formed therein to allow passage of an EGR mixture outwardly from said tank chamber;

An exhaust pipe which is connected to said main tank housing for connecting to an exhaust system of a vehicle, said exhaust pipe having a passage formed therethrough to  
10 permit the flow of exhaust gas through said exhaust pipe; and

an EGR pipe branching off of the primary exhaust pipe within the main tank housing, said EGR pipe having a proximal end attached to and in fluid communication with the primary exhaust pipe, and a distal end opposite said first end and disposed in said tank chamber of said main tank housing, said distal end of said EGR pipe having an outlet which  
15 is open to said tank chamber and adapted to be immersed in said fluid solution during use.

2. The exhaust treatment apparatus of claim 1, wherein said exhaust pipe extends through said tank housing, and is situated in the tank chamber so as to be at least partially immersed in said fluid solution during use.

20

3. The exhaust treatment apparatus of claim 1, further comprising a fluid level indicator attached to said tank housing.

4. The exhaust treatment apparatus of claim 1, wherein the exhaust pipe extends  
25 outwardly beyond the tank housing on two opposed sides of the tank housing.

5. The exhaust treatment apparatus of claim 1, wherein the exhaust pipe and the tank housing are integrally connected as a unitary body.

30 6. The exhaust treatment apparatus of claim 1, wherein the outlet of the EGR pipe is larger in diameter than the outlet port of the tank housing.

7. An exhaust emissions reduction system, comprising the exhaust treatment apparatus

of claim 1 and an insulated EGR tube for placement on a vehicle between the tank housing outlet port and an engine.

8. A method of operating a vehicle having an internal combustion engine, said method  
5 comprising the steps of:

passing hot exhaust gas which has been output from said internal combustion engine through an exhaust treatment apparatus comprising a tank housing having a hollow tank chamber formed therein and an exhaust pipe which is connected to said tank housing, wherein said tank chamber has a aqueous fluid solution therein, whereby heat from said  
10 exhaust pipe heats said aqueous fluid solution;

passing a portion of said exhaust gas through an EGR outlet pipe which branches off of said exhaust pipe and bubbling said exhaust gas portion through said heated aqueous fluid solution in said tank chamber to form a hydrated EGR mixture containing water vapor;

15 routing said hydrated EGR mixture outwardly from said exhaust treatment apparatus and to an intake portion of said engine through an EGR flow pipe; and

mixing said hydrated EGR mixture with intake air flowing into said intake portion of said engine.

20 9. The method of claim 8, wherein the aqueous fluid solution comprises an additive composition.

10. The method of claim 9, wherein the additive composition comprises a material selected from the group consisting of cerium carboxylate, copper naphthanate, copper acetate,  
25 and mixtures thereof.

11. The method of claim 8, further comprising a step of burning a fuel-air mixture containing said hydrated EGR mixture in a combustion chamber of said engine.



12. An exhaust treatment apparatus for a vehicle, said apparatus comprising:

a main tank housing having a hollow tank chamber formed therein, said tank housing configured and adapted to hold a fluid solution in said tank chamber, said main tank housing having an intake port therein to permit addition of said fluid solution into said tank chamber  
5 and an outlet port formed therein to allow passage of an EGR mixture outwardly from said tank chamber;

an exhaust pipe which passes through the tank chamber of said main tank housing for connecting to an exhaust system of a vehicle, said exhaust pipe having a passage formed therethrough to permit the flow of exhaust gas through said exhaust pipe, and

10 an EGR tube branching off of the primary exhaust pipe within the main tank housing, said EGR tube having a proximal end attached to and in fluid communication with the primary exhaust pipe, and a distal end opposite said first end and disposed in said tank chamber of said main tank housing, said distal end of said EGR tube being open to said tank chamber and adapted to be immersed in said fluid solution during use.

FIG-1

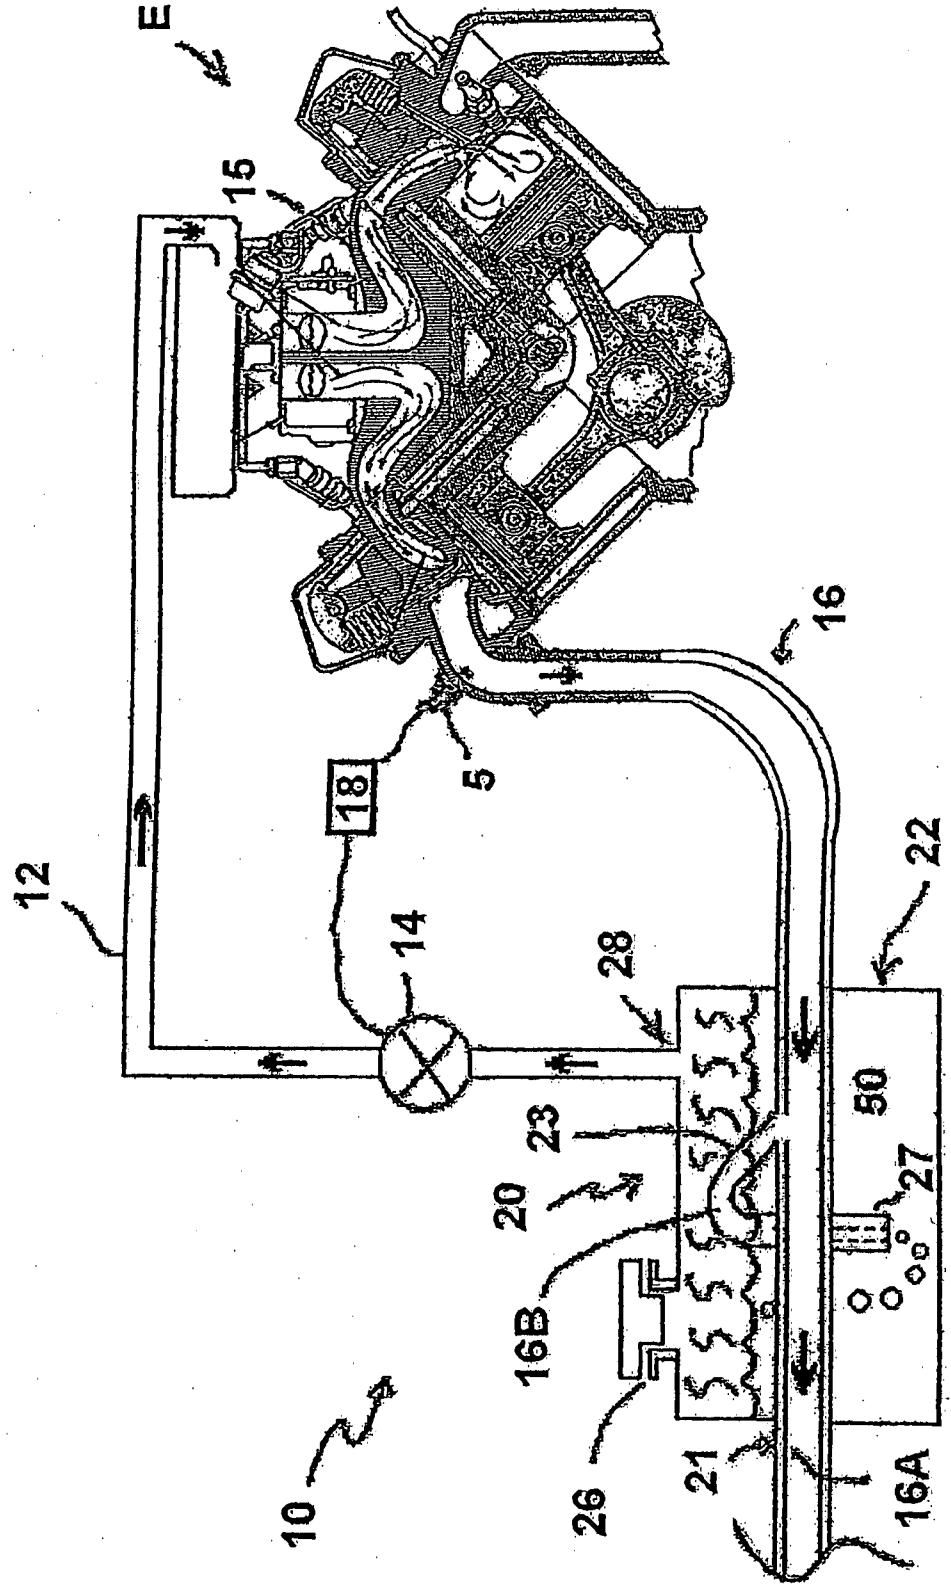


FIG - 2

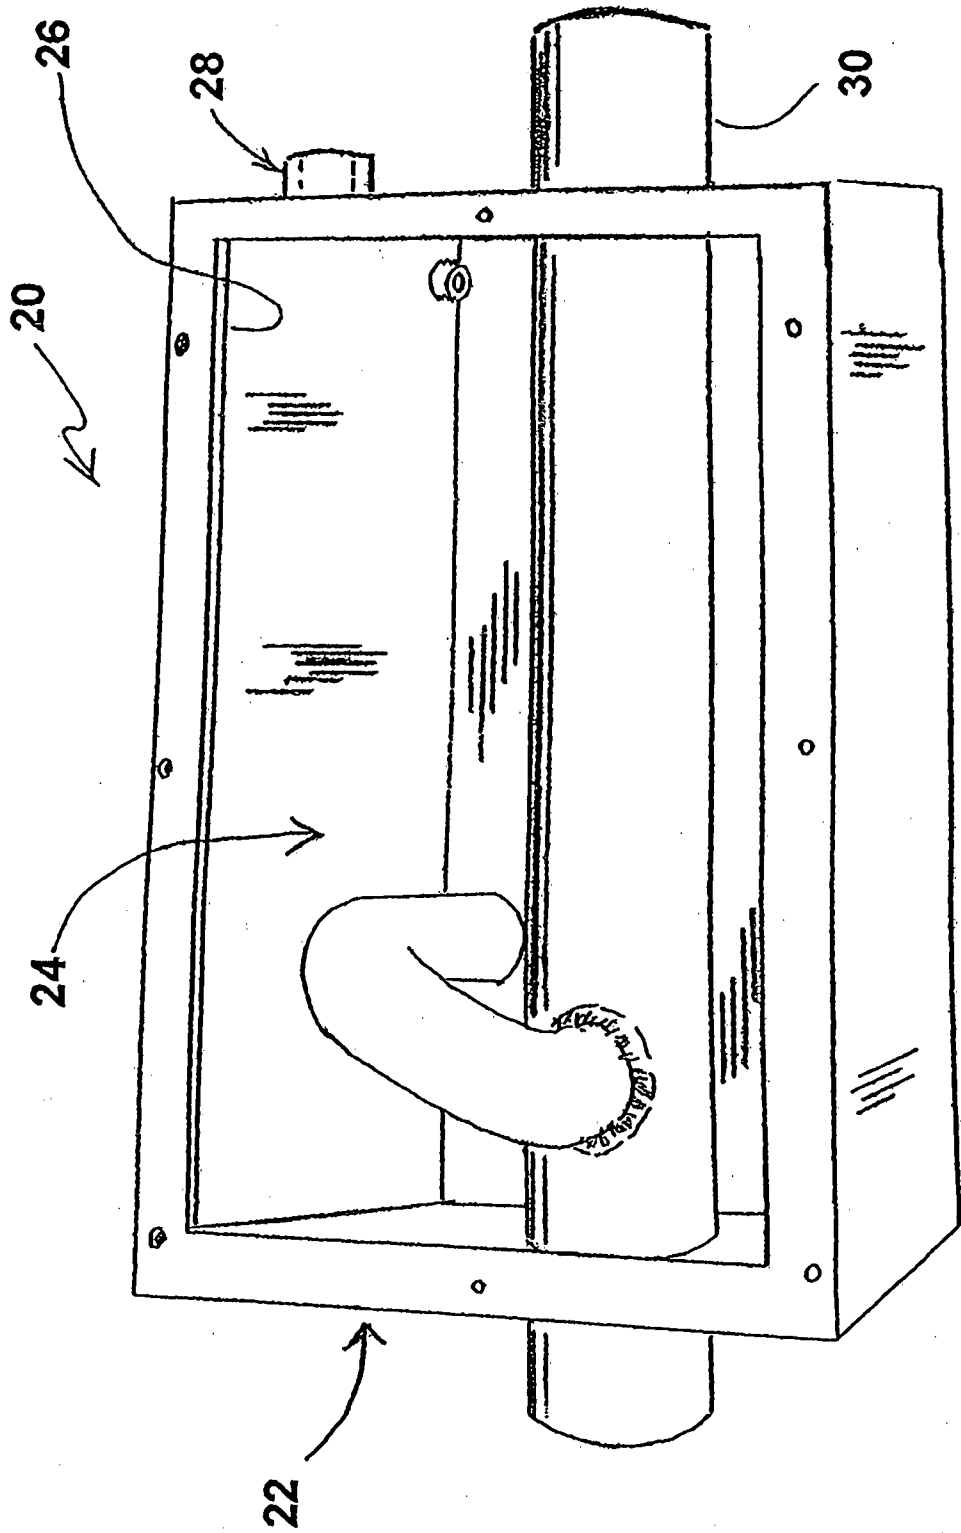


FIG-3

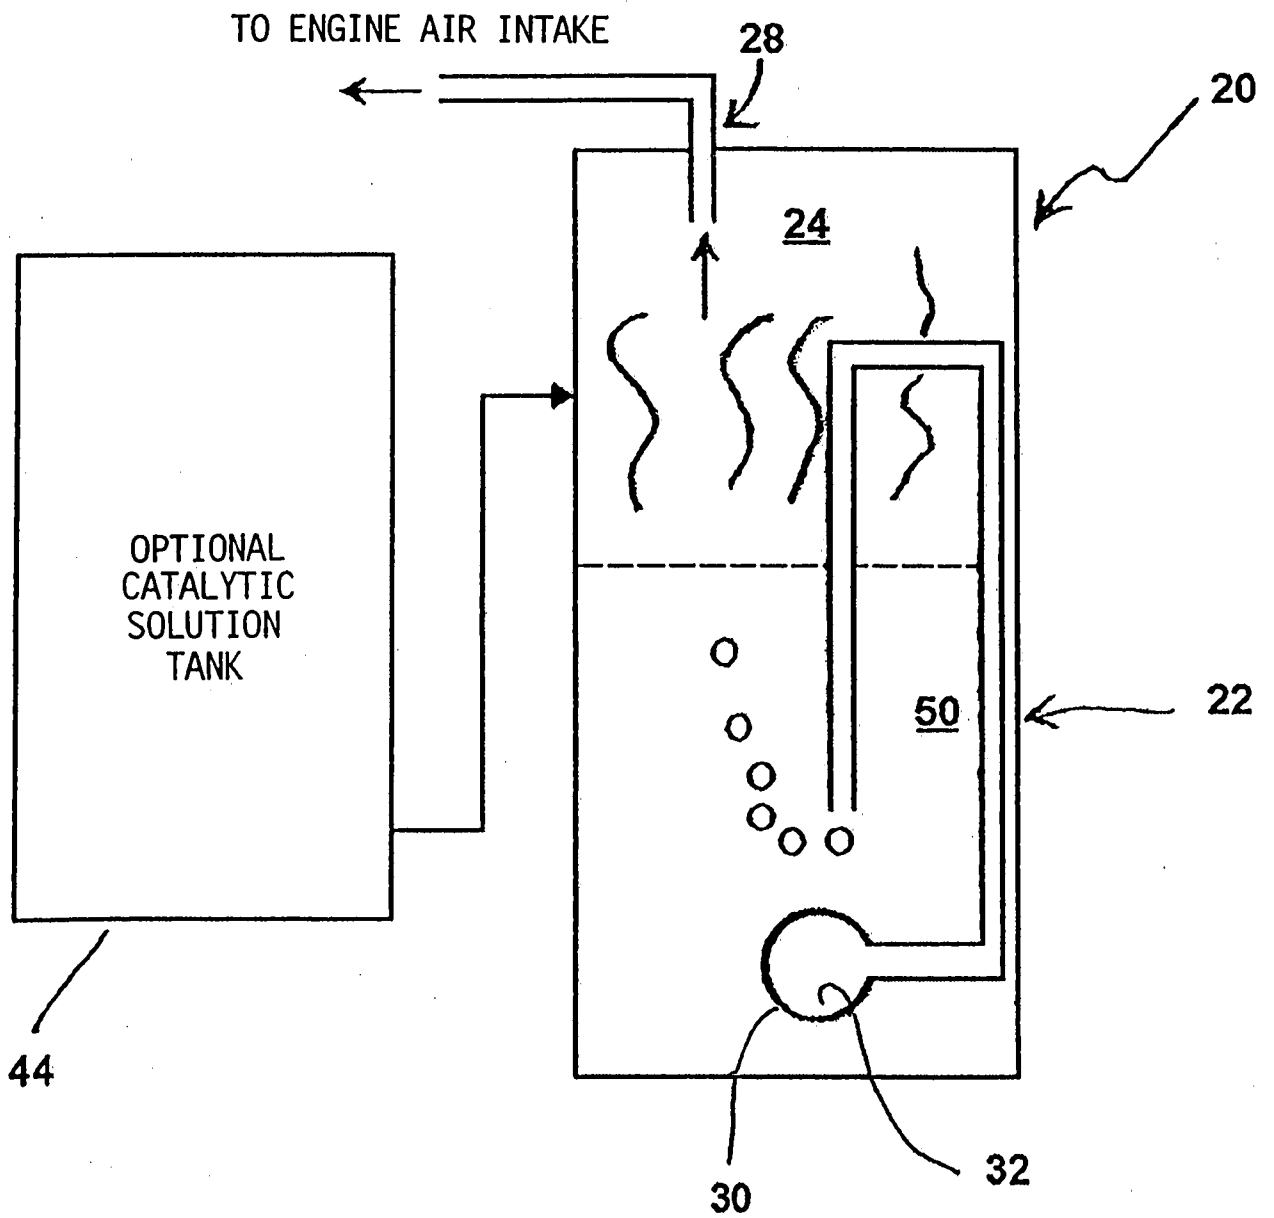


FIG - 4


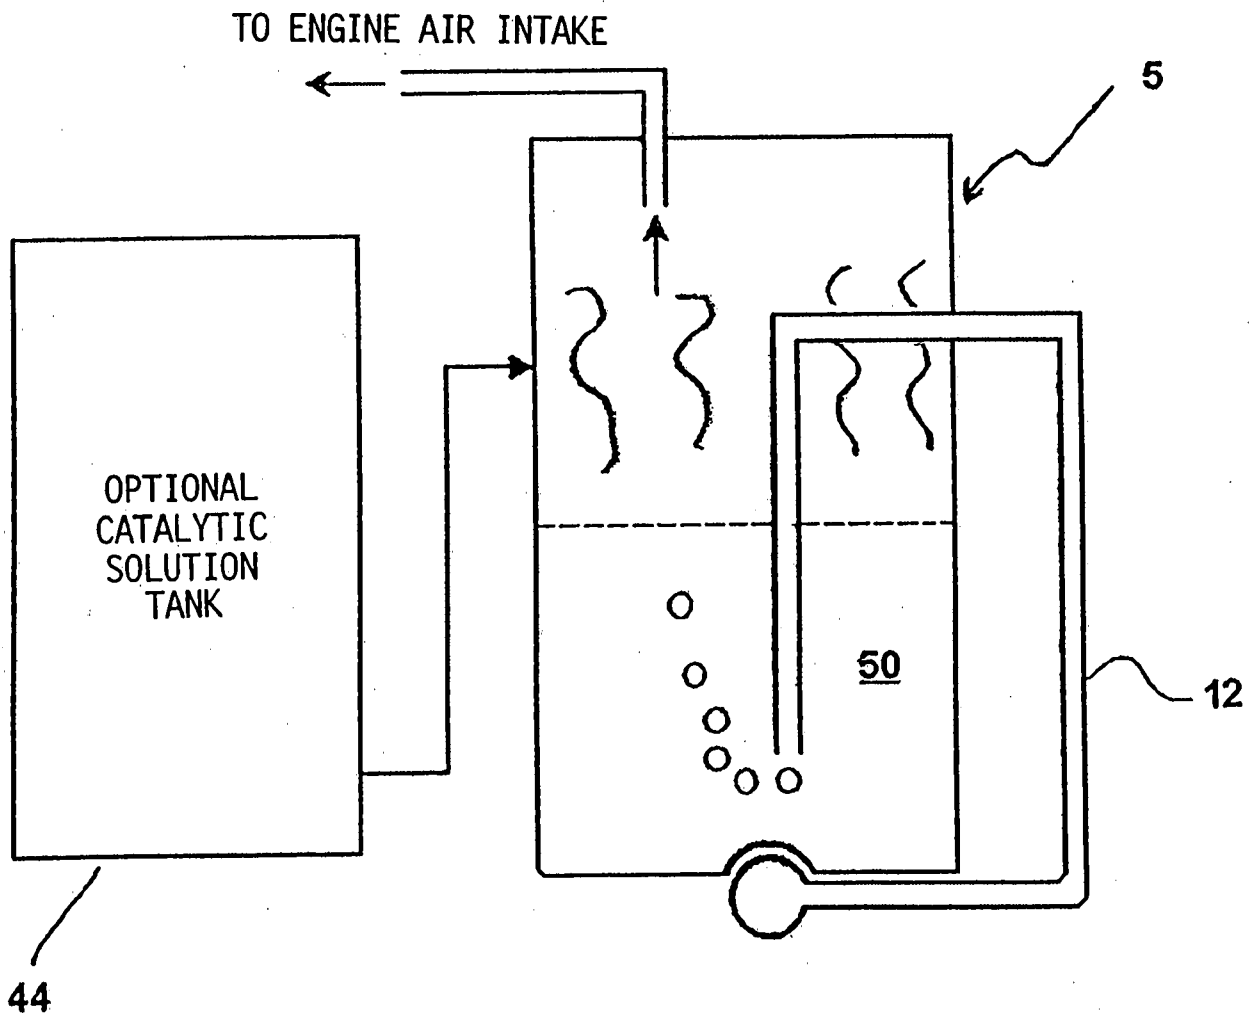


FIG. 5

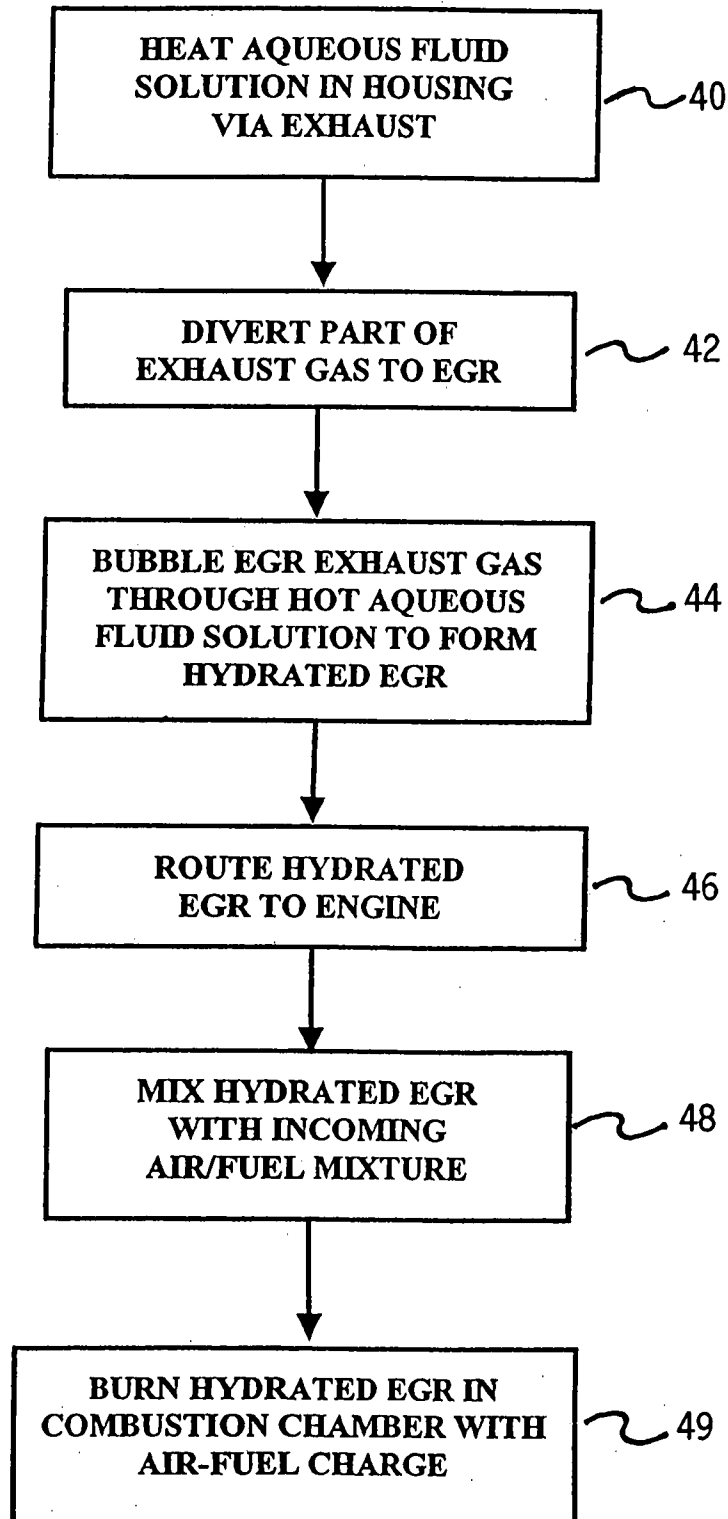

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2008/071772

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - F02B 47/02 (2008.04) USPC - 123/25B According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - F02B 47/02 (2008.04) USPC - 123/25B  Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PatBase		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 1,750,342 A (BAILEY) 11 March 1930 (11.03.1930) entire document	1-6, 8-9, 11-12 ----- 7, 10
Y	US 4,141,323 A (HART) 27 February 1979 (27.02.1979) entire document	7
Y	US 5,407,887 A (MIYASHITA et al) 18 April 1995 (18.04.1995) entire document	10
A	US 5,199,386 A (HUBBARD) 06 April 1993 (06.04.1993) entire document	1-12
A	US 4,166,435 A (KIANG) 04 September 1979 (04.09.1979) entire document	1-12
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/>		
* Special categories of cited documents:		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 12 October 2008	Date of mailing of the international search report 22 OCT 2008	
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774	