




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : D21F 3/08, D21G 1/02</p>	<p>A1</p>	<p>(11) International Publication Number: WO 98/56984</p> <p>(43) International Publication Date: 17 December 1998 (17.12.98)</p>
<p>(21) International Application Number: PCT/US98/12225</p> <p>(22) International Filing Date: 11 June 1998 (11.06.98)</p> <p>(30) Priority Data: 08/874,757 13 June 1997 (13.06.97) US</p> <p>(71) Applicant (for all designated States except US): STOWE WOODWARD COMPANY [US/US]; 8207 Valley Pike, P.O. Box 356, Middletown, VA 22645 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): PAASONEN, Jan, A. [FI/FI]; Auratie 2 A 15, FIN-04220 Kerava (FI). YLISELÄ, Seppo, A. [FI/FI]; Kantokuja 1, FIN-04440 Järvenpää (FI).</p> <p>(74) Agents: CANNON, James, R. et al.; Myers, Bigel, Sibley, & Sajovec, P.A., P.O. Box 37428, Raleigh, NC 27627 (US).</p>	<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: ROLL COVER AND METHOD OF MAKING THE SAME

(57) Abstract

A covered roll structure (10) employed in the manufacture of a paper machine roll (20) comprises a core roll having a substantially cylindrical outer surface, a sleeve (30) of removable material surrounding the core roll outer surface, a sleeve of compressible material surrounding the sleeve of removable material (30), and a sleeve (50) of polymeric material surrounding the sleeve (40) of compressible material and the sleeve of removable material (30).

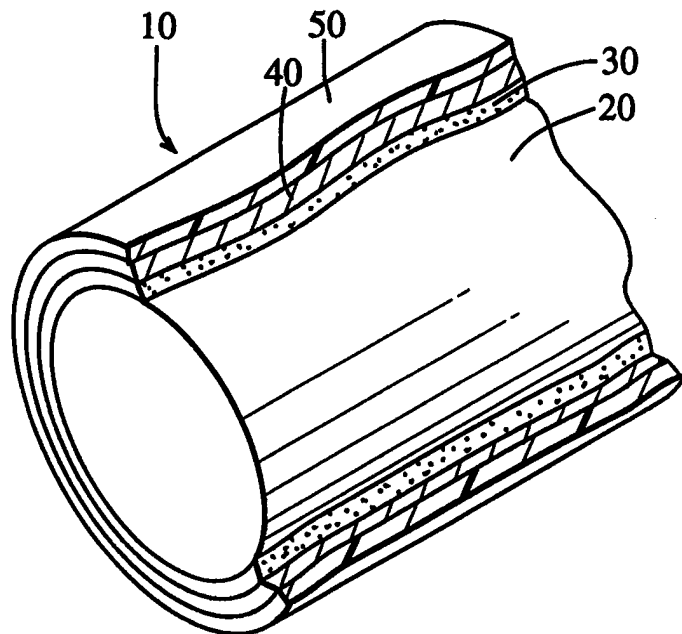

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ROLL COVER AND METHOD OF MAKING THE SAME

Field of the Invention

The present invention relates to covered rolls used in papermaking operations and methods of producing the same. More specifically, the invention relates to covered rolls used in papermaking operations which contain a polymeric coating material which is more easily removed from the roll upon
5 which it is processed.

Background of the Invention

Cylindrical rolls are utilized in a number of industrial applications, especially those relating to papermaking. Such rolls are typically employed in
10 demanding environments in which they can be exposed to high dynamic loads and temperatures. As an example, in a typical paper mill, rolls are used not only for transporting a fibrous web sheet between processing stations, but also, in the case of pressure and calendar rolls, for processing the web sheet itself
into paper.

15 Pressure rolls are included, *inter alia*, in the press section of a papermaking machine in which press felts apply pressure to a newly formed web and, through heat and pressure, remove moisture from the web. Typically, the web is conveyed on the press felt through a nip between two
20 pressure rolls, which tends to squeeze moisture from the web. In this environment, such pressure rolls are subjected to high dynamic loads due to the

-2-

extreme pressures and high paper speeds, and also to moisture. Accordingly, the rolls should be strong, tough, wear-resistant, and moisture-resistant. Also, often the rolls are "crowned" along the longitudinal axis for to reduce wrinkling of the web.

5 Calender rolls are often employed in the calendering section of a papermaking machine. Typically, a series of calender rolls are positioned to define a somewhat convoluted path for the paper web, with some of the rolls located closely enough to one another that they apply pressure to the paper web. Calendering is performed primarily to improve the smoothness and gloss
10 of the paper, each of which are affected by the number and surface hardness of the calender rolls and pressure applied thereby.

 Because papermaking rolls can have many different performance demands, and because replacing an entire metallic roll can be quite expensive, many papermaking rolls include a polymeric cover that surrounds the
15 circumferential surface of a metallic core. By varying the polymer employed as a cover, the designer can provide the roll with different performance characteristics as the papermaking application demands. Also, replacement of a cover over a metallic roll can be less expensive than the replacement of an entire metallic roll. The polymers used in the cover are most often thermosets
20 or thermoplastics.

 In addition, some rolls comprise a polymeric shell core. In these rolls, the shell is typically supported by an internal frame which includes hydraulic or pneumatic cylinders that press on the inner surface of the shell. In
25 manufacturing the cover shell for a roll, generally a polymer is applied to a core formed of metal or some other rigid material, cast or molded into the desired shape, and cured. The cover or shell is then removed from the mold core and bonded to a core or internal frame.

 Problems arise in the creation of polymer covers or shells due to the marked difference in thermal expansion between the polymeric material and the
30 material of the core. More specifically, the polymeric material typically has a coefficient of thermal expansion which is an order of magnitude greater than that of the metal. As a result, the sleeve formed from the polymeric material

-3-

tends to shrink, and thus closely clings or sticks to the mold core. Accordingly, it is often very difficult to remove the polymeric sleeve from the mold core. Additionally, due to the shrinkage of the polymeric material, undesirable residual stresses may form therein.

5 There remains a need in the art to provide polymeric covers and shells which are more easily removable from the core molds upon which they are made.

Summary of the Invention

In view of the foregoing, it is an object of the present invention to
10 provide a covered roll structure for use in papermaking which allows a sleeve of polymeric material formed thereon to be more easily removed from the roll structure.

It is another object of the present invention to provide a method of producing such a covered roll structure.

15 To this end and others, the present invention provides covered roll structures which allow the sleeve of polymeric material formed thereon to be more easily removed from roll structures than conventional polymeric sleeves. Once removed, the sleeve of polymeric material can be used to cover another core to form a roller or used as a shell by itself or with an internal frame.

20 In one embodiment, a roll structure is formed by first applying a removable material, preferably formed from an inorganic pre-impregnated powder, to a mold core having a cylindrical outer surface to form a sleeve of removable material. The removable material preferably has a melting point of at least about 100°F. Subsequently, polymeric material is applied over the
25 sleeve of removable material to form a sleeve of polymeric material. The sleeve of polymeric material is subsequently cured, and the removable material is dissolved or otherwise removed from the roll structure. As a result, the sleeve of polymeric material, which can serve as either a cover or a shell, can be readily removed from the roll structure.

30 In another embodiment, a sleeve of compressible material may be formed subsequent to the formation of the sleeve of removable material and

-4-

prior to the formation of the sleeve of polymeric material. Advantageously, the compressible material is able to contract during and after the curing process such that the polymeric material may be able to shrink to a greater extent than if removable material were present without the compressible material. This structure can reduce the amount of stress present in the cover or shell. If
5 desired, the sleeve of polymeric material may be readily removed from the roll structure and attached to a roll core or frame. Alternatively, the sleeve can be bonded to the mold core, which also serves as the core for the operational roll itself. The compressible material can also serve as a conduit for solvent if the
10 removable material is to be removed by dissolution with that solvent.

Brief Description of the Drawings

FIG. 1 is a perspective view of a covered roll structure employed in the manufacture of a paper machine roll.

15 FIGS. 2a-2c are cross-sectional views of a method of forming a roll for a papermaking machine which includes employing a sleeve of removable material and a sleeve of compressible material.

FIGS. 3a-3c are cross-sectional views of a method of forming a roll for a papermaking machine which includes employing a sleeve of removable material.

20 FIGS. 4a-4c are cross-sectional views of a method of forming a roll for a papermaking machine which includes employing a sleeve of compressible material.

Detailed Description of the Invention

The present invention will now be described more fully hereinafter, in
25 which preferred embodiments of the invention are shown. This invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, like numbers
30 refer to like elements throughout.

-5-

Referring now to the drawings, FIG. 1 illustrates a covered roll structure 10 of the present invention, which includes a core roll (i.e., a mold core) 20, a sleeve 30 of removable material, a sleeve 40 of compressible material, and a polymeric sleeve 50. The roll structure 10 may be used in forming the sleeve 50 of polymeric material (described in greater detail herein) which may eventually removed from the remainder of the roll structure 10. The polymeric sleeve 50 may be then be used alone as a shell structure, in combination with an internal core, or in combination with an internal support framework. The polymeric sleeve 50 may also be bonded over a roll structure different from the one it is made on, or may remain with and become attached to the core roll 20. In either instance, such roll structures may be used in a variety of applications in papermaking operations such as calendaring rolls, suction rolls, wireturning rolls, or a press rolls.

As illustrated, the core roll 20 has a substantially cylindrical outer surface. The core roll 20 may be fabricated from a number of various materials, such as cast iron, rolled and welded pipe, cast steel (e.g., POLYCAST™), ductile iron, chilled iron, stainless steel and alloys thereof, and bronze. Alloys of the above may also be used. In addition, a base coat of fiberglass or epoxy is commonly included. If the polymer sleeve 50 is to remain attached to the core roll 20, it is preferred that the core roll 20 be formed of cast iron, chilled iron, ductile iron or stainless steel.

The size of the core roll 20 can vary greatly, depending on the desired size of the polymer sleeve 50. For example, the core roll can have a diameter ranging from about 2 to about 60 inches, and a length ranging from about 5 to about 30 feet.

Referring still to FIG. 1, a sleeve 30 of removable material surrounds the outer surface of the core roll 20. As used herein, "removable material" refers to material that is added to the core roll 20 or other underlying support substrate which may be displaced from the core roll 20 to leave a void space in the volume formerly occupied without first removing the overlying polymeric sleeve 50. As a result, the polymeric sleeve 50 may be more easily removed from the core roll 20.

The removable material preferably comprises a heat resistant inorganic pre-impregnated powder, such as a ceramic or metallic powder, and more preferably comprises such a powder that can be dissolved with an aqueous solvent. For the purposes of the invention, the term "aqueous solvent" is to be broadly construed to include water in the form of, for example, tap water, distilled water, and mixtures thereof. The aqueous solvent may also include a number of appropriate additives such as, for example, buffering agents. The heat resistant inorganic pre-impregnated powder typically includes an inorganic core binder, an inorganic filler, water, and surface active agents. In particular, the removable material preferably includes one or more low melting eutectic salts or alloy.

Alternatively, the removable material can comprise an organic material, such as polyacrylate, polyacrylamide, starch, or polyvinyl alcohol, each of which are water-soluble polymers. These can be used unfilled or filled with a particulate filler, such as sand, which the polymer bonds in a desired configuration. The addition of water causes the polymer to dissolve.

Preferably, the removable material has a melting temperature ranging from at least about 70°F to about 500°F or higher, and more preferably from about 100°F to about 450°F. It is desirable that the removable material be able to withstand these temperatures without melting or otherwise breaking down in order to remain in place as molten polymeric material is applied.

Also, it is preferred that the removable material have a relatively low thermal expansion rate. This enables the removable material to maintain its circumferential stability at polymer processing temperatures.

The sleeve 30 of removable material may be employed in various thicknesses, preferably from about 1/16 to about 1 inch. Preferably, the ratio of the thickness of the circumference of the core roll 20 to the sleeve 30 of removable material ranges from about 0.02 to about 1.

Those skilled in the art will recognize that a number of techniques may be used to apply removable material to core roll 20. For example, a trowel may be used to spread removable material onto the core roll 20. Alternatively, the removable material may be extruded onto the core roll 20.

As shown in FIG. 1, the sleeve 40 of compressible material surrounds the sleeve 30 of removable material. The term "compressible material" refers to material which compresses when polymeric material shrinks during cooling. As a result, residual stress formation may be minimized in the polymeric sleeve

5 50.

The compressible material may be formed from a number of components, including various thermoplastic and thermoset materials such as, for example, polyester, polyamide, para-amide, polyurethane or butadiene. Additional filler materials, such as mineral or metal material, may also be

10 included in sleeve 40. The compressible material preferably has a modulus of elasticity ranging from about 145 psi to about 14,500 psi, and more preferably from about 145 psi to about 4,000 psi. The sleeve of compressible material 40 has a preferred thickness ranging from about 1/16 to about 1 inches such that the ratio of its thickness to the circumference of the core roll ranges from about

15 0.02 to about 1. In some embodiments, it is preferred that the compressible material be sufficiently porous to allow solvent to pass therethrough and dissolve the sleeve 30 of removable material.

Referring still to FIG. 1, the sleeve 50 of polymeric material surrounds the sleeve 40 of compressible material. A number of polymers may be used in

20 sleeve 50, including, for example, thermoplastic and thermosetting polymers such as polypropylene, polyether sulfone, polyetheretherketone, epoxy, polyurethane, polyimide, and cyanate resins, and copolymers, mixtures and blends thereof. The sleeve 50 of polymeric material preferably has a modulus of elasticity ranging from about 200,000 psi to about 30×10^6 psi, and a

25 preferred thickness ranging from about 1/8 to about 1 inches. The ratio of the sleeve 50 of polymeric material to the circumference of the core roll 20 preferably ranges from about 0.03 to about 1. The polymers may contain particulate fillers and/or fibers, such as glass, talc or other minerals, or the

like.

30 FIGS. 2a-2c schematically illustrate a method for forming a roll structure 10 for a papermaking machine in accordance with the present invention. As shown in FIG. 2a, removable material is first applied to core

-8-

troweling, extruding, overlaying, or the like) the removable material onto the cylindrical surface of the core roll 20. If desired, the sleeve 30 of removable material may be further treated by an appropriate technique, such as with a mold release compound.

5 After the removable material is applied to the core structure, compressible material is applied to the core roll 20 to form the sleeve 40 (FIG. 2a). The compressible material is typically applied to the core roll 20 by a trowel or extrusion technique. Subsequently, molten polymeric material is applied over the compressible material to form sleeve 50 and thus a covered
10 roll structure (FIG. 2b). The polymeric material may be applied utilizing any appropriate techniques which are known to the skilled artisan. For example, the sleeve 50 of polymeric material may be formed by extrusion, static casting, centrifugal casting, molding, winding and the like. The polymeric material is applied until a pre-selected thickness (preferably between about 1/8 and 1
15 inches) is obtained.

 Subsequently, the sleeve 50 of polymeric material is cured. Typically, if the sleeve 50 is made of thermoset polymer this step is carried out by inserting the roll structure 10 in a oven or like apparatus which exposes the polymeric material to sufficient temperature and time conditions such that the
20 polymeric material becomes cured. Hardening can be carried out for other materials, such as thermoplastics, by simply allowing the polymeric material in molten form to cool. Preferably, heating is carried out at a temperature ranging from about 50°C to about 300°C, and more preferably from about 100°C to about 200°C. Curing preferably lasts in duration from about 1 to
25 about 60 hours, and more preferably from about 10 to about 40 hours, for thermoset materials. The curing step can also be employed under various pressure conditions, including a vacuum. Variations of the above processing conditions may be utilized as known by the skilled artisan according to differences in the types of materials used in sleeves 30, 40, and 50.

30 Subsequent to or concurrent with curing, the sleeve 50 is allowed to cool at a predetermined rate, preferably between about 0.1 °C/h. and about 3 °C/h. As the polymeric material sleeve 50 cools, it shrinks at a rate that is particular

to the polymeric material. This rate is typically much greater than the shrinkage for the underlying core 20 and sleeves 30 and 40. As a result, the polymer sleeve 50 constricts onto the compressible sleeve 40 (indicated by arrows in Fig. 2c).

5 Next, as illustrated in FIG. 2c, the sleeve 30 of removable material is removed from the roll 20. The sleeve 30 is preferably removed from the roll 20 by contacting the removable material with a solvent, preferably an aqueous solvent, which allows the removable material to be dissolved therein. The aqueous solvent is preferably applied to the polymeric material at a temperature
10 ranging from about 5°C to about 100°C. The removable material dissolved in the solvent may then be transported to an appropriate system which allows for the removable material to be separated from the aqueous solvent. As a result, the removable material may be reused.

As illustrated in FIG. 2c, the void space created by the shrinkage of the
15 compressible material and by the absence of the sleeve 30 of removable material allows the sleeve 50 of polymeric material to shrink in a radially inward direction (denoted by arrows). After cooling is completed, the sleeve 50 of polymeric material may be removed therefrom and placed on another core structure for use in papermaking. Alternatively, the sleeve 50 may be removed
20 from the roll 20 and supported internally to serve as a controlled crown roll. Also, the sleeve 50 may remain on core roll 20 and adhered thereto.

FIGS. 3a-3c represent another method of forming a roll structure for a papermaking machine in accordance with the invention. In this embodiment, removable material is applied to core roll 20 in a manner described above to
25 form sleeve 30 (FIG. 3a). After this step, polymeric material is applied over the sleeve 30 of removable material to form a sleeve 50 (FIG. 3b). The polymeric material 50 is then cured using techniques as set forth herein.

Subsequent to the curing step, the roll structure 10 is transported from the mold, and the sleeve 30 of removable material is removed from the roll 20
30 by using the techniques described herein (FIG. 3c). Despite shrinkage during cure, the sleeve 50 of polymeric material may be readily removed from the core roll 20 if so desired.

-10-

FIGS. 4a-4c illustrate another method of forming a roll structure 10 for a papermaking machine in accordance with the present invention. As shown in FIG. 4a, compressible material is first applied to core roll 20 to form sleeve 40 by employing the techniques described herein. After the compressible material is applied to the core structure, polymeric material is applied over the compressible material to form sleeve 50 and thus a covered roll structure (FIG. 4b). The polymeric material is applied by using the techniques set forth above.

The curing of the polymeric material is carried out in similar fashion to that described herein. As shown in FIG. 4c and elsewhere, the sleeve 50 of polymeric material contracts radially inward (see arrows). During curing, the compressible material advantageously absorbs stresses such that minimal residual stresses are formed in sleeve 50. Subsequent to curing, the sleeve 50 may be adhered to the core roll 20 by using, for example, an epoxy, or may be removed from the core roll 20.

In the specification and drawings, there have been disclosed typical preferred embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation of the scope of the invention being set forth in the following claims.

-11-

That Which is Claimed Is:

1. A covered roll structure employed in the manufacture of a paper machine roll, said structure comprising:
a core roll having a substantially cylindrical outer surface;
a sleeve of compressible material surrounding said core roll outer
5 surface;
a sleeve of removable material surrounding said sleeve of compressible material; and
a sleeve of polymeric material surrounding said sleeve of compressible material and said sleeve of removable material.
- 10 2. The covered roll structure according to Claim 1, wherein the removable material comprises an inorganic material.
3. The covered roll structure according to Claim 1, wherein the removable material has a melting point ranging from about at least 70°F to about 500°F.
- 15 4. The covered roll structure according to Claim 1, wherein the polymeric material is selected from the group consisting of polypropylene, polyethersulfone, polyetherketone, epoxy, polyimide, and polyurethane.
5. The covered roll structure according to Claim 4, wherein said polymeric material includes fiber or particulate fillers.
- 20 6. The covered roll structure according to Claim 1, wherein the polymeric material has a modulus of elasticity ranging from about 20×10^4 psi to about 30×10^6 psi.
7. The covered roll structure according to Claim 1, wherein the compressible material is selected from the group consisting of polyester,
25 polyamide, para-amide, polyurethane and butadiene.

-12-

8. The covered roll structure according to Claim 1, wherein the compressible material has a modulus of elasticity ranging from about 145 psi to about 14500 psi.

9. The covered roll structure according to Claim 1, wherein the ratio of the thickness of said sleeve of removable material to the circumference of said core roll ranges from about 0.02 to about 1.

10. The covered roll structure according to Claim 1, wherein the ratio of the thickness of said sleeve of compressible material to the circumference of said core roll ranges from about 0.02 to about 1.

11. The covered roll structure according to Claim 1, wherein said core roll has a coefficient of thermal expansion ranging from about 5×10^{-6} to about 20×10^{-6} in/in $^{\circ}$ C.

12. A covered roll structure employed in the manufacture of a paper machine roll, said roll structure comprising:

15 a core roll having a substantially cylindrical outer surface;
a sleeve of removable material surrounding said cylindrical core roll, said removable material having a melting point of at least 70 $^{\circ}$ F; and
a sleeve of polymeric material surrounding said sleeve of removable material.

20 13. The covered roll structure according to Claim 12, wherein the removable material comprises an inorganic eutectic salt.

14. The covered roll structure according to Claim 12, wherein the polymeric material is selected from the group consisting of polypropylene, polyethersulfone, polyetheretherketone, epoxy, polyimide, and polyurethane.

-13-

15. The covered roll structure according to Claim 12, wherein said polymeric material has a modulus of elasticity ranging from about 20×10^4 psi to about 30×10^6 psi.

5 16. The covered roll structure according to Claim 12, wherein the ratio of said sleeve of removable material to the circumference of said core roll ranges from about 0.02 to about 1.

17. The covered roll structure according to Claim 12, wherein said cylindrical core roll has a coefficient of thermal expansion ranging from about 5×10^{-6} to about 20×10^{-6} in/in °C.

10 18. A roll for a papermaking machine, comprising:
a core roll having a substantially cylindrical outer surface;
a sleeve of compressible material surrounding said core roll outer surface, wherein said compressive material has a modulus of elasticity ranging from about 145 psi to about 14,500 psi; and
15 a sleeve of polymeric material surrounding said sleeve of removable material.

19. The roll according to Claim 18, wherein said polymeric material has a modulus of elasticity ranging from about 20×10^4 psi to about 30×10^6 psi.

20 20. The roll according to Claim 18, wherein the compressible material is selected from the group consisting of polyester, polyamide, para- amide, polyurethane and butadiene.

21. The roll according to Claim 18, wherein the polymeric material is selected from the group consisting of polypropylene, polyethersulfone,
25 polyetheretherketone, epoxy, polyimide and polyurethane.

22. The roll according to Claim 18, wherein the ratio of the thickness of said sleeve of compressible material to the circumference of said core roll ranges from about 0.02 to about 1.

23. A method of forming a roll for a papermaking machine, said
5 method comprising:

applying removable material to a core roll having a cylindrical outer surface to form a sleeve of removable material, wherein said removable material has a melting point ranging of at least 70°F;

10 applying polymeric material over said sleeve of removable material to form a sleeve of polymeric material and a covered roll structure;

curing said polymeric material; and
removing said sleeve of removable material.

24. The method according to Claim 23, further comprising the step of removing said sleeve of polymeric material from said covered roll structure.

15 25. The method according to Claim 23, wherein said curing step is carried out by heating said polymeric material at a temperature ranging from about 50°C to about 300°C.

26. The method according to Claim 23, wherein said curing step is carried out between about 1 and about 60 hours.

20 27. The method according to Claim 23, wherein said curing step is performed in a mold which surrounds said roll.

28. The method according to Claim 23, wherein the removable material comprises an inorganic material selected from the group consisting of quartz, sand, ceramic powder, glass beads, metallic powder or eutectic salts.

-15-

29. The method according to Claim 23 wherein the removable material comprises an organic material.

30. The method according to Claim 23, wherein said step of removing said removable material occurs by contacting said removable material
5 with an aqueous solvent.

31. The method according to Claim 23, wherein the polymeric material has a modulus of elasticity ranging from about 20×10^4 psi to about 30×10^6 psi.

32. The method according to Claim 23, further comprising the step
10 of inserting a core within said sleeve of polymeric material to form a roll structure.

33. A method of forming a roll structure for a papermaking machine, said method comprising:
applying compressible material to a core roll having a cylindrical outer
15 surface to form a sleeve of compressible material, wherein said compressible material has a modulus of elasticity from about 145 psi to about 14,500 psi;
applying polymeric material over said sleeve of resilient material to form a sleeve of polymeric material and a covered roll structure; and
curing said polymeric material.

20 34. The method according to Claim 33, wherein said curing step is carried out by heating said polymeric material at a temperature ranging from about 50° C to about 300° C.

35. The method according to Claim 33, wherein said curing step is carried out between about 1 and about 60 hours.

36. The method according to Claim 33, wherein said curing step occurs in a preformed mold.

37. The method according to Claim 33, wherein the compressible material is selected from the group consisting of polyester, polyamide, para-
5 amide, polyurethane and butadiene.

38. The method according to Claim 33, wherein the polymeric material is selected from the group consisting of polypropylene, polyethersulfone, polyetheretherketone, epoxy, polyimide and polyurethane.

10 39. The method according to Claim 33, further comprising the step of removing said sleeve of polymeric material from said covered roll structure.

40. A method of forming a roll for a papermaking machine, said method comprising:

15 applying removable material to a core roll having a cylindrical outer surface to form a sleeve of removable material, wherein said removable material has a melting point ranging of at least 70°F;

applying compressible material to the core roll to form a sleeve of compressible material, wherein said compressible material has a modulus of elasticity from about 145 psi to about 14,500 psi;

20 applying polymeric material over said sleeve of resilient material and said sleeve of removable material to form a sleeve of polymeric material and a covered roll structure;

curing said polymeric material;

removing said removable material from said covered roll structure; and

25 removing said sleeve of polymeric material from said covered roll structure.

41. The method according to Claim 40, wherein said removable material is removed by applying an aqueous solvent to the removable material.

-17-

42. The method according to Claim 40, wherein said curing step is carried out by heating the polymeric material at a temperature ranging from about 50°C to about 300°C.

43. The method according to Claim 40, wherein said curing step
5 occurs between about 1 and about 60 hours.

44. The method according to Claim 40, wherein the removable material comprises an inorganic material selected from the group consisting of quart, sand, ceramic powder, glass beads, metallic powder or eutectic salts.

45. The method according to Claim 40, wherein the compressible
10 material is selected from the group consisting of polyester, polyamide, para-
amide, polyurethane and butadiene.

46. The method according to Claim 40, wherein the polymeric material is selected from the group consisting of polypropylene, polyethersulfone, polyetheretherketone, epoxy, polyimide and polyurethane.

1/3

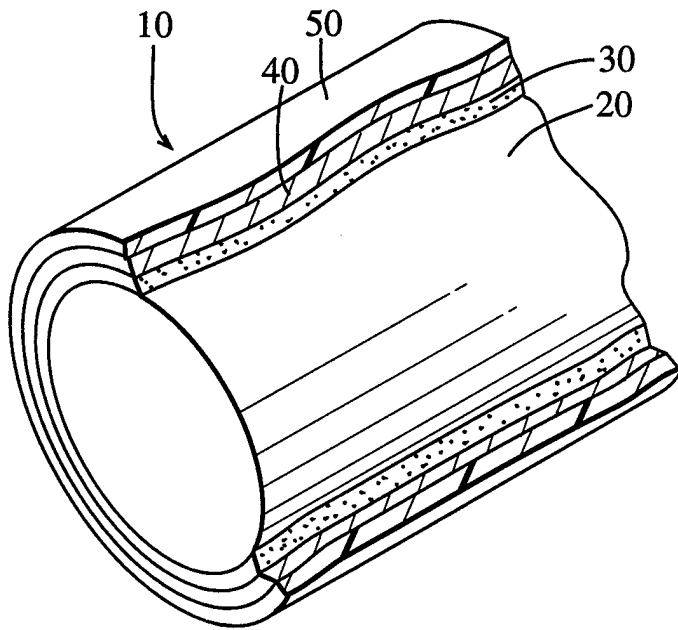


FIG. 1

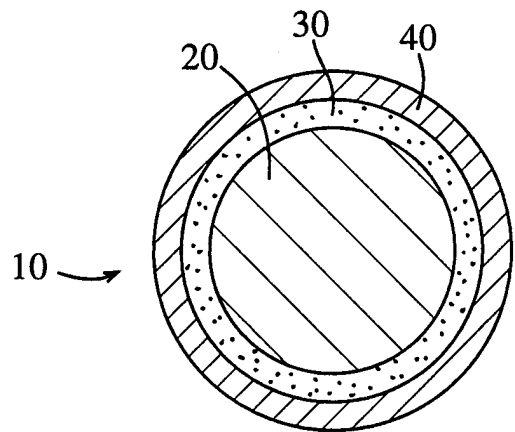


FIG. 2a

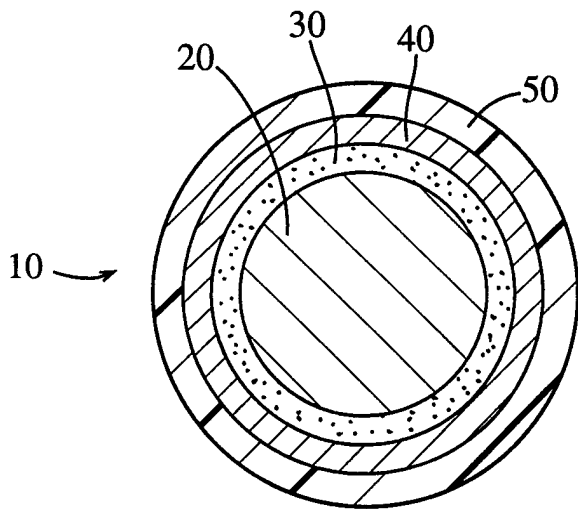


FIG. 2b

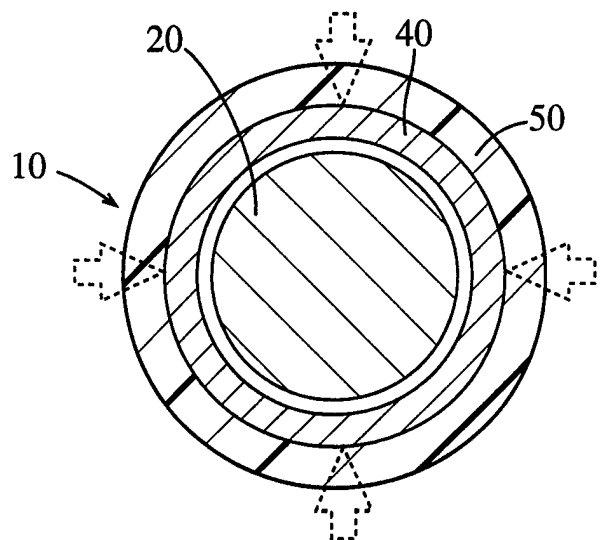


FIG. 2c

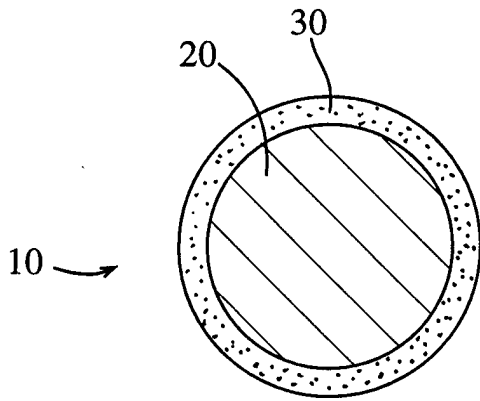


FIG. 3a

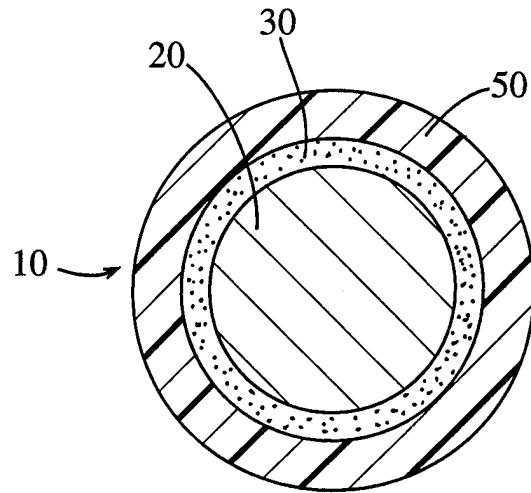


FIG. 3b

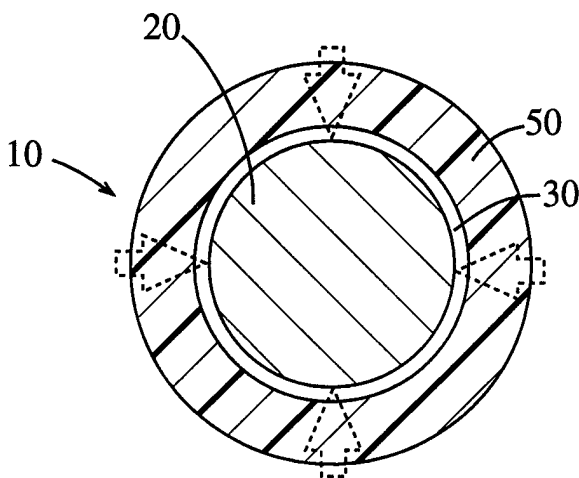


FIG. 3c

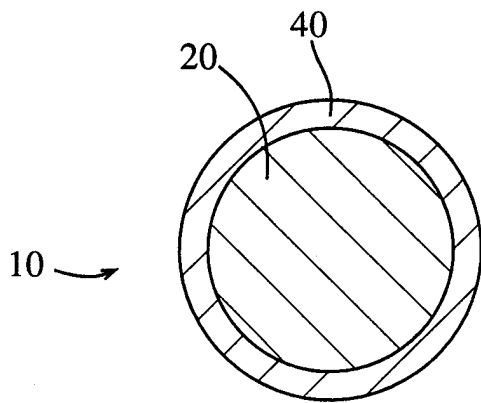


FIG. 4a

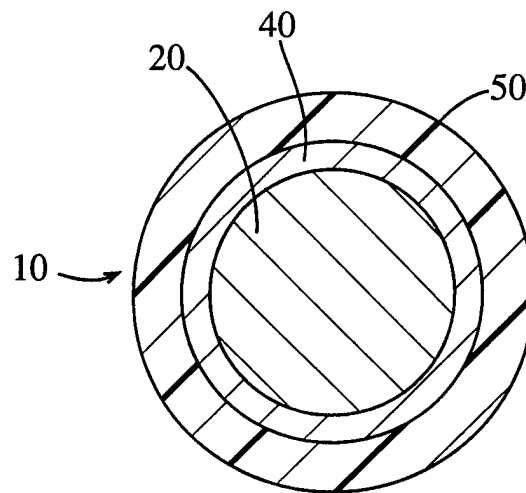


FIG. 4b

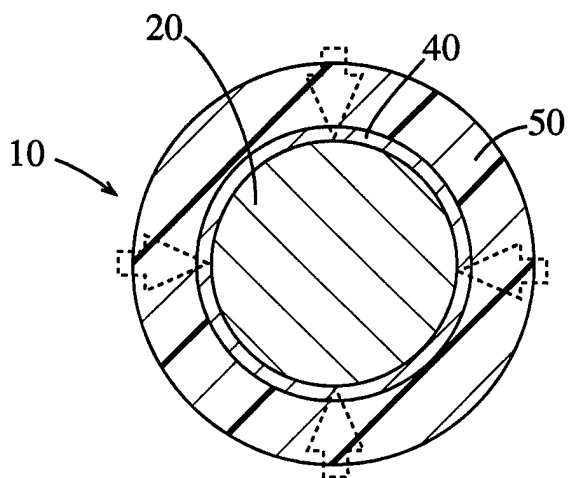


FIG. 4c

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/12225

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D21F3/08 D21G1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 D21F D21G F16C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 842 944 A (KUGE TSUKASA ET AL) 27 June 1989 see column X ---	18-22
P, X	WO 97 38162 A (PAASONEN JAN A ; STAUDENMEIER BERTRAM (DE)) 16 October 1997 see the whole document ---	18-22
A	US 4 551 894 A (BEUCKER ALBERT W) 12 November 1985 ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 015, no. 012 (C-0795), 10 January 1991 & JP 02 259186 A (ODAKA RUBBER KOGYO KK), 19 October 1990 see abstract -----	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

7 October 1998

Date of mailing of the international search report

15/10/1998

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Guisan, T

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/12225

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4842944 A	27-06-1989	JP 6080473 B	12-10-1994
		JP 61170769 A	01-08-1986
		JP 1946784 C	10-07-1995
		JP 6074804 B	21-09-1994
		JP 61171912 A	02-08-1986
		JP 61170770 A	01-08-1986
		JP 2077941 C	09-08-1996
		JP 7082272 B	06-09-1995
		JP 61173278 A	04-08-1986
		JP 1931431 C	12-05-1995
		JP 6058579 B	03-08-1994
		JP 61173279 A	04-08-1986
		JP 61174057 A	05-08-1986
		JP 2091647 C	18-09-1996
		JP 5007715 B	29-01-1993
		JP 61113083 A	30-05-1986
DE 3539377 A	22-05-1986		
WO 9738162 A	16-10-1997	AU 2173797 A	29-10-1997
US 4551894 A	12-11-1985	CA 1240190 A	09-08-1988
		JP 1457372 C	09-09-1988
		JP 60099091 A	01-06-1985
		JP 62054917 B	17-11-1987