



(51) International Patent Classification:

F41A 3/26 (2006.01) F41A 3/30 (2006.01)  
F41A 21/48 (2006.01) F41A 25/26 (2006.01)  
F41A 3/08 (2006.01)

(21) International Application Number:

PCT/US2018/046995

(22) International Filing Date:

17 August 2018 (17.08.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/546,888 17 August 2017 (17.08.2017) US  
16/104,823 17 August 2018 (17.08.2018) US

(72) Inventor; and

(71) Applicant: MILLER, Michael, D. [US/US]; 810 N. Main, Wichita, KS 67203 (US).

(74) Agent: BROWN, Mark; Law Office Of Mark Brown, LLC, 7225 Renner Road, Suite 201, Shawnee, KS 66217 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: FIREARM ASSEMBLY SYSTEM AND METHOD

(57) Abstract: A firearm configured for disassembly into stock, and receiver and barrel assemblies. Stock-receiver and receiver-barrel mounting assemblies facilitate assembling and disassembling the firearm. Modified components are adapted for placement on standard firearms and enable expedited assembly and disassembly. A firearm assembly method is also disclosed.

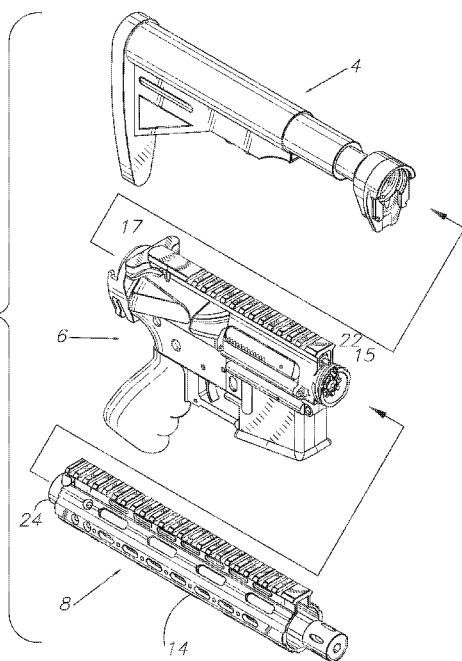


FIG. 4



## FIREARM ASSEMBLY SYSTEM AND METHOD

### CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority in U.S. Non-Provisional Application 16/104,823 filed August 17, 2018, as well as U.S. Provisional Patent Application No. 5 62/546,888 Filed August 17, 2017, which is incorporated herein by reference.

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

[0002] The present invention relates generally to firearm assembly and disassembly systems and methods, and more specifically to a system and method for the assembly and 10 disassembly of a firearm in a compact configuration for portability and customizability.

#### 2. Description of the Related Art

[0003] One drawback presented with the standard firearm gas system is that the gas tube runs down the length of the barrel from the gas block and then extends inside the AR upper receiver and into the gas key part of the firearm bolt. This gas tube eliminates the 15 ability to screw off a barrel set up or barrel nut that holds the barrel to the upper receiver.

[0004] This inability to screw off the barrel also means that for transportation purposes, the firearm is longer and bulkier than necessary

### BRIEF SUMMARY OF THE INVENTION

[0005] The present invention was developed to be a quick detachable AR platform 20 firearms system. The idea is to be able to quickly and safely take the barrel and handrail off a firearm and change it to a different length or caliber barrel system. The main problem with the standard AR gas system is that you have a gas tube that runs down the length of the barrel from the gas block and then extends inside the AR upper receiver and into the gas key part of the firearm bolt. This gas tube eliminates the ability to screw off a barrel set up or barrel nut 25 that holds the barrel to the upper receiver.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The drawings constitute a part of this specification and include exemplary embodiments of the present invention illustrating various objects and features thereof.

[0007] Fig. 1 is a right-side elevational view of a firearm (AR 15) in a fully- 30 assembled state and embodying an aspect of the present invention.

[0008] Fig. 2 is an exploded, elevational view thereof, particularly showing an upper receiver cover and a hand guard separated from a receiver assembly and a barrel assembly respectively.

-2-

- [0009] Fig. 3 is an exploded, elevational view thereof, particularly showing the stock, receiver and barrel assemblies separated.
- [0010] Fig. 4 is an exploded, perspective view of the separated stock, receiver and barrel assemblies.
- 5 [0011] Fig. 5 is an enlarged, upper, front, perspective view of a barrel nut.
- [0012] Fig. 6 is an enlarged, upper, front, perspective view of the barrel nut mounting a barrel lock and the barrel.
- [0013] Fig. 7 is a lower, front, exploded, perspective view of the barrel nut, the gas tube, the barrel lock and a barrel lock spring.
- 10 [0014] Fig. 8 is an upper, rear, perspective view of the barrel nut, with the barrel shown in hidden lines.
- [0015] Fig. 9 is an upper, rear, perspective view of the barrel nut with the barrel lock, the barrel lock spring and the barrel.
- [0016] Fig. 10 is an upper, front, perspective view of a charging handle and a gas  
15 tube.
- [0017] Fig. 10a is a fragmentary, enlarged, upper, front, perspective view of the charging handle and the gas tube, taken generally within circle 10a in Fig. 10.
- [0018] Fig. 11 is an upper, front, perspective view of a hand guard.
- [0019] Fig. 12 is an upper, front, perspective view of an upper receiver cover.
- 20 [0020] Fig. 13 is an upper, front, perspective view of a stock-receiver mounting assembly.
- [0021] Fig. 14 is an upper, front, exploded view of the stock-receiver mounting assembly.
- [0022] Fig. 15 is a lower, front, exploded view of the stock-receiver mounting  
25 assembly.
- [0023] Fig. 16 is an enlarged, upper, front perspective view of the stock-receiver mounting assembly, with the front and back separated.
- [0024] Fig. 17 is an enlarged, upper, rear, perspective of the stock-receiver mounting assembly, with the front and back separated.
- 30 [0025] Fig. 18 is an upper, rear, exploded, perspective view of the stock-receiver mounting assembly.

[0026] Fig. 19 is an enlarged, vertical, cross-sectional view of the stock-receiver mounting assembly, taken generally within circle 19 in Fig. 1.

[0027] Fig. 20a is an upper, front, perspective view of the AR 15, with the barrel assembly upside down and aligned for placement on the receiver assembly.

5 [0028] Fig. 20b is an upper, front, perspective view of the AR 15, with the barrel assembly upside down and placed against the receiver assembly.

[0029] Fig. 20c is an upper, front, perspective view of the AR 15 with the barrel assembly installed on the receiver assembly.

10 [0030] Fig. 21 is a perspective view of the disassembled AR 15 on a folding bag configured for transporting in a relatively compact configuration.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

### I. Introduction and Environment

[0031] As required, detailed aspects of the present invention are disclosed herein, however, it is to be understood that the disclosed aspects are merely exemplary of the  
15 invention, which may be embodied in various forms. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art how to variously employ the present invention in virtually any appropriately detailed structure.

[0032] Certain terminology will be used in the following description for convenience  
20 in reference only and will not be limiting. For example, up, down, front, back, right and left refer to the invention as orientated in the view being referred to. The words, “inwardly” and “outwardly” refer to directions toward and away from, respectively, the geometric center of the aspect being described and designated parts thereof. Forwardly and rearwardly are generally in reference to the muzzle and the butt of the firearm respectively. Said  
25 terminology will include the words specifically mentioned, derivatives thereof and words of similar meaning.

### II. Preferred Embodiment Firearm Assembly System

[0033] Referring to the drawings more detail, Fig. 1 shows an AR 15 firearm (AR 15)  
2, which embodies an aspect of the present invention. The assembly system and method are  
30 adaptable to a wide range of AR 15 variants, and other models of firearms. The firearm 2 generally comprises a stock assembly 4, a receiver assembly 6 and a barrel assembly 8, which can be readily disassembled to a relatively compact configuration, as shown in Figs. 3 and 4,

-4-

by disengaging a stock-receiver mounting assembly 10 and a receiver-barrel mounting assembly 12.

[0034] Fig. 2 shows an upper receiver cover 15 and a hand guard 14 removed to illustrate internal components of the receiver and barrel assemblies. The receiver includes a bolt 16, which is conventional to AR 15 firearms. A modified gas tube 18 includes front and rear sections 20, 22. The front section 20 extends from a conventional gas block 22, which diverts high-pressure gas from a barrel 23. The diverted gas is conveyed rearwardly to a barrel nut 24, and is further conveyed through the gas tube rear section 22 for driving the bolt 16 rearwardly against a recoil spring (not shown) in the stock assembly 4. The compressed recoil spring then pushes the bolt 16 forwardly to chamber another round. This operation is conventional with gas-powered automatic and semi-automatic firearms, including AR 15s. Figs. 3 and 4 show the firearm 2 disassembled into stock, receiver and barrel assemblies 4, 6, 8.

[0035] The modified AR 15 2 includes a modified charging handle 17, which is elongated compared to a conventional (OEM) charging handle and includes the gas tube rear section 22 therein. The gas tube rear section 22 extends forwardly from the charging handle front end. Alternatively, an adapter (not shown) with the configuration of the charging handle 17 front end can be mounted on a conventional AR 15 charging handle.

### III. Stock-Receiver Mounting Assembly 10

[0036] The stock-receiver mounting assembly 10 includes a forwardly-extending plug 26, which is received in a conventional bolt carrier 28 and reciprocates within the mounting assembly 10 as the firearm 2 cycles with each shot. The stock assembly 14 includes a conventional action spring and buffer assembly, which engage and return the reciprocating plug 26.

[0037] Figs. 13 and 14 show the stock-receiver mounting assembly 10 assembled and exploded respectively. The mounting assembly 10 generally includes a back 52 and a front 54, which are secured together by upwardly-extending tabs 56 received in downwardly-open slots 58. Retaining hooks 60 swing inwardly under pressure from compression springs 62, thus capturing corresponding flanges 64 in the mounting assembly back 52. Manually pressing the hooks 60 inwardly releases them from the flanges 64, enabling the back 52 to slide upwardly from the front 54 (Figs. 16, 17) for disconnecting the stock assembly 4 from the receiver assembly 6. As shown in Fig. 19, a plug lock 66 in the stock-receiver mounting

assembly back 52 is biased upwardly by a plug lock compression spring 68, which is retained in a threaded receiver 70 by a plug lock set screw 72. The stock-receiver mounting assembly back 52 also includes a buffer retaining pin 74 pushed upwardly by a compression spring 76, which is retained in a threaded buffer retaining pin hole 78 by a buffer retaining pin set screw 80.

#### IV. Receiver-Barrel Mounting Assembly 12

**[0038]** Figs. 5 and 6 show the barrel nut 24, including a generally cylindrical, tubular barrel nut body 30 with a front tab 32 including a gas tube receiver 34 and a gas tube connection housing 36, under the barrel lock 45, with a passage 38 coaxially aligned with the receiver 34. The barrel nut 24 includes a front end 40 with a smooth bore for receiving the rear end of the barrel 23, and a barrel nut rear end 42 with a coarse-threaded bore 43 for receiving a correspondingly coarse-threaded extension 44 extending forwardly from the receiver assembly 6. The barrel lock 45 (Figs. 6 and 7) includes a channel 46 receiving the gas tube connection housing 36 and a front end 47 with a gas tube passage 48. The barrel lock 45 can be slid forwardly on the barrel nut 24 by manually engaging barrel lock knobs 49 extending laterally from both sides, thereby compressing a barrel lock return spring 50 between the front tab 32 and the barrel lock front end 47 around the gas tube front section 20. The elongated charging handle 17 and the gas tube rear section 22 therein are accommodated by a bore 7 extending through the upper portion of the receiver assembly 6.

**[0039]** The receiver-barrel mounting assembly 12 facilitates quickly mounting and dismounting the barrel assembly 8 on the receiver assembly 6. Fig. 20a shows the assemblies 6, 8 aligned, with the barrel assembly 8 upside down. Fig. 20b shows the assemblies 6, 8 pushed together, whereby the rear end of the barrel 23 extends into the receiver coarse-threaded extension 44. The coarse threads are configured for securing the barrel assembly 8 and the receiver assembly 6 with approximately 180° of rotation therebetween. The mounting rotation movement is limited by a pin 84 in the rear end of the barrel assembly 8 (between the barrel 23 and the barrel nut 24) engaging a stop 82 formed on the coarse-threaded extension 44a (Fig. 12). Fig. 20c shows the barrel assembly 8 in its operating (shooting) position relative to the receiver assembly 6. The barrel assembly 8 is locked in this position by the barrel lock tabs 49, which snap forwardly into barrel lock tab slots 51 in the hand guard (rail) on both sides, thereby providing another security feature preventing relative rotation between the receiver and barrel assemblies 6, 8. To facilitate a tight,

-6-

threaded engagement, shims 86 can be placed within the barrel nut 24 (Fig. 9) and over the rear end of the barrel 23 whereby the threads are securely tightened when the barrel assembly 8 is properly aligned with the receiver assembly 6 and further rotation is blocked by the engagement between the stop 82 and the pin 84. The barrel nut 24 includes a gas flow  
5 adjustment screw 25 for adjusting the gas flow, e.g., less gas flow when a suppressor is used on the AR 15 2.

**[0040]** As shown in Fig. 21, the separated stock, receiver and barrel assemblies 4, 6, 8 can be placed in a suitable, foldable, multi-compartment carrying bag 88 for transportation in a relatively compact configuration. The carrying bag 88 can also receive one or more  
10 magazines 90, a scope, ammunition, a sling and other items, such as accessories and supplies.

**[0041]** Having described the preferred embodiments, it will become apparent that various modifications can be made without departing from the scope of the invention as defined in the accompanying claims. It is to be understood that while certain embodiments and/or aspects of the invention have been shown and described, the invention is not limited  
15 thereto and encompasses various other embodiments and aspects.

-7-

## CLAIMS

1. A firearm configured for disassembly into stock and receiver assemblies, which comprises:

5 a stock-receiver mounting assembly including a back mounted on the stock assembly and including a back engagement, and a front mounted on the receiver assembly including a front engagement;

said front and back engagements configured for disengagement for separating said stock and receiver assemblies; and

10 a locking mechanism having a locked position retaining said stock assembly on said receiver assembly and an unlocked position releasing said stock assembly from said receiver assembly for separation.

2. A firearm configured for disassembly into receiver and barrel assemblies, which comprises:

15 a receiver-barrel mounting assembly including a threaded extension extending from said receiver assembly;

a barrel nut mounted on said barrel assembly and including a threaded bore and configured for threadably receiving said threaded extension; and

20 a locking mechanism having a locked position retaining said receiver assembly on said barrel assembly and an unlocked position releasing said receiver assembly from said barrel assembly for separation.

3. A firearm configured for disassembly into stock, and receiver and barrel assemblies, which comprises:

25 a stock-receiver mounting assembly including a back mounted on the stock assembly and including a back engagement, and a front mounted on the receiver assembly including a front engagement;

said front and back engagements configured for disengagement for separating said stock and receiver assemblies; and

a receiver-barrel mounting assembly including vehicle including a navigation system and a working component configured for performing a site-specific application.



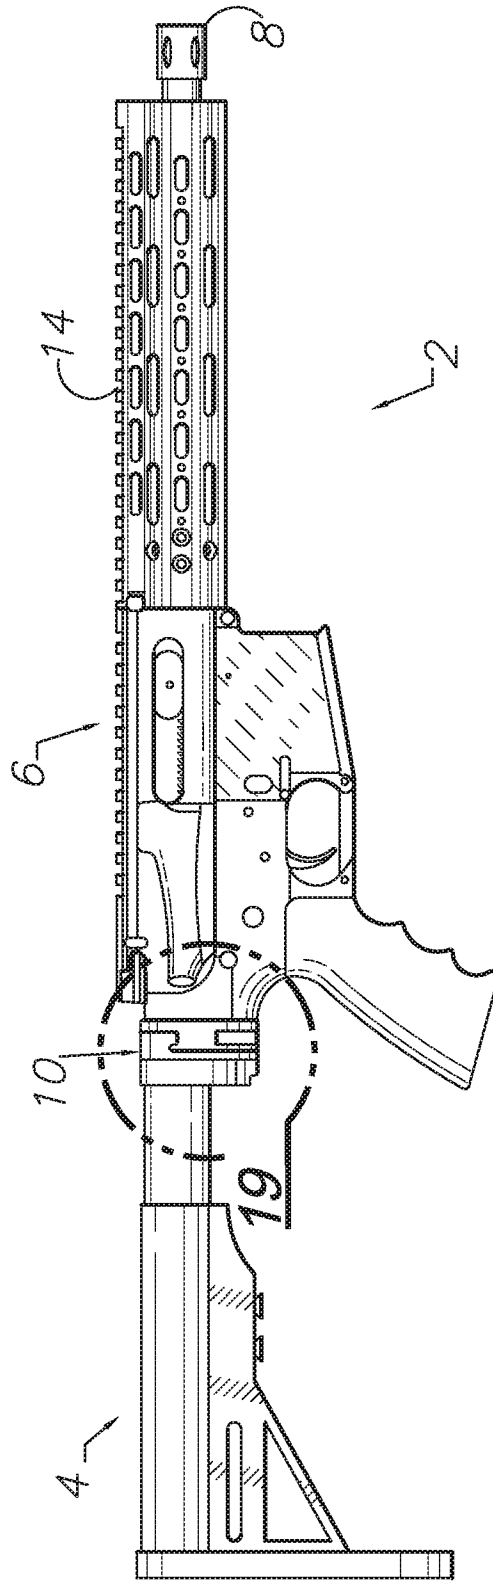


FIG. 1



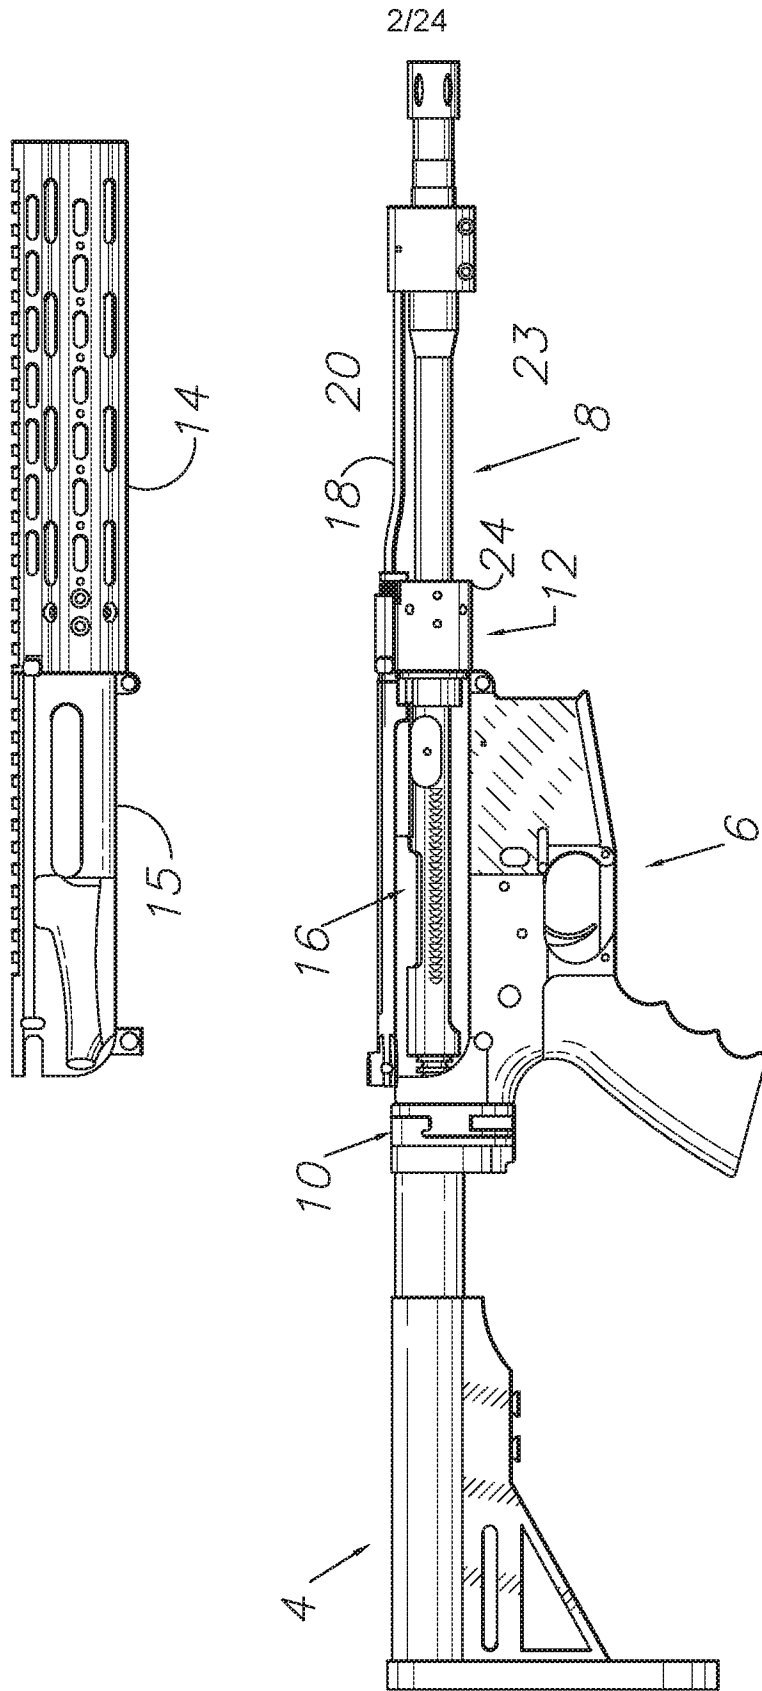



FIG. 2

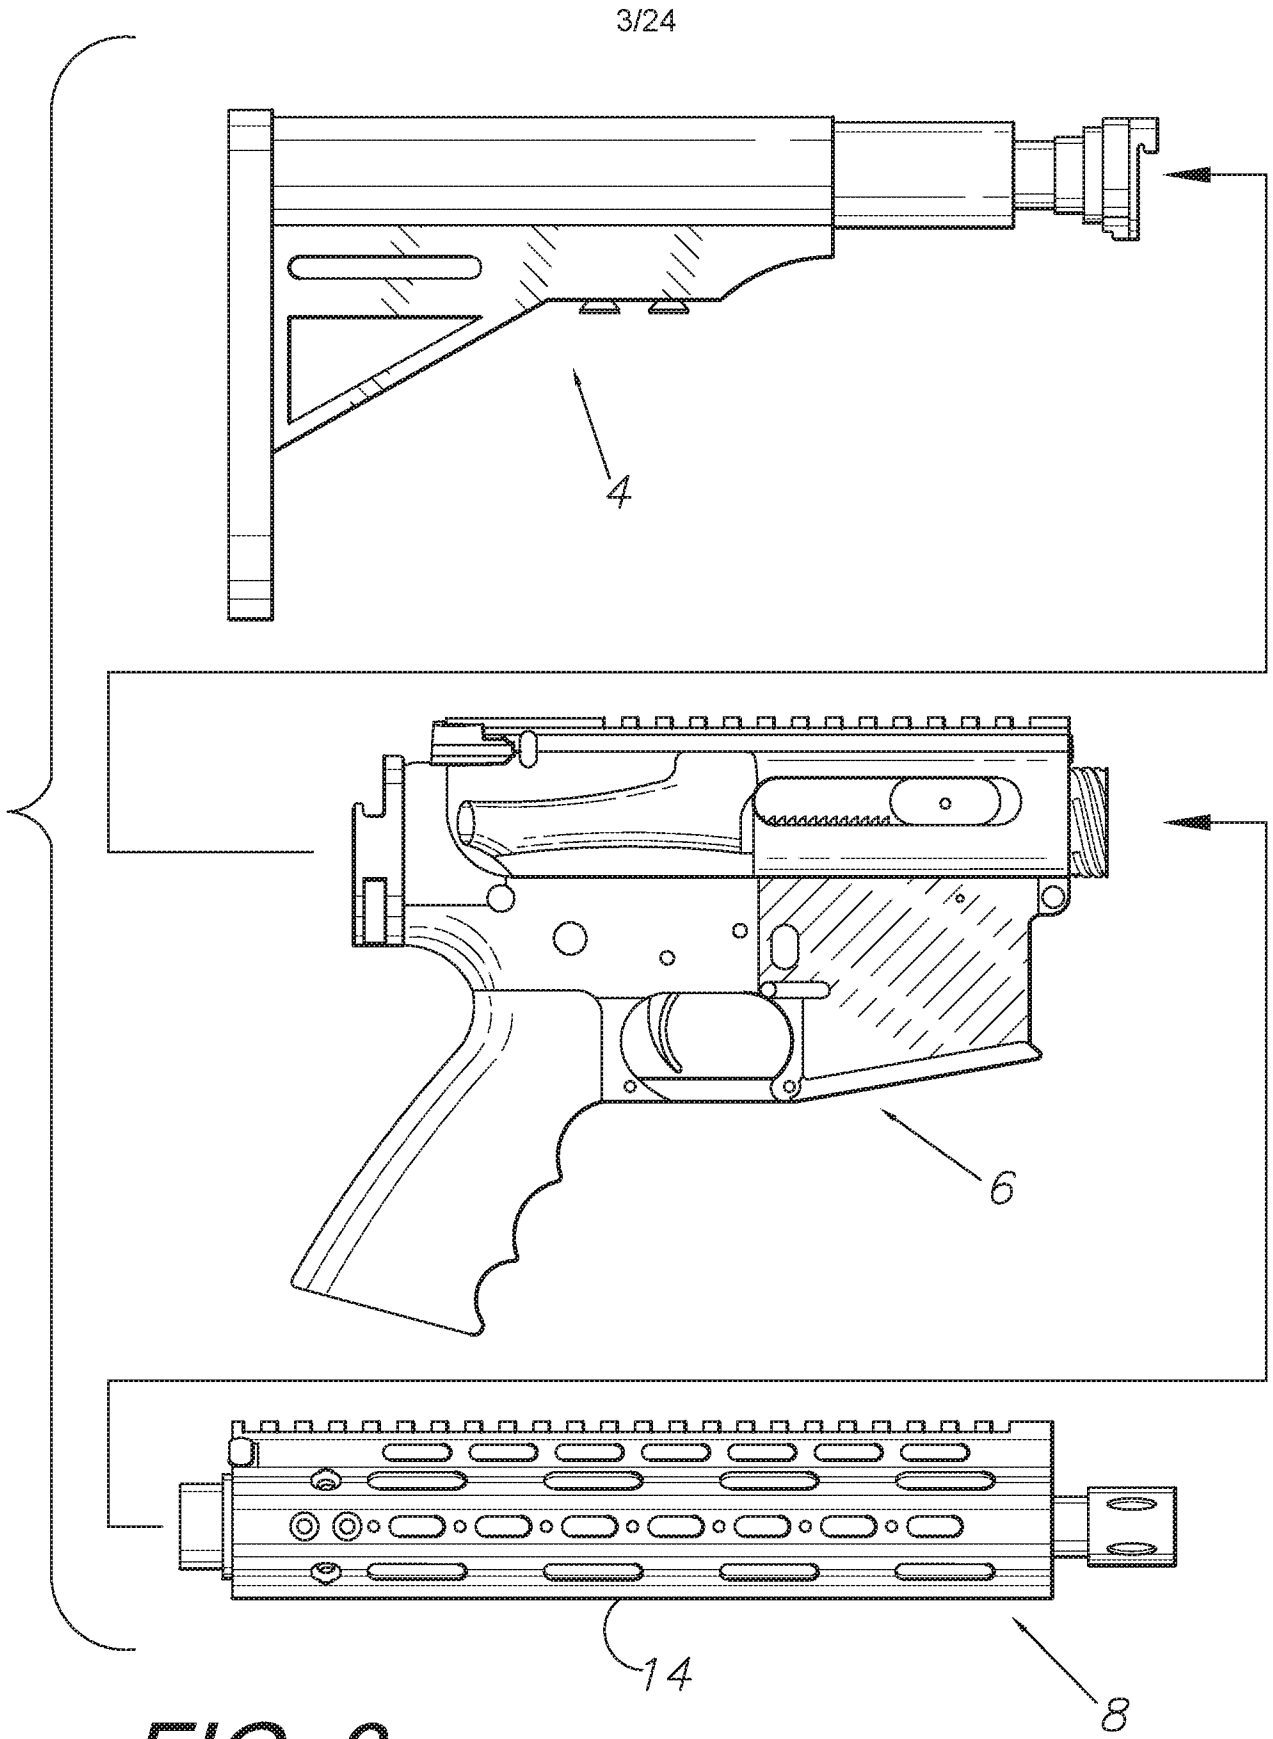

**FIG. 3**

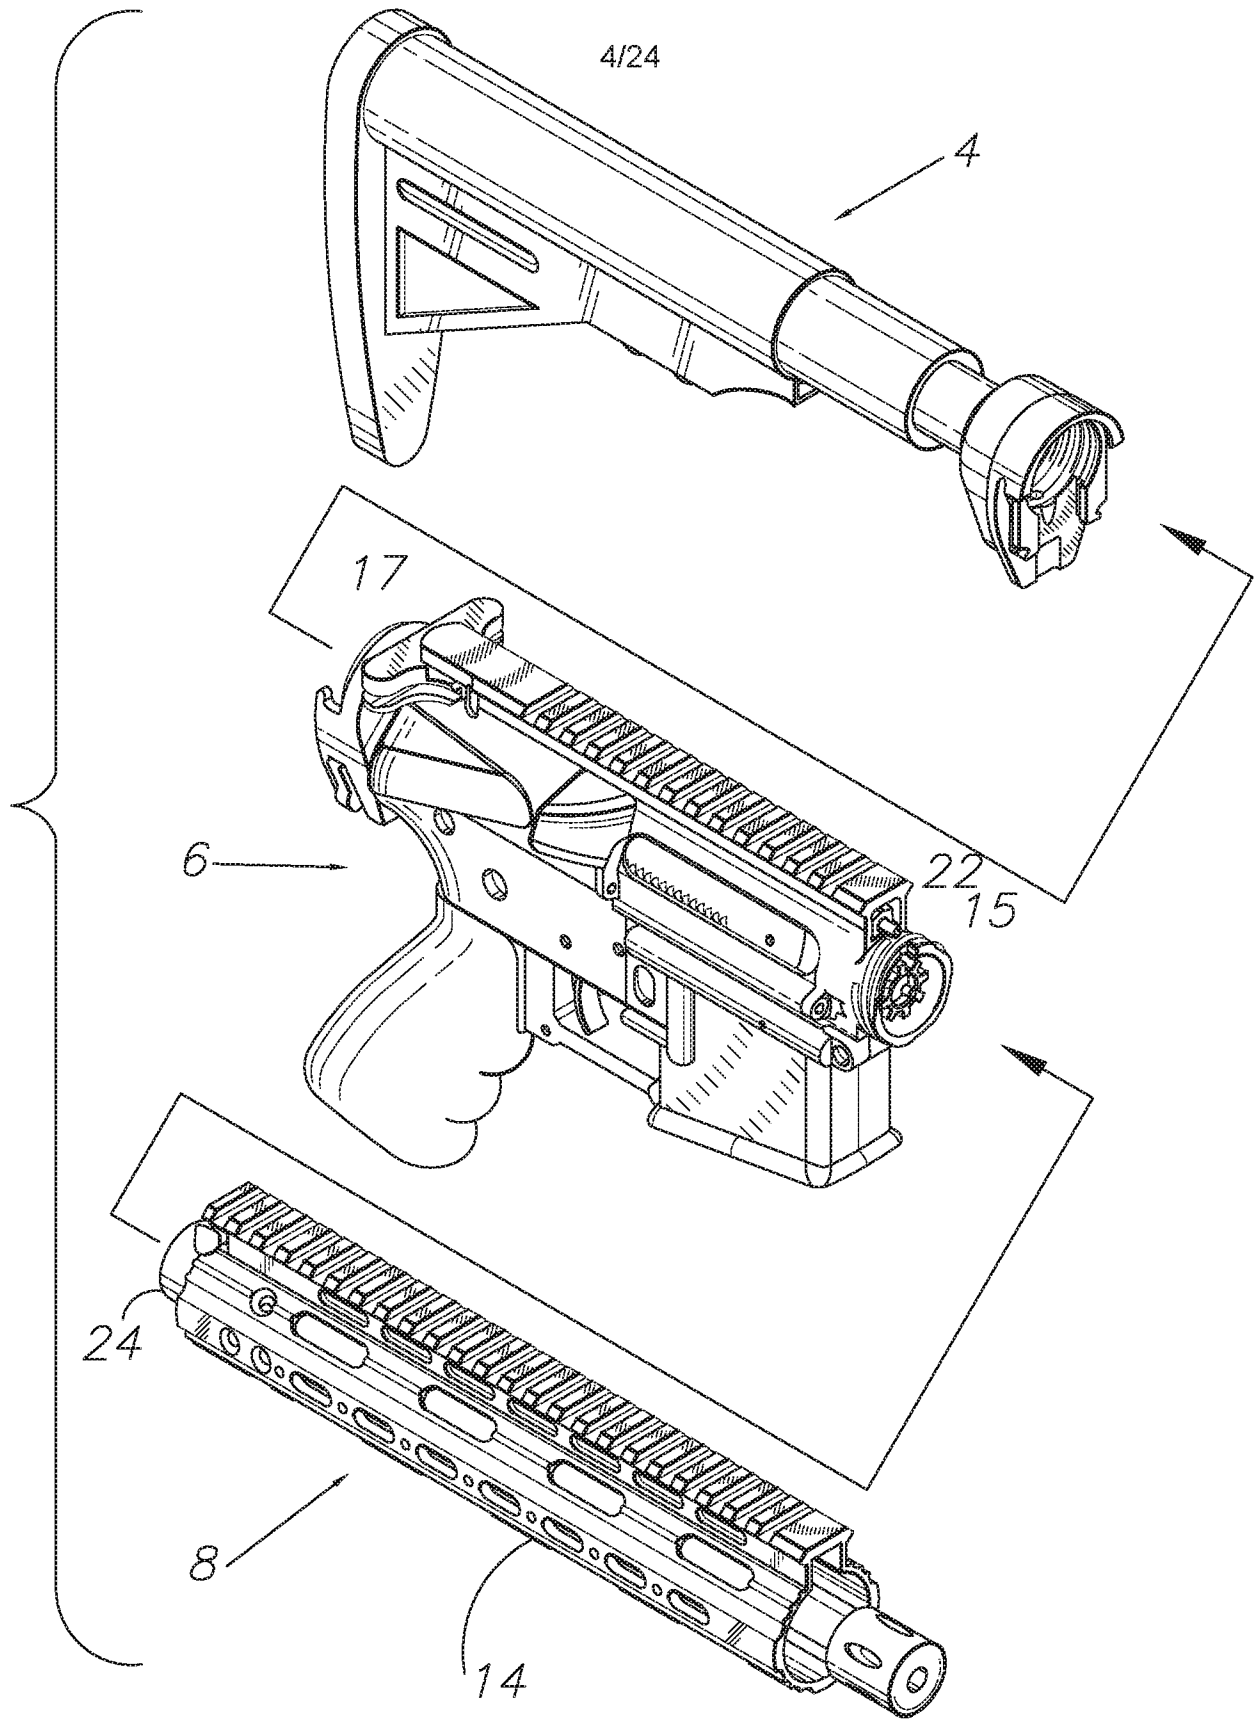

**FIG. 4**

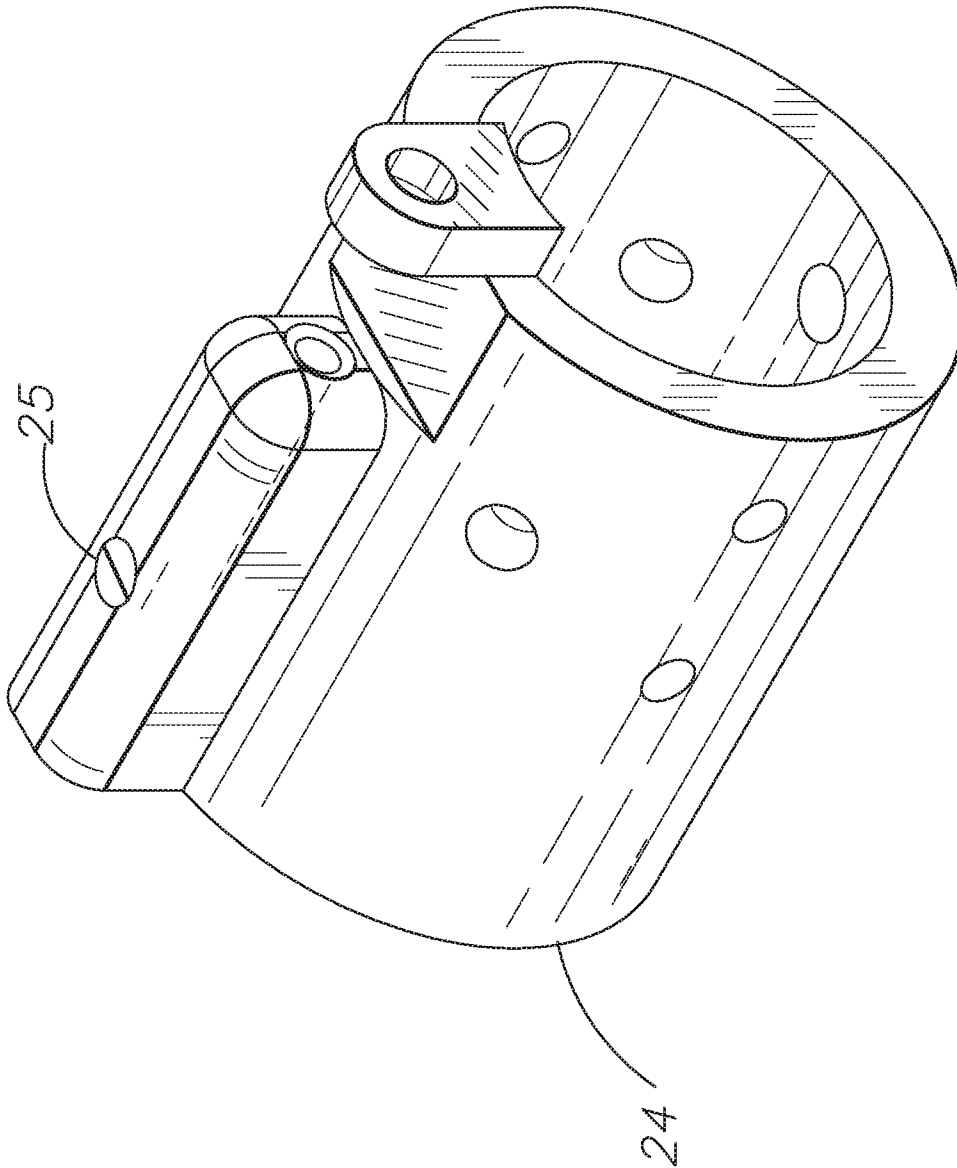

**FIG. 5**

6/24


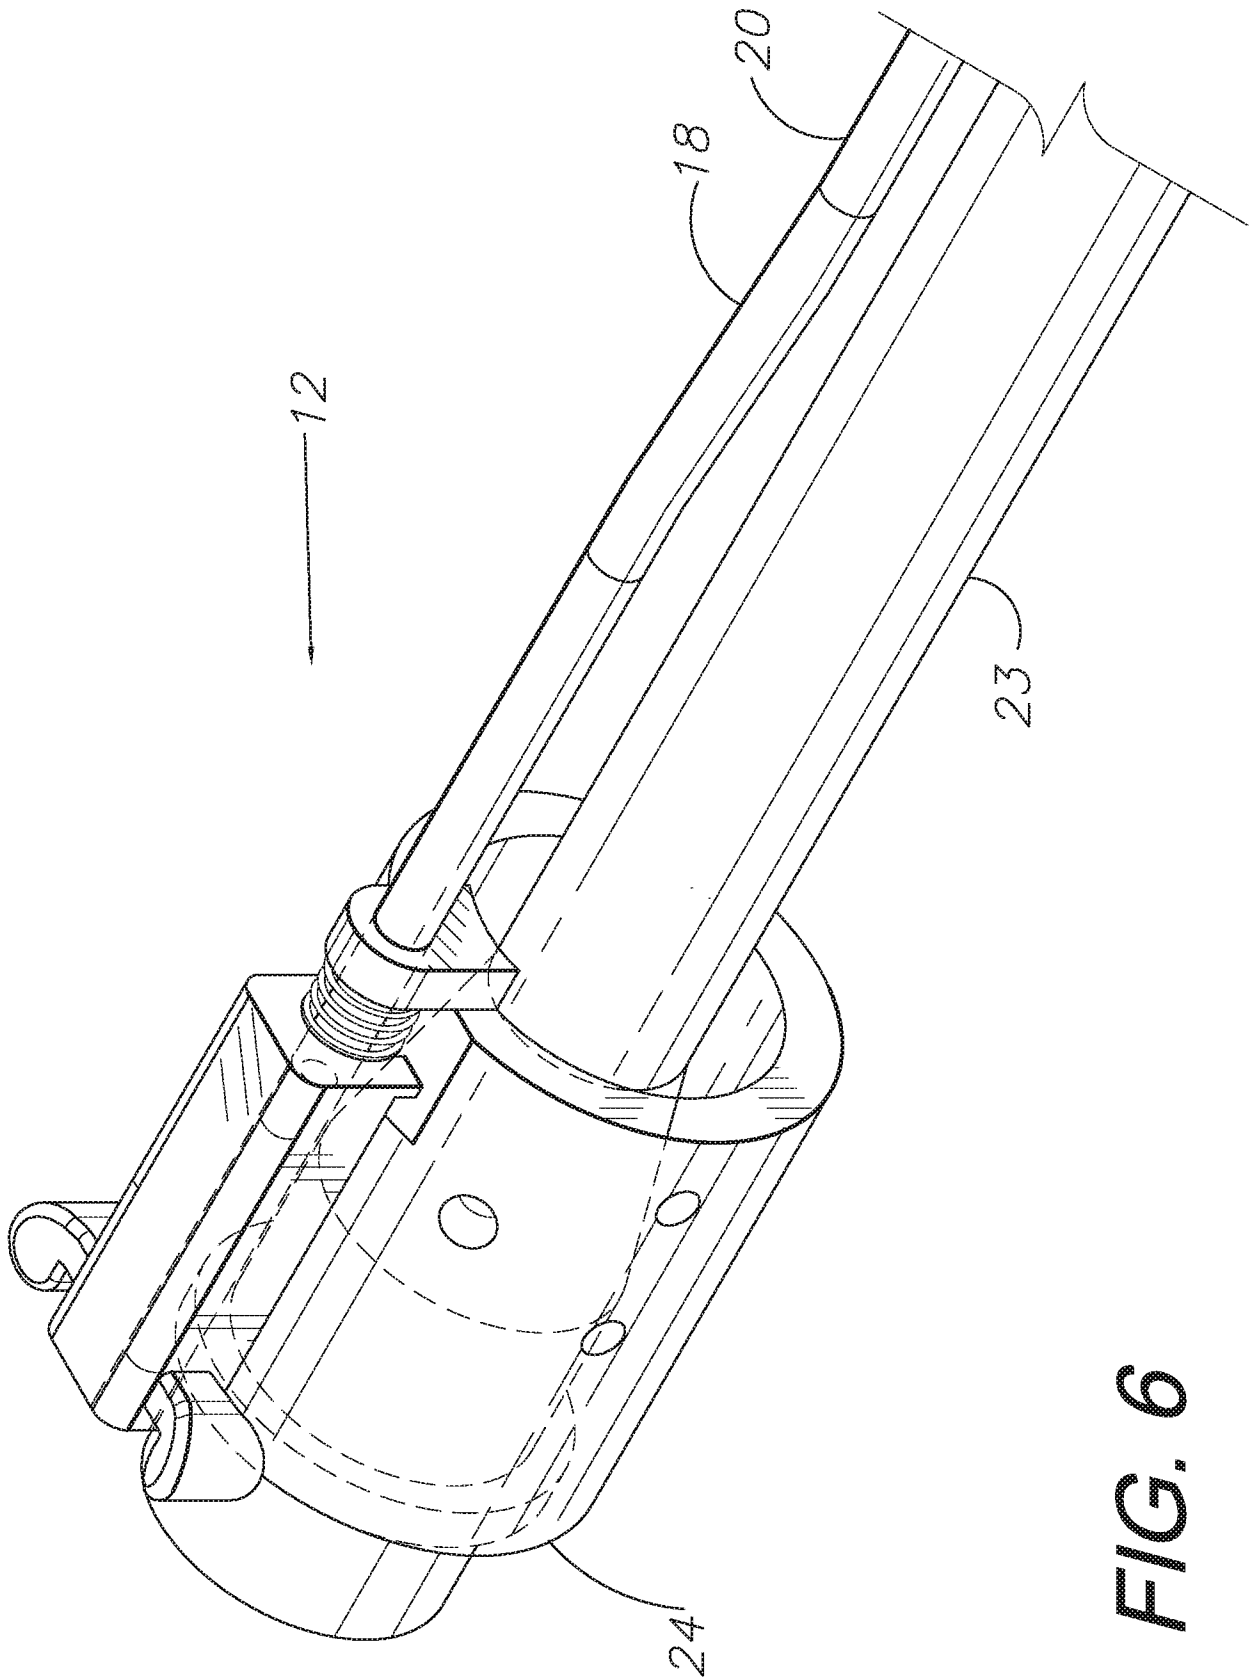


FIG. 6

7/24

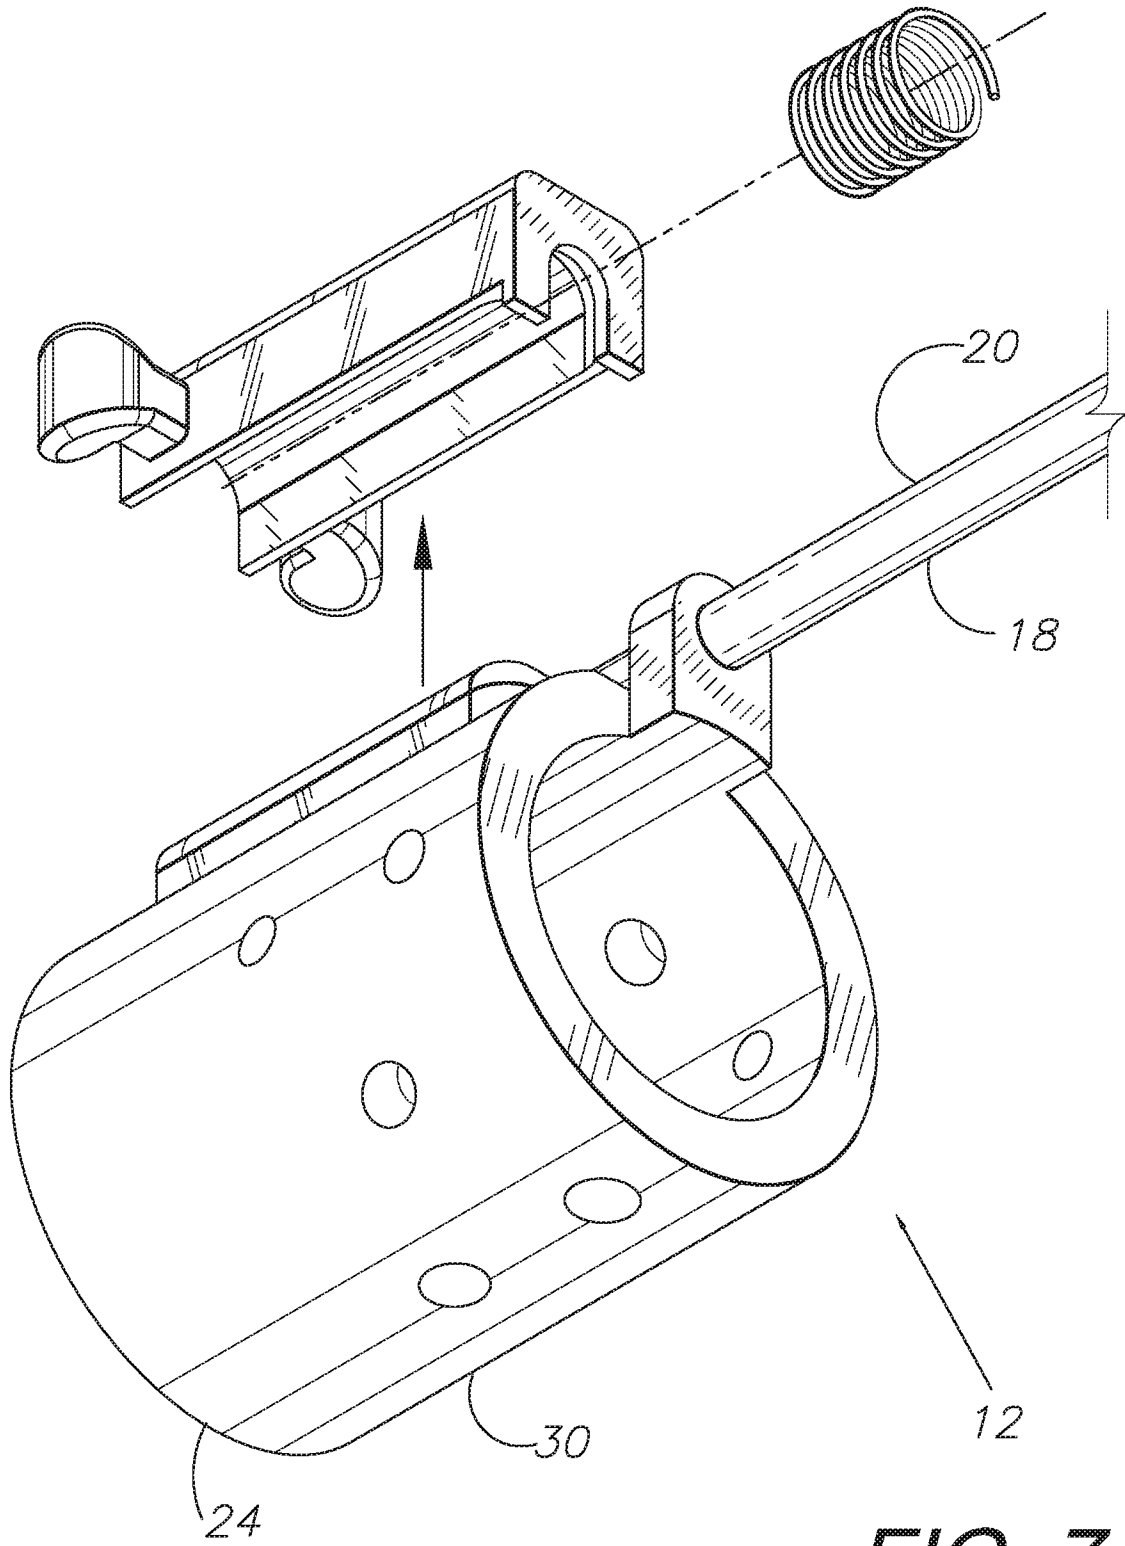

**FIG. 7**


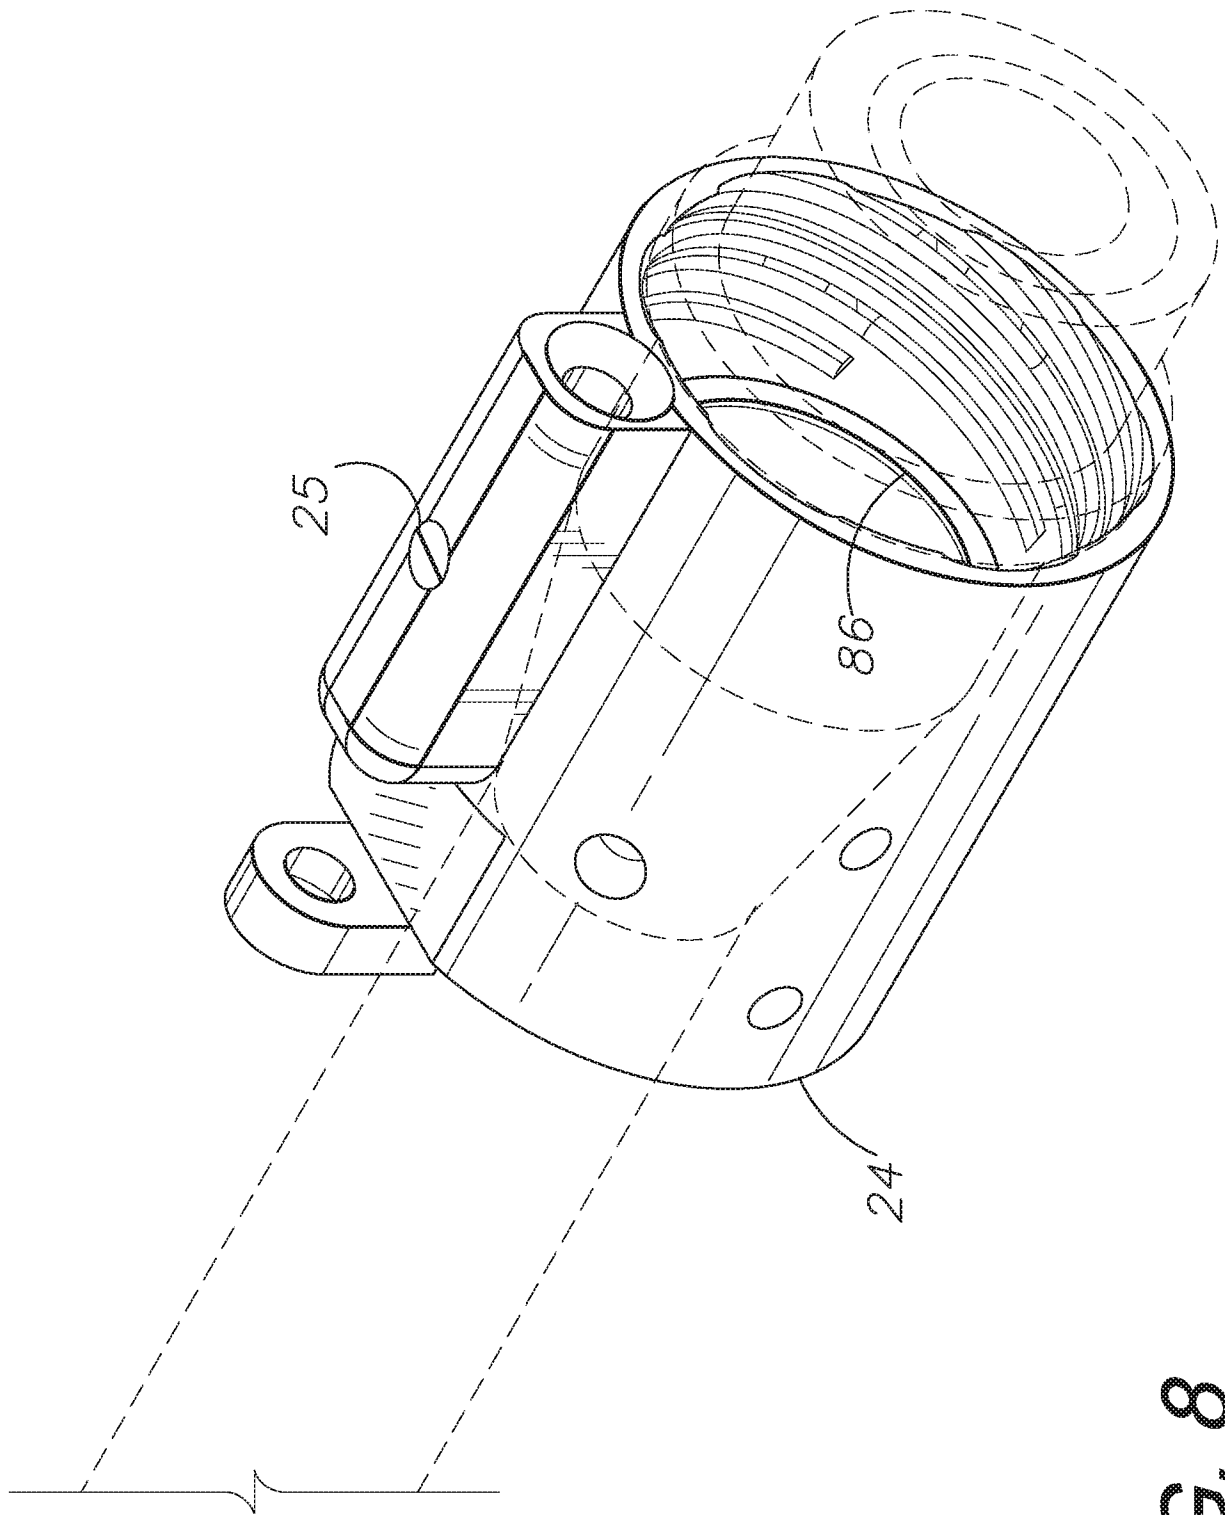


FIG. 8



9/24

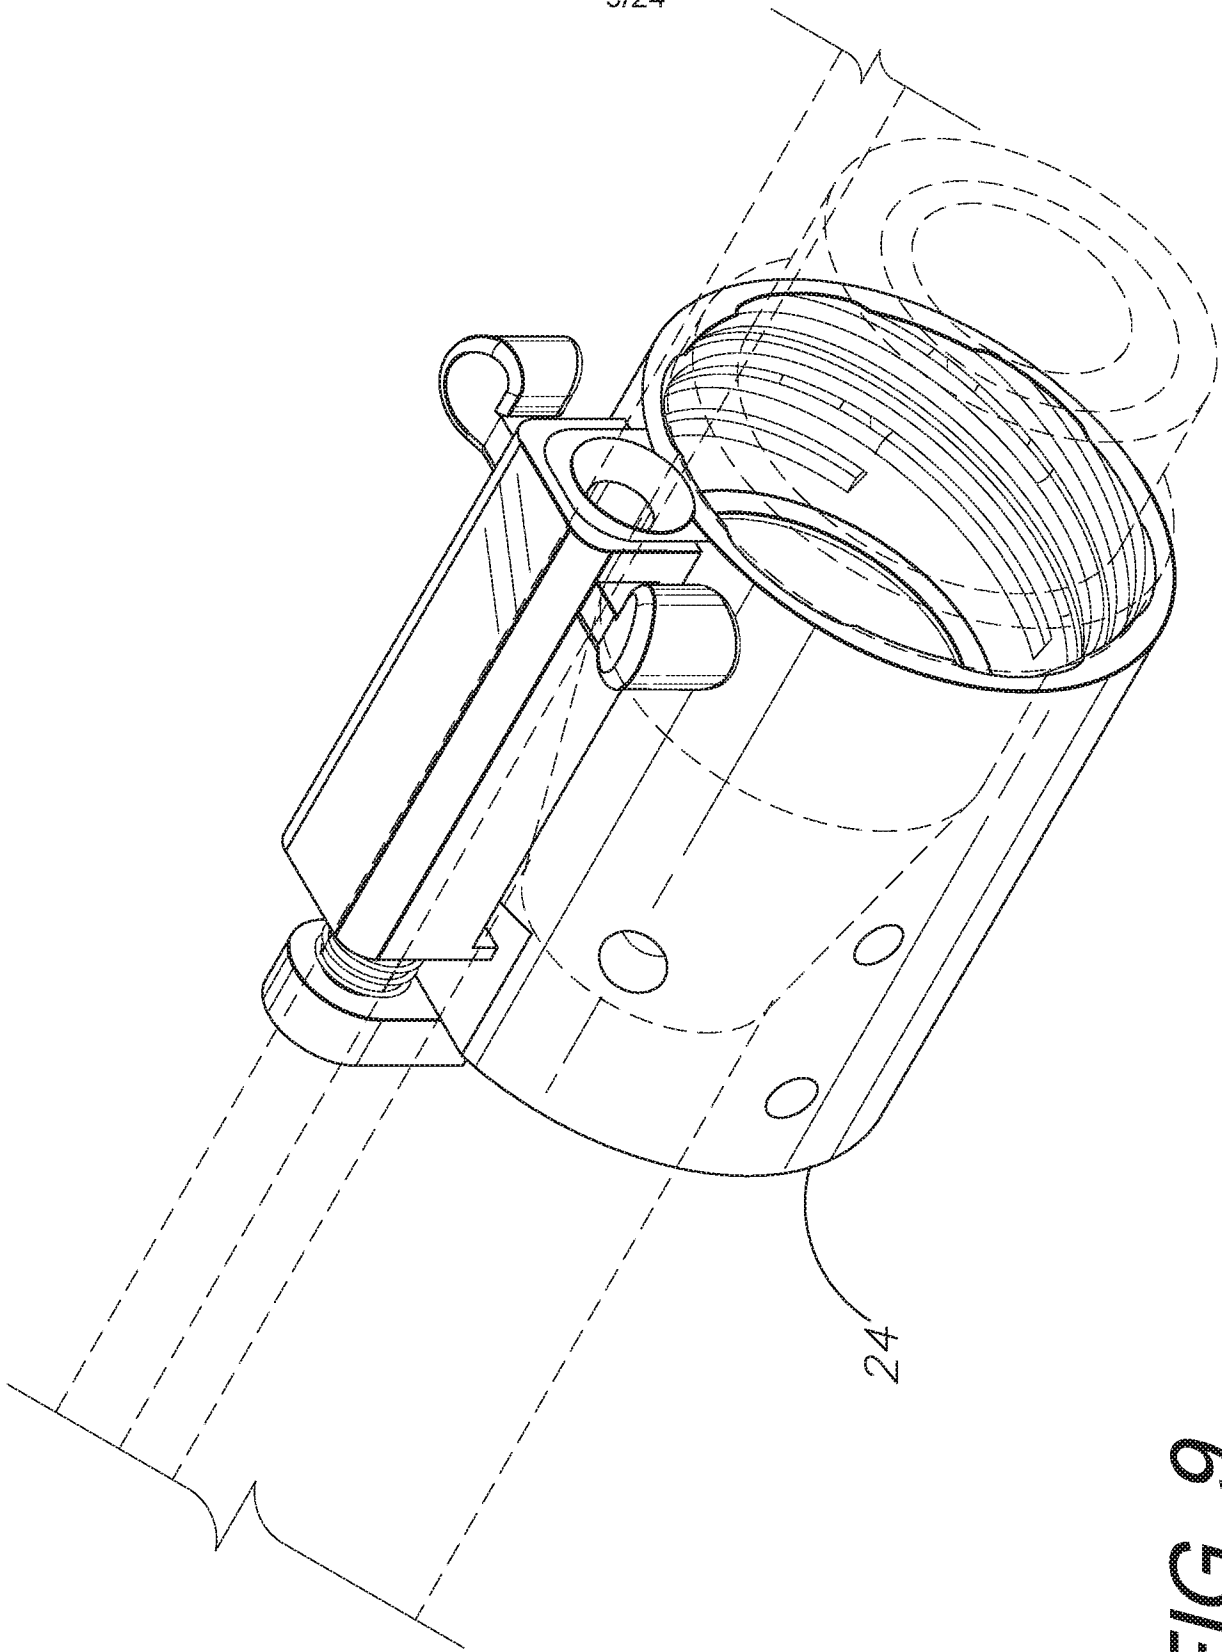

**FIG. 9**

10/24



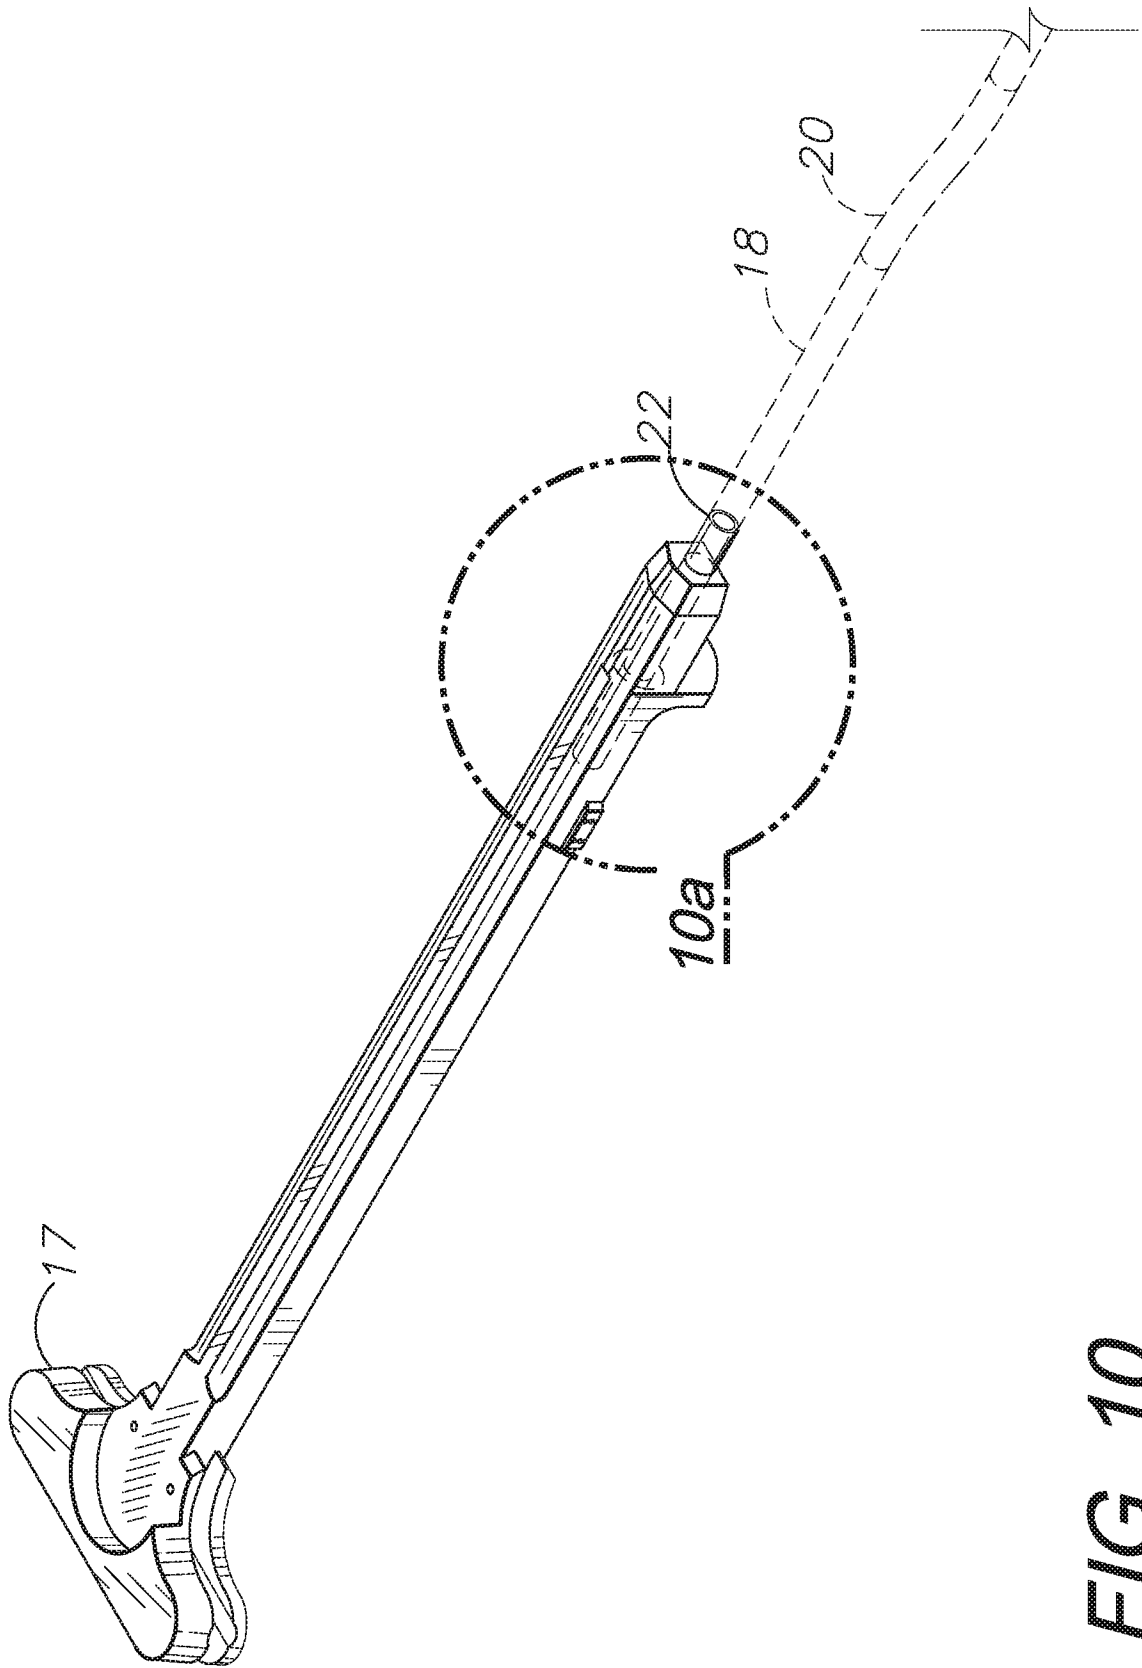



FIG. 10

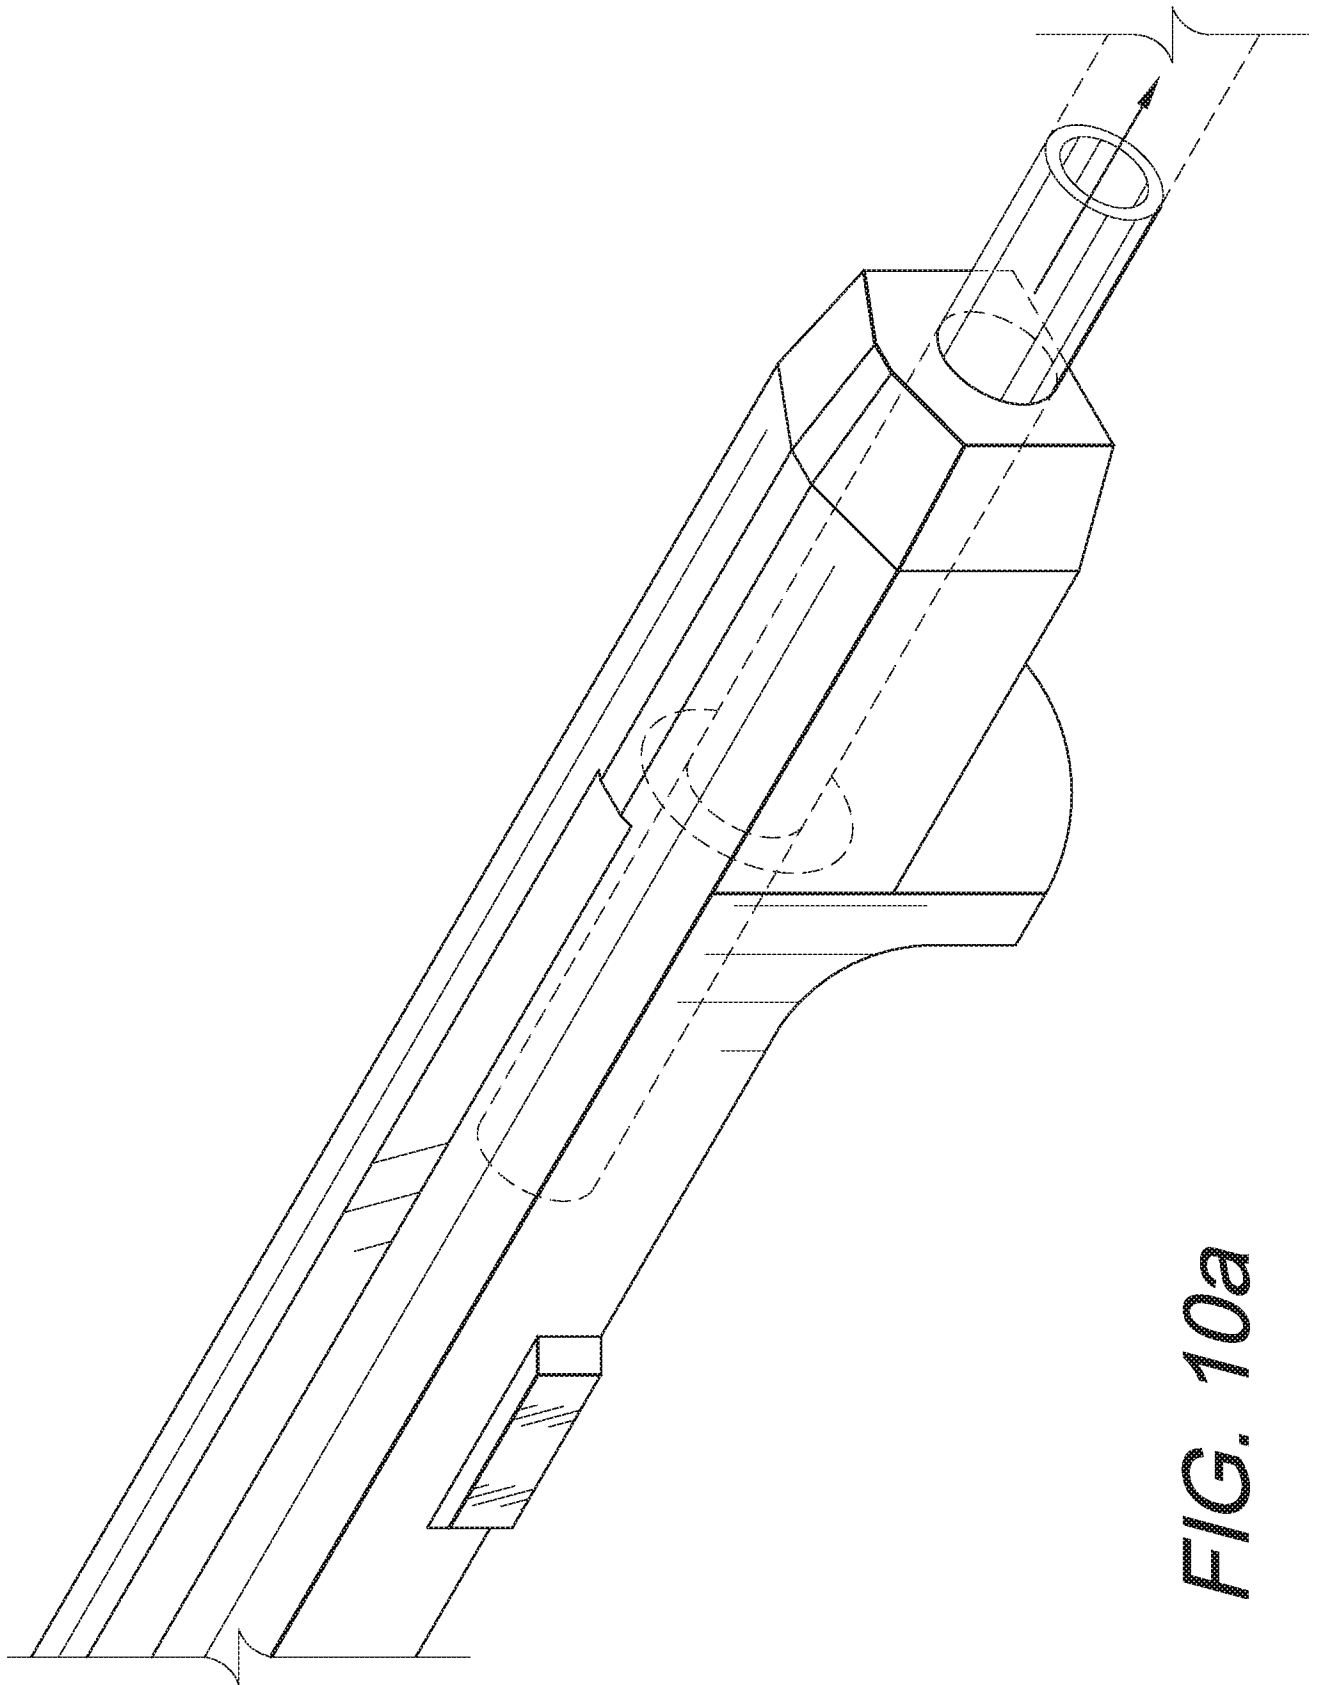


**FIG. 10a**

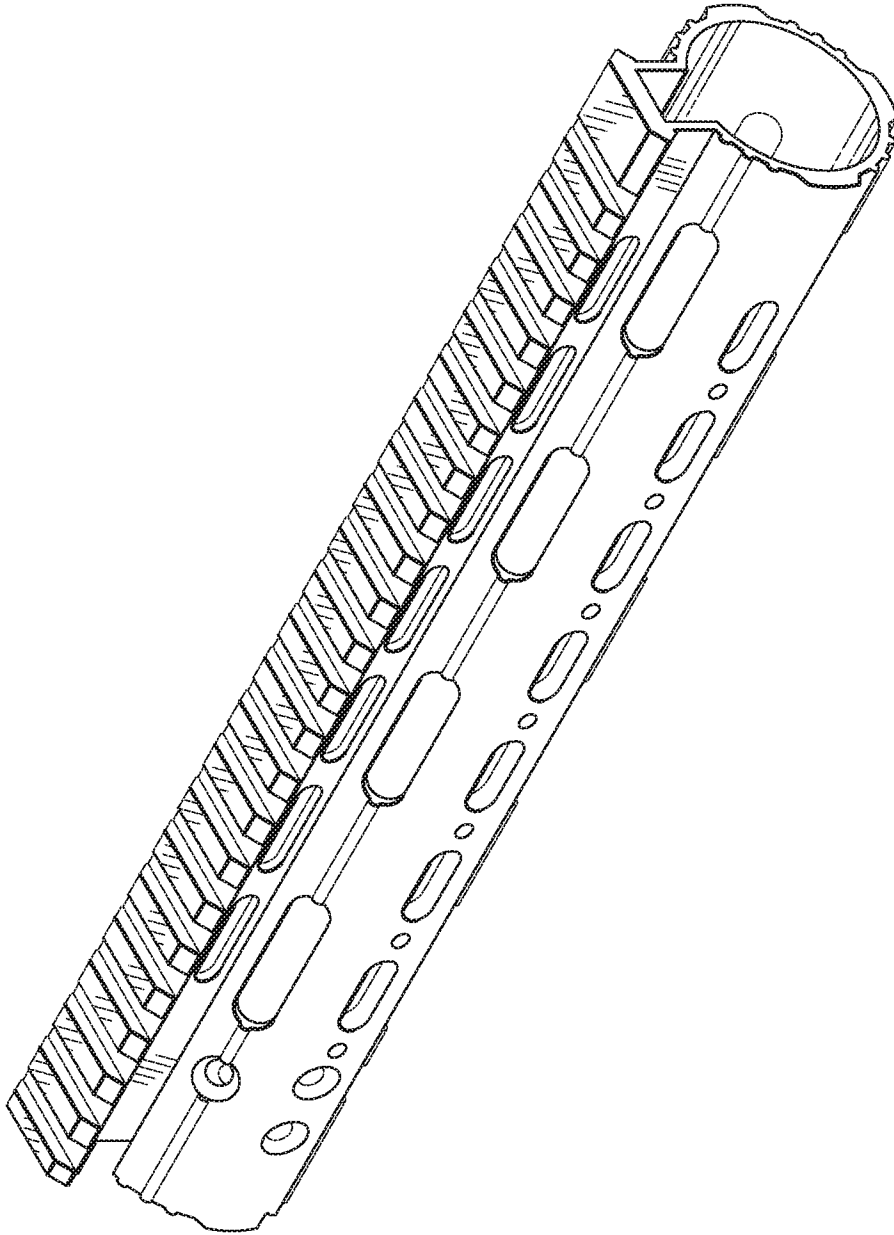

**FIG. 11**

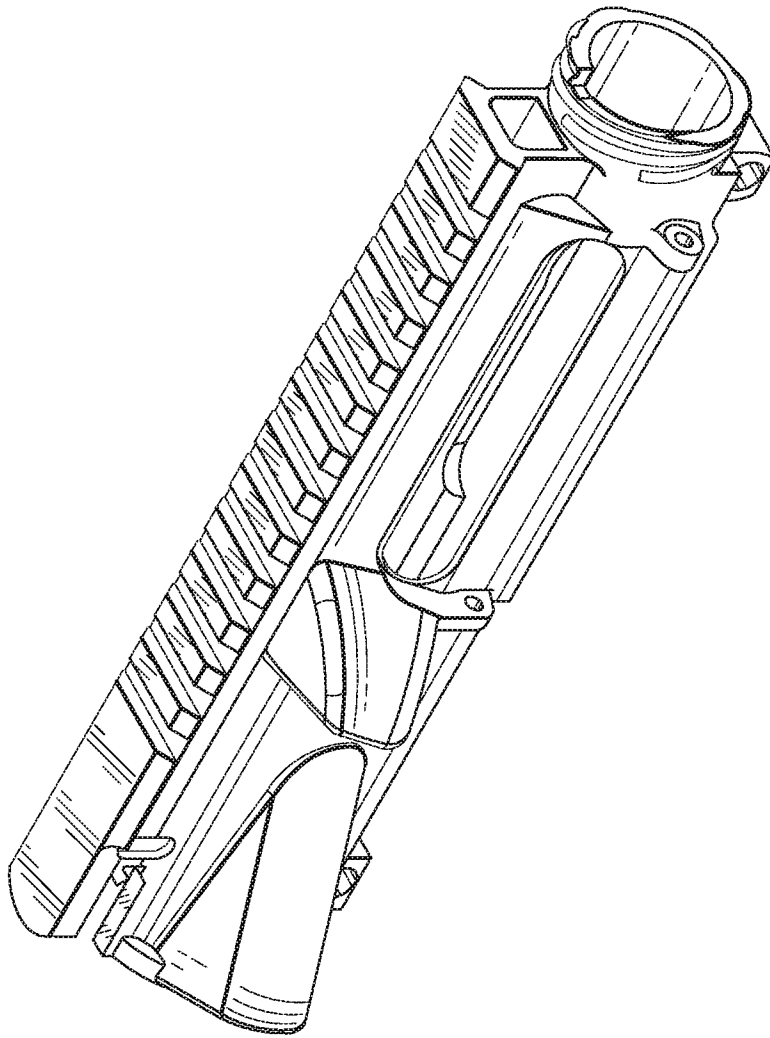

**FIG. 12**

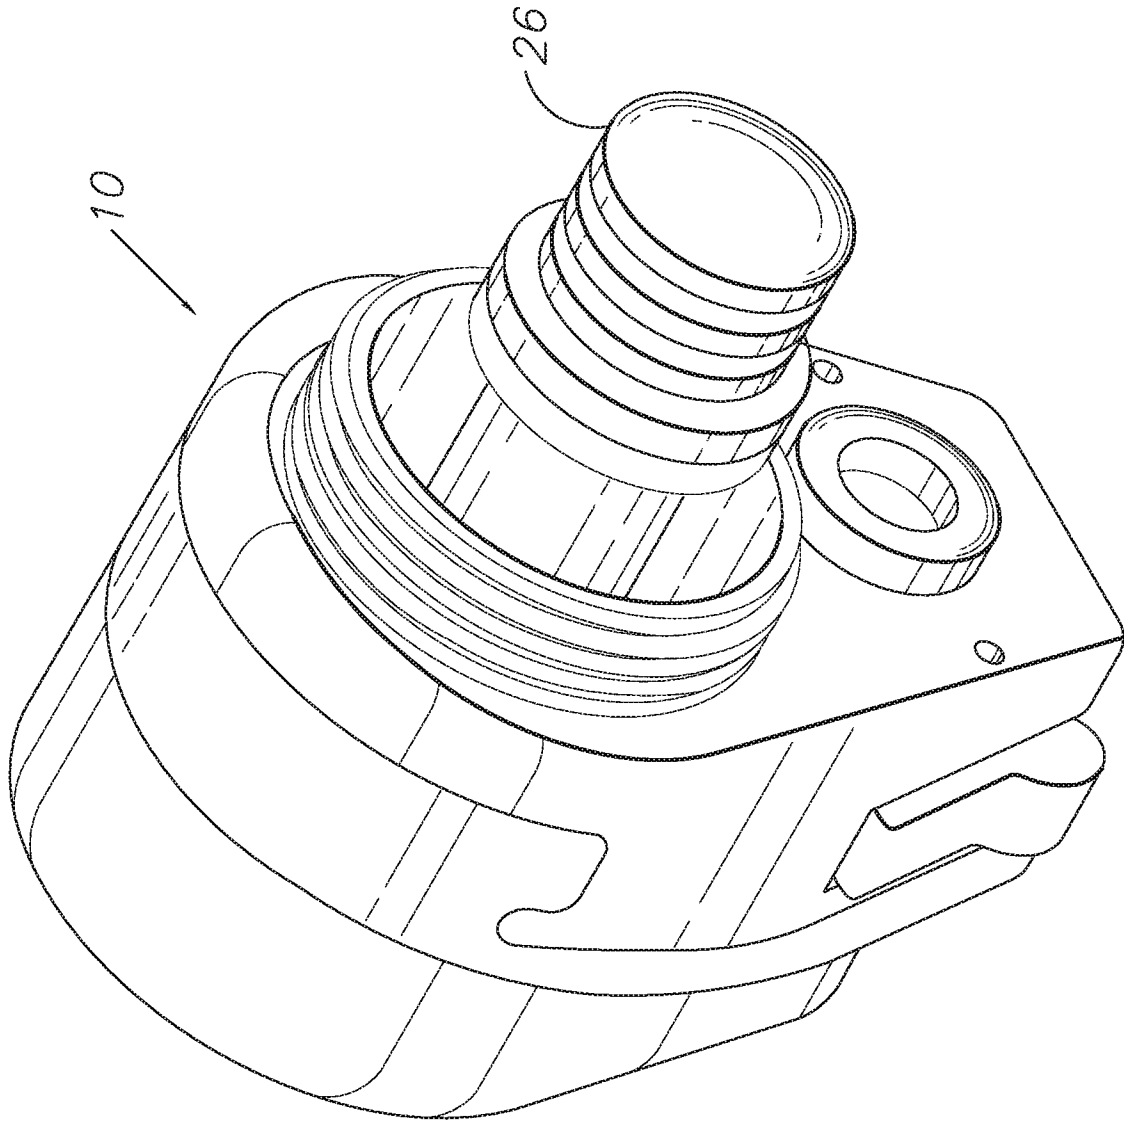

**FIG. 13**

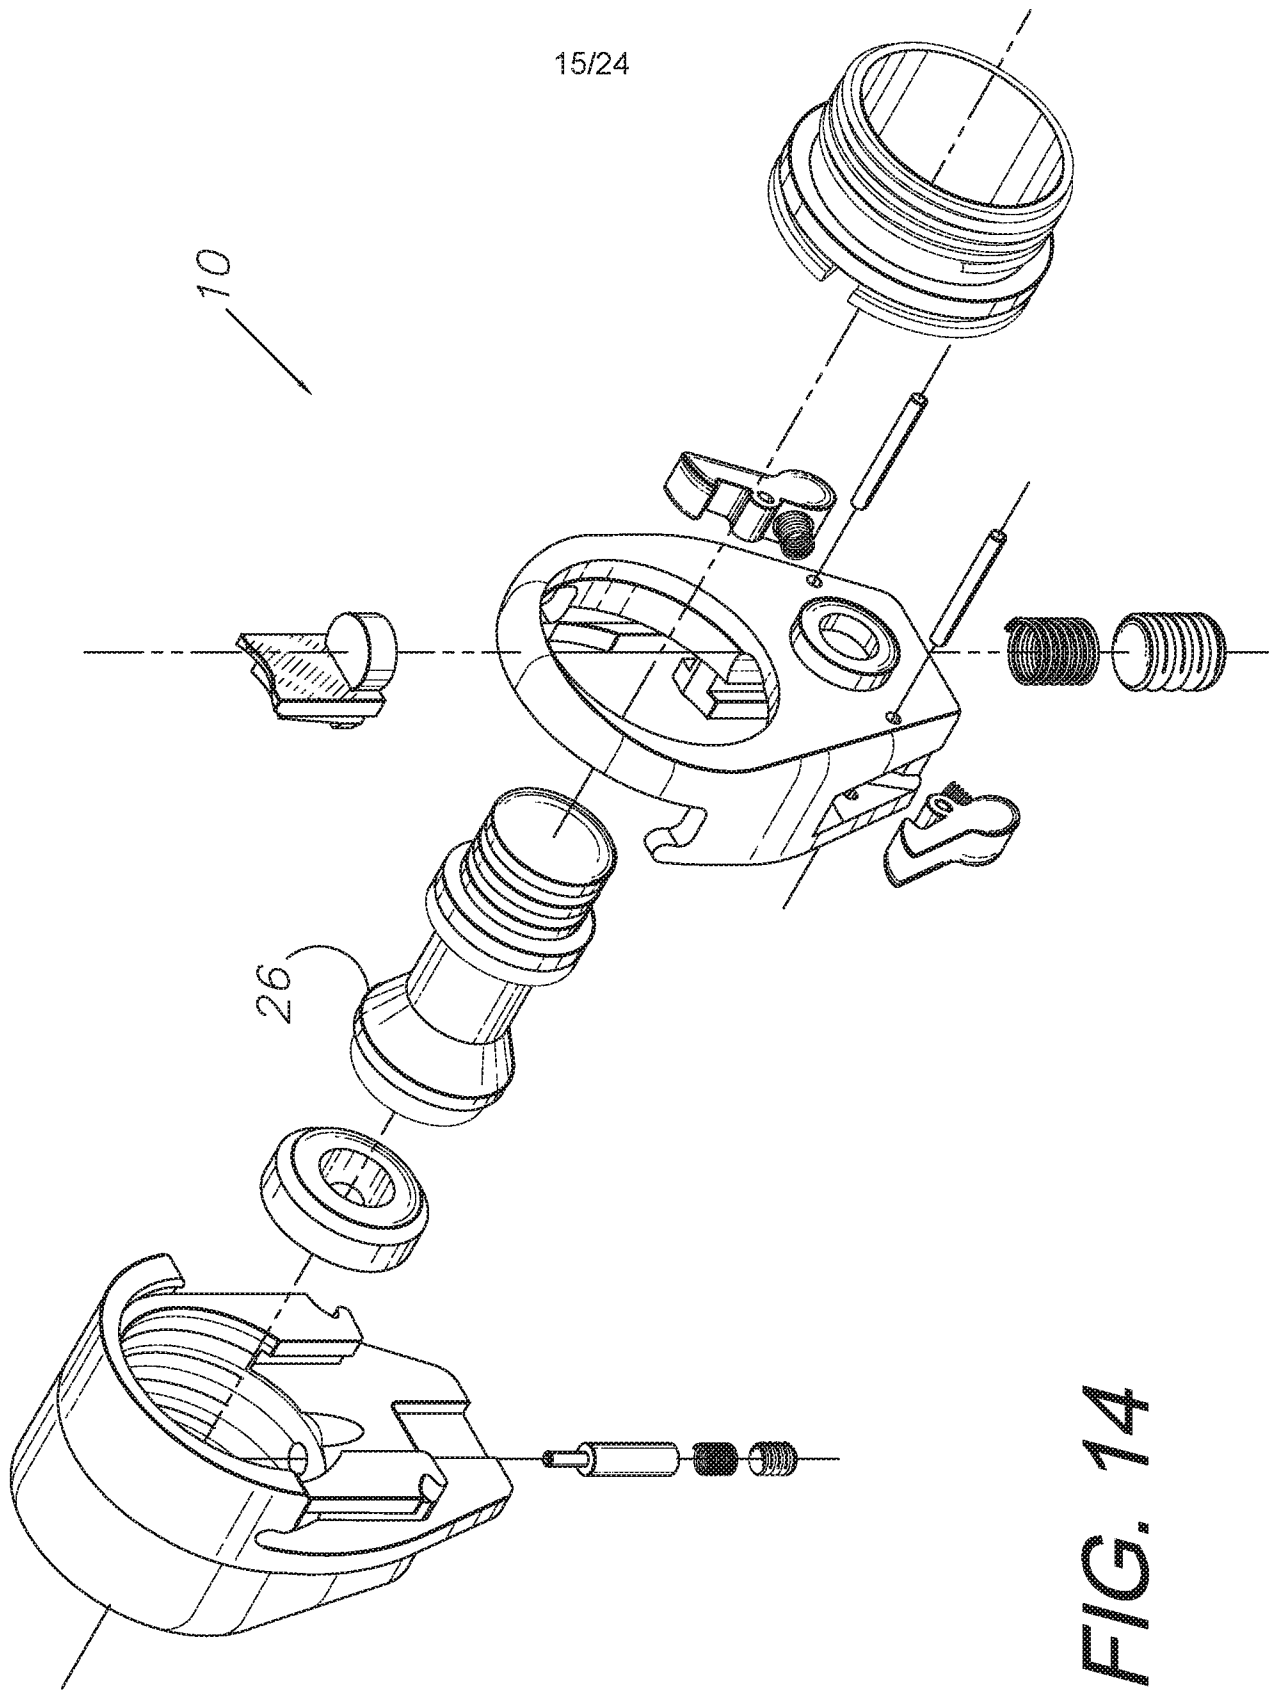


FIG. 14



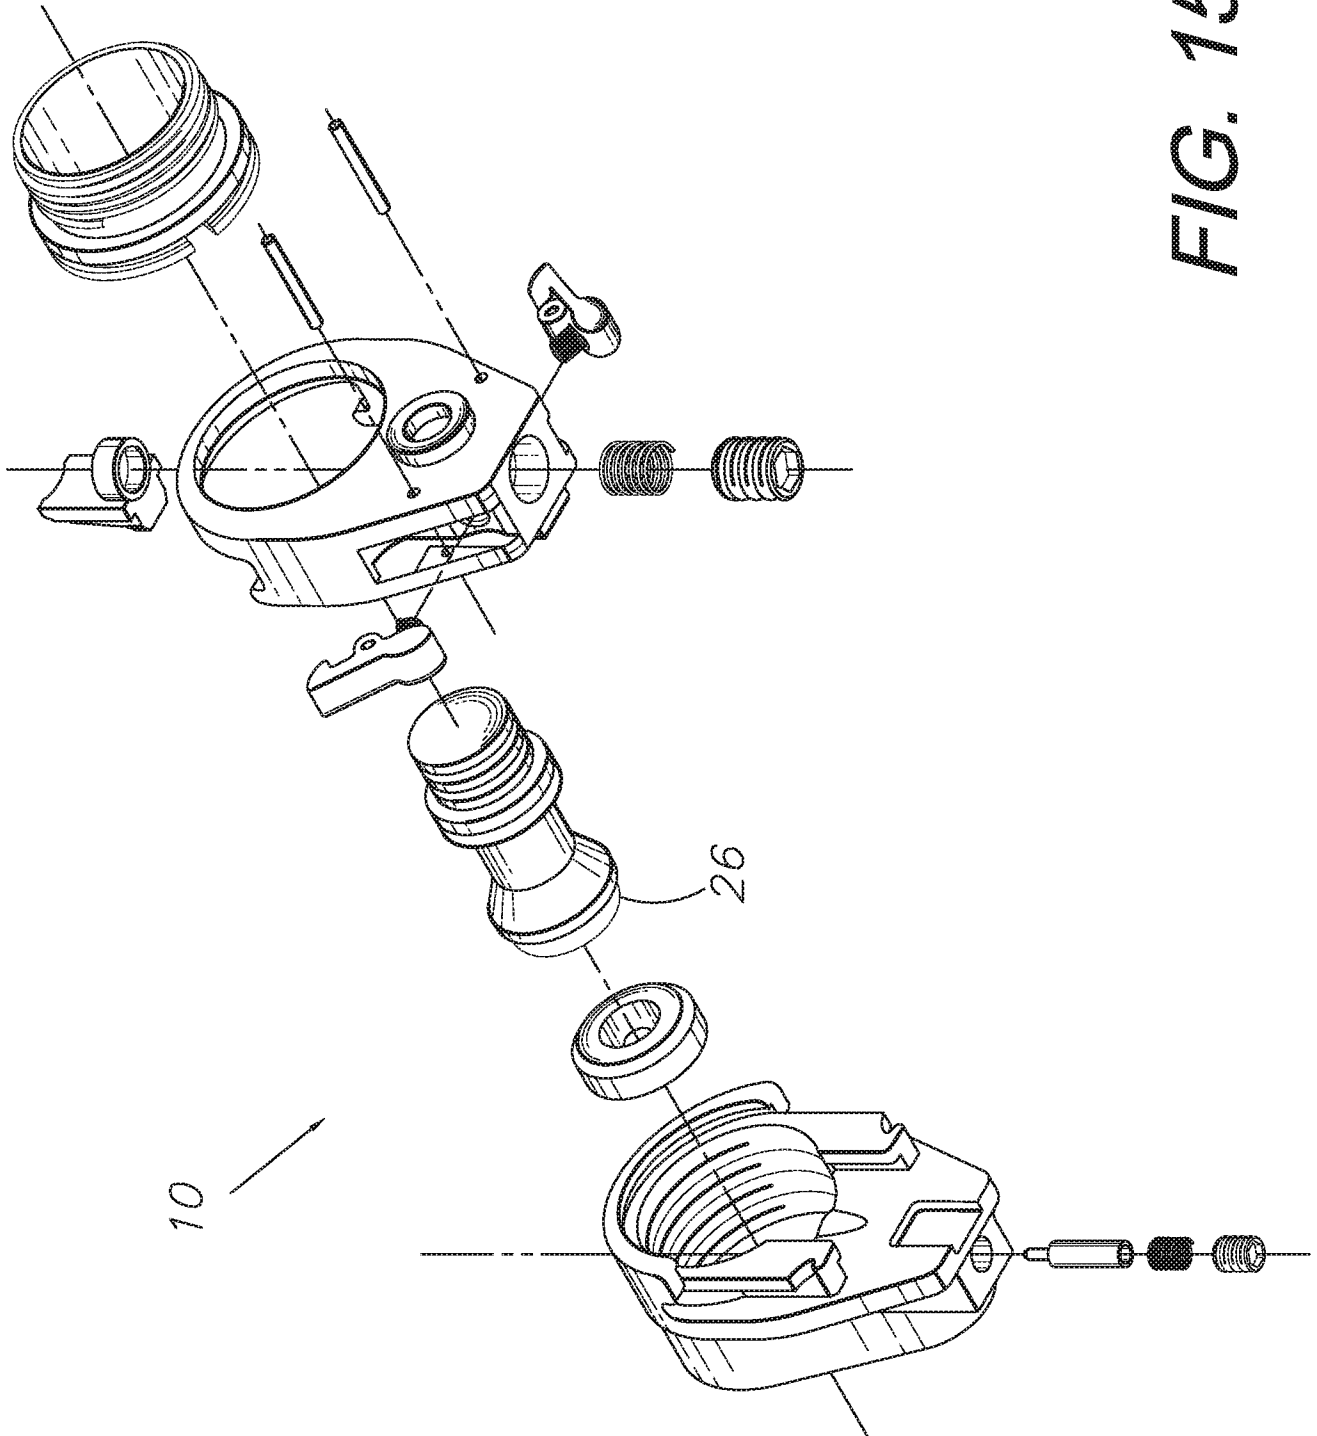


FIG. 15




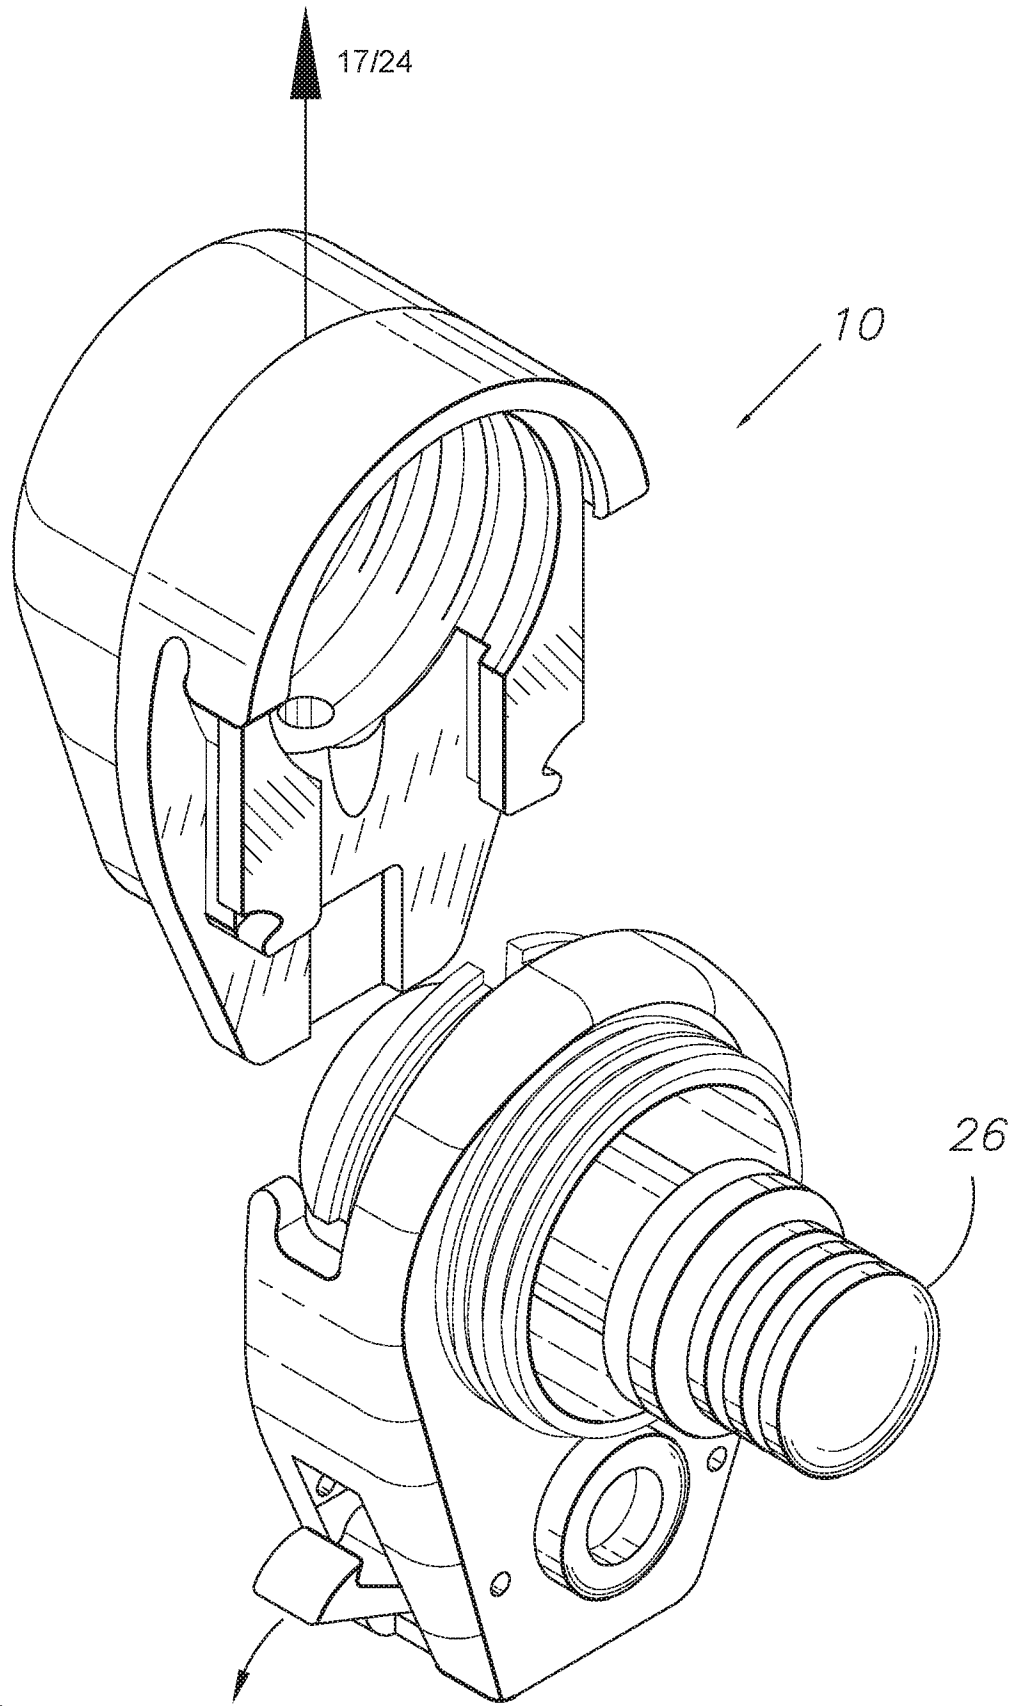

**FIG. 16**

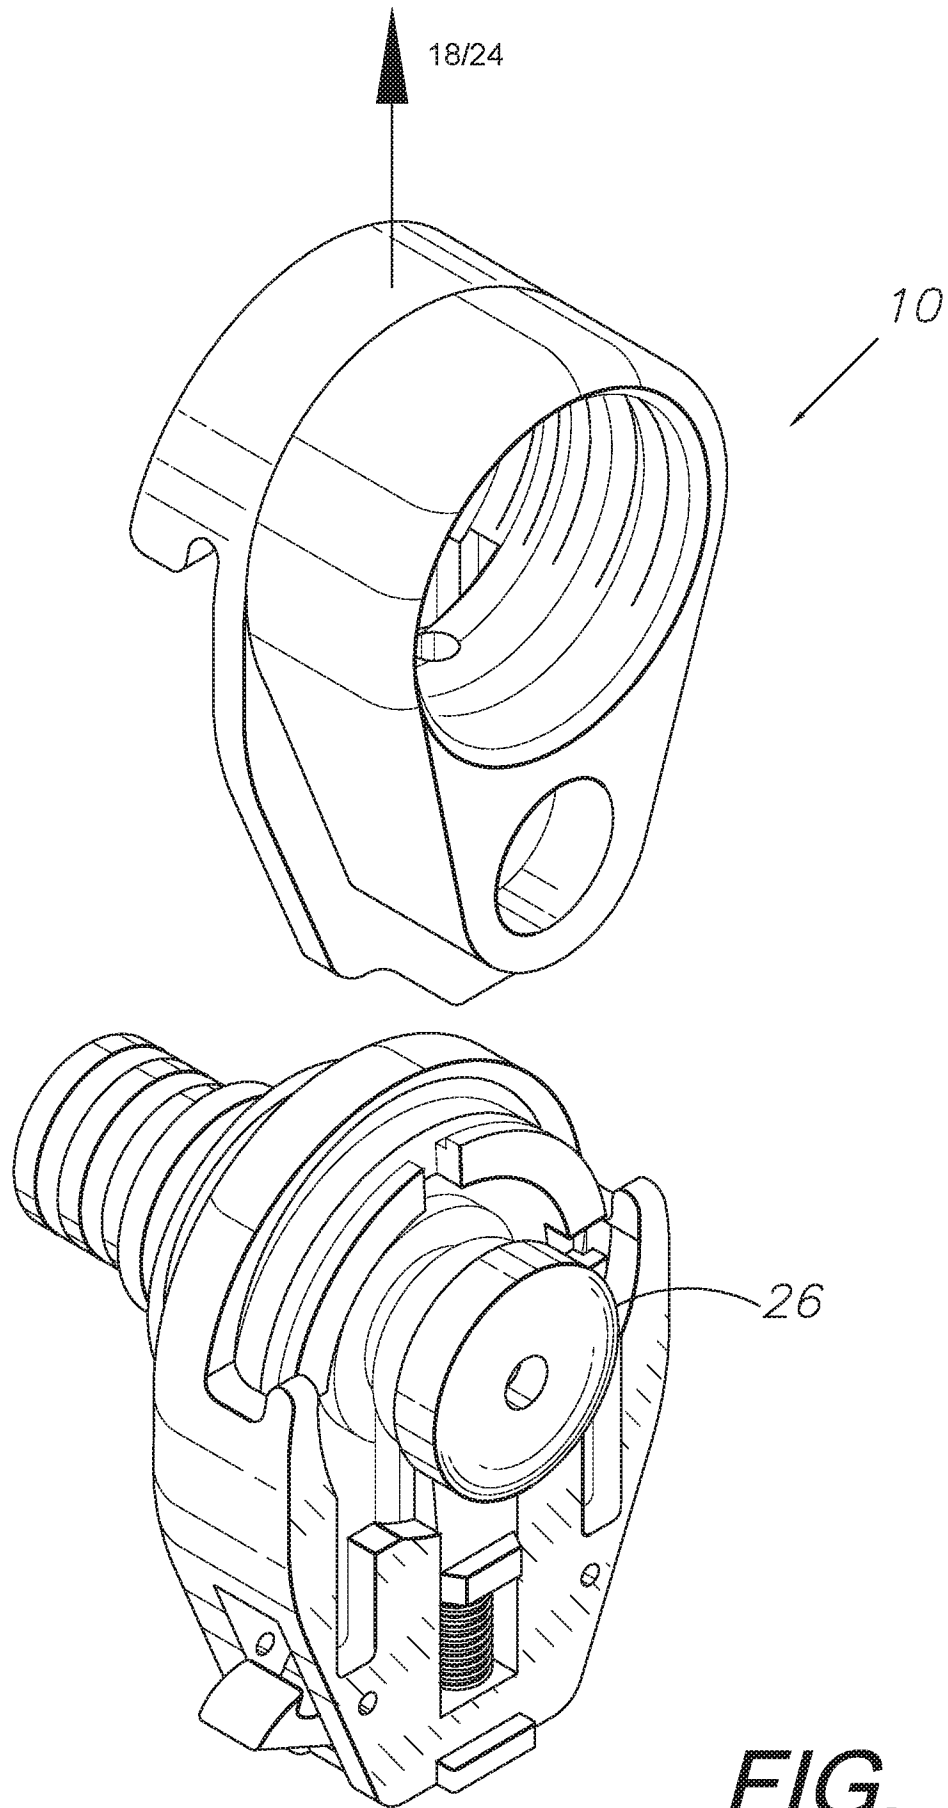

**FIG. 17**

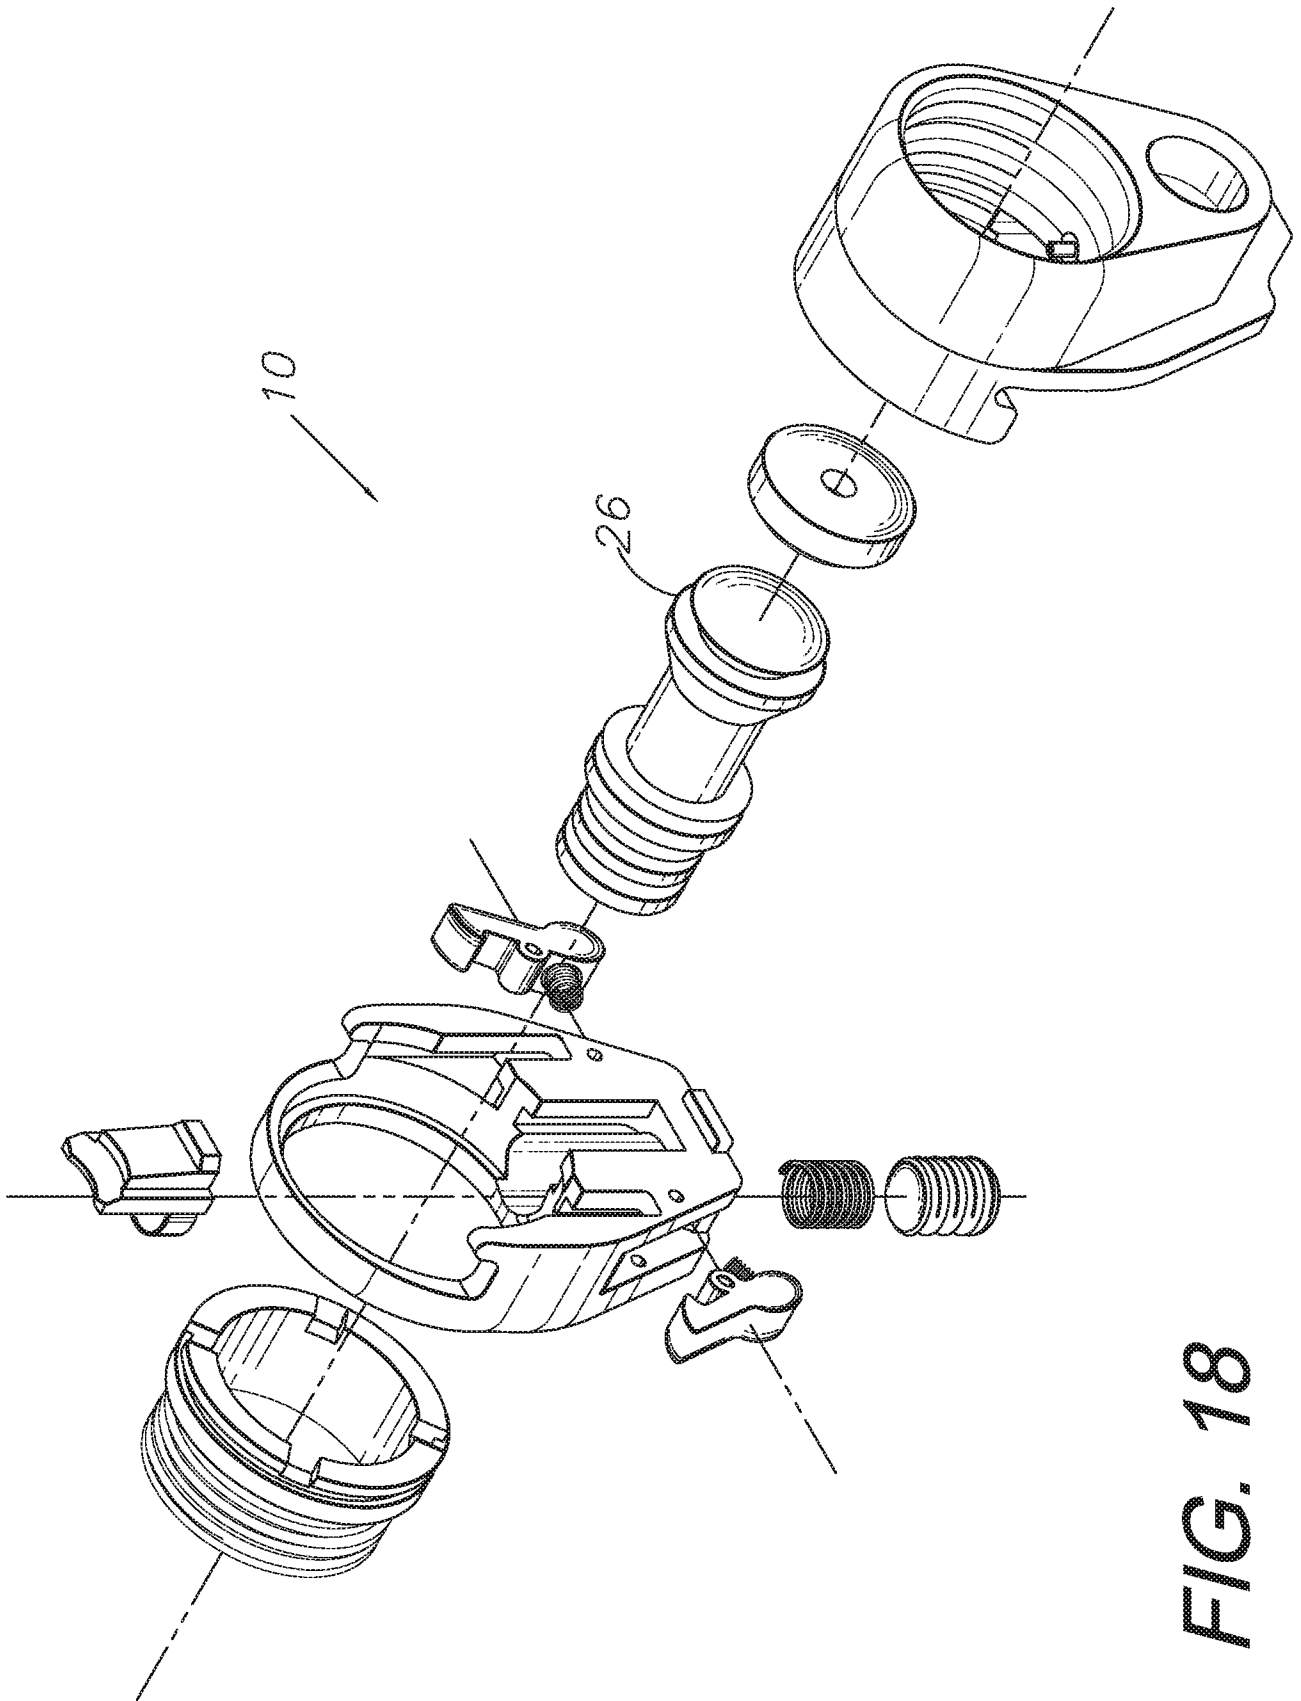

**FIG. 18**

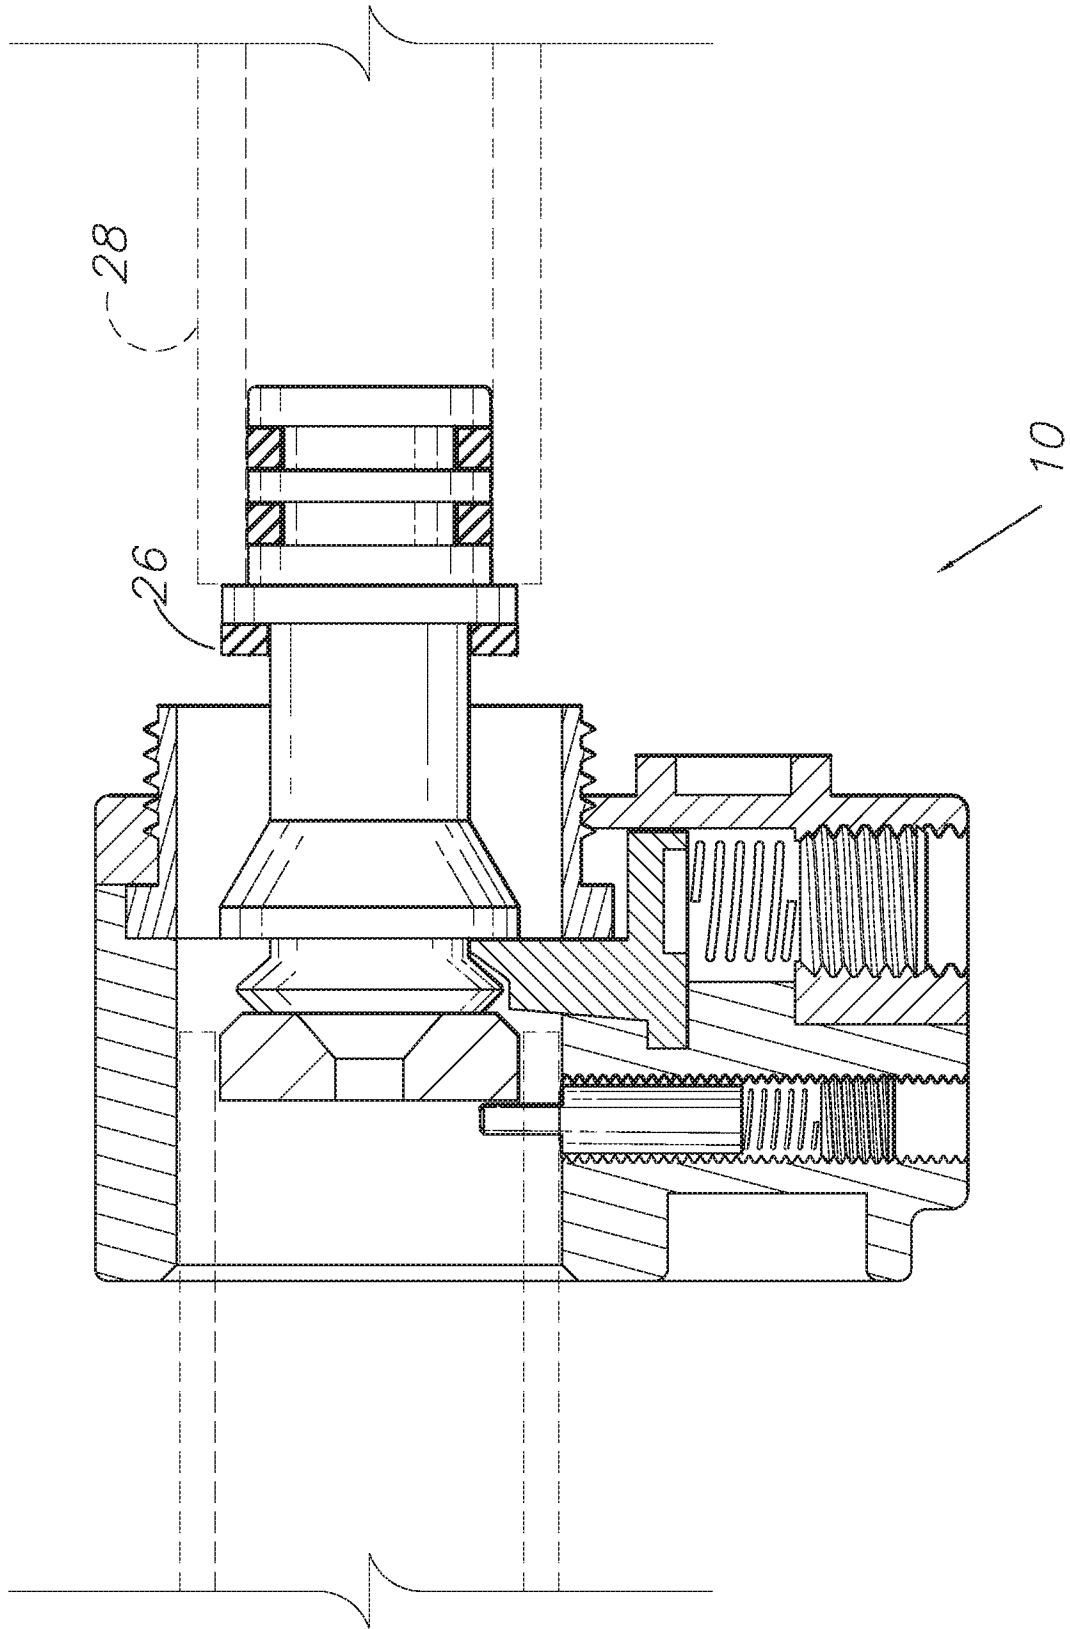


FIG. 19

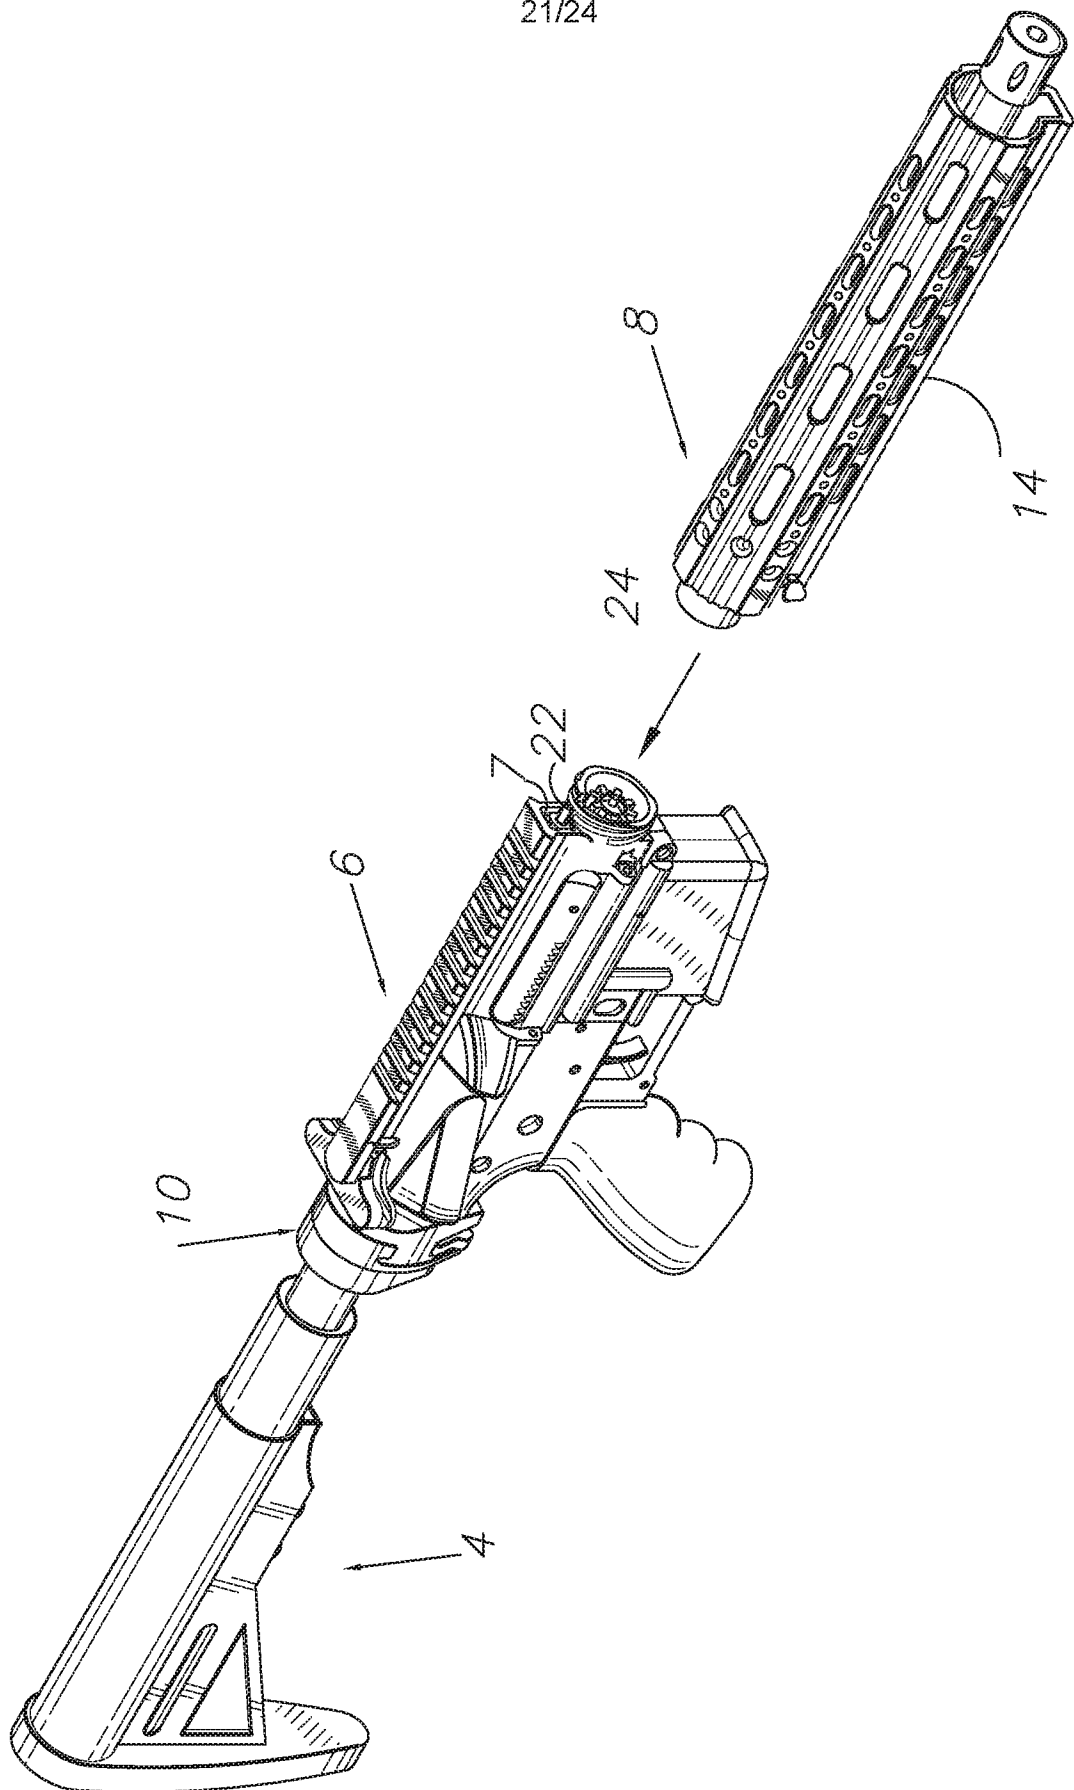


FIG. 20a

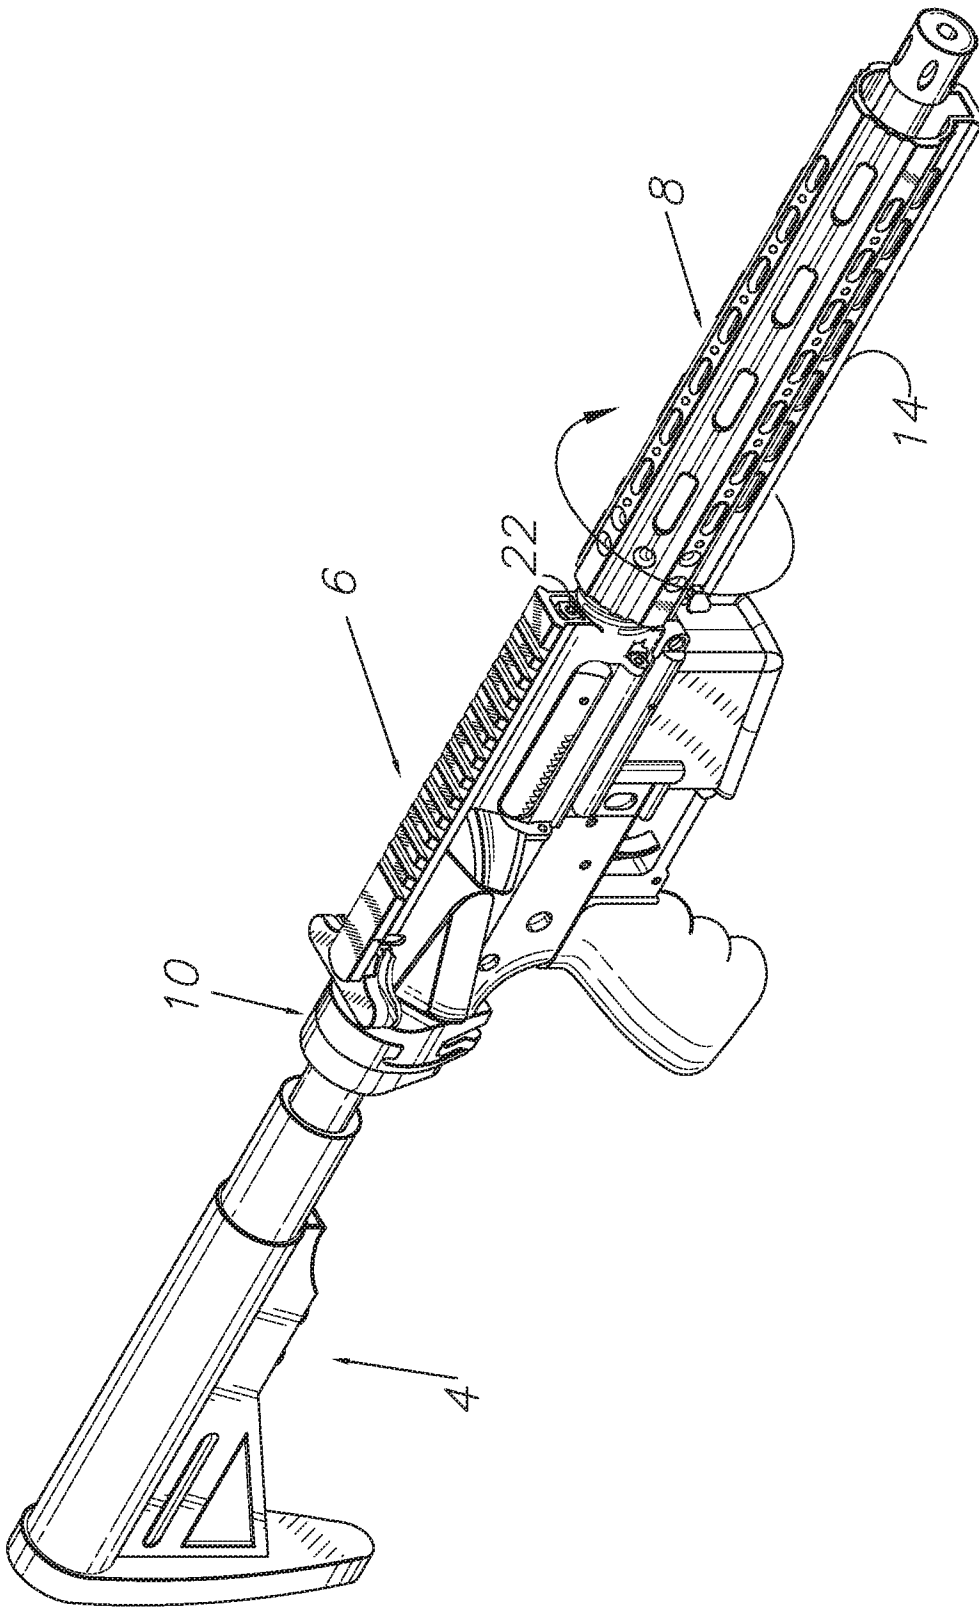


FIG. 20b

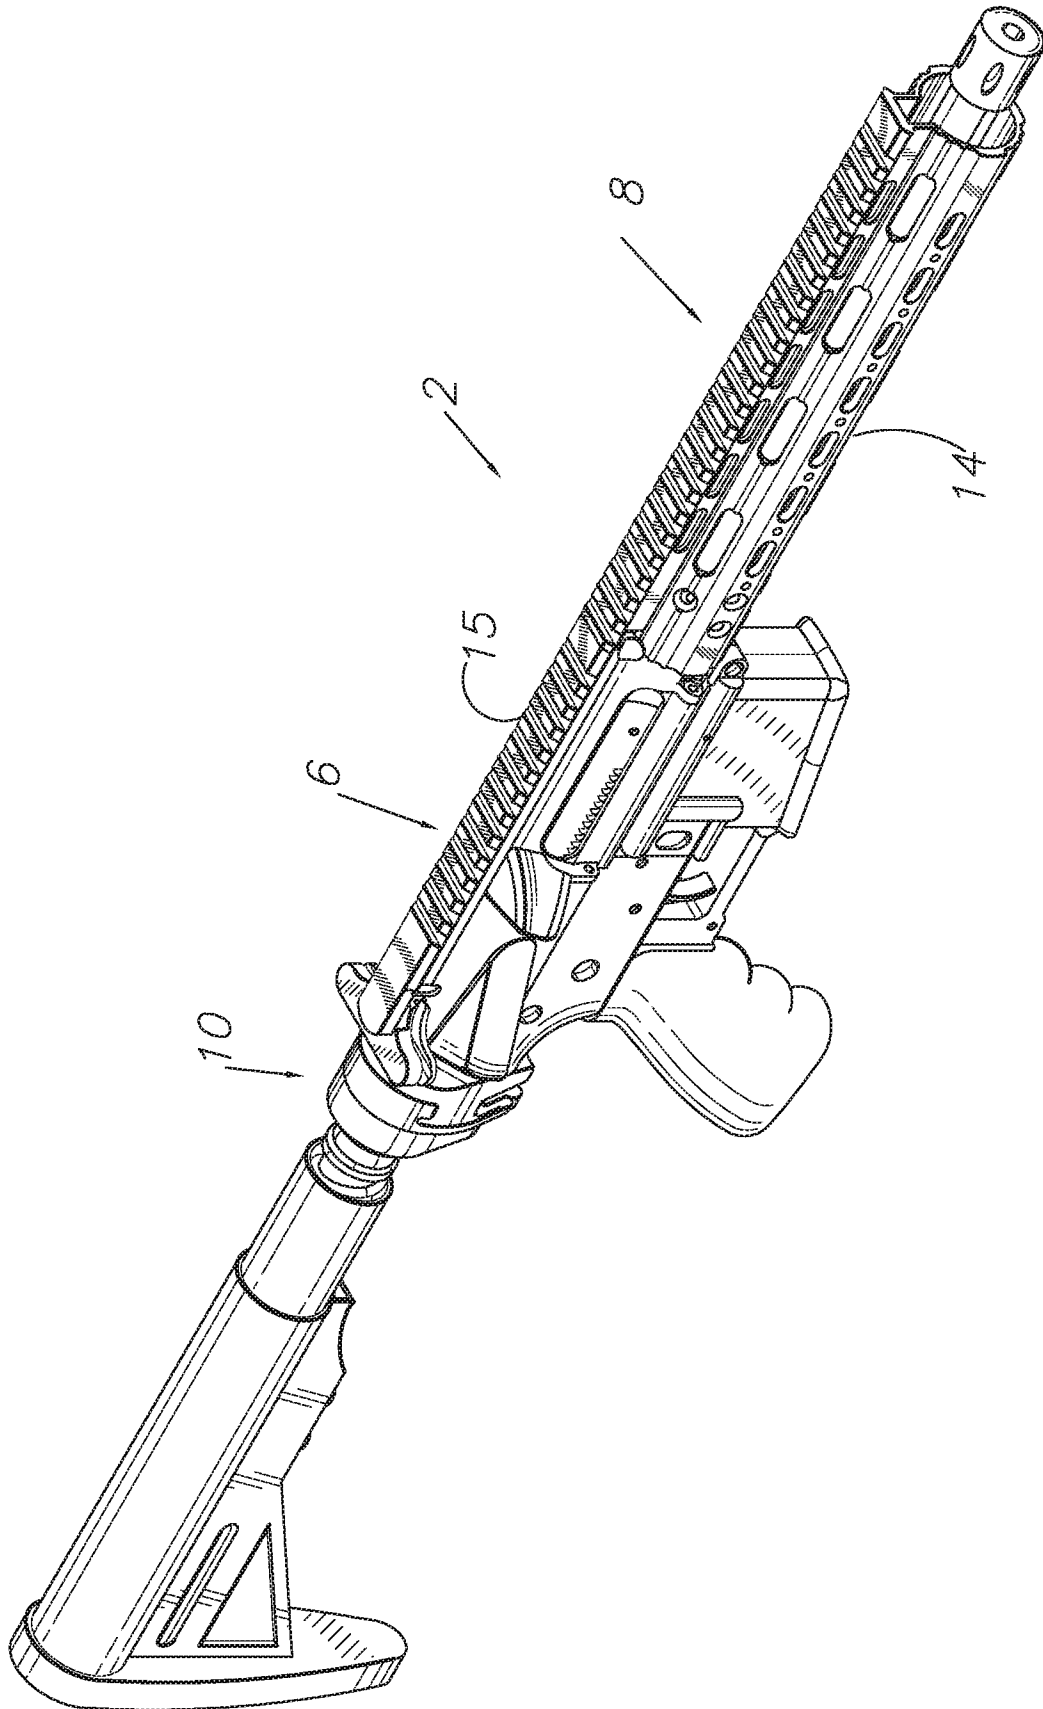


FIG. 20C

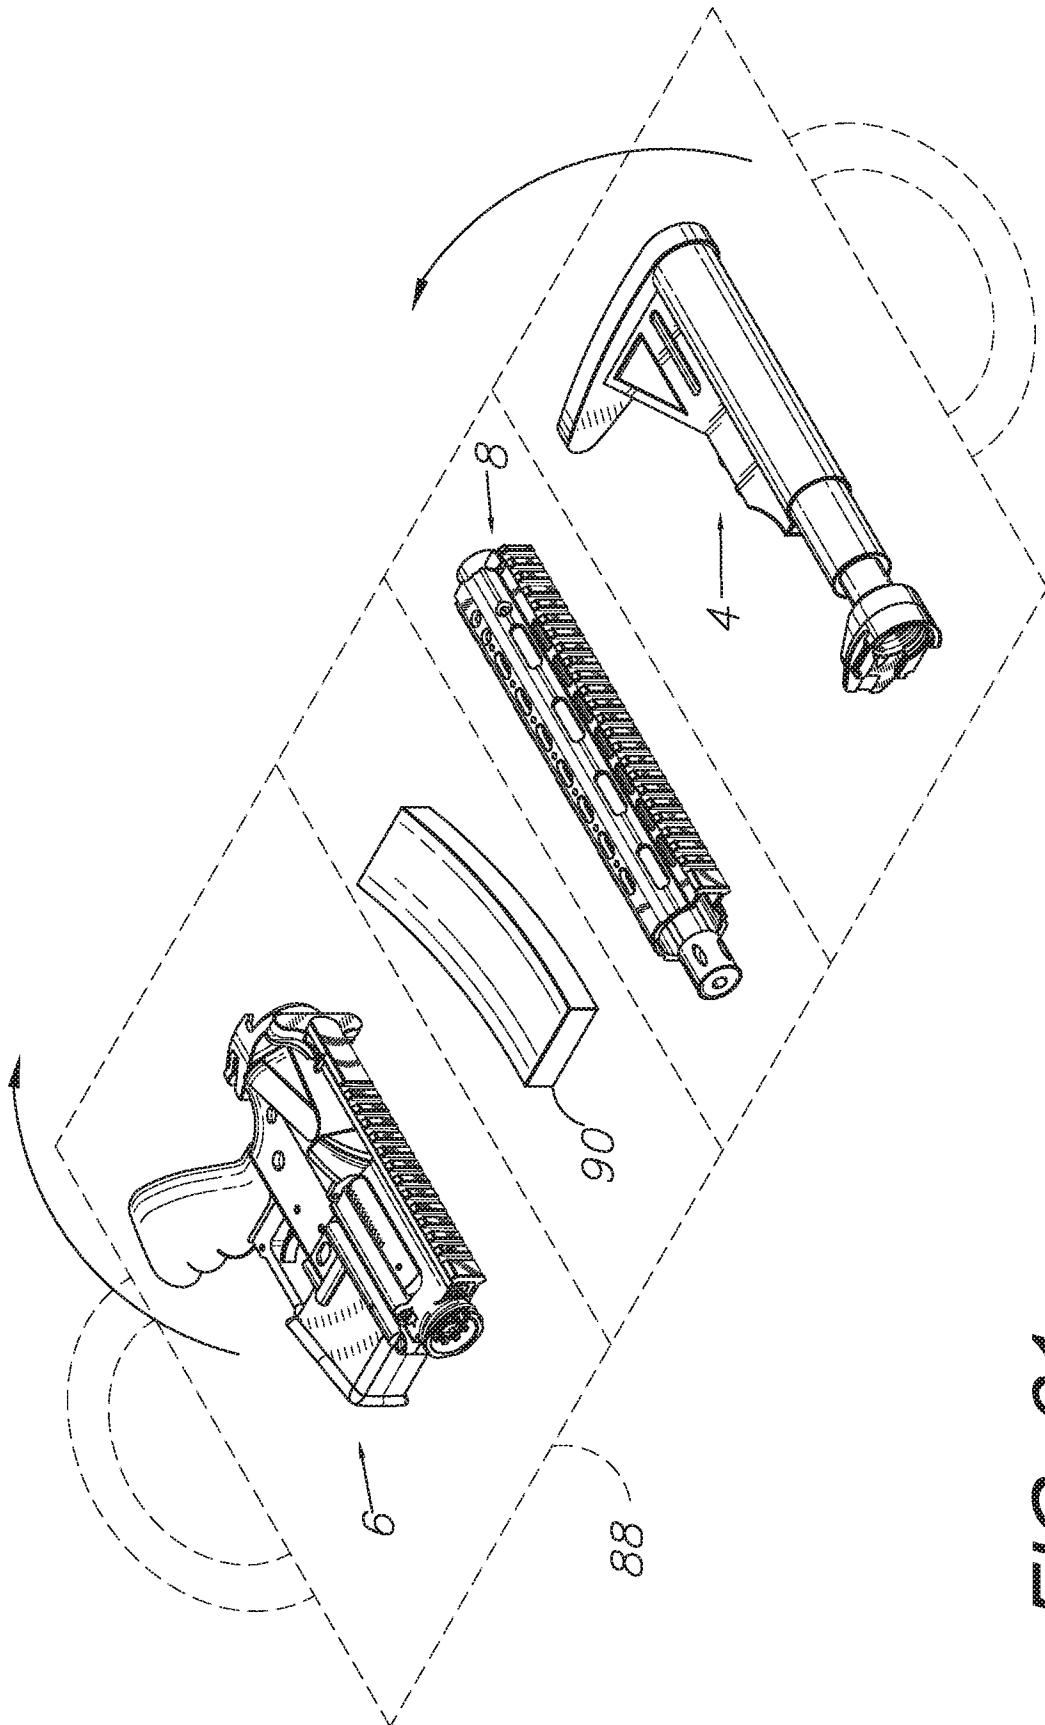


FIG. 21



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 18/46995

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - F41A 3/26, F41A 21/48, F41A 11/00, F41A 3/08, F41A 3/30, F41A 25/26 (2018.01)  
 CPC - F41A 3/26, F41A 21/482, F41A 11/00, F41A 3/08, F41A 3/30, F41A 25/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2,447,091 A (Pope) 18 September 1943 (18.09.1943) entire document, especially title, abstract.	1, 3
X	US 9,303,949 B1 (Oglesby) 05 April 2016 (05.04.2016) entire document, especially title, abstract, Fig. 22-25.	2
A	US 2016/0033225 A1 (Selveti) 04 February 2016 (04.02.2016) entire document, especially title, abstract.	1-3
A	US 9,638,484 B1 (Friend) 02 May 2017 (02.05.2017) entire document, especially title, abstract.	1-3
A	US 2012/0017483 A1 (Vuksanovich) 26 January 2012 (26.01.2012) entire document, especially title, abstract, Fig. 3.	1-3
A	US 2017/0160037 A1 (Gray et al.) 08 June 2017 (08.06.2017) entire document, especially title, abstract.	1-3



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 November 2018

Date of mailing of the international search report

10 DEC 2018

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents  
 P.O. Box 1450, Alexandria, Virginia 22313-1450  
 Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300  
 PCT OSP: 571-272-7774