



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08F 220/24, 220/34, C08L 33/14, 33/16, D06M 15/277, 15/263, 15/273, 15/267	A1	(11) International Publication Number: WO 99/65959 (43) International Publication Date: 23 December 1999 (23.12.99)
(21) International Application Number: PCT/US99/13535 (22) International Filing Date: 16 June 1999 (16.06.99) (30) Priority Data: 60/089,871 19 June 1998 (19.06.98) US 09/312,264 14 May 1999 (14.05.99) US (71) Applicant: E.I DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19898 (US). (72) Inventor: FITZGERALD, John, J.; 14 Forest Hill Drive, Boothwyn, PA 19061 (US). (74) Agent: MAYER, Nancy, S.; E.I. du Pont de Nemours and Company, Legal Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).	(81) Designated States: AU, BR, CA, CN, ID, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: POLYMERIC COMPOSITIONS FOR SOIL RELEASE ON FABRICS		
(57) Abstract <p>A copolymer composition and its use as a soil release agent for fabrics comprising monomers copolymerized in the following percentages by weight: (a) from about 30 % to about 49 % of at least one monomer of formula (I): $R_f-Q-A-C(O)-C(R)=CH_2$, wherein R_f is a straight or branched-chain perfluoroalkyl group of from 2 to about 20 carbon atoms, R is H or CH_3, A is O, S or $N(R')$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $-(C_nH_{2n})(OC_qH_{2q})_m-$, $-SO_2-NR'(C_nH_{2n})-$, or $-CONR'(C_nH_{2n})-$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, n is 1 to about 15, q is 2 to about 4, and m is 1 to about 15; (b) from about 10 % to about 70 % of at least one monomer or a mixture of monomers selected from the formulae (IIA): $(R_1)_2N-(CH_2)_r-Z-C(O)-C(R_2)=CH_2$, (IIB): $(O)(R_3)(R_4)N-(CH_2)_r-Z-C(O)-C(R_2)=CH_2$, (IIC): $X-(R_5)(R_4)(R_3)N^+-(CH_2)_r-Z-C(O)-C(R_2)=CH_2$, wherein Z is $-O-$ or $-NR_5-$; R_1 is an alkyl group of from 1 to about 3 carbon atoms; R_2 is H or an alkyl radical of 1 to about 4 carbon atoms; R_3 and R_4 are each an alkyl of 1 to 4 carbon atoms, hydroxyethyl, benzyl, or R_3 and R_4 together with the nitrogen atom form a morpholine, pyrrolidine, or piperadine ring; R_5 is H or an alkyl of 1 to 4 carbon atoms, or R_3, R_4 and R_5 together with the nitrogen atom form a pyridine ring; r is 2 to 4; and wherein for formula (IIA) the nitrogen is from about 40 % to 100 % salinized; and (c) eventually other monomers.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE**POLYMERIC COMPOSITIONS FOR
SOIL RELEASE ON FABRICS****FIELD OF THE INVENTION**

5 This invention relates to fluorochemical copolymers and their application to fabrics and fabric blends to impart soil release properties.

BACKGROUND OF THE INVENTION

Fabric soiling, always a problem with textiles, became even more of a problem with the advent of permanent press fabrics composed of cotton-synthetic
10 blends. These are treated with various additives, which often make them more difficult to clean. In addition, permanent press fabrics are best laundered at low temperatures and mild agitation, whereas soil is best removed at higher temperatures and vigorous agitation. For these reasons, various soil release agents are frequently applied to such fabrics to aid in removing soil during laundering.
15 Preferably, these soil release agents are not themselves removed during laundering (i.e., are durable), and either improve or do not harm other desired properties of the fabric.

Fluorochemicals, despite their comparatively high cost, are probably the most widely used soil release agents on cellulosic fabrics because of their
20 performance at low concentration, their compatibility with permanent press finishes, and freedom from most undesired side effects. However, these agents also tend to affect the hydrophilicity and oleophobicity (i.e., the water and oil repellency) of the fabrics in ways that may be desirable for some applications but undesirable for others. For example, hydrophilic soil releasers are useful to
25 maintain the desired wicking of moisture from skin that fabrics provide, but such hydrophilicity may not be desirable for some other applications such as outerwear. Balancing these characteristics to achieve the desired properties for certain applications while maintaining good soil release properties is often difficult.

A widely used class of soil release fluorochemicals is composed of perfluorinated urethanes containing polyethylene oxide moieties. Such urethanes and their intermediate isocyanates are costly and potentially hazardous to manufacture. The urethane type products are often repellent as well as soil releasing, and thus reduce the comfort of wearing cotton or similar garments. These existing products are difficult to modify when it is desired to increase the degree of hydrophilicity of the fabric for a particular application.


Fluorochemicals which are not urethane based have been used for oil and water repellency in the paper industry. US Patent 5,674,961 of Fitzgerald discloses a class of fluorochemical copolymers useful for improving the water, oil and grease resistance of paper. None of the information in this patent suggests that such a copolymer might be useful as a soil release agent, an entirely different type of application than grease-proofing paper. US Patent 4,147,851 of Reynolds teaches fluorochemical copolymers useful for oil and water repellency applications for paper and fabrics. Again, there is no suggestion that these copolymers are useful as a soil release agent.

Soil release fluorochemicals which are as effective as the perfluorinated urethanes, but which do not involve costly and potentially hazardous isocyanate/urethane chemical manufacturing processes are highly desirable and would have widespread applications. Even more desirably, such a soil release agent would be made by a process, which makes it easier to modify the degree of hydrophilicity of the agent and treated fabric over a wide range to suit various applications. The present invention provides such soil release fluorochemicals.

SUMMARY OF THE INVENTION

The present invention comprises a copolymer composition, which imparts soil release properties to fabrics and fabric blends comprising monomers copolymerized in the following percentages by weight:

- (a) from about 30% to about 49% of at least one monomer of formula I:



wherein

R_f is a straight or branched-chain perfluoroalkyl group of from 2 to about 20 carbon atoms,


R is H or CH_3 ,

5 A is O, S or N(R'), wherein R' is H or an alkyl of from 1 to about 4 carbon atoms,

Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $-(C_nH_{2n})(OC_qH_{2q})_m-$, $-SO_2-NR'(C_nH_{2n})-$, or

10 $-CONR'(C_nH_{2n})-$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, n is 1 to about 15, q is 2 to about 4, and m is 1 to about 15;




(b) from about 10% to about 70% of at least one monomer or a mixture of monomers selected from formula IIA, formula IIB, and formula IIC:

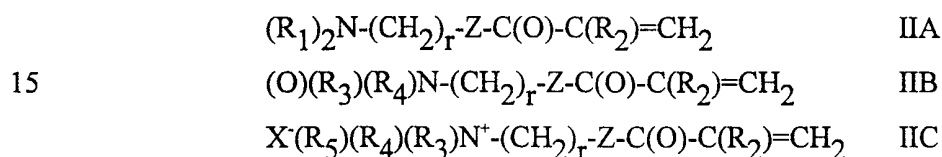

wherein

Z is -O- or $-NR_5-$; R_1 is an alkyl group of from 1 to about 3 carbon atoms; R_2 is H or an alkyl radical of 1 to about 4 carbon atoms; R_3 and R_4 are each an alkyl of 1 to 4 carbon atoms, hydroxyethyl, benzyl, or R_3 and R_4 together with the nitrogen atom form a morpholine, pyrrolidine, or piperadine ring; R_5 is H or an alkyl of 1 to 4 carbon atoms, or R_3 , R_4 and R_5 together with the nitrogen atom form a pyridine ring; r is 2 to 4; and wherein for formula IIA the nitrogen is from about 40% to 100% salinized; and,

- (c) from 0% to about 7% of a monomer of the formula III, IV, V, or VI or a mixture thereof:



or



10 wherein

each R_2 is independently H or an alkyl radical of 1 to about 4 carbon atoms and each R_6 is independently H or an alkyl of 1 to about 8 carbon atoms.

The present invention further comprises a method of treating fabrics and fabric blends to impart soil release properties comprising application to the surface of the fabric or blended fabric of an effective amount of the copolymer composition comprising monomers copolymerized in the following percentages by weight:

- (a) from about 30% to about 90% of at least one monomer of formula I:



20 wherein

R_f is a straight or branched-chain perfluoroalkyl group of from 2 to about 20 carbon atoms,




R is H or CH_3 ,

A is O, S or $\text{N}(\text{R}')$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms,

Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $-(C_nH_{2n})(OC_qH_{2q})_m-$, $-SO_2-NR'(C_nH_{2n})-$, or

$-CONR'(C_nH_{2n})-$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, n is 1 to about 15, q is 2 to about 4, and m is 1 to about 15;

- 5 (b) from about 10% to about 70% of at least one monomer or a mixture of monomers selected from formula IIA, formula IIB, and formula IIC:





wherein

Z is -O- or -NR₅-; R₁ is an alkyl group of from 1 to about 3 carbon atoms; R₂ is H or an alkyl radical of 1 to about 4 carbon atoms; R₃ and R₄ are each an alkyl of 1 to 4 carbon atoms, hydroxyethyl, benzyl, or R₃ and R₄ together with the nitrogen atom form a morpholine, pyrrolidine, or piperadine ring; R₅ is H or an alkyl of 1 to 4 carbon atoms, or R₃, R₄ and R₅ together with the nitrogen atom form a pyridine ring; r is 2 to 4; and wherein for formula IIA the nitrogen is from about 40% to 100% salinized; and,

15

- (c) from 0% to about 7% of a monomer of the formula III or IV, or a mixture thereof:
- 20



or



wherein

each R_2 is independently H or an alkyl radical of 1 to about 4 carbon atoms, and each R_6 is independently H or an alkyl of 1 to about 8 carbon atoms.


- 5 The present invention further comprises a fabric or fabric blend which has been treated according to the method of the present invention as described above. The treated fabric or fabric blend has a fluorine content of from about 0.05% to about 0.5% by weight.

DETAILED DESCRIPTION OF THE INVENTION

- 10 This invention comprises improved fluorochemical copolymers useful for imparting soil release properties to fabrics or blends. By "fabrics" is meant natural or synthetic fabrics composed of fibers of cotton, rayon, silk, wool, polyester, polypropylene, polyolefins, nylon, and aramids such as "NOMEX" and "KEVLAR." By "fabric blends" is meant fabric made of two or more types of
- 15 fibers. Typically these blends are a combination of a natural fiber and a synthetic fiber, but also can include a blend of two natural fibers or of two synthetic fibers. Trademarks and tradenames are indicated herein by capitalization. Superior soil release properties, along with desirable properties of repellency and wicking can be imparted to fabrics and fabric blends by the addition of certain fluorochemical
- 20 copolymers. These can be applied to the fabric in the form of a self-dispersed emulsion or dispersion in water or other solvent either before, after or during the application of other fabric treatment chemicals.

- The highly efficient copolymers useful for this purpose are characterized in that they contain copolymerized comonomers in the following percentages by
- 25 weight, relative to the total weight of the copolymers:

- (a) from about 30% to about 90% of at least one monomer of formula I:



wherein

R_f is a straight or branched-chain perfluoroalkyl group of from 2 to about 20 carbon atoms,


R is H or CH_3 ,

5 A is O, S or $N(R')$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms,

Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $-(C_nH_{2n})(OC_qH_{2q})_m-$, $-SO_2-NR'(C_nH_{2n})-$, or

10 $-CONR'(C_nH_{2n})-$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, n is 1 to about 15, q is 2 to about 4, and m is 1 to about 15;



(b) from about 10% to about 70% of at least one monomer or a mixture of monomers selected from formula IIA, formula IIB, and formula IIC:

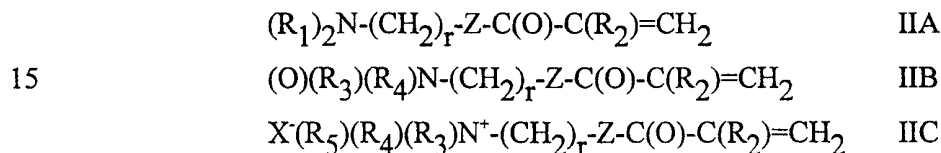

wherein

Z is -O- or $-NR_5-$; R_1 is an alkyl group of from 1 to about 3 carbon atoms; R_2 is H or an alkyl radical of 1 to about 4 carbon atoms; R_3 and R_4 are each an alkyl of 1 to 4 carbon atoms, hydroxyethyl, benzyl, or R_3 and R_4 together with the nitrogen atom form a morpholine, pyrrolidine, or piperadine ring; R_5 is H or an alkyl of 1 to 4 carbon atoms, or R_3 , R_4 and R_5 together with the nitrogen atom form a pyridine ring; r is 2 to 4; and wherein for formula IIA the nitrogen is from about 40% to 100% salinized; and,

25 (c) from 0% to about 7% of a monomer of the formula III, IV, V, or VI, or a mixture thereof:



or



wherein

each R_2 is independently H or an alkyl radical of 1 to about 4 carbon
 10 atoms, and each R_6 is independently H or an alkyl of 1 to about 8 carbon atoms.

Preferably the monomer of formula I is a perfluoroalkylethyl acrylate.
 More preferably the perfluoroalkyl carbon chain length distribution by weight is
 about 50% of 8-carbon, about 29% of 10-carbon, about 11% of 12-carbon, and
 with smaller percentages of 6-carbon, 14-carbon and longer chain lengths.

15 The proportion of monomer (a) of formula I is at least about 30% relative
 to the total weight of copolymer. If it is present in lower amounts, the polymer
 becomes more hydrophilic and the oil repellency drops off to an undesirable level.
 In the method and treated fabric or fabric blend of the present invention the
 proportion of monomer (a) of formula I is less than about 90%. If it is present in
 20 higher amounts, the amounts of the solubilizing monomer (b) of formula IIA
 and/or IIB will be too low, resulting in poor dispersability. In the copolymer
 composition of the present invention the proportion of monomer (a) of formula I
 in the copolymer is between about 30% and about 49% by weight. This latter
 range is preferred for the best balance of soil release, hydrophilicity and
 25 oleophobicity in currently envisioned applications of treatment of fabrics and
 fabric blends. More preferably the proportion of monomer (a) of formula I in the
 copolymer is between about 30% and about 45% by weight. Other proportions
 may be more desirable for other applications.

In fact, one of the major advantages of the inventive composition is that its hydrophilic and oleophobic properties can be varied over a wide range for different applications by simply varying the relative amounts of monomers (a) of formula I and (b) of formula IIA and/or IIB, while still maintaining its properties as an effective soil release agent. That is, the copolymer is modified to make the treated fabric more oleophobic and water repellent by increasing the proportion of monomer (a) of formula I within the above range, or is modified to make the treated fabric more hydrophilic (thereby improving wicking) by increasing the proportion of monomer (b) of formula IIA and/or IIB. This flexibility has not been found possible with existing, more expensive soil release agents.

Preferably monomer (b) of formula IIA is derived from diethylaminoethyl methacrylate by partial or full salinization. The free amine portions of the resulting copolymer is then reacted with a salinizing agent such as acetic acid, resulting in the conversion of part or all of the amine moieties to the corresponding acetate. It must be at least about 40% salinized for adequate solubilizing effect, but may be as high as 100%. Preferably the degree of salinization is between about 50% and about 100%. Alternatively, the salinization reaction is carried out on the amine group before the polymerization reaction with equally good results. The salinizing group is an acetate, halide, sulfate, tartarate or other known salinizing group.

The proportion of monomer (b) of formula IIA, IIB, IIC or a mixture thereof must be at least about 10% for adequate solubilization. While a copolymer with proportions of this monomer (b) above about 70% may be satisfactory in soil releasing properties, such a proportion will produce polymers with very high viscosity, making processing and handling difficult. Preferably the proportion of monomer (b) of formula IIA, IIB, IIC or a mixture thereof in the copolymer is between about 50% and about 65% by weight for the best balance of soil release, hydrophilicity, oleophobicity and viscosity in currently envisioned applications. Other proportions may be more desirable for other applications. All weight percentages are based on the monomer weight as quaternized.

The amine oxide monomers of formula IIB have the formula
 $(O)(R_3)(R_4)N-(CH_2)_r-Z-C(O)-C(R_2)=CH_2$ as described hereinabove wherein
 $NR_3R_4(O)$ represents



They are prepared by reacting the aforesaid acrylate or methacrylate ester or
 10 corresponding acrylamide or methacrylamide with conventional oxydizing agents
 such as hydrogen peroxide or peracetic acid.

The quaternary ammonium monomers of formula IIC are prepared by
 reacting the acrylate or methacrylate esters or corresponding acrylamide or
 methacrylamide with a di-(lower alkyl) sulfate, a lower alkyl halide,
 15 trimethylphosphate or triethylphosphate. Dimethyl sulfate and diethyl sulfate are
 preferred quaternizing agents.

The presence of monomer (c) of formula III, IV, V, or VI is optional,
 depending on the particular application for the copolymer. While there are some
 applications for which it is not necessary, for most of the presently envisioned
 20 applications it is present to achieve satisfactory bonding to the fibers. While not
 wishing to be bound by this theory, it is believed that monomer (c) of formula III
 and IV acts as a reactive site for the polymer to covalently bond to the substrate
 surface. Monomers V and VI can be incorporated to improve the compatability of
 the copolymer with the fabric substrate. To have a noticeable effect on this
 25 property, it must be present in a proportion of at least about 1%. An amount
 above about 7% is unnecessary and may not further improve this performance.
 Preferably, for many applications, the proportion of monomer (c) of formula III,
 IV, V or VI in the copolymer is from about 1% to about 5% by weight. Preferably
 (c) is glycidyl methacrylate. The monomers of formula III, IV, V and VI are
 30 prepared by conventional methods known in the art.

The polymerization of comonomers (a), (b) and (c) is carried out in a solvent such as acetone, methylisobutyl ketone, ethyl acetate, isopropanol, and other ketones, esters and alcohols. The polymerization is conveniently initiated by azo initiators such as 2,2'-azobis(2,4-dimethylvaleronitrile). These initiators
5 are sold by E. I. du Pont de Nemours and Company, Wilmington, Delaware, commercially under the name of "VAZO" 67, 52 and 64, and by Wako Pure Industries, Ltd., Richmond, Virginia, under the name "V-501."

The present invention further comprises a method of treating fabrics or fabric blends comprising application to the surface of the fabric or fabric blend of
10 an effective amount of a copolymer as described above. The copolymers are applied to the fabric or blended fabric to be treated from aqueous dispersions, either alone or in a mixture with other textile treatment agents or finishes. The dispersions are generally applied to textile fabrics by spraying, dipping, padding, or other well-known methods. After excess liquid has been removed, for example
15 by squeeze rolls, the treated fabric is dried and then cured by heating, for example, to 100°C to 190°C, for at least 30 seconds, typically 60-180 seconds. Such curing enhances soil release and durability of the soil release. While these curing conditions are typical, some commercial apparatus may operate outside these ranges because of its specific design features.

20 The present invention further comprises a fabric or fabric blend which has been treated to impart soil release properties thereto by application of an effective amount of a copolymer as described above. The treated fabric has a fluorine content of from about 0.05% to about 0.5% by weight. The treated fabric has superior soil release properties along with desirable properties of repellency and
25 wicking.

The copolymers and method of the present invention are useful to enhance soil release from fabrics and fabric blends during laundering. The soil release property is durable, and is especially effective for permanent press fabric blends. The treated fabrics and fabric blends of the present invention are useful in a
30 variety of applications such as for textiles, clothing, furnishings and the like. The copolymers of the present invention are advantageous in that they are safer to

manufacture than the isocyanate type copolymer, and that it is easy to adjust the degree of hydrophilicity of the copolymer and treated fabric or fabric blend over a wide range by modifying the level of monomers of formulae I versus IIA and IIB allowing for a variety of end use applications. The inventive compositions are
5 made at lower materials cost than isocyanate-based soil release agents, in part because the gas/liquid reactions required for manufacturing phosgene and isocyanates are eliminated.

TEST METHODS

The following tests were employed in evaluating the examples herein.

10 Soil Release

The copolymer materials were tested as a soil release agent as described in AATCC 130-1981, designed to measure the ability of a fabric to release oily stains during a typical home laundering. In this method, an oily stain on a test specimen is produced by using a weight to force a given amount of stain into the
15 fabric. The soiled fabric is laundered, and the residual stain is compared to a scale from 1 to 5 using a standard soil release replica. The number 5 represents the most effective soil release properties and the number 1 the least. Intermediate values are assigned between 1 and 5.

Specifically, the tests are carried out as follows. Five drops of a specific
20 oily soiling agent are placed in the approximate center of a test specimen of fabric. Then a square of glassine paper is placed over the fabric, covering the puddle, followed by a 5 lb (2.3 Kg) weight over the glassine paper. This is allowed to sit for 60 seconds, then the weight and glassine paper are removed. The test specimen is then washed within 15 to 60 minutes at a temperature of 41°C using
25 140 grams of detergent "Tide" available from Procter and Gamble Company, Cincinnati, Ohio, in a standard washer, along with test specimen ballast to make a total weight of 1.8 Kg, for a period of 12 minutes. The entire washer load of specimen and ballast is then placed in a dryer and dried at a maximum air outlet

temperature of 70°C for 45 minutes. The dried test samples are then judged in comparison to the standard scale as described above.

Water Repellency

The water repellency of a treated substrate was measured according to the DuPont technical Laboratory Method as outlined in the Teflon® Global Specifications and Quality Control Tests information packet. The test determines the resistance of a treated substrate to wetting by aqueous liquids. Drops of water-alcohol mixtures of varying surface tensions are placed on the fabric and the extent of surface wetting is determined visually. The test provides a rough index of aqueous stain resistance. The higher the water repellency rating, the better the resistance of a finished substrate to staining by water-based substances. The composition of standard test liquids is shown in the following table.

Table 1
Standard Test Liquids

Water Repellency Rating Number	Composition, Isopropyl Alcohol	Vol % Distilled Water
1	2	98
2	5	95
3	10	90
4	20	80
5	30	70
6	40	60
7	50	50
8	60	40

15

Oil Repellency

The treated fabric samples were tested for oil repellency by a modification of AATCC standard Test Method No. 118, conducted as follows. A fabric sample, treated with an aqueous dispersion of polymer as previously described, is conditioned for a minimum of 2 hours at 23°C + 20% relative humidity and

20

65°C + 10% relative humidity. A series of organic liquids, identified below in Table I, are then applied dropwise to the fabric samples. Beginning with the lowest numbered test liquid (Repellency Rating No. 1), one drop (approximately 5 mm in diameter or 0.05 mL volume) is placed on each of three locations at least 5 mm apart. The drops are observed for 30 seconds. If, at the end of this period, two of the three drops are still spherical in shape with no wicking around the drops, three drops of the next highest numbered liquid are placed on adjacent sites and similarly observed for 30 seconds. The procedure is continued until one of the test liquids results in two of the three drops failing to remain spherical to hemispherical, or wetting or wicking occurs.

The oil repellency rating of the fabric is the highest numbered test liquid for which two of the three drops remained spherical to hemispherical, with no wicking for 30 seconds. In general, treated fabrics with a rating of 5 or more are considered good to excellent; fabrics having a rating of one or greater can be used in certain applications.

Table 1A
Oil Repellency Test Liquids

Oil Repellency Rating Number	Test Solution
1	NUJOL Purified Mineral Oil
2	65/35 Nujol/n-hexadecane by volume at 21°C
3	n-hexadecane
5	n-dodecane
6	n-decane

Note: NUJOL is a trademark of Plough, Inc., for a mineral oil having a Saybolt viscosity of 360/390 at 38°C and a specific gravity of 0.880/0.900 at 15°C.

The following preparative examples were used in evaluating the properties of fabric and fabric blends treated with the inventive copolymers and comparative copolymers.

Example 1

A vessel fitted with a stirrer, thermometer, and reflux condenser was charged with 673.5 parts by weight of fluoromonomer (a) having the formula: $\text{CF}_3\text{CF}_2(\text{CF}_2)_x\text{C}_2\text{H}_4\text{OC(O)-C(H)=CH}_2$, wherein $x = 6, 8, 10, 12, 14, 16,$ and 18 in the respective relative amounts of about 3%, 50%, 31%, 10%, 3% 2% and 1%, said monomer having a weight average molecular weight of 569; 119.5 parts by weight of monomer (b), N,N-diethylaminoethyl methacrylate; 19.0 parts by weight of monomer (c), glycidyl methacrylate; and 505 parts by weight of methyl isobutyl ketone (MIBK). The charge was purged with nitrogen at 40°C for 30 minutes. "VAZO" 67 (0.6 parts by weight), or 2,2-azobis (2,4-dimethylvaleronitrile) available from E. I. du Pont de Nemours and Company, Wilmington, Delaware, was then added to initiate polymerization and the charge was stirred for 16 hours at 70°C under nitrogen.

A mixture of water (2435 parts) and acetic acid (59.5 parts) at room temperature was added to the above copolymer mixture at 70°C. The reflux condenser was replaced with a distillation column and the MIBK was removed at reduced pressure. A total of 3103 parts of copolymer solution was obtained. The copolymer solids (23.1%) contained 82.2% perfluoroalkylethyl acrylate units, 15.4% N,N-diethylaminoethyl methacrylate units and 2.4% glycidyl methacrylate units.

Example 2

The process of Example 1 was repeated using the same monomers and other ingredients, but in the following proportions: Monomer (a), 40.0 g; monomer (b), 57.6 g; monomer (c), 2.4 gm; "VAZO" 67, 1.6 g; MIBK, 136 g, water 387.6 g, acetic acid, 28.9 g.

After the MIBK was removed, the copolymer solids contained 40.0% perfluoroalkylethyl acrylate units, 57.6% N,N-diethylaminoethyl methacrylate units and 2.4% glycidyl methacrylate units.

Comparative Example A

This is an example of a fluorourethane with polyethylene oxide units, "ZONYL" 7910 commercially used for soil release purposes. ("ZONYL" 7910 is available from E. I. du Pont de Nemours and Company, Wilmington, Delaware.)

5 The fabric used in the following tests was a 50%/50% polyester/cotton fabric treated with the previously described fluorochemicals of Examples 1, 2 and Comparative Example A. The oily materials used in the following tests were Kaydol 4 (a standard mineral oil), corn oil, and motor oil as soils. The wickability (hydrophilicity) represents the time in seconds for a water drop to be completely
 10 absorbed into the fabric surface. Results are shown in Table 2 below.

Table 2
Tests of Fluorochemicals on Polyester/Cotton

	Soil Release Properties			Repellency	
	Mineral Oil	Corn Oil	Motor Oil	Wickability	Oil Repellency
Initial Performance (1 Home Wash)					
Example 1	4	4	1	None	5
Example 2	4	4	2	45 seconds	0
Comparative Example A	4	4	2	None	1
After 5 Home Washes					
Example 1	4	4	1		
Example 2	5	4	2		
Comparative Example A	-	5	2		

In the above tests, the composition of Example 2 tested better than that of Example 1, and nearly equivalent to the more expensive Comparative Example A.
 15 In the wickability test, Example 2 showed complete absorption in 45 seconds, whereas for Example 1 and Comparative Example A the water drop never penetrated the fabric. The comparison of Examples 1 and 2 shows the difference in wickability obtainable by varying the ratio of monomers (a) and (b).

20 In the following tests, the fluorocarbon polymer was applied to a 100% cotton fabric for pants by a size press. Both baths contained a resin (Permafresh

MSC available from Sequa Chemicals, Inc., Chester, South Carolina) at 16 grams/liter. The fabric samples were dried at 166°C for 2 minutes. After washing, the fabrics were tumble dried and evaluated for oil and water repellency and soil release (using Kaydol 4 mineral oil). The number of home washings is listed in the table as HW.

Table 3
Comparative Tests of Fluorochemicals on Cotton

	Oil Repellency		Water Repellency		Spray Rating		Soil Release	
	1HW	10 HW	1 HW	10 HW	1 HW	10 HW	1 HW	10 HW
Example 1	6	2	8	2	70	50	5	4
Comparative Example A	4	0	5	0	50	0	5	4

The above results clearly showed the advantage in oil and water repellency for Example 1 versus the more expensive ethoxylated isocyanate composition (Comparative Example A).

Example 3

A vessel was charged with 75.0 parts by weight of fluoromonomer (a) having the formula $CF_3CF_2(CF_2)_x C_2H_4OC(O)-C(H)=CH_2$, wherein $x = 6, 8, 10, 12, 14, 16,$ and 18 in the respective relative amounts of about 3%, 50%, 31%, 10%, 3% 2% and 1%, said monomer having a weight average molecular weight of 569; 25.0 parts by weight of N,N-diethylaminoethyl methacrylate; 2.5 parts by weight of glycidyl methacrylate and 100.0 parts by weight of isopropyl alcohol. The charge was purged with nitrogen for 30 minutes at 45°C. "VAZO" 67 (1.4 parts) as in Example 1 was then added to initiate polymerization and the charge was stirred at 65°C for 16 hours. Paracetic acid (32.0 parts, 32% in acetic acid available from Aldrich Chemical Co., Milwaukee, WI) was added over a period of about 1 hour while the temperature was maintained at about 70°C. The mixture held at 70°C for a further hour after the addition of the peracetic acid was complete.

Example 4

A mixture of 70 parts by weight fluoromonomer
CF₃CF₂(CF₂)_sC₂H₄O₂CC(CH₃)=CH₂, wherein s = 2, 4, 6, 8, 10 and 12, and
30 parts by weight N,N-diethylaminoethyl methacrylate (DEAM) monomer was
5 polymerized at 80°C to 83°C, in 43 parts by weight methyl isobutyl ketone as
solvent, using 0.5 parts by weight azobis(isobutyronitrile) as initiator.

The DEAM units were functionalized after polymerization by conversion
to either the amine acetate or amine oxide salt or a mixture thereof. DEAM
functionalization was effected by heating (50°C to 60°C) the copolymer
10 dispersion with at least equivalent amounts of acetic acid, sulfuric acid, 30%
hydrogen peroxide, 40% peracetic acid or mixtures thereof in aqueous-
methylisobutyl ketone solvent. The solvent was distilled under reduced pressure.
The nonvolatile solids content of the resulting copolymer solution was determined
by drying a 0.4 to 0.6 part sample for 2 hours at 110°C in a vacuum oven at 20-22
15 in of Hg. The copolymer solids was 23.6%.

The following samples were then applied to a white 65% polyester/35%
cotton blend and to 100% cotton at equal fluorine loadings on the fabrics. All
baths contained a permanent press resin Permafresh 113B available from Segua
Chemicals Inc., Chester, South Carolina, and catalyst at about 30 g/L and acetic
20 acid at 1 g/L. Fabric was dried and cured by heating to 380°F (193°C) for
3 minutes. Oil repellency, water repellency, and soil release (Kaydol mineral oil)
were determined as previously described. No wickability performance was
evaluated in this experiment.

Table 4

Sample	Oil Repellency	Water Repellency	Soil Release
65% Polyester/35% Cotton Fabric			
Example 1	6	8	4
Example 3	3	6	2
Example 4	2	7	3
Comparative Example A	5	5	4
100% Cotton Fabric			
Example 1	5	8	4
Example 3	3	5	2
Example 4	2	6	3
Comparative Example A	2	4	4

Example 5-6

The process of Example 1 was repeated using the following components.

- 5 Monomer (a) in these examples had the formula $CF_3CF_2(CF_2)_x C_2H_4OC(O)-C(CH_3)=CH_2$, wherein $x = 2, 4, 6, 8, 10,$ and 12 , in the respective relative amounts of about 3%, 35%, 30%, 17%, 8% and 6%, said monomer having a weight average molecular weight of 543 available from E. I. du Pont de Nemours and Co., Wilmington, DE, as "ZONYL" TM; monomer (b) for Example 5 was
- 10 N,N-dimethylaminoethyl methacrylate methyl chloride salt (70% aqueous solution), and monomer(b) for Example 6 was N,N-dimethylaminoethyl methacrylate methyl sulfate salt. Both monomers are available from Monomer-polymer & Dajac Laboratories, Inc. of Trevese Pennsylvania. In examples 5 and 6 component (a) was present at 70% by weight and component (b) was present at
- 15 30% by weight. "VAZO" 67, (0.5 g) as described in Example 1, was used as the polymerization initiator and the solvent used in both cases was isopropyl alcohol (60 g). After heating at 60 °C for 3 hours, water (470 g) was added and the polymeric material was dispersed with stirring. The isopropanol was not removed in these examples.

The Examples 5 and 6 were applied to a 100 % cotton twill fabric and to a 65%/35% polyester cotton fabric as previously described at 35 g/ L and 31 g/L respectively with 80 g/L of permanent press resin Permafresh MSC available from Segua Chemicals Inc., Chester, South Carolina. The fabrics were cured at 330°F (166°C) for two minutes and the fabrics were rated for soil release and oil and water repellency initially and after laundering as previously described. The results are displayed in Table 5. HW indicates the number of home washings

Table 5: Comparative Tests on Cotton and Polyester Cotton

	100% Cotton					65% / 35% Polyester / Cotton				
	Oil Repellency		Water Repellency		Soil Release	Oil Repellency		Water Repellency		Soil Release
	Initial	5 HW	Initial	5 HW	Initial	Initial	5 HW	Initial	5 HW	Initial
Example 5	0	0	0	0	3	0	0	0	0	2
Example 6	0	0	7	2	2	0	0	3	0	2
Example 1	6		8		5					

10

As can be seen from Example 5 and 6 (compared to Example 1 for the 100% cotton fabric), soil release properties were imparted to fabrics without providing a high level repellency (Example 6) or indeed any repellency at all (Example 5).

Examples 7-13

15 The process of Example 5 was repeated using the copolymer compositions as described in Table 6. Monomer (a) in these examples had the formula $CF_3CF_2(CF_2)_x C_2H_4OC(O)-C(CH_3)=CH_2$, wherein x = 2, 4, 6, 8, 10, and 12, in the respective relative amounts of about 3%, 35%, 30%, 17%, 8% and 6%, said monomer having a weight average molecular weight of 543 available from E. I. 20 du Pont de Nemours and Co., Wilmington, DE, as "ZONYL" TM. In Example 13, 2-(N)-ethylperfluorooctanesulfonamide, available as "FLUORAD" FX-14 from the Minnesota Mining and Manufacturing Co., Minneapolis, MN, was used. Monomer (b) was N,N-diethylaminoethyl methacrylate (DEAM) and monomer

(c) was as described in Table 6. "VAZO" 67, as described in Example 1, was used as the polymerization initiator and the solvent used in both cases was isopropyl alcohol.

Table 6

	Monomer a	Monomer b	Monomer c	Monomer c	Salt
	Zonyl TM (wt%)	DEAM* (wt%)		(wt%)	
Example 7	70	25	Methacrylic acid	5	Acetic acid
Example 8	70	15	2-ethylhexyl methacrylate	15	Acetic acid
Example 9	65	30	Vinylidene chloride	5	Acetic acid
Example 10	60	30	Vinylidene chloride	10	Acetic acid
Example 11	55	30	Vinylidene chloride	15	Acetic acid
Example 12	70	30	-	-	Tartaric acid
Example 13	FX-14 (74.4 g)	25.6	-	-	Acetic acid

5 * N,N – diethylaminoethyl methacrylate

After polymerization as described in Example 5, water (470 g) and acetic acid (1 molar equivalent to monomer b) was added and the polymeric material was dispersed with stirring. In the cases of Examples 7-11, various types and amounts of monomer (c) are shown. In the case of Example 12, 1 molar
 10 equivalent of tartaric acid was used to form the salt of the amine moieties from monomer (b). The isopropanol was also not removed in these examples. The Example 7-13 were applied to the fabrics and tested for oil and water repellency and soil release as described in Examples 5-6. The results are shown in Table 7. HW indicates the number of home washings.

Table 7: Comparative Tests on Cotton and Polyester cotton

	100% cotton					65% / 35% Polyester / Cotton				
	Oil Repellency		Water Repellency		Soil Release	Oil Repellency		Water Repellency		Soil Release
	Initial	5 HW	Initial	5 HW	Initial	Initial	5 HW	Initial	5 HW	Initial
Example 7	2	0	7	0	3	2	0	5	0	2
Example 8	0	0	6	2	1	0	0	5	2	2
Example 9	1	0	6	2	4	0	0	4	2	2
Example 10	1	0	5	2	4	0	0	4	2	2
Example 11	1	0	5	2	4	0	0	4	2	2
Example 12	2	0	6	2	3	1	0	5	3	1
Example 13	2	1	5	3	4	1	0	4	2	1

Examples 14-16

- 5 The process of Example 5 was repeated using the copolymer compositions described in Table 8. Monomer (a) in these examples had the formula $CF_3CF_2(CF_2)_x C_2H_4OC(O)-C(CH_3)=CH_2$, wherein $x = 2, 4, 6, 8, 10,$ and 12 , in the respective relative amounts of about 3%, 35%, 30%, 17%, 8% and 6%, said monomer having a weight average molecular weight of 543 available from E. I.
- 10 du Pont de Nemours and Co., Wilmington, DE, as "ZONYL" TM; monomer (b) for Examples 14-16 was N,N-diethylaminoethyl methacrylate (DEAM). No monomer (c) was used in these examples. "VAZO" 67, as described in Example 1 was used as the polymerization initiator and the solvent used in Examples 14-16 was isopropyl alcohol.

15

Table 8

	Monomer a	Monomer b	Peracetic acid	Hydrogen peroxide
	Zonyl TM (wt%)	DEAM (wt%)		
Example 14	70	30	Yes	No
Example 15	70	30	No	Yes
Example 16	FX-14 (70 g)	30	Yes	No

After polymerization as described in Example 5, peracetic acid or hydrogen peroxide (both available from Aldrich Chemical Co., Milwaukee, WI; 1 molar equivalent to monomer b) was cautiously added and heated for 1 hour. Water was then added and the polymeric material was dispersed with stirring. The isopropanol was also not removed in these examples. Examples 14-16 were applied to the fabrics as in Example 5, and tested for oil and water repellency and soil release as previously described. The results are shown in Table 9. HW indicates the number of home washings.

Table 9: Comparative Tests on Cotton and Polyester cotton

	100% cotton					65% / 35% Polyester / Cotton				
	Oil Repellency		Water Repellency		Soil Release	Oil Repellency		Water Repellency		Soil Release
	Initial	5 HW	Initial	5 HW	Initial	Initial	5 HW	Initial	5 HW	Initial
Example 14	3	0	5	3	3	1	0	4	2	1
Example 15	3	0	5	3	3	2	0	4	2	1
Example 16	2	0	4	1	1	2	0	3	2	1

10

Example 17-21

The process of Example 14 was repeated using the copolymer compositions as described in Table 10. Component (a) had the formula $CF_3CF_2(CF_2)_x C_2H_4OC(O)-C(H)=CH_2$ wherein x=4, 6, 8, 10 and 12+ in the respective relative amounts of about 3%, 50%, 29%, 11% and 7% said monomer having a weight average molecular weight of 543, available as "ZONYL" TA-N from E. I. DuPont de Nemours and Co., Wilmington, DE; component (b) for Example 17 was N,N-diisopropylethylaminoethyl methacrylate (DIPAM); Component (c) was glycidyl methacrylate (GMA). For Examples 18-21 component (b) was N,N-diethylaminoethyl methacrylate (DEAM). For Example 18 component (c) was chlorohydroxypropyl methacrylate (CHPM). For Examples 19-21 component (c) was glycidyl methacrylate (GMA). "VAZO" 67, as described in Example 1 was used as the polymerization initiator and the solvent used in both cases was isopropyl alcohol.

25

After polymerization as described in Example 5 peracetic acid (available from Aldrich Chemical Co., Milwaukee, WI; 1 molar equivalent to component b) was cautiously added and heated for 1 hour. Water was then added and the polymeric material was dispersed with stirring. The isopropanol was also not removed in these examples. Examples 17-21 were applied to fabrics as in Example 5 and tested for oil and water repellency and soil release as previously described. The results are shown in Table 11. HW indicates the number of home washings.

Table 10

	Monomer a	Monomer b	Monomer b	Monomer c	Salt
	Zonyl TAN (wt)	DEAM (wt)	(wt)	(wt)	
Example 17	82	-	DIPAM 15.4	GMA (2.4)	Peracetic acid
Example 18	82	15.4	-	CHPM (2.4)	Acetic acid
Example 19	82.1	15.4	-	GMA (2.4)	Peracetic acid
Example 20	78	19.5	-	GMA (2.5)	Peracetic acid
Example 21	63	34.5	-	GMA (2.5)	Peracetic acid

10

GMA = Glycidyl methacrylate. CHPM = chlorohydroxypropyl methacrylate
DIPAM = N,N-diisopropyl aminoethyl methacrylate

Table 11: Comparative Tests on Cotton and Polyester cotton

	100% cotton					65% / 35% Polyester / Cotton				
	Oil Repellency		Water Repellency		Soil Release	Oil Repellency		Water Repellency		Soil Release
	Initial	5 HW	Initial	5 HW	Initial	Initial	5 HW	Initial	5 HW	Initial
Example 17	2	0	3	2	4	1	0	3	1	2
Example 18	5	2	7	3	5	4	1	5	3	1
Example 19	5	2	8	3	4	3	0	5	2	2
Example 20	4	0	5	2	4	1	0	3	1	1
Example 21	2	0	4	3	2	0	0	2	0	1

15

For Example 17, an amine-containing monomer (DIPAM) was used showing that the performance as a soil release / repellent is general to this

component. Example 18 showed the utility of 2-chlorohydroxypropyl methacrylate and its effect on the durability of the oil and water repellency. Examples 19-21 showed the effects of a range of ratios of Component (a) to Component (b). Example 19 had the highest ratio of Component (a) to Component (b) and also had the most durable oil and water repellency and the highest stain release performance.

Example 22

10

In a Warring blender of the following materials were combined; "ZONYL"™, as described in Examples 14-16 (70.0 parts); N,N-diethylaminoethyl methacrylate methyl chloride salt (30.0 parts); the cationic surfactant N,N-dimethyloctadecyl amine (10.0 parts); and acetic acid (1.0 parts). The mixture was blended for 30 seconds then microfluidized by 2 passes at 6,000 psi (4.14×10^7 Pa). A vessel fitted with a stirrer, thermometer, and reflux condenser was charged with the resulting emulsion and was purged with nitrogen 30 minutes. Azobis isobutyramidine hydrochloride (V-50, 0.5g) available from Wako Chemical, Richmond, Virginia, in water (10.0g), was then added to initiate polymerization and the charge was stirred for 10 hours at 60°C under nitrogen. The resulting emulsion was applied to 100% cotton twill fabric and cured as described in Example 5. The results are shown in Table 12. HW indicates the number of Home Washings.

15

20

Table 12: Comparative Tests on Cotton and Polyester cotton


	100% cotton				
	Oil Repellency		Water Repellency		Soil Release
	Initial	5 HW	Initial	5 HW	Initial
Example 22	0	0	0	0	3
Example 5	3		8		2

25

WHAT IS CLAIMED IS:

1. A copolymer composition for treating fabrics and fabric blends to impart soil release properties comprising monomers copolymerized in the following percentages by weight:

- 5 (a) from about 30% to about 49% of at least one monomer of formula I:



wherein

R_f is a straight or branched-chain perfluoroalkyl group of from 2 to about 20 carbon atoms,

- 10 R is H or CH_3 ,

A is O, S or $N(R')$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms,

Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $-(C_nH_{2n})(OC_qH_{2q})_m-$, $-SO_2-NR'(C_nH_{2n})-$, or

- 15 $-CONR'(C_nH_{2n})-$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, n is 1 to about 15, q is 2 to about 4, and m is 1 to about 15;

- (b) from about 10% to about 70% of at least one monomer or a mixture of monomers selected from formula IIA, formula IIB, and formula IIC:




- 20 $(R_1)_2N-(CH_2)_r-Z-C(O)-C(R_2)=CH_2 \quad IIA$
 $(O)(R_3)(R_4)N-(CH_2)_r-Z-C(O)-C(R_2)=CH_2 \quad IIB$
 $X(R_5)(R_4)(R_3)N^+-(CH_2)_r-Z-C(O)-C(R_2)=CH_2 \quad IIC$

wherein

- 25 Z is -O- or $-NR_5-$; R_1 is an alkyl group of from 1 to about 3 carbon atoms; R_2 is H or an alkyl radical of 1 to about 4 carbon atoms; R_3 and R_4 are each an alkyl of 1 to 4 carbon atoms, hydroxyethyl, benzyl, or R_3 and R_4 together

with the nitrogen atom form a morpholine, pyrrolidine, or piperadine ring; R_5 is H or an alkyl of 1 to 4 carbon atoms, or R_3 , R_4 and R_5 together with the nitrogen atom form a pyridine ring; r is 2 to 4; and wherein for formula IIA the nitrogen is from about 40% to 100% salinized; and,

- 5 (c) from 0% to about 7% of a monomer of the formula III, IV, V, or VI or a mixture thereof:



or



wherein

- 15 each R_2 is independently H or an alkyl radical of 1 to about 4 carbon atoms and each R_6 is independently H or an alkyl of 1 to about 8 carbon atoms.

2. The composition of Claim 1 wherein for the monomer of formula I, R_f is a straight chain fluoroalkyl group of 2 to about 20 carbon atoms, A is O, and Q is alkylene of 1 to about 15 carbon atoms.


- 20 3. The composition of Claim 1 wherein formula I is perfluoroalkylethyl acrylate, formula II is diethylaminoethyl methacrylate, and formula III is glycidyl methacrylate.

4. The composition of Claim 3 wherein the monomer of formula I is $\text{CF}_3\text{CF}_2(\text{CF}_2)_x\text{C}_2\text{H}_4\text{OC}(\text{O})-\text{C}(\text{H})=\text{CH}_2$ wherein x is an even integer from 6 to 18
25 or mixtures thereof.

5. A method of treating fabrics or fabric blends to impart soil release properties comprising application to the surface of the fabric or fabric blend of an

effective amount of a composition comprising monomers copolymerized in the following percentages by weight:

- (a) from about 30% to about 90% of at least one monomer of formula I:



5 wherein

R_f is a straight or branched-chain perfluoroalkyl group of from 2 to about 20 carbon atoms,




R is H or CH_3 ,

A is O, S or $N(R')$, wherein R' is H or an alkyl of from 1 to about 4 carbon
10 atoms,

Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $-(C_nH_{2n})(OC_qH_{2q})_m-$, $-SO_2-NR'(C_nH_{2n})-$, or

$-CONR'(C_nH_{2n})-$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, n is 1 to about 15, q is 2 to about 4, and m is 1 to about 15;

- 15 (b) from about 10% to about 70% of at least one monomer or a mixture of monomers selected from formula IIA, formula IIB, and formula IIC:






wherein

Z is -O- or $-NR_5-$; R_1 is an alkyl group of from 1 to about 3 carbon atoms; R_2 is H or an alkyl radical of 1 to about 4 carbon atoms; R_3 and R_4 are each an alkyl of 1 to 4 carbon atoms, hydroxyethyl, benzyl, or R_3 and R_4 together
25 with the nitrogen atom form a morpholine, pyrrolidine, or piperadine ring; R_5 is H or an alkyl of 1 to 4 carbon atoms, or R_3 , R_4 and R_5 together with the nitrogen

atom form a pyridine ring; r is 2 to 4; and wherein for formula IIA the nitrogen is from about 40% to 100% salinized; and,

- (c) from 0% to about 7% of a monomer of the formula III, IV, V, or VI or a mixture thereof:

5



10

or



wherein

each R_2 is independently H or an alkyl radical of 1 to about 4 carbon atoms and each R_6 is independently H or an alkyl of 1 to about 8 carbon atoms.


6. The method of Claim 5 wherein the effective amount is such to deposit from about 0.05% to about 0.5% by weight fluorine.

7. The method of Claim 6 wherein formula I is perfluoroalkylethyl acrylate, formula II is diethylaminoethyl methacrylate, and formula III is glycidyl methacrylate.

8. A fabric or fabric blend which has been treated to impart soil release properties thereto with a composition comprising monomers copolymerized in the following percentages by weight:

- (a) from about 30% to about 90% of at least one monomer of formula I:

25



wherein

R_f is a straight or branched-chain perfluoroalkyl group containing from 2 to about 20 carbon atoms,


R is H or CH_3 ,

5 A is O, S or N(R'), wherein R' is H or an alkyl of from 1 to about 4 carbon atoms,

Q is alkylene of 1 to about 15 carbon atoms, hydroxyalkylene of 3 to about 15 carbon atoms, $-(C_nH_{2n})(OC_qH_{2q})_m-$, $-SO_2-NR'(C_nH_{2n})-$, or

10 $-CONR'(C_nH_{2n})-$, wherein R' is H or an alkyl of from 1 to about 4 carbon atoms, n is 1 to about 15, q is 2 to about 4, and m is 1 to about 15;




(b) from about 10% to about 70% of at least one monomer or a mixture of monomers selected from formula IIA, formula IIB, and formula IIC:

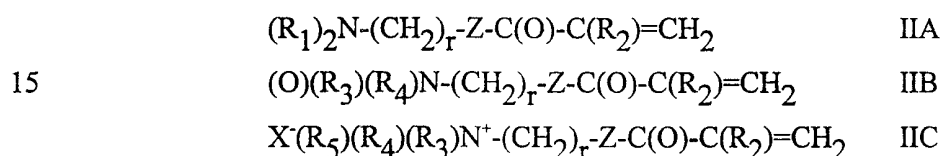


wherein

20 Z is -O- or $-NR_5-$; R_1 is an alkyl group of from 1 to about 3 carbon atoms; R_2 is H or an alkyl radical of 1 to about 4 carbon atoms; R_3 and R_4 are each an alkyl of 1 to 4 carbon atoms, hydroxyethyl, benzyl, or R_3 and R_4 together with the nitrogen atom form a morpholine, pyrrolidine, or piperadine ring; R_5 is H or an alkyl of 1 to 4 carbon atoms, or R_3 , R_4 and R_5 together with the nitrogen atom form a pyridine ring; r is 2 to 4; and wherein for formula IIA the nitrogen is
25 from about 40% to 100% salinized; and,

- (c) from about 1% to about 7% of at least one monomer of the formula III, IV, V or VI or a mixture thereof:



or



10 wherein

each R_2 is independently H or an alkyl radical of 1 to about 4 carbon atoms, and each R_6 is independently H or an alkyl of 1 to about 8 carbon atoms.

9. A fabric or fabric blend of Claim 8 having a fluorine content of from about 0.05% to about 0.5% by weight.

15

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/13535

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 C08F220/24 C08F220/34 C08L33/14 C08L33/16 D06M15/277 D06M15/263 D06M15/273 D06M15/267				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) IPC 6 C08F C08L D06M				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	EP 0 682 146 A (DAIKIN IND LTD) 15 November 1995 (1995-11-15) claim 1 page 3, line 1-47 page 4, line 17-29 page 7, line 1-18 page 7, line 55 -page 8, line 12 ---	1-5,8		
P,X	US 5 872 180 A (MICHELS GISBERT ET AL) 16 February 1999 (1999-02-16) claim 1 column 5, line 51-67 examples A1-A2 --- -/--	1-3,5,8		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
° Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
8 October 1999	18/10/1999			
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Rose, E			

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/13535

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0682146 A	15-11-1995	JP 6228534 A	16-08-1994
		WO 9418377 A	18-08-1994
		US 5614123 A	25-03-1997
US 5872180 A	16-02-1999	DE 4441982 A	30-05-1996
		EP 0713939 A	29-05-1996
		JP 8243480 A	24-09-1996
		US 5753569 A	19-05-1998
WO 9739072 A	23-10-1997	AU 2450697 A	07-11-1997
		CA 2251367 A	23-10-1997
		EP 0892835 A	27-01-1999
		US 5919527 A	06-07-1999
EP 0554667 A	11-08-1993	DE 4201603 A	29-07-1993
		DE 59305473 D	27-03-1997
		JP 2845416 B	13-01-1999
		JP 5279541 A	26-10-1993
		US 5387640 A	07-02-1995
US 4013627 A	22-03-1977	BE 833374 A	31-12-1975
		CA 1056992 A	19-06-1979
		DE 2540829 A	25-03-1976
		FR 2284619 A	09-04-1976
		GB 1530275 A	25-10-1978
		IT 1042172 B	30-01-1980
		JP 1232892 C	26-09-1984
		JP 51055500 A	15-05-1976
		JP 59009666 B	03-03-1984
		US 8505221 I	30-03-1976
		US 5674934 A	07-10-1997
CA 2245782 A	28-08-1997		
EP 0882079 A	09-12-1998		
WO 9731042 A	28-08-1997		