

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 601 265 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
15.01.1997 Bulletin 1997/03

(51) Int Cl.⁶: **H01R 13/658**, H01R 13/648,
H01R 13/629, H01R 23/70

(21) Application number: **93103334.4**

(22) Date of filing: **02.03.1993**

(54) **Socket-type multipolar electrical connector**

Mehrpoliger elektrischer Verbinder vom Buchsentyt

Connecteur électrique multipolaire à douille

(84) Designated Contracting States:
DE FR GB IE

(30) Priority: **11.12.1992 JP 85328/92**

(43) Date of publication of application:
15.06.1994 Bulletin 1994/24

(73) Proprietor: **HOSIDEN CORPORATION**
Osaka-fu (JP)

(72) Inventor: **Nakamura, Masahiko**
Yoa-shi, Osaka-fu (JP)

(74) Representative: **Fleuchaus, Leo, Dipl.-Ing. et al**
Melchiorstrasse 42
81479 München (DE)

(56) References cited:

EP-A- 0 123 590	EP-A- 0 166 115
EP-A- 0 292 144	EP-A- 0 340 327
EP-A- 0 496 082	DE-A- 2 259 231
DE-A- 2 925 590	DE-A- 4 015 915
DE-U- 8 630 023	DE-U- 9 108 753
US-A- 3 864 000	US-A- 5 013 262

EP 0 601 265 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Background of the Invention

1. Field of the Invention

The present invention relates to a socket-type multipolar electrical connector according to the preamble of claim 1 which is for example to be used together with its counter connector or plug-type multipolar electrical connector, and more particularly to a socket-type multipolar electrical connector in which, without hindrance for various types of signal processings, the pitch between each adjacent contact pieces of a plurality of contact pieces is minimized to miniaturize the connector with the density of contact pieces increased, and which can be mounted directly on a printed circuit board.

Such a socket-type multipolar electrical connector is for example known from EP-A-0 123 590.

When a socket-type multipolar electrical connector is used together with its counter connector or plug-type multipolar electrical connector in which all the terminal pins are arranged in a predetermined assembly pattern with high density, the socket-type multipolar electrical connector is required such that all the contact pieces thereof corresponding to the terminal pins are also arranged in the same assembly pattern with high density.

There is conventionally known a socket-type multipolar electrical connector capable of satisfying the requirement above-mentioned, which has contact piece groups comprising a plurality of contact pieces all of which are assembled with the body of the connector with the horizontal pitch between each adjacent contact pieces being fine.

On the other hand, it is recently required to execute a variety of signal processings using a composite cable in which a braided shell shield surrounds various types of conductors (core wires, twisted wires and the like) having different diameters.

When there is used, as a plug-type multipolar electrical connector satisfying the requirement above-mentioned, an electrical connector of the type mentioned earlier in which all the terminal pins are arranged in a predetermined assembly pattern with high density, this presents the problem that it becomes difficult to provide a space necessary for connecting (by soldering or calking) the respective conductors of the composite cable to the respective terminal pins. The same problem also resides in a socket-type multipolar electrical connector.

As prior art proposed in view of this problem, there is also known a technique discussed in Japanese Utility Model Publication No. 4-15664. This technique relates to a plug-type multipolar electrical connector which facilitates the wire handling of connecting the respective conductors having different diameters of a composite cable to respective terminal pins, yet enabling the electrical connector to be miniaturized with the density of terminal pins increased. More specifically, this plug-type

multipolar electrical connector is arranged such that the terminal pins are divided into a terminal pin group for thin conductors and a terminal pin group for thick conductors, wherein the horizontal pitch between each adjacent terminal pins of the terminal pin group for thin conductors is substantially smaller than the horizontal pitch between each adjacent terminal pins of the terminal pin group for thick conductors, the terminal pin group for thin conductors is disposed at the center of the body made of an insulating material, and the terminal pin group for thick conductors is disposed at a lateral side of the terminal pin group for thin conductors.

The document DE-U-8 630 023 discloses a socket type multipolar connector which is an assembly of two connector housings and which may receive separate plugs.

Summary of the Invention

The present invention is proposed in view of the foregoing.

It is an object of the present invention to provide a socket-type multipolar electrical connector which can be used together with, as its counter connector, a plug-type multipolar electrical connector as shown in Japanese Utility Model Publication No. 4-15664 which comprises a terminal pin group for thin conductors in which the horizontal pitch between each adjacent terminal pins is substantially smaller than the horizontal pitch between each adjacent terminal pins in a terminal pin group for thick conductors, the terminal pin group for thick conductors being disposed at a lateral side of the terminal pin group for thin conductors.

It is another object of the present invention to provide a socket-type multipolar electrical connector which is effectively restrained from being increased in size to meet the demand for a miniaturized connector.

It is a further object of the present invention to provide a socket-type multipolar electrical connector having an excellent shielding function as an anti-noise (electrical noise) measure.

It is still another object of the present invention to provide a socket-type multipolar electrical connector excellent in maneuverability of attaching to and removing from its counter connector or plug-type multipolar electrical connector and also excellent in performance of preventing the socket-type multipolar electrical connector as attached to its counter connector from being unexpectedly disconnected therefrom.

To achieve the objects above-mentioned, the present invention provides a socket-type multipolar electrical connector according to claim 1.

According to the socket-type multipolar electrical connector having the arrangement above-mentioned, the layout and the horizontal and vertical pitches of the plurality of first and second contact pieces forming the contact piece groups can fit in with the layout and the horizontal and vertical pitches of terminal pin groups for

thin and thick conductors of a plug-type multipolar electrical connector using a composite cable. Accordingly, such a plug-type multipolar electrical connector can be used as a counter connector. Further, by connecting the plurality of first contact pieces to the thin conductors of the composite cable and by connecting the plurality of second contact pieces to the thick conductors of the composite cable, the respective contact pieces can be readily connected to the respective conductors of the composite cable having different diameters. Accordingly, the socket-type multipolar electrical connector of the present invention can be miniaturized with the density of the contact pieces increased.

According to the socket-type multipolar electrical connector having the arrangement above-mentioned, the layout and the horizontal and vertical pitches of the first and second contact-piece holding holes can fit in with the layout and the horizontal and vertical pitches of terminal pin groups for thin and thick conductors of a plug-type multipolar electrical connector using a composite cable. Accordingly, such a plug-type multipolar electrical connector can be used as a counter connector. Further, the respective contact pieces can be fitted in and held by the first and second contact-piece holding holes. Accordingly, even though each of the contact pieces is made in the form of a very slender piece to miniaturize the connector in its entirety, the first and second contact-piece holding holes securely maintain the shapes of the contact pieces, thus restraining the contact pieces from being deformed.

According to the present invention, the socket-type multipolar electrical connector may furthermore comprise: a first terminal group comprising a plurality of first terminals extending downwardly from and at right angles to the rear end portions of the first contact pieces forming the first contact piece group; and a second terminal group comprising a plurality of second terminals extending downwardly from and at right angles to the rear end portions of the second contact pieces forming the second contact piece group, the plurality of first and second terminals which form the terminal groups being arranged in an assembly pattern similar to the assembly pattern in which the contact pieces forming the contact piece groups are arranged. When it is said in the foregoing that the assembly pattern of the terminals is similar to the assembly pattern of the contact pieces, this means that the layout or arrangement of the terminal is generally similar to the layout or arrangement of the contact pieces. More specifically, it means that, when the contact pieces are arranged in a grid manner, the terminals are also arranged in a grid manner. Accordingly, it does not mean that the horizontal and vertical pitches of the terminals are identical to those of the contact pieces in terms of numeral values.

According to the socket-type multipolar electrical connector having the arrangement above-mentioned, the assembly pattern of the terminals forming the terminal groups, is similar to the assembly pattern of the con-

tact pieces forming the contact piece groups. Accordingly, the terminals forming the terminal groups can be regularly arranged, thus enabling the production steps to be simplified.

5 According to the present invention, the socket-type multipolar electrical connector may further comprise a plate-like terminal holder having terminal holding holes arranged in an assembly pattern identical with the assembly pattern in which the terminal groups are arranged, the terminals which form the terminal groups, being respectively inserted into the terminal holding holes, and the terminal holder being fitted in an opening at the bottom of the rearward portion of the body.

10 According to the socket-type multipolar electrical connector having the arrangement above-mentioned, the terminal holder can securely maintain the terminals forming the terminal groups in predetermined pitches. Further, the terminal holder can maintain the shapes of the terminals, thus restraining the terminals from being deformed, even though each of the terminals is made in the form of a very slender piece.

20 According to the present invention, the socket-type multipolar electrical connector may further comprise a shield cover comprising, in a unitary structure: a case-like portion put on the forward portion of the body; an intermediate plate portion so put on the rearward portion of the body as to surround the top and lateral sides of the rearward portion, the intermediate plate portion integrally having terminals which downwardly extend; and a rear surface portion for closing an opening at the rear side of the body, the rear surface portion being bent at a boundary part thereof between the rear surface portion and the intermediate plate portion, thereby to close the opening of the body.

25 According to the socket-type multipolar electrical connector having the arrangement above-mentioned, the shield cover can make the entire connector in a compact design in external appearance. Further, the shield cover has, in a unitary structure, the case-like portion which surrounds the forward portion of the body, the intermediate plate portion which surrounds the top and lateral sides of the rearward portion of the body, and the rear surface portion which closes the opening of the body. This presents an excellent shielding performance as an anti-noise measure. Further, when the terminals integrally formed at the shield cover are used as grounding terminals, the shielding performance can be further enhanced. Thus, the present invention can provide a socket-type multipolar electrical connector which meets the demand for miniaturization and higher density and which is excellent in shielding performance as an anti-noise measure.

30 According to the present invention, the socket-type multipolar electrical connector may be arranged such that there is formed, between the case-like portion of the shield cover and the forward portion of the body on which the case-like portion is put, a space in which a shield cover of a plug-type electrical connector is adapt-

ed to be fitted, and that the case-like portion has a top plate portion, inclined surfaces extending, as downwardly inclined, from both transverse ends of the top plate portion, a pair of lateral plates downwardly extending from the lower ends of the inclined surfaces, and a lower plate portion extending between the lateral plates.

According to the socket-type multipolar electrical connector having the arrangement above-mentioned, the upper portion of the shield cover is different in shape from the lower portion thereof. This effectively prevents a plug-type multipolar electrical connector from being erroneously inserted. Such an erroneous-insertion preventive function prevents the contact pieces from being deformed due to erroneous insertion of a plug-type multipolar electrical connector.

According to the present invention, the socket-type multipolar electrical connector may be arranged such that the case-like portion of the shield cover is provided in the pair of lateral plates thereof with engagement holes into and from which locking projections of a shield cover of a plug-type electrical connector are adapted to be fitted and removed.

According to the arrangement above-mentioned, the socket-type multipolar electrical connector can be securely connected to its counter connector or plug-type multipolar electrical connector, and the socket-type multipolar electrical connector as connected to its counter connector or plug-type multipolar electrical connector is prevented from being unexpectedly removed therefrom.

These and other features, objects and advantages of the present invention will be more fully apparent from the following description of embodiments thereof.

Brief Description of the Drawings

Figure 1 is an exploded perspective view of a body, a shield cover and a terminal holder of a socket-type multipolar electrical connector according to an embodiment of the present invention;

Figure 2 is a plan view of contact pieces and terminals used in the connector shown in Figure 1;

Figure 3 is a side view of the contact pieces and terminals used in the connector shown in Figure 1;

Figure 4 is a front view of the connector shown in Figure 1;

Figure 5 is a side view of the connector shown in Figure 1;

Figure 6 is an end view of the connector shown in Figure 1;

Figure 7 is a plan view, with portions broken away, of the connector shown in Figure 1;

Figure 8 is a bottom view of the connector shown in Figure 1;

Figure 9 is a plan view of the body with portions shown in section;

Figure 10 is a section view taken along the line X-X in Figure 9;

Figure 11 is an enlarged section view of portions of the connector shown in Figure 1;

Figure 12 is a plan view of a plug-type multipolar electrical connector with portions shown in section; Figure 13 is a view, with portions broken away, a stage of an operation of connecting the socket-type multipolar electrical connector to the plug-type multipolar electrical connector;

Figure 14 is a view illustrating another stage of the operation of connecting the socket-type multipolar electrical connector to the plug-type multipolar electrical connector;

Figure 15 is a view illustrating a further stage of the operation of connecting the socket-type multipolar electrical connector to the plug-type multipolar electrical connector; and

Figure 16 is a view, with portions broken away, illustrating an operation of removing the socket-type multipolar electrical connector from the plug-type multipolar electrical connector.

Detailed Description of the Preferred Embodiments

In Fig. 1, a socket-type multipolar electrical connector has a body 1, a shield cover 2, a terminal holder 8 and the like.

As shown in Figs. 1, 9 and 10, the body 1 is molded from resin excellent in insulating properties. The shape in front elevation of the body 1 is long from side to side and substantially rectangular. The body 1 has a forward portion 11, a rearward portion 12 and a stepped portion 13 at the boundary area therebetween at which the rearward portion 12 outwardly projects. In the body 1, the forward portion 11 is provided in the lateral surfaces thereof with concave grooves 14 extending in the longitudinal direction A. The concave grooves 14 are opened at the front ends thereof and provided at the rear surfaces thereof with inclined surfaces 14a. The forward portion 11 of the body 1 has a plurality of contact-piece holding holes which are pierced through the forward portion 11. These contact-piece holding holes are divided into two groups, i.e., a first contact-piece holding hole group comprising a plurality of first contact-piece holding holes 51 in which the horizontal pitch P1 between each adjacent holes is as shown in Fig. 4, substantially smaller than the horizontal pitch P2 between each adjacent holes in a second contact-piece holding hole group comprising a plurality of second contact-piece holding holes 52.

These first and second contact-piece holding hole groups form a contact-piece holding hole group 5. The second contact-piece holding holes 52 are formed at a lateral side of the first contact-piece holding holes 51. The first contact-piece holding holes 51 and the second contact-piece holding holes 52 are basically arranged in a grid manner in which a plurality of stages are vertically arranged (basically 5 stages in Fig. 4). In Fig. 4, the first contact-piece holding holes 51' of one row in the

vicinity of the left lateral side of the body 1 are formed in three alternate stages, and the first contact-piece holding holes 51 of the left-end row are formed in the two highest and lowest stages with the intermediate three stages skipped. The second contact-piece holding holes 52 are formed substantially symmetrically with respect to the first contact-piece holding holes 51, 51". Terminal pins 300 of a plug-type multipolar electrical connector to be discussed later (See Fig. 12) are to be respectively inserted into the contact-piece holding holes 51, 52 forming the contact-piece holding hole group 5.

As shown in Fig. 10, the first contact-piece holding holes 51 have engagement projections 53 on the upper walls of the rear ends thereof. Although not shown, the second contact-piece holding holes 52 have similar engagement projections.

As understood from Figs. 9 and 10, the body 1 is provided at the rearward portion 12 thereof with projecting walls 15 which extend from the lateral walls of the forward portion 11 in the rearward direction R. The projecting walls 15 are provided in the lateral sides thereof with concave grooves 16 extending in the longitudinal direction A. The projecting walls 15 are provided at the upper outside corners thereof with inclined surfaces 17. The rearward portion 12 of the body 1 has openings 1a, 1b at the rear side and bottom thereof, respectively. In the space between the projecting walls 15, vertical ribs 61 to 65 for holding the contact pieces project, in the rearward direction R, from a plurality of vertical and transverse positions of the rear surface 18 of the forward portion 11 of the body 1. Horizontal ribs 61' to 65' are respectively formed on the vertical ribs 61 to 65 as transversely projecting from the upper end edges of the vertical ribs 61 to 65. The rearwardly projecting distances of the vertical and horizontal ribs 61 to 65, 61' to 65' from the forward portion of the body are gradually reduced in the direction from the highest ribs toward the lowest ribs. Partitioned spaces S defined by the vertical and horizontal ribs 61 to 65, 61' to 65' respectively communicate with the first and second contact-piece holding holes 51, 52. In this embodiment, the horizontal rib 62' of the left-end vertical rib 62 and the horizontal rib 62' for the vertical rib 62 next thereto are formed in a unitary structure in the form of a flat plate, and the horizontal rib 62' of the right-end vertical rib 62 and the horizontal rib 62' for the vertical rib 62 next thereto are also formed in a unitary structure in the form of a flat plate (See Fig. 9). Further, all the horizontal ribs 63' of the vertical ribs 63 are formed in a unitary structure in the form of a flat plate (See Fig. 10).

Plate portions 19 downwardly project from the lower end edges of the projecting walls 15. The plate portions 19 are provided at the outer sides thereof with engagement projections 19a (See Fig. 1) and at the inner sides thereof with engagement grooves 19b (See Fig. 10). At the stepped portion 13, a rib 10 having three concaves 10a, 10b is formed on the top of the body 1, and a con-

cave 10c is formed at the bottom of the body 1 (See Fig. 10).

As shown in Fig. 1, the shield cover 2 before it is assembled with the body 1 has, in a unitary structure, a case-like portion 21, an intermediate plate portion 22 and a rear surface portion 23 which projects from the intermediate plate portion 22 in the rearward direction R.

The case-like portion 21 has a top plate portion 21a, inclined plate portions 21b inclined downwardly from the both lateral ends of the top plate portion 21a, a pair of lateral plates 21c downwardly extending from the lower ends of the inclined plate portions 21b, and a lower plate portion 21d extending between the lateral plates 21c. The lower plate portion 21d is transversely divided at the center thereof with the divided ends thereof abutting to each other. The lateral plates 21c are provided at portions of the front end edges thereof with guide portions 21e which are outwardly expanded. Engagement holes 21f are formed immediately rearward of the guide portions 21e. Inwardly expanding contact portions 24 are formed at a plurality of positions of the top plate portion 21a and the lower plate portion 21d in the vicinity of the front ends thereof. The lower plate portion 21d has an engagement piece 33 which projects in the rearward direction R (See Figs. 4, 8, 11).

The shape of the intermediate plate portion 22 is similar to the case-like portion 21, but lacks in the lower plate portion 21d. The intermediate plate portion 22 is provided at two different positions of each of the lateral sides thereof with downwardly projecting terminals 25, 26. Engagement pawls 32 are formed between the terminals 25, 26. The intermediate plate portion 22 also has inwardly expanding portions 27 at the positions corresponding to the concave grooves 16 in the body 1. At the boundary part between the intermediate plate portion 22 and the top plate portion 21a of the case-like portion 21, there are formed engagement pawls 28, 29 by and between which the rib 10 of the body 1 is held. The intermediate plate portion 22 is provided at the rear end portions of the lateral sides thereof with engagement projections 20.

In the rear surface portion 23, a boundary portion 23a between the rear surface portion 23 and the intermediate plate portion 22 is so formed as to be bent. The rear surface portion 23 is provided at the lateral sides thereof with plate pieces 30 having engagement holes 31.

The shield cover 2 having the arrangement above-mentioned may be integrally formed by punching or bending a metallic plate.

The terminal holder 8 has a plurality of terminal holding holes 81 arranged in the same assembly pattern as the assembly pattern in which terminals 71, to be discussed later, are arranged. The terminal holder 8 is provided at the lateral sides thereof with concave portions 82 having engagement projections 83.

As shown in Figs. 2 and 3, each contact piece 41 is made in the form of a very slender piece which has, at

the front end thereof, a pair of guide pieces 42, a pair of contact-piece main bodies 43 which are raised from the rearward parts of the contact piece 41 and which extend in the forward direction F, and an engagement pawl 44 formed as cut and raised between the contact-piece main bodies 43. The contact-piece main bodies 43 are provided at the front ends thereof with contacts 43a. The contact pieces 41 before they are assembled with the first and second contact-piece holding holes 51, 52 in the body 1, have the terminals 71 which extend in the rearward direction R through narrow-width parts 45 which are formed at the rear ends of the contact pieces 41 and which can be bent. Each terminal 71 is made in the form of a very slender piece having a pair of reinforcing ribs 72. A plurality of units each of which comprises a contact pieces 41 and a terminal 71 and which are connected to one another by connecting pieces 40, 70, are supplied to the assembling step.

The following description will discuss an example of assembling the socket-type multipolar electrical connector shown in the embodiment above-mentioned.

The body 1 is pushed in the shield cover 2 as discussed in connection with Fig. 1 in which the rear surface portion 23 projects from the intermediate plate portion 22 in the rearward direction R, in the forward direction F from the rear end of the shield cover 2. Accordingly, the rib 10 of the body 1 is held by and between the engagement pawls 28, 29 of the shield cover 2, and the engagement piece 33 of the shield cover 2 is fitted into the concave 10c of the body 1 as shown in Fig. 11. Further, the engagement pawls 32 of the shield cover 2 are engaged with the rear sides of the engagement projections 19a of the body 1 as shown in Figs. 5 and 8.

In the units in which a predetermined number of contact pieces 41 and terminals 71 are connected to one another by the connecting pieces 40, 70 (as shown in Fig. 2), the connecting piece 70 is cut off at cutting portions 73 and separated from the terminals 71. The terminals 71 are inserted into the corresponding first and second contact-piece holding holes 51, 52 from the front side of the body 1, so that the respective contact pieces 41 are fitted in the partitioned spaces S in the corresponding first and second contact-piece holding holes 51, 52. Accordingly, the shapes of the contact pieces 41 are maintained by the first contact-piece holding holes 51 and the second contact-piece holding holes 52. This prevents the contact pieces 41 from being deformed even though each of the contact pieces 41 is made in the form of a very slender piece so that the connector is miniaturized in its entirety. After the contact pieces 41 have been respectively fitted in and held by the first contact-piece holding holes 51 and the second contact-piece holding holes 52, the connecting piece 40 is cut off and separated at cutting portions 47 (See Fig. 2). Thus, as shown in Fig. 11 which shows the contact pieces 41 fitted in the first contact-piece holding holes 51 at the lowest stage, the engagement projections 53 are fitted between the pairs of the contact-piece main bodies

43 and the engagement pawls 44 get over the engagement projections 53 and are engaged with the rear surfaces thereof. The engagement of the engagement pawls 44 with the engagement projections 53 prevents the contact pieces 41 from being positionally shifted in the forward direction F.

The contact pieces 41 fitted in and held by the first contact-piece holding holes 51 and the second contact-piece holding holes 52 form a contact piece group 4 (See Fig. 4). The assembly pattern of the contact pieces 41 forming the contact piece group 4 is the same as the assembly pattern in which the first and second contact-piece holding holes 51, 52 forming the contact-piece holding hole group 5 are arranged. As apparent from the description of the arrangement of the first contact-piece holding holes 51 and the second contact-piece holding holes 52, the assembly pattern of the contact pieces 41 in this embodiment is basically arranged in a grid manner in which a plurality of stages are vertically arranged (basically 5 stages in Fig. 4). The assembly pattern of the contact pieces 41 is identical with that of terminal pins 300 for thin and thick conductors in a plug-type multipolar electrical connector using a composite cable. With such an arrangement, this socket-type multipolar electrical connector can be used as the counter connector of the plug-type multipolar electrical connector.

Thus, when the contact pieces 41 are fitted in and held by the first contact-piece holding holes 51, the second contact-piece holding holes 52 and the partitioned spaces S, the terminals 71 extending from the contact pieces 41 project to the space between the pairs of the projecting walls 15 of the body 1. Out of these terminals 71, the terminals 71 projecting from the partitioned space S of the same stage are simultaneously bent at the narrow-width parts 45 thereof, successively starting from the terminals 71 projecting from the partitioned space S at the lowest stage (Fig. 11 shows the state where the terminals 71 at the lowest stage are bent), so that the terminals 71 downwardly extend at right angles to the contact-piece main bodies 43.

The terminals 71 thus perpendicularly bent form a terminal group 7 (See Figs. 4 to 6). The assembly pattern in which the terminal group 7 is arranged, is similar to that of the contact pieces 41. More specifically, the arrangement of the respective terminals 71 forming the terminal group 7 is generally similar to the arrangement of the respective contact pieces 41 forming the contact piece group 4. In the embodiment, the terminals 71 are basically arranged in a grid manner in the transverse and longitudinal directions. The transverse pitch between each adjacent terminals 71 is the same as the horizontal pitch P1 between each adjacent contact pieces 41. The longitudinal pitch of the terminals 71 is slightly greater than the vertical pitch of the contact pieces 41. With such an arrangement, the terminals 71 can be regularly arranged. This is useful for simplifying the production steps. The assembly pattern of the terminal holding holes 81 in the terminal holder 8 is the same as

the assembly pattern of the terminals 71 forming the terminal group 7.

The terminals 71 forming the terminal group 7 are respectively inserted into the terminal holding holes 81 of the terminal holder 8, and the terminal holder 8 is fitted into the opening 1b (See Fig. 10) at the bottom of the rearward portion of the body 1 as shown in Fig. 6 or 8. Accordingly, the terminal holder 8 not only securely maintains the terminals 71 in a predetermined pitch, but also prevents the contact pieces 41 from being positionally shifted in the rearward direction R. Further, the terminal holder 8 can maintain the shapes of the terminals 71. This causes the terminals 71 to be hardly deformed even though each of the terminals 71 is made in the form of a very slender piece. To fit the terminal holder 8 into the opening 1b, the concave portions 82 of the terminal holder 8 are fitted to the plate portions 19 of the body, 1 and the engagement projections 83 of the concave portions 82 are engaged with the engagement grooves 19b (See Fig. 10) of the plate portions 19, as shown in Figs. 5 and 8.

After or before the terminal holder 8 is mounted on the body 1 in the manner above-mentioned, the rear surface portion 23 of the shield cover 2 is bent at the boundary portion 23a. Accordingly, the rear surface portion 23 closes the opening 1a at the rear side of the body 1, and the plate pieces 30 are opposite to the lateral sides of the intermediate plate portion 22 such that the engagement holes 31 are engaged with the engagement projections 20.

The procedure above-mentioned is shown as a mere example, and the assembling procedure should not be limited to that above-mentioned.

In the socket-type multipolar electrical connector shown in Figs. 4 to 8, the forward portion 11 of the body 1 is wholly surrounded by the case-like portion 21 of the shield cover 2, and the top and lateral sides of the rearward portion 12 of the body 1 are surrounded by the intermediate plate portion 22 of the shield cover 2, and the opening 1a at the rear end side of the body 1 is closed by the rear surface portion 23 of the shield cover 2. In addition, the terminal holder 8 closes the opening 1b at the bottom of the body 1. Such an arrangement provides an excellent shielding function as an anti-noise measure. The terminals 25, 26 integrally formed at the shield cover 2 are grounded. This further improves the connector in shielding performance.

Between the forward portion 11 of the body 1 inserted into the case-like portion 21 of the shield cover 2 and the case-like portion 21, there is formed a space 9 (See Figs. 4 and 7) into which a case-like shield cover 100 of a plug-type multipolar electrical connector to be discussed later, can be fitted. Since the upper and lower portions of the case-like portion 21 are formed asymmetrically with each other, the plug-side shield cover 100 can be fitted to the space 9 only in a predetermined orientation. This effectively prevents the plug-type multipolar electrical connector from being erroneously

inserted.

With reference to Fig. 12, the following description will discuss the arrangement of the plug-type multipolar electrical connector which serves as a counter connector of the socket-type multipolar electrical connector.

The plug-type multipolar electrical connector comprises the shield cover 100, a body 200 surrounded by the shield cover 100 and a plurality of terminal pins 300 assembled with the body 200 in the same pattern as that of the contact pieces 41, the terminal pins 300 being connected to thin conductors 410 and thick conductors 420 of a composite cable 400. The shield cover 100 is provided at the lateral sides thereof with locking mechanisms 500. The locking mechanisms 500 have, in a unitary structure, (i) resilient movable pieces 510 provided at the tips thereof with projections 511 formed by bending the tips of the movable pieces 510, and (ii) holding frame portions 520 integrally formed at the base end portions of the movable pieces 510. The holding frame portions 520 are so arranged as to house and hold spring members 530 and base portions 610 of sliders 600 normally biased in the rearward direction R by the spring members 530. The movable pieces 510 are housed in openings 110 extending in the longitudinal direction A formed in the shield cover 100. There are also disposed a strain relief 700, a sleeve 710 and a ferrite core 720.

With reference to Figs. 13 to 16, the following description will discuss how the plug-type multipolar electrical connector is connected to the socket-type multipolar electrical connector, and how the both connectors as connected to each other are disconnected from each other.

For connecting the plug-type multipolar electrical connector to the socket-type multipolar electrical connector, the rear end portion (the right end in Fig. 13) of the shield cover 100 of the plug-type multipolar electrical connector is inserted into the space 9 between the forward portion 11 of the body 1 and the case-like portion 21 of the shield cover 2 in the socket-type multipolar electrical connector. At the first stage, the projections 511 of the movable pieces 510 are guided by the guides 21e of the shield cover 2, so that the movable pieces 510 pass through the guides 21e while the sliders 600 fitted in the concave grooves 14 are bent and inwardly displaced. Immediately after the projections 511 have passed through the guides 21e, the tips of the sliders 600 come in contact with the inclined surfaces 14a of the concave grooves 14, as shown in Fig. 13. When the plug-type multipolar electrical connector is further inserted, only the movable pieces 510 are moved forward as shown in Fig. 14, and the sliders 600 which remain in contact with the inclined surfaces 14a, are prevented from being moved forward, so that the spring members 530 are compressed. When the plug-type multipolar electrical connector is further inserted in the direction X from the position shown in Fig. 14, the projections 511 reach the engagement holes 21f formed in the shield

cover 2. At this time, the movable pieces 510 are outwardly displaced and reset due to the resiliency thereof, so that the projections 511 are fitted into the engagement holes 21f. Thus, when the projections 511 are fitted into the engagement holes 21f, the sliders 600 are displaced and reset, and the sliders 600 are then pushed out by the spring loads of the spring members 530. Then, the sliders 600 are fitted between the shield cover 2 and the surface of the forward portion 11 of the body 1. Accordingly, the sliders 600 are backed up from the back sides thereof by the surface of the forward portion 11 of the body 1, thereby to prevent the movable pieces 510 from being inwardly displaced. Accordingly, even though the composite cable 400 or the strain relief 700 is pulled, there is no possibility of the projections 511 coming out from the engagement holes 21f. This prevents the plug-type multipolar electrical connector from unexpectedly coming out from the socket-type multipolar electrical connector.

For pulling out the plug-type multipolar electrical connector as connected to the socket-type multipolar electrical connector as shown in Fig. 15, from the socket-type multipolar electrical connector, the plug-type multipolar electrical connector can be pulled out in a direction shown by an arrow Y in Fig. 16 with the sleeve 710 held with the hand. At the first stage, the engagement portion 711 of the sleeve 710 engaged with the rear ends of the base portions 610 of the sliders 600, pushes the base portions 610 in the forward direction F (See Fig. 1), so that the sliders 600 are retreated against the spring loads of the spring members 530. Then, as shown in Fig. 16, the sliders 600 come out from between the surface of the forward portion 11 of the body 1 and the movable pieces 510 to form gaps at the back sides of the movable pieces 510. This enables the movable pieces 510 to be inwardly displaced. Accordingly, when the plug-type multipolar electrical connector is further pulled out, the pulling force causes the projections 511 to be inwardly pulled out from the engagement holes 21f. Then, the movable pieces 510 and the shield cover 100 are pulled out from the shield cover 2, so that the plug-type multipolar electrical connector is removed from the socket-type multipolar electrical connector.

In such inserting and removing operations, the projections 511 are engaged with the engagement holes 21f at the left- and right-hands of the both electrical connectors. This enables the inserting and pulling operations to be carried out in a well balanced manner.

Claims

1. A socket-type multipolar electrical connector having a body (1) made of a unitary piece of insulating material in which contact piece groups having a plurality of contacts (41) are assembled and in which a plurality of contact-piece holding holes (51, 52) are formed which are adapted such that terminal pins

(71, 300) of a plug-type multipolar electrical connector are respectively inserted therein;

characterized in

- 5 that a first contact-piece holding group is provided having a plurality of first contact-piece holding holes (51) formed in the body (1) and being arranged at a plurality of levels in the vertical direction of said body (1);
- 10 that a second contact-piece holding group is provided having a plurality of second contact-piece holding holes (52) formed in said body (1) at a lateral side of said first contact-piece holding group and being arranged at a plurality of levels in the vertical direction of said body (1), wherein the horizontal pitch (P1) between each adjacent hole in the first contact-piece holding group is substantially smaller than the horizontal pitch (P2) between each adjacent hole in the second contact-piece holding group.
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
2. A socket-type multipolar electrical connector according to Claim 1, wherein the shape of the body (1) in front elevation is long from side to side and substantially rectangular.
 3. A socket-type multipolar electrical connector according to Claim 1, wherein the rearward portion (12) of the body (1) is opened at the rear side and bottom thereof, vertical ribs (61-65) for holding the contact pieces project in the rearward direction from a plurality of vertical and transverse positions of the rear surface (18) of the forward portion (11) of said body (1), horizontal ribs (61'-65') are respectively disposed on said vertical ribs (61-65) as transversely projecting from the upper end edges of said vertical ribs (61-65), the rearwardly projecting distances of said vertical and horizontal ribs from said forward portion (11) of body (1) are gradually reduced in the direction from the highest ribs toward the lowest ribs, and partitioned spaces (9) defined by said vertical and horizontal ribs respectively communicate with the first and second contact-piece holding holes (51, 52).
 4. A socket-type multipolar electrical connector according to Claim 1, wherein each of the contact pieces has a pair of guide pieces (42) at the front end thereof and a pair of contact-piece main bodies (43) which are raised from the rearward part of said each contact

piece and which extend in the forward direction, said contact-piece main bodies (43) being provided at the front ends thereof with contacts.

5. A socket-type multipolar electrical connector according to Claim 4,

wherein each of the contact pieces has a terminal (71) which rearwardly extends through a narrow-width part (45) which is formed at the rear end portion of said contact piece and which is adapted to be bent.

6. A socket-type multipolar electrical connector according to Claim 4,

wherein

the first contact-piece holding holes (51) and the second contact-piece holding holes (52) are provided on the upper walls of the rear end portions thereof with engagement projections (53), and said engagement projections (53) are fitted between the pairs of contact-piece main bodies (43) respectively inserted and fitted in adjacent first contact-piece holding holes (51), and also fitted between the pairs of contact-piece main bodies (43) respectively inserted and fitted in adjacent second contact-piece holding holes (52).

7. A socket-type multipolar electrical connector according to Claim 1,
characterized in,

that a first terminal group is provided comprising a plurality of first terminals (71) extending downwardly from and at right angles to the rear end portions of the first contact pieces forming the first contact piece group; and that a second terminal group is provided comprising a plurality of second terminals extending downwardly from and at right angles to the rear end portions of the second contact pieces forming the second contact piece group, that said plurality of first and second terminals forming said terminal groups are arranged in an assembly pattern similar to the assembly pattern in which said contact pieces forming said contact piece groups are arranged.

8. A socket-type multipolar electrical connector according to Claim 7,
wherein

the rearward portion (12) of the body (1) is opened at the rear side and bottom thereof, vertical ribs (61-65) for holding the contact pieces project in the rearward direction from a plu-

rality of vertical and transverse positions of the rear surface of the forward portion of said body (1),

horizontal ribs (61'-65') are respectively formed on said vertical ribs (61-65) as transversely projecting from the upper end edges of said vertical ribs (61-65),

the rearwardly projecting distances of said vertical and horizontal ribs from said forward portions (11) of said body (1) are gradually reduced in the direction from the highest ribs toward the lowest ribs, and

partitioned spaces (9) defined by said vertical and horizontal ribs respectively communicate with the first and second contact-piece holding holes (51, 52).

9. A socket-type multipolar electrical connector according to Claim 7, further comprising

a plate-like terminal holder having terminal holding holes therein arranged in an assembly pattern identical with the assembly pattern in which the terminal groups are arranged, the terminals which form said terminal groups, being respectively inserted into said terminal holding holes, and said terminal holder being fitted in an opening at the bottom of the rearward portion (12) of the body (1).

10. A socket-type multipolar electrical connector according to Claim 7,

further comprising a shield cover (2) comprising, in a unitary structure:

a case-like portion (21) put on the forward portion of the body (1); an intermediate plate portion (22) so put on the rearward portion (12) of said body (1) as to surround the top and lateral sides of said rearward portion (12), said intermediate plate portion (22) integrally having terminals which downwardly extend; and a rear surface portion (23) for closing an opening at the rear side of said body, said rear surface portion (23) being bent at a boundary part thereof between said rear surface portion and said intermediate plate portion (22), thereby to close said opening of said body (1).

11. A socket-type multipolar electrical connector according to Claim 10,

wherein there is formed, between the case-like portion (21) of the shield cover (2) and the forward portion (11) of the body (1) on which said case-like portion (21) is put, a space in which a shield cover (2) of a plug-type electrical con-

nector is adapted to be fitted, and said case-like portion (21) has a top plate portion (21a), inclined surfaces extending, as downwardly inclined, from both transverse ends of said top plate portion (21a), a pair of lateral plates (21c) downwardly extending from the lower ends of said inclined surfaces, and a lower plate portion (21d) extending between said lateral plates.

12. A socket-type multipolar electrical connector according to Claim 11,

wherein the case-like portion of the shield cover (2) is provided in the pair of lateral plates thereof with engagement holes into and from which locking projections of the shield cover (2) of the plug-type electrical connector are adapted to be fitted and removed.

Patentansprüche

1. Mehrpoliger elektrischer Verbinder vom Buchsentyp mit einem Körper (1) aus einem Einheitsstück aus Isoliermaterial, in dem Kontaktstückgruppen mit einer Vielzahl von Kontakten (41) eingebaut sind, und in dem eine Vielzahl von Kontaktstück-Halteöffnungen (51, 52) ausgebildet sind, die so eingerichtet sind, daß Kontaktstifte (71, 300) eines elektrischen Mehrpolsteckverbinders entsprechend eingesetzt sind; dadurch gekennzeichnet,

daß eine erste Kontaktstück-Haltegruppe vorgesehen ist mit einer Vielzahl von ersten, im Körper (1) ausgebildeten Kontaktstück-Halteöffnungen (51) und die in Vertikalrichtung des Körpers (1) in einer Vielzahl von Ebenen angeordnet sind;

daß eine zweite Kontaktstück-Haltegruppe vorgesehen ist, die eine Vielzahl von zweiten Kontaktstück-Halteöffnungen (52) im Körper (1) an einer Seite der ersten Kontaktstück-Haltegruppe aufweist, die in Vertikalrichtung des Körpers (1) in einer Vielzahl von Ebenen angeordnet sind, worin die Horizontalteilung (P1) zwischen den einzelnen nebeneinanderliegenden Öffnungen in der ersten Kontaktstück-Haltegruppe wesentlich kleiner ist als die Horizontalteilung (P2) zwischen nebeneinanderliegenden Öffnungen in der zweiten Kontaktstück-Haltegruppe.

2. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 1, in dem die Form des Körpers (1) in Vorderansicht von einer Seite zur anderen Seite länglich und im

wesentlichen rechteckig ist.

3. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 1, in dem

der hintere Teil (12) des Körpers (1) nach hinten und nach unten offen ist, vertikale Rippen (61-65) zum Halten der Kontaktstücke in rückwärtiger Richtung aus der Vielzahl vertikaler und querstehender Positionen der hinteren Oberfläche (18) des vorderen Teils (11) des Körpers (1) vorstehen; horizontale Rippen (61'-65') entsprechend an den vertikalen Rippen (61-65) angeordnet sind, so daß sie von den oberen Endkanten der vertikalen Rippen (61-65) aus quer vorstehen; die hinteren Vorsprungsabstände der vertikalen und horizontalen Rippen vom vorderen Teil (11) des Körpers (1) in Richtung von den obersten Rippen zu den untersten Rippen schrittweise abnehmen, und abgeteilte Zwischenräume (9), die durch diese vertikalen und horizontalen Rippen definiert sind, mit den ersten und zweiten Kontaktstück-Halteöffnungen (51, 52) übereinstimmen.

4. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 1, in dem jedes Kontaktstück an seinem Vorderende ein Paar Führungsstücke (42) und ein Paar Kontaktstück-Hauptkörper (43), die vom hinteren Teil jedes Kontaktstücks aus hochstehen und sich in Richtung nach vorne erstrecken, aufweist, wobei die Kontaktstück-Hauptkörper (43) an ihren vorderen Enden mit Kontakten versehen sind.

5. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 4, in dem jedes Kontaktstück einen Endkontakt (71) aufweist, der sich durch einen schmalen Teil (45), der am hinteren Endteil des Kontaktstücks ausgebildet ist, nach hinten erstreckt und der so eingerichtet ist, daß er umgebogen werden kann.

6. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 4, in dem

die ersten Kontaktstück-Halteöffnungen (51) und die zweiten Kontaktstück-Halteöffnungen (52) auf der oberen Wand des hinteren Endteils mit Eingriffsvorsprüngen (53) vorgesehen sind, und die Eingriffsvorsprünge (53) zwischen die Paare der Kontaktstück-Hauptkörper (43) eingepaßt sind bzw. in nebeneinanderliegende erste Kontaktstück-Halteöffnungen (51) eingeschoben werden, und auch zwischen die Paare der

Kontaktstückhauptkörper (43) eingepaßt sind bzw. in nebeneinanderliegende zweite Kontaktstück-Halteöffnungen (52) eingeschoben werden und eingepaßt sind.

7. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 1, dadurch gekennzeichnet,

daß eine erste Endkontaktgruppe vorgesehen ist, die eine Vielzahl von ersten Endkontakten (71) enthält, die sich von den und rechtwinklig zu den hinteren Endteilen der ersten Kontaktstücke nach unten erstrecken und die erste Kontaktstückgruppe bilden; und

daß eine zweite Endkontaktgruppe vorgesehen ist, die eine Vielzahl von zweiten Endkontakten enthält, die sich von den und rechtwinklig zu den hinteren Endteilen der zweiten Kontaktstücke nach unten erstrecken und die zweite Kontaktstückgruppe bilden;

daß die Vielzahl der ersten und zweiten Endkontakte, die die Endkontaktgruppen bilden, in einem Anordnungsmuster angeordnet sind, die dem Anordnungsmuster ähnlich ist, in dem die Kontaktstücke, die die Kontaktstückgruppen bilden, angeordnet sind.

8. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 7, in dem

der hintere Teil (12) des Körpers (1) nach hinten und nach unten offen ist, vertikale Rippen (61-65) zum Halten der Kontaktstücke in rückwärtiger Richtung aus der Vielzahl vertikaler und querstehender Positionen der hinteren Oberfläche des vorderen Teils des Körpers (1) vorstehen;

horizontale Rippen (61'-65') entsprechend an den vertikalen Rippen (61-65) ausgebildet sind, so daß sie von den oberen Endkanten der vertikalen Rippen (61-65) aus quer vorstehen; die hinteren Vorsprungsabstände der vertikalen und horizontalen Rippen vom vorderen Teil (11) des Körpers (1) in Richtung von den obersten Rippen zu den untersten Rippen schrittweise abnehmen, und

abgeteilte Zwischenräume (9), die durch diese vertikalen und horizontalen Rippen definiert sind, mit den ersten und zweiten Kontaktstück-Halteöffnungen (51, 52) übereinstimmen.

9. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 7, der ferner umfaßt

einen plattenförmigen Endkontakthalter mit Endkontakt-Halteöffnungen, die in diesem in

einem Gruppenmuster angeordnet sind, das identisch mit dem Einbaumuster ist, in dem die Endkontaktgruppen angeordnet sind, die Endkontakte, die diese Endkontaktgruppen bilden, die entsprechend in die Endkontakt-Halteöffnungen eingesetzt sind, und den Endkontakthalter, der in eine Öffnung an der Unterseite des hinteren Teils (12) des Körpers (1) eingesetzt ist.

10. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 7,

der ferner umfaßt eine Abschirmabdeckung (2) bestehend aus einer Einheitsstruktur:

einen gehäuseähnlichen Teil (21), der auf den vorderen Teil des Körpers (1) aufgesetzt ist; einen Zwischenplattenteil (22), der so auf den hinteren Teil (12) des Körpers (1) aufgesetzt ist, daß er den oberen Teil und die Seiten des hinteren Teils (12) umgibt, wobei der Zwischenplattenteil (22) integrierte Endkontakte aufweist, die sich nach unten erstrecken; und einen hinteren Oberflächenteil (23) zum Verschließen einer Öffnung im hinteren Teil des Körpers, wobei dieser hintere Oberflächenteil (23) im Grenzteil zwischen dem hinteren Oberflächenteil und dem Zwischenplattenteil (22) umgebogen ist, um so die Öffnung im Körper (1) zu verschließen.

11. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 10,

in dem zwischen dem gehäuseähnlichen Teil (21) der Abschirmabdeckung (2) und dem Vorderenteil (11) des Körpers (1), auf den der gehäuseähnliche Teil (21) aufgesetzt wird, ein Raum so angepaßt ist, daß eine Abschirmabdeckung (2) eines elektrischen Verbinders vom Steckertyp eingesetzt werden kann, und dieser gehäuseähnliche Teil (21) einen oberen Plattenteil (21a) aufweist, wobei sich schräge Oberflächen von beiden Querenden des oberen Plattenteils (21a) aus schräg nach unten erstrecken, sich ein Paar seitlicher Platten (21c) von den unteren Enden dieser schrägen Oberflächen aus nach unten erstreckt, und sich ein unterer Plattenteil (21d) zwischen diesen beiden Seitenplatten erstreckt.

12. Ein mehrpoliger elektrischer Verbinder vom Buchsentyp gemäß Anspruch 11,

in dem der gehäuseähnliche Teil der Abschirmabdeckung (2) in dem Seitenplattenpaar mit Eingriffsöffnungen versehen ist, wobei Verriegelungsvorsprünge der Abschirmabdeckung (2) des elektrischen Verbinders vom Steckertyp so eingerichtet

sind, daß sie in diese eingesteckt und aus diesen herausgezogen werden können.

Revendications

1. Connecteur électrique multipolaire du type à douille, comportant un corps (1) fait d'une pièce intégrée d'un matériau isolant dans laquelle des groupes de pièces de contact comportant une pluralité de contacts (41) sont assemblés et dans laquelle une pluralité de trous de maintien de pièces de contact (51, 52) sont formés, lesquels sont adaptés de façon à ce que les broches de bornes (71, 300) d'un connecteur électrique multipolaire du type à fiche soient respectivement insérées dans celles-ci, **caractérisé en ce que**

un premier groupe de maintien de pièces de contact est prévu et comporte une pluralité de premiers trous de maintien de pièces de contact (51) formés dans le corps (1) et agencés suivant une pluralité de niveaux dans la direction verticale dudit corps (1),

un second groupe de maintien de pièces de contact est prévu et comporte une pluralité de seconds trous de maintien de pièces de contact (52) formés dans le corps (1) au niveau d'une face latérale dudit premier groupe de maintien de pièces de contact et étant agencés suivant une pluralité de niveaux dans la direction verticale dudit corps (1), dans lequel le pas horizontal (P1) entre chaque trou adjacent dans le premier groupe de maintien de pièces de contact est substantiellement plus petit que le pas horizontal (P2) entre chaque trou adjacent dans le second groupe de maintien de pièces de contact.

2. Connecteur électrique multipolaire du type à douille selon la revendication 1,

dans lequel la forme du corps (1) en élévation avant est allongée d'une face à l'autre et est pratiquement rectangulaire.

3. Connecteur électrique multipolaire du type à douille selon la revendication 1,

dans lequel la partie vers l'arrière (12) du corps (1) est ouverte à la face arrière et en-dessous de celui-ci,

des nervures verticales (61 à 65) destinées à maintenir les pièces de contact saillent dans la direction vers l'arrière depuis une pluralité de positions verticales et transversales de la surface arrière (18) de la partie avant (11) dudit corps (1),

des nervures horizontales (61' à 65') sont dis-

posées respectivement sur lesdites nervures verticales (61 à 65) en saillant transversalement depuis les bords d'extrémités supérieures desdites nervures verticales (61 à 65),

les distances de saillies vers l'arrière desdites nervures verticales et horizontales depuis ladite partie avant (11) du corps (1) se réduisant progressivement dans la direction partant des nervures les plus élevées vers les nervures les plus basses, et

des espacements cloisonnés (9) définis par lesdites nervures verticales et horizontales communiquent respectivement avec les premiers et seconds trous de maintien de pièces de contact (51, 52).

4. Connecteur électrique multipolaire du type à douille selon la revendication 1,

dans lequel chacune des pièces de contact comporte une paire de pièces guides (42) à l'extrémité avant de celle-ci et une paire de corps principaux de pièce de contact (43) qui sont surélevés par rapport à la partie vers l'arrière de ladite chaque pièce de contact et qui s'étend dans la direction avant, lesdits corps principaux de pièce de contact (43) étant munis de contacts aux extrémités avant de ceux-ci.

5. Connecteur électrique multipolaire du type à douille selon la revendication 4,

dans lequel chacune des pièces de contact comporte une borne (71) qui s'étend vers l'arrière au travers d'une pièce à largeur étroite (45) qui est formée à la partie d'extrémité arrière de ladite pièce de contact et qui est adaptée pour être courbée.

6. Connecteur électrique multipolaire du type à douille selon la revendication 4,

dans lequel

les premiers trous de maintien de pièces de contact (51) et les seconds trous de maintien de pièces de contact (52) sont munis de saillies d'engagement sur les parois supérieures des parties d'extrémité arrière de ceux-ci (53), et lesdites saillies d'engagement (53) sont adaptées entre les paires de corps principaux de pièce de contact (43) respectivement insérés et adaptés dans des premiers trous de maintien de pièces de contact adjacents (51), et également adaptés entre les paires de corps principaux de pièce de contact (43) respectivement insérés et adaptés dans des seconds trous de maintien de pièces de contact adjacents (52).

7. Connecteur électrique multipolaire du type à douille selon la revendication 1,

caractérisé en ce que,

un premier groupe de bornes est prévu et comprend une pluralité de premières bornes (71) s'étendant vers le bas depuis les parties d'extrémité arrière des premières pièces de contact formant le premier groupe de pièces de contact et à angle droit avec celles-ci, et

un second groupe de bornes est prévu et comprend une pluralité de secondes bornes s'étendant vers le bas depuis les parties d'extrémité arrière des secondes pièces de contact formant le second groupe de pièces de contact et à angle droit avec celles-ci,

ladite pluralité des premières et secondes bornes formant lesdits groupes de bornes sont agencées suivant un motif d'assemblage similaire au motif d'assemblage suivant lequel lesdites pièces de contact formant lesdits groupes de pièces de contact sont agencées.

8. Connecteur électrique multipolaire du type à douille selon la revendication 7, dans lequel

la partie vers l'avant (12) du corps (1) est ouverte à la face arrière et inférieure de celui-ci, des nervures verticales (61 à 65) destinées à maintenir les pièces de contact saillantes dans la direction vers l'arrière depuis une pluralité de positions verticales et transversales de la surface arrière de la partie avant dudit corps (1), des nervures horizontales (61' à 65') sont formées respectivement sur lesdites nervures verticales (61 à 65) en saillant transversalement depuis les bords d'extrémités supérieures desdites nervures verticales (61 à 65),

les distances de saillie vers l'arrière desdites nervures verticales et horizontales par rapport auxdites parties avant (11) dudit corps (1) se réduisent progressivement dans la direction allant des nervures les plus élevées vers les nervures les plus basses, et

des espacements cloisonnés (9) définis par lesdites nervures verticales et horizontales communiquent respectivement avec les premiers et seconds trous de maintien de pièces de contact (51, 52)

9. Connecteur électrique multipolaire du type à douille selon la revendication 7, comprenant en outre

un support de bornes en forme de plaque comportant des trous de maintien de bornes dans celui-ci, agencé suivant un motif d'assemblage identique au motif d'assemblage suivant lequel les groupes de bornes sont agencés, les bornes qui forment lesdits groupes de bornes étant respectivement insérées dans lesdits trous de maintien de bornes, et

ledit support de bornes étant adapté dans une ouverture au fond de la partie vers l'arrière (12) du corps (1).

- 5 10. Connecteur électrique multipolaire du type à douille selon la revendication 7,

comprenant en outre un capot de blindage (2) comportant, en une structure intégrée :

10 une partie en forme de boîtier (21) placée sur la partie avant du corps (1), une partie de plaque intermédiaire (22) placée sur la partie vers l'arrière (12) dudit corps (1) de façon à entourer les faces supérieure et latérales de ladite partie vers l'arrière (12), ladite partie de plaque intermédiaire (22) comportant de façon intégrée des bornes qui s'étendent vers le bas, et une partie de surface arrière (23) destinée à refermer une ouverture au niveau de la face arrière dudit corps, ladite partie de surface arrière (23) étant incurvée au niveau d'une partie limite de celle-ci entre ladite partie de surface arrière et ladite partie de plaque intermédiaire (22), afin de refermer ainsi ladite ouverture dudit corps (1).

11. Connecteur électrique multipolaire du type à douille selon la revendication 10,

30 dans lequel on forme, entre la partie en forme de boîtier (21) du capot de blindage (2) et la partie avant (11) du corps (1) sur lequel ladite partie en forme de boîtier (21) est placée, un espacement dans lequel un capot de blindage (2) d'un connecteur électrique multipolaire du type à fiche est prévu pour être adapté, et ladite partie en forme de boîtier (21) comporte une partie de plaque supérieure (21a), des surfaces inclinées s'étendant, inclinées vers le bas, depuis les deux extrémités transversales de ladite partie de plaque supérieure (21a), une paire de plaques latérales (21c) s'étendant vers le bas depuis les extrémités inférieures desdites surfaces inclinées, et une partie de plaque inférieure (21d) s'étendant entre lesdites plaques latérales.

12. Connecteur électrique multipolaire du type à douille selon la revendication 11,

50 dans lequel la partie en forme de boîtier du capot de blindage (2) est munie dans la paire de plaques latérales de celui-ci de trous d'engagement dans lesquels et à partir desquels les saillies de blocage du capot de blindage (2) du connecteur électrique multipolaire du type à fiche sont prévues pour être adaptées et enlevées.

Fig.1

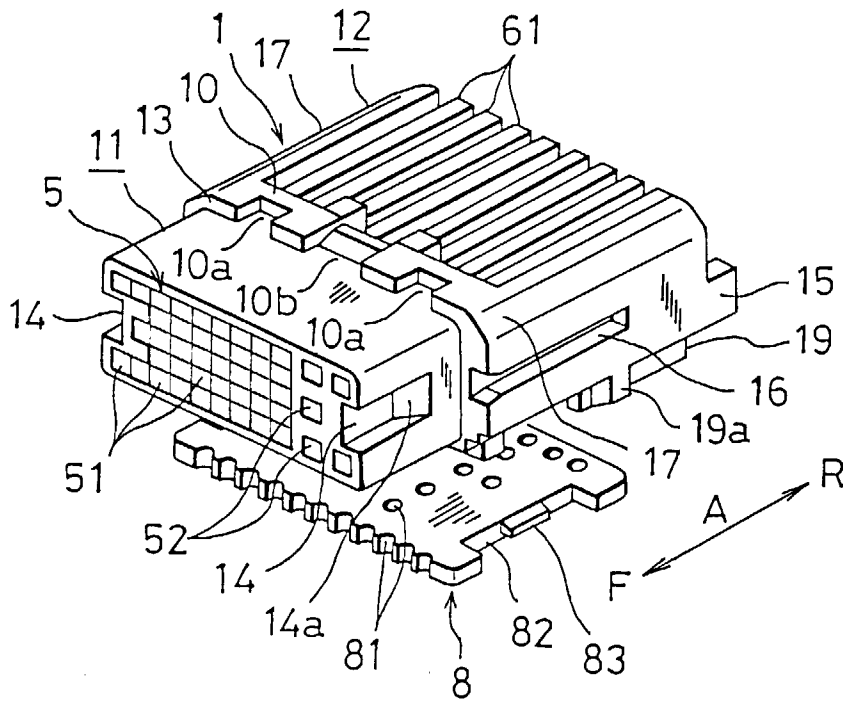
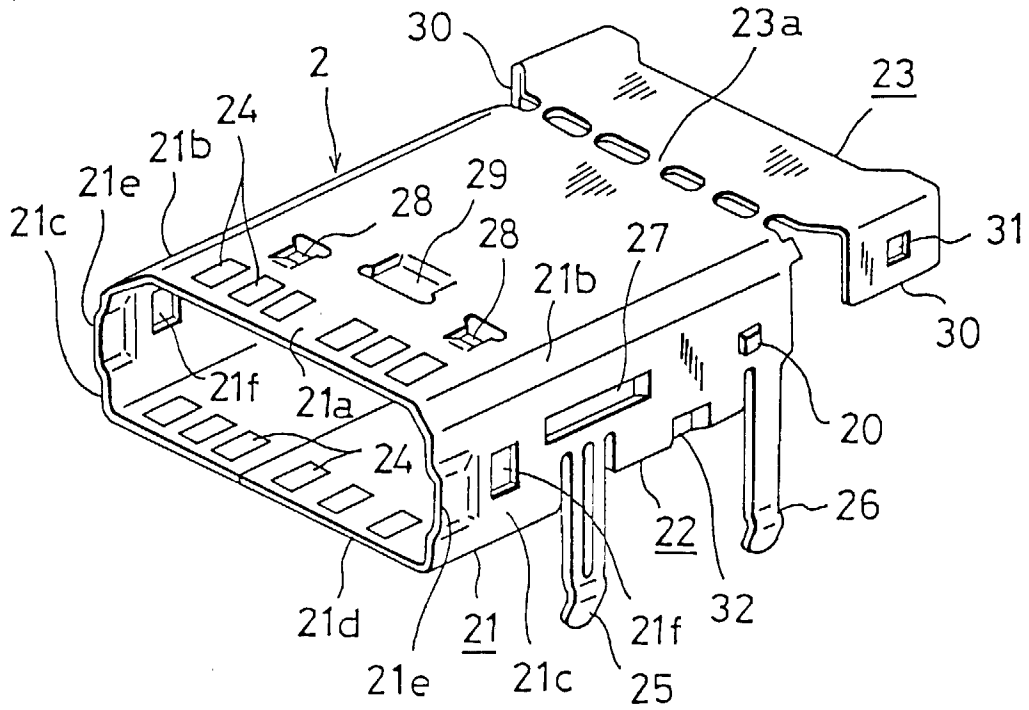


Fig.2

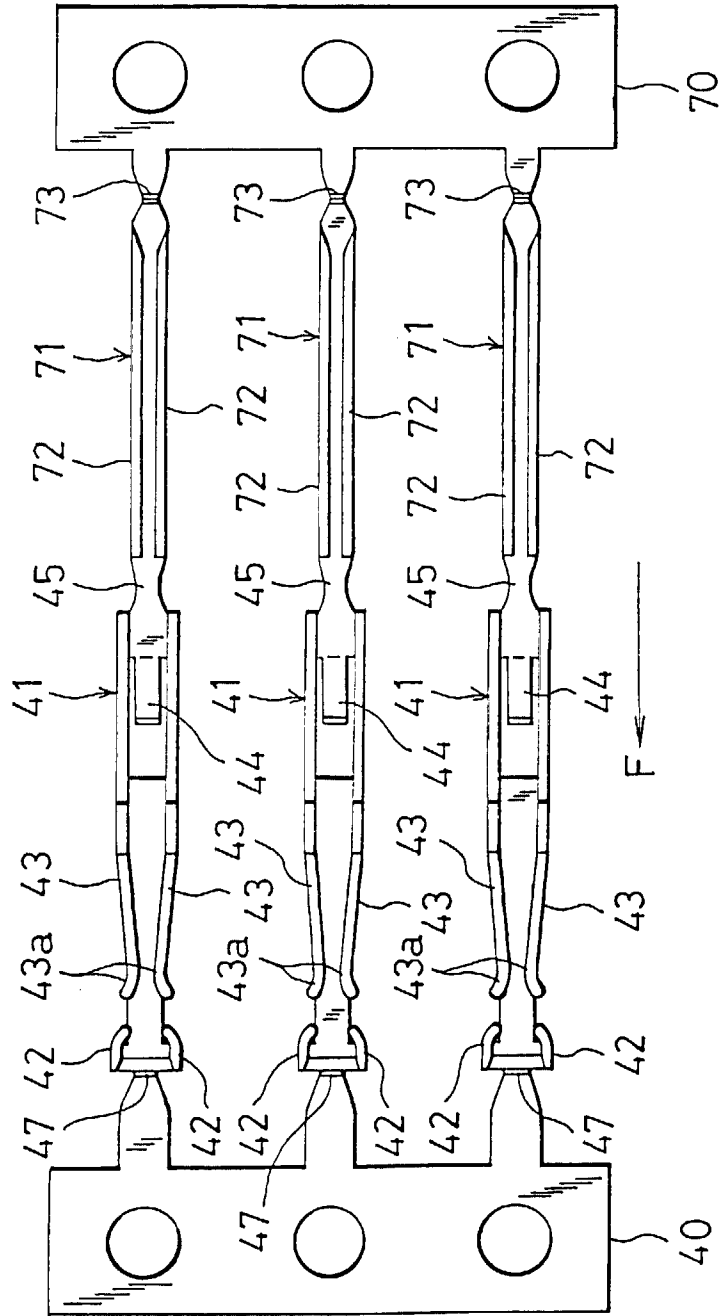


Fig.3

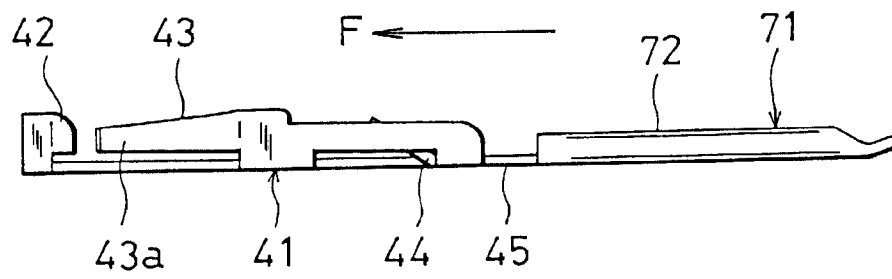


Fig.4

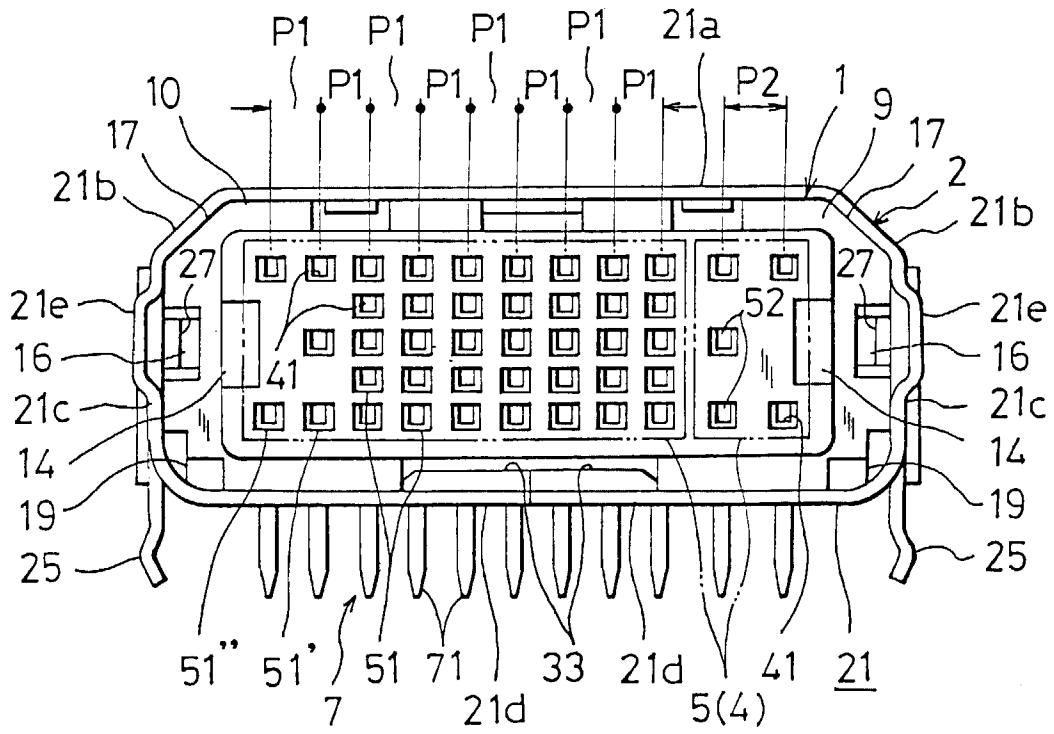


Fig.5

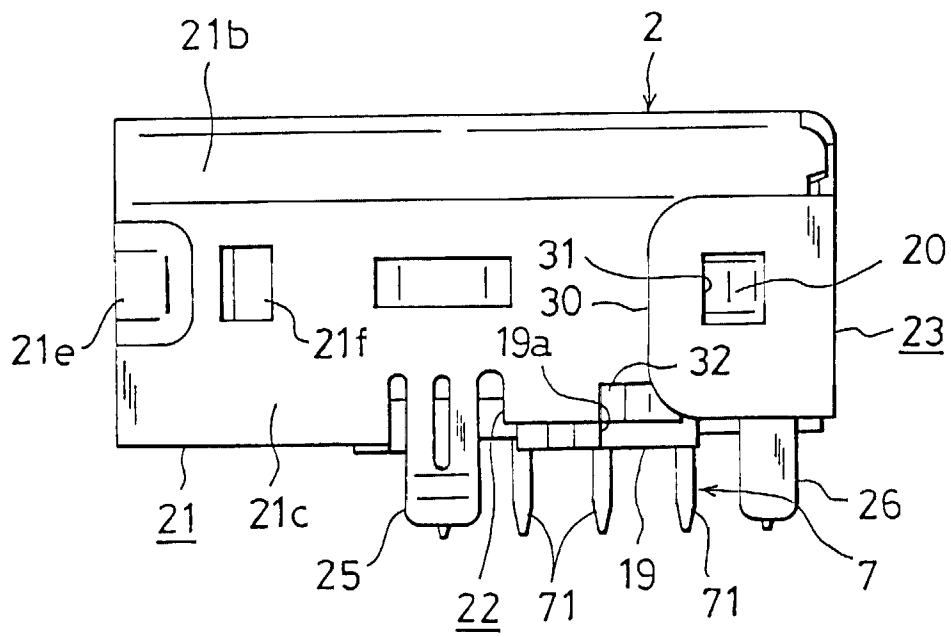


Fig.6

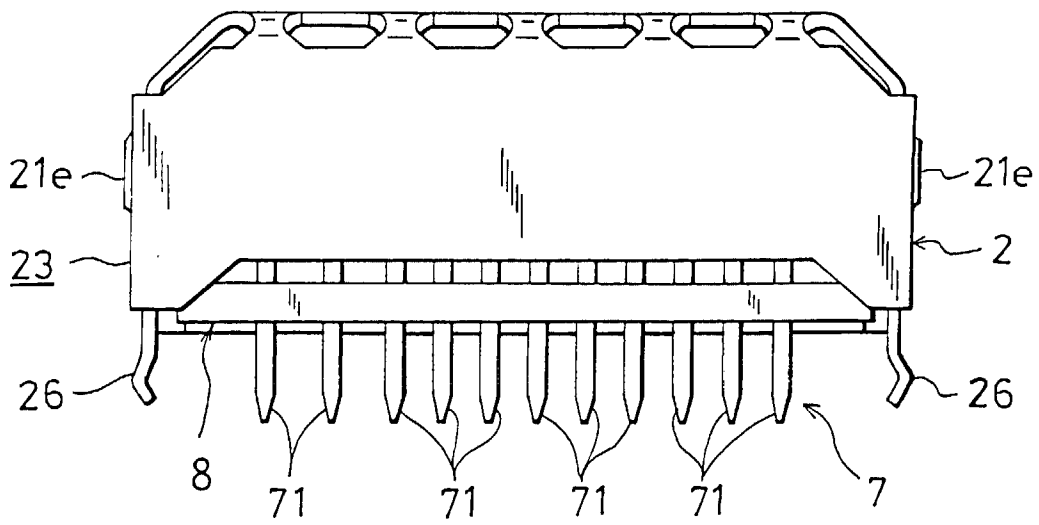


Fig.7

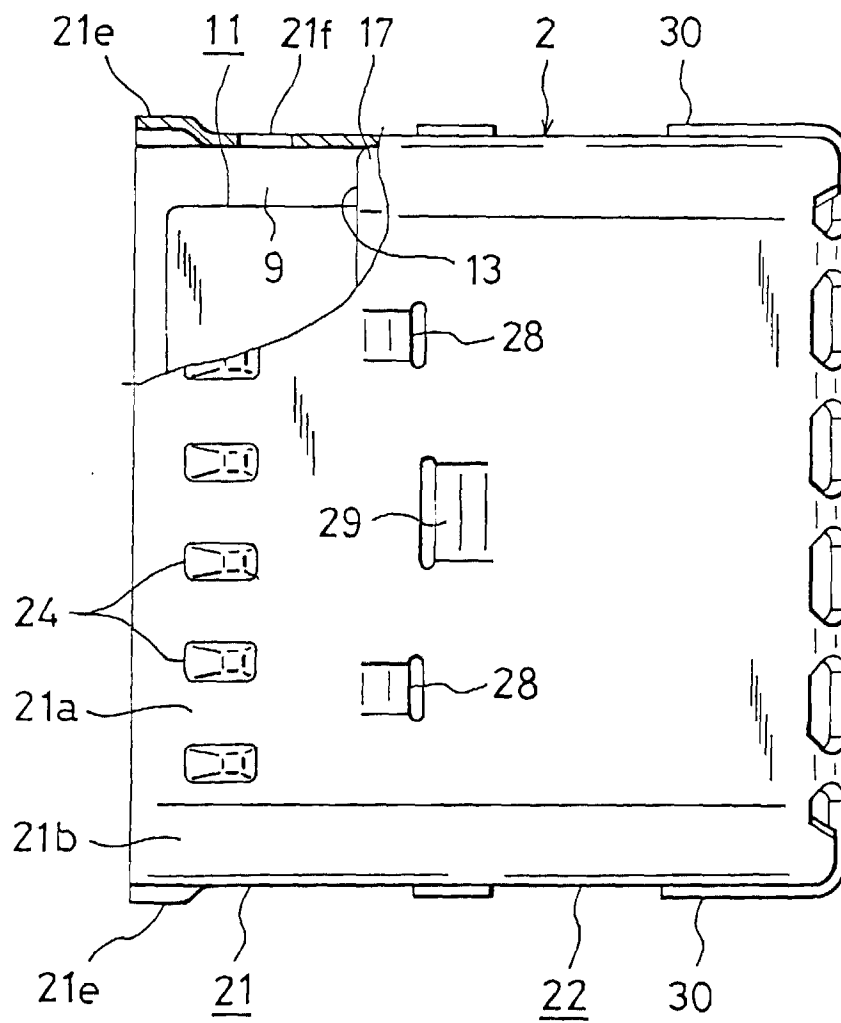


Fig.8

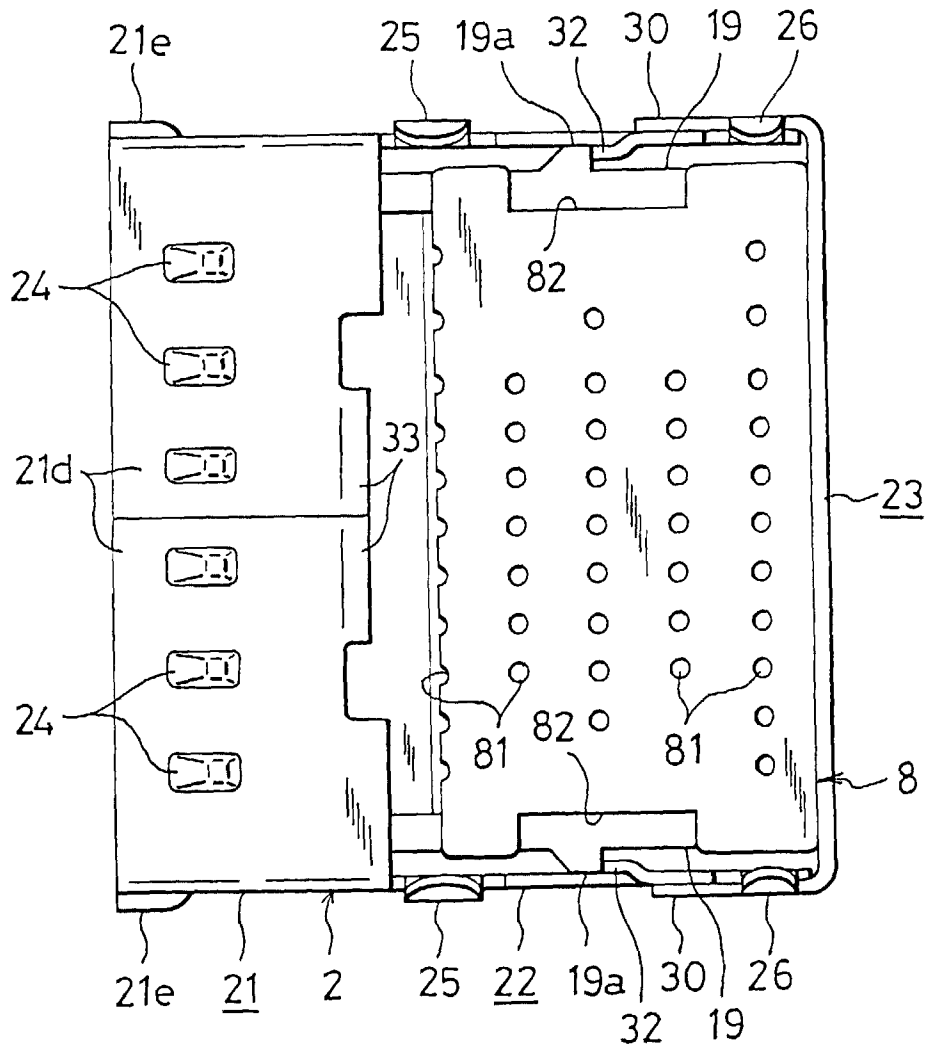


Fig.9

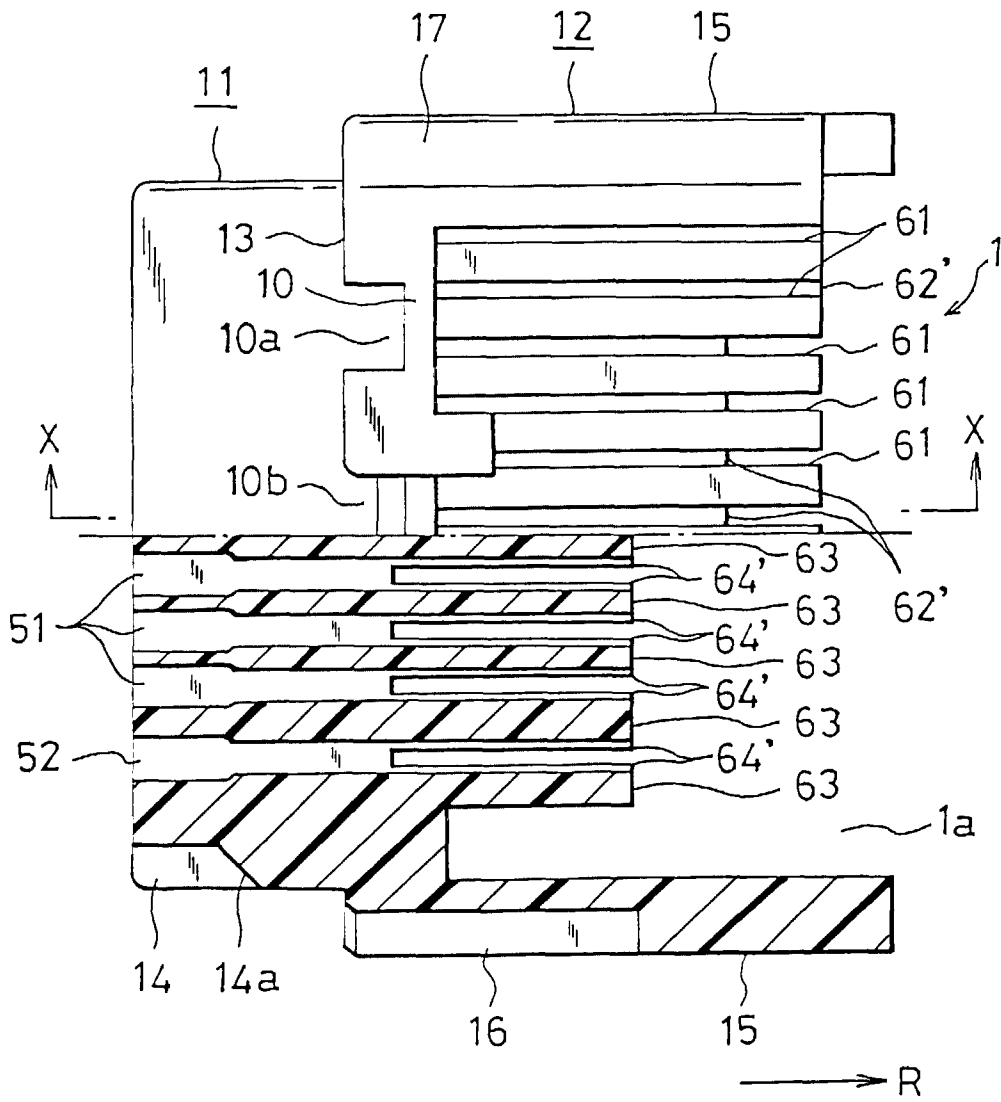


Fig.10

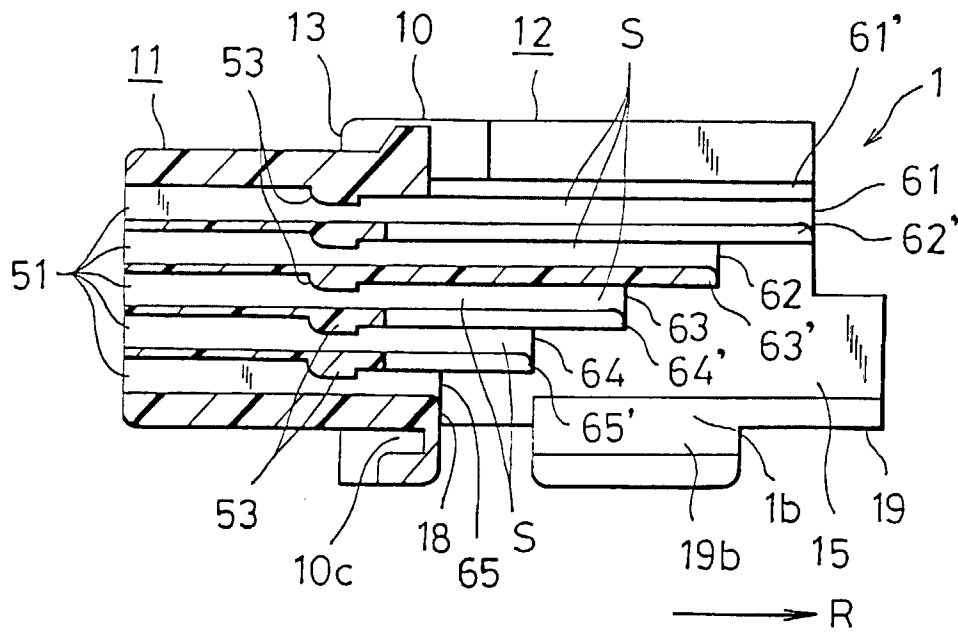


Fig.11

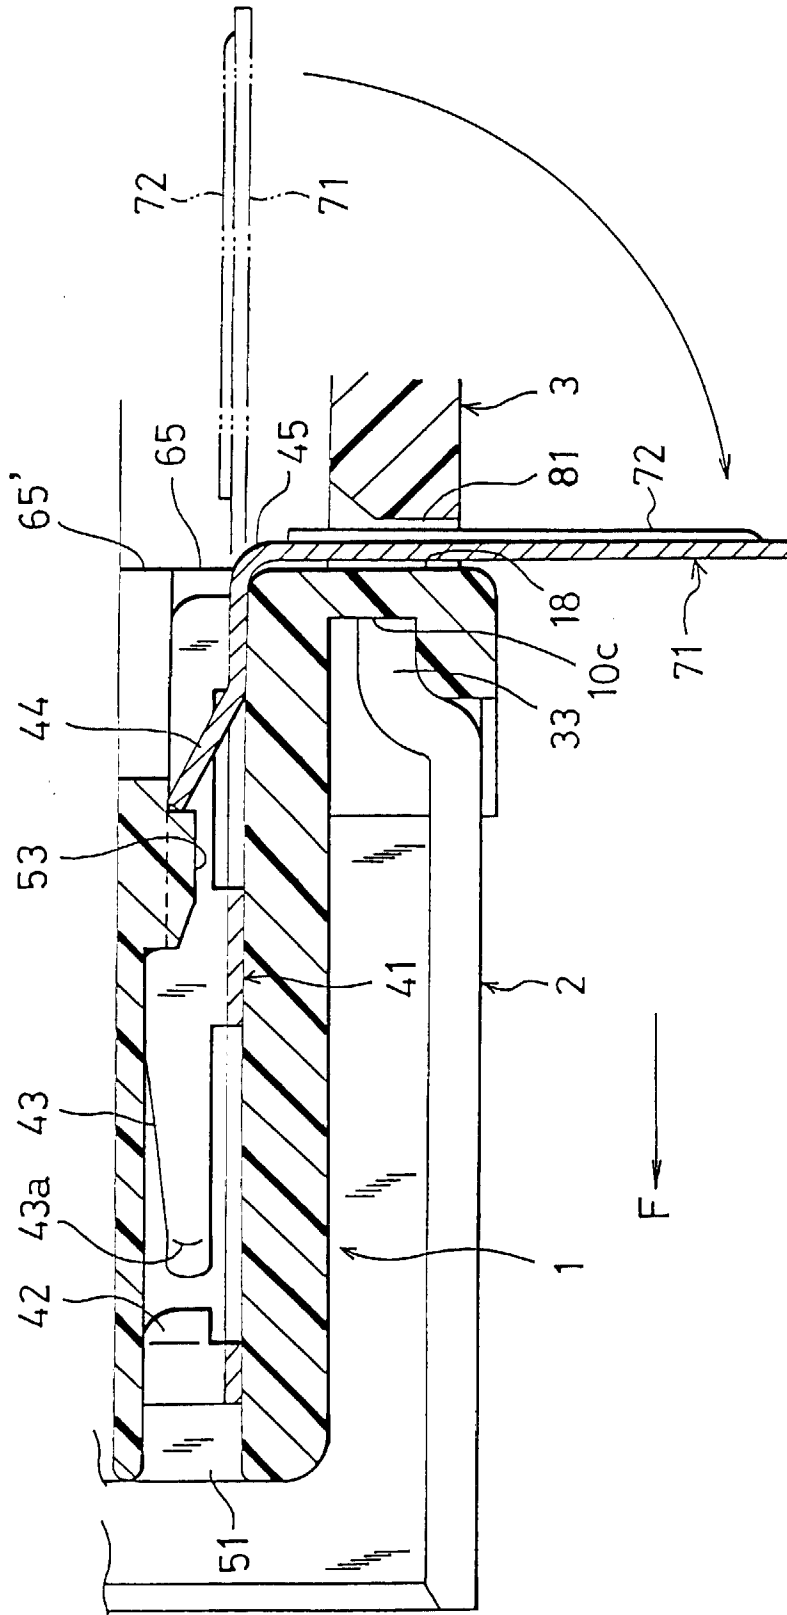


Fig.12

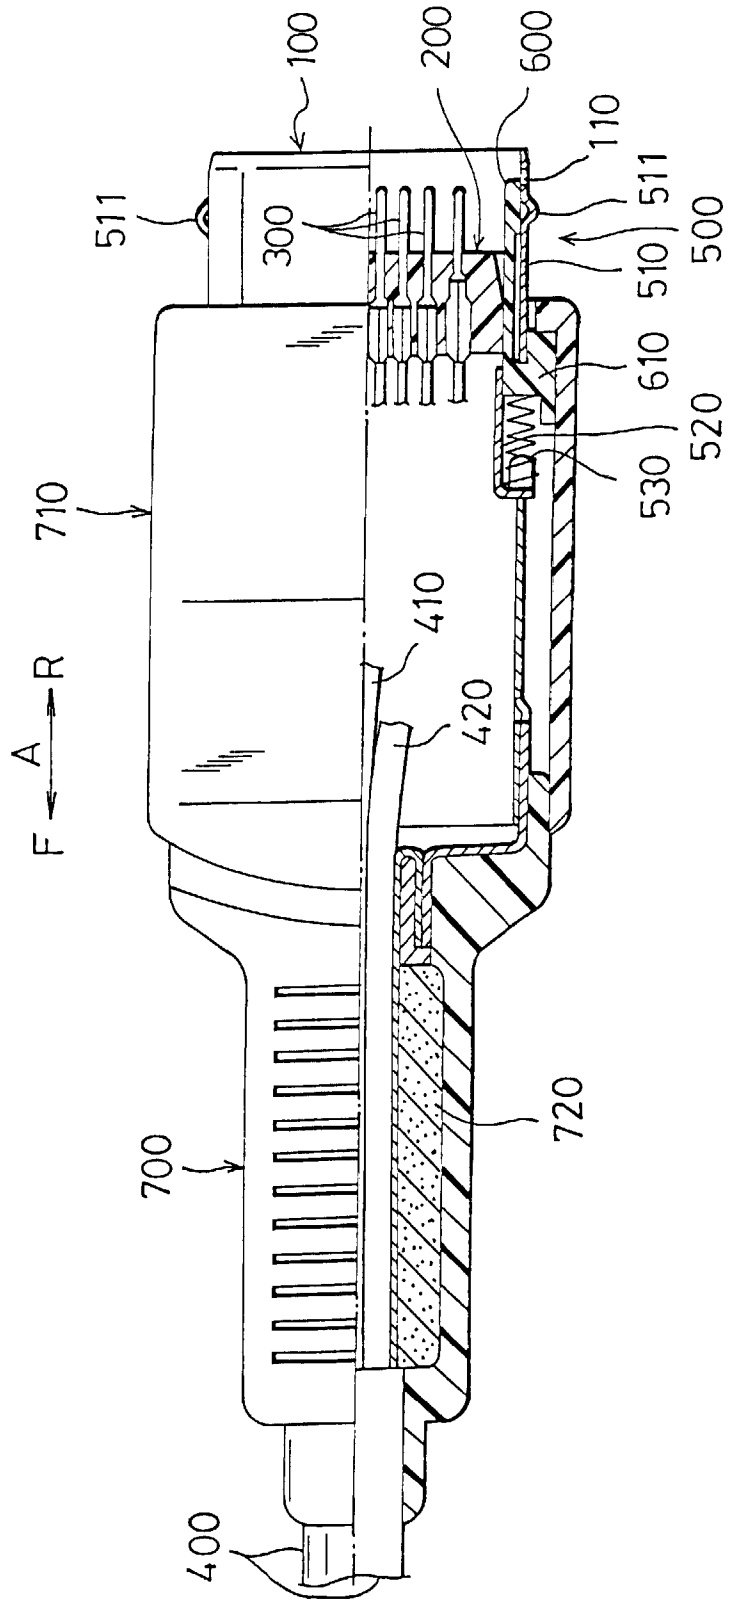


Fig.13

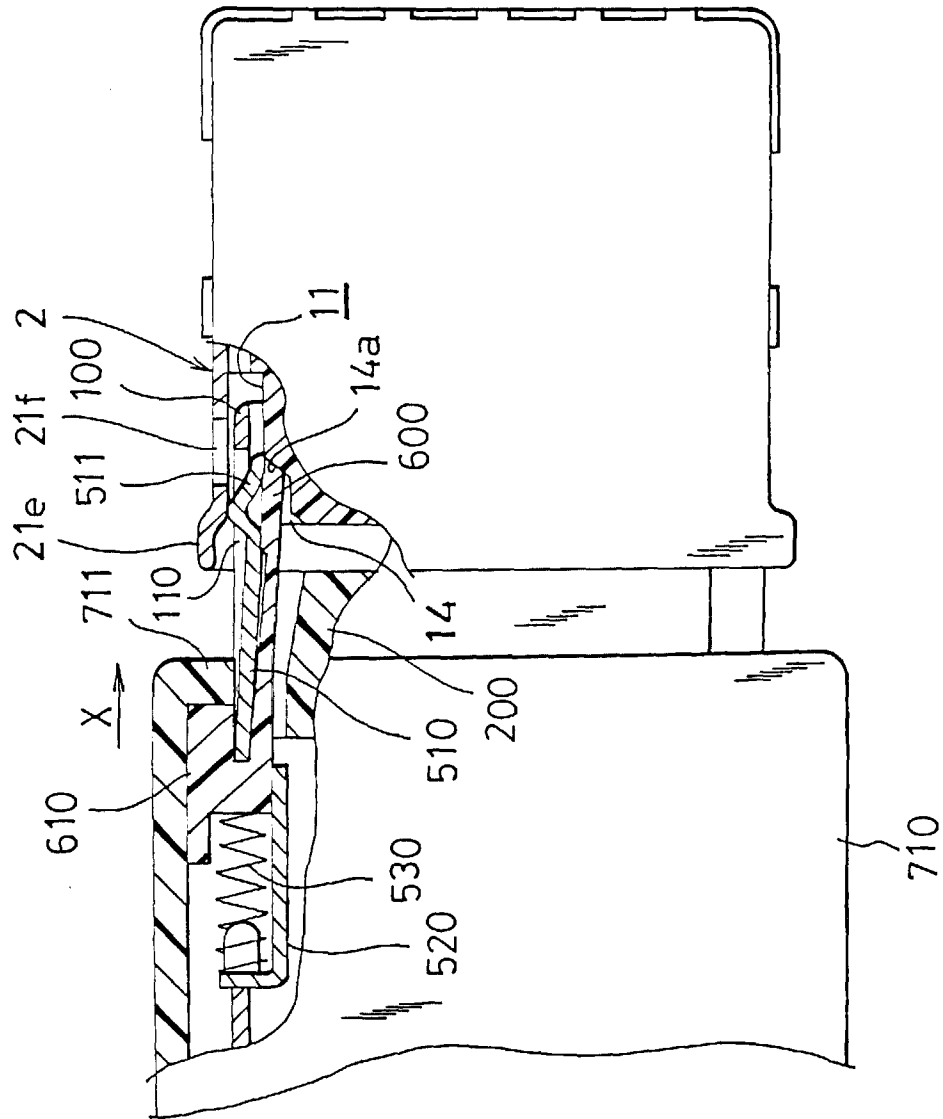


Fig.14

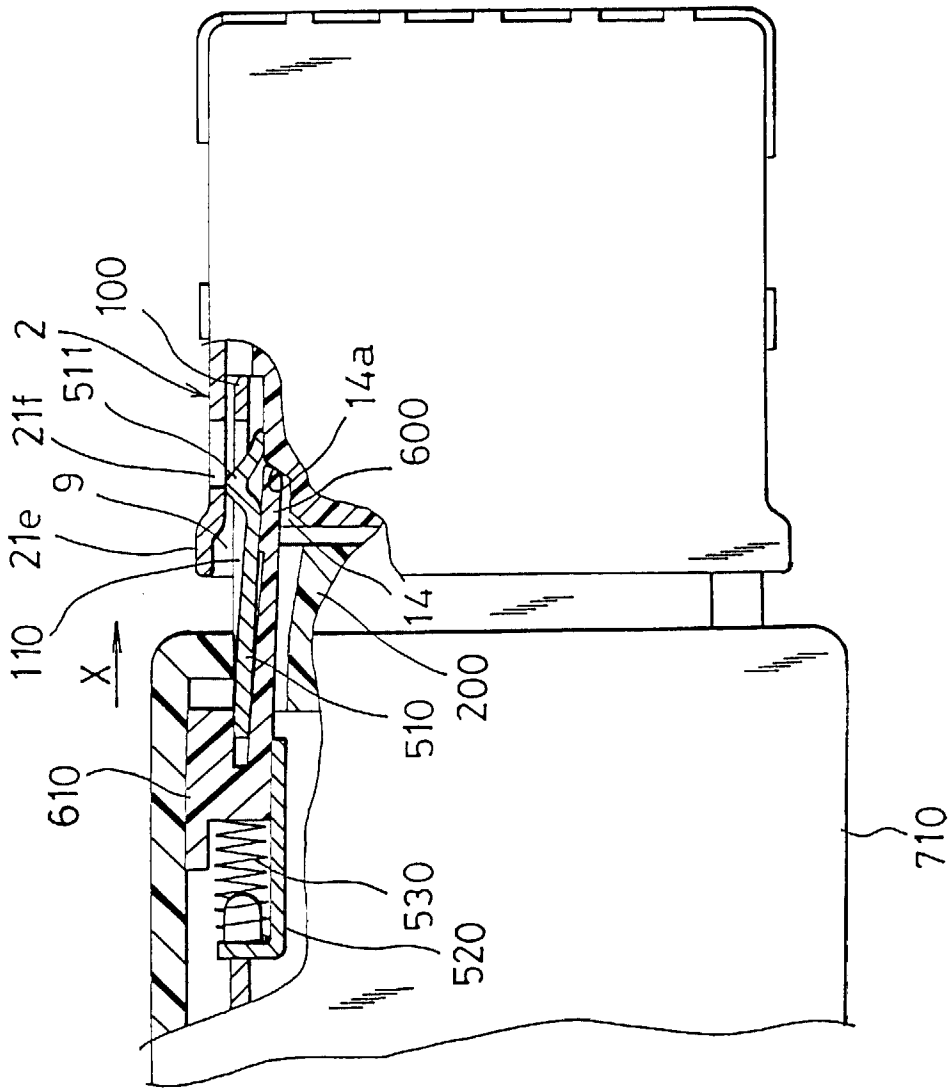


Fig.15

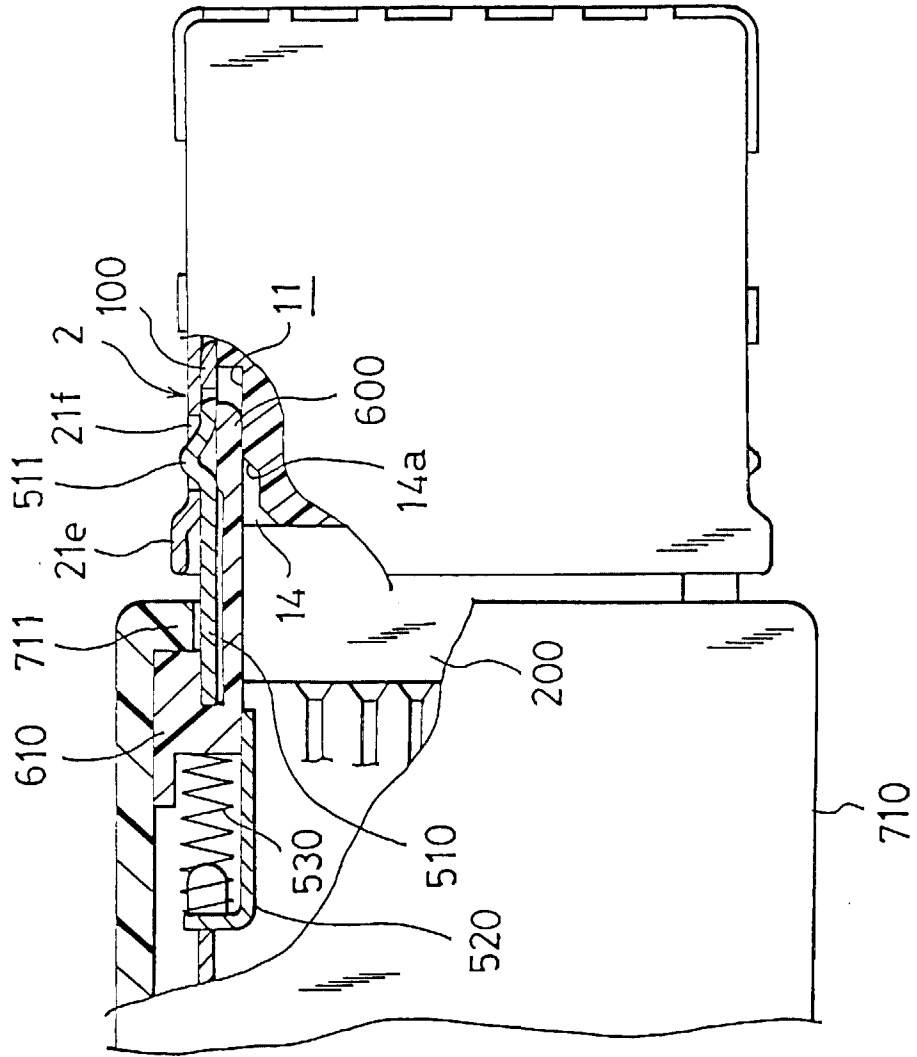


Fig.16

