

(19) **DANMARK**

(10) **DK/EP 2936621 T3**



Patent- og  
Varemærkestyrelsen

(12) **Oversættelse af  
europæisk patentskrift**

- 
- (51) Int.Cl.: **H 01 R 4/24 (2006.01)** **H 01 R 13/627 (2006.01)** **H 01 R 13/639 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2018-09-03**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2018-05-30**
- (86) Europæisk ansøgning nr.: **13830147.8**
- (86) Europæisk indleveringsdag: **2013-12-17**
- (87) Den europæiske ansøgnings publiceringsdag: **2015-10-28**
- (86) International ansøgning nr.: **DE2013000812**
- (87) Internationalt publikationsnr.: **WO2014094720**
- (30) Prioritet: **2012-12-21 DE 102012025106**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **ERNI Production GmbH & Co. KG., Seestrasse 9, 73099 Adelberg, Tyskland**
- (72) Opfinder: **Lappöhn, Jürgen, Im Enter 3, 73108 Gammelshausen, Tyskland**
- (74) Fuldmægtig i Danmark: **NORDIC PATENT SERVICE A/S, Bredgade 30, 1260 København K, Danmark**
- (54) Benævnelse: **ELEKTRISK STIKFORBINDELSE**
- (56) Fremdragne publikationer:  
**EP-A2- 1 139 494**  
**US-A- 4 412 714**  
**US-A- 6 074 237**  
**US-B1- 6 171 131**



The invention relates to an electrical plug-in connector having a first housing part and a second housing part, wherein blade contact elements are arranged in the first or second housing part and spring contact elements which are adapted to the blade contact elements and are able to be inserted into them are arranged in the second or first housing part.

#### Prior art

Such plug-in connectors are widespread in the prior art. Thus, for example, an electrical plug-in connector of the type conforming to its genre arises from DE 10 2004 054 203 A1, in which an insulation displacement plug-in contact strip is provided.

DE 10 2008 019 016 A1 discloses an electrical plug-in connector that has locking clips for locking two housing parts. Two locking clips are provided which are mounted for rotation on bearing pins arranged on a housing part of the plug-in connector. This rotatable mounting of both locking clips requires complex, time-consuming production; moreover, the bearing pins and, in particular, the locking protrusions that serve for the locking are easily exposed to damage. In addition, two locking clips must be actuated and arrested in order to ensure a secure locking of both housing parts of the plug-in connector.

A similar secondary locking agent on a plug-in connector housing arises from DE 10 2010 032 013 A1. In this case as well, both locking clips must be mounted for rotation on a housing part. Two locking clips are also provided here. US 6074237 A discloses an electrical plug-in connector with two housing parts and a locking clip according to the preamble of claim 1.

Disclosure of the inventionAdvantages of the invention

The electrical plug-in connector according to the invention having the features of claim 1, in contrast, has the  
5 advantage that the locking clip does not have to be fastened to a housing, but rather can be handled as a separate component. This is therefore advantageous because, for example, if the locking clip is damaged, an exchange of the locking clip with an undamaged locking clip is easily  
10 possible. Furthermore, the locking clip according to the invention is designed to be substantially more massive and stable than the locking clips known from the prior art. It is particularly advantageous that the locking clip according to the invention is, in particular, able to be a secondary  
15 locking clip which provides additional security for a plug-in connection that is already locked, such that this is able to be used in particularly critical environments (for example environments that are subject to heavy vibrations and so forth). A tongue having a latching hook, arranged on the  
20 second housing part, for example, and an opening arranged in the first housing part, with which opening the latching hook engages, are provided as the primary locking agent. A locking clip is provided according to the invention which is able to be locked in/on the second or first housing part while it  
25 encloses the first or second housing part substantially parallel to the plugging direction, when both housing parts are plugged into each other. A particularly stable connection of the two plug-in connector parts that are plugged into each other is hereby implemented.

30 By the measures specified in the dependent claims, advantageous developments and improvements of the plug-in connector specified in claim 1 are possible.

According to the invention, guide elements for guiding the clip arms of the locking clip, which run substantially parallel to the plugging direction, are arranged in the first or second housing part. In this way, a precise guiding of the locking clip on the one housing part is implemented and, at the same time, a fastening of the clip arms of the locking clip to the housing part is also enabled.

Moreover, according to the invention, provision is made for latch elements for locking with the counterpart latch elements arranged on the clip arms to be provided in the second or first housing part. The counterpart latch elements arranged on the clip arms lock with the latch elements, wherein a precise guiding, and therefore also a precise locking of the latch elements to one another is ensured by the guide elements.

According to the invention, the locking clip is designed in a U shape with two U-shaped legs that are bent fundamentally orthogonally from a base. Such a U-shaped design is used particularly advantageously in the case of mostly cuboidal plug-in connector housing parts.

According to the invention, provision is made for the U-shaped legs to have grooves as guide elements on their respective inner side facing the first or second housing part, with which grooves protrusions that are adapted to them and are arranged on the outer sides running parallel to the plugging direction engage in a sliding manner. The guide elements are therefore implemented by grooves and by protrusions engaging therewith. This enables, on the one hand, a precise guiding of the locking clip, but on the other hand enables an optimal fastening of the locking clip to the housing part having the protrusions.

Provision is particularly advantageously made for the U-shaped legs to have latching hooks as counterpart elements on their ends, said latching hooks interacting with snap-in noses arranged on the first or second housing part. The  
5 interaction of the grooves, together with the protrusions and the latching hooks, with the snap-in noses arranged on the housing part enables precise guiding of the U-shaped legs and thus also a precise latching of the latching hooks into the snap-in noses. In order to simplify this latching, provision  
10 is advantageously made for the latching hooks and the snap-in noses to have sliding surfaces on their sides facing one another that are adapted to one another and that run obliquely.

The locking clips can, purely as a matter of principle,  
15 consist of highly different materials. They are particularly advantageously designed as a plastic part which is not only easy to produce, but is also particularly light and at the same time has insulating properties.

#### Brief description of the drawings

20 One exemplary embodiment of the invention is depicted in the drawings and illustrated in greater detail in the description below.

Shown are:

Figure 1 an isometric depiction of a plug-in connector  
25 according to the invention before both housing parts are plugged into each other and of the locking clip;

Figure 2 an isometric depiction of the plug-in  
connector depicted in Figure 1 after both  
30 housing parts of the plug-in connector are

plugged into each other and before the fastening of the locking clip, and

Figure 3 the plug-in connector according to the invention depicted in Figure 1 and Figure 2 when both housing parts are plugged into each other and when the locking clip is plugged in.

#### Embodiments of the invention

An electrical plug-in connector, depicted in Figures 1 to 3 in different plugging states, has a first housing part 100 in which first plug contact elements, for example blade contact elements 105, are arranged. Adapted to this first housing part 100 is a second housing part 200, which is able to be plugged into the first housing part 100 in a manner that is known in itself, and in which corresponding counterpart contact elements, i.e. spring contacts (not visible here) are arranged.

A locking clip 300 is moreover provided, which has a substantially U-shaped configuration with U-shaped legs 301, 302. The inner side of the U-shaped legs 301, 302 has U-shaped grooves 310 which are adapted to corresponding protrusions 210 that are designed here to be cuboidal, said protrusions being fitted onto the outer sides of the second housing part 200 of the plug-in connector, in such a way that the cuboidal protrusions 210 are able to be slid into the grooves 310 of the locking clip 300. Latching hooks 320 are formed on the respective ends of the U-shaped limbs 301, 302, the front sides of which hooks, so their sides facing both housing parts 100, 200, having a respective slope 322. These obliquely running surfaces 322 are adapted to corresponding obliquely running surfaces 122 of snap-in noses 120 which are arranged on the first housing part 100.

Figure 1 shows the unplugged state of both housing parts 100, 200, whereas Figure 2 shows the plugged state of both housing parts 100, 200. Figure 1 and Figure 2 each show the unlocked state, whereas Figure 3 shows the plugged and locked state of both housing parts 100, 200. As can be gleaned from Figures 1 and 2, the housing part 200 has an elastic tongue 280 having a snap-in nose 290 that engages with an opening 180 provided in the housing part 100. Tongue 280, snap-in nose 290 and opening 180 thus already act as a primary locking agent, which ensures a locking of both housing parts 200 and 100 to each other. This locking is additionally ensured by the locking clip 300 that acts in this case as a secondary locking agent. After both housing parts 100, 200 have been plugged into each other, the locking clip 300 is slid above the second part 200, wherein the protrusions 210 engage with the grooves 310 and slide into the grooves 310. Then the latching hooks 320 lock on or with the snap-in noses 120 of the first housing part 100. The locking takes place while the second housing part 200 is secured by the locking clip 300. In this instance, the extensively arranged protrusions 210, which practically completely fill the grooves 310 in the locked state, prove to be highly advantageous. They enable not only a precise guiding of both U-shaped legs 301, 302 and thus also a precise guiding of the latching hooks 320 in the direction of the snap-in noses 120. They also enable a secure holding of the second housing part 200, in particular if pressure is exerted perpendicularly to the plugging direction, which is possible purely in principle, since the education of the electrical conductors takes place perpendicularly to the drawing plane by a ribbon cable or even individual wires, for example, being inserted into the opening 207, said cable or wires being contacted by means of insulation displacement contact in the second housing part 200, for example in the manner described in DE 10 2004 054



203 A1. The housing part 100 is, however, arranged on a circuit board, for example, and the contact elements are contacted on the circuit board by corresponding conducting paths. Purely as a matter of principle, the housing part 100  
5 could, however, be designed in such a way that the electrical conductors are guided away perpendicularly from the drawing plane, such as in the case of the housing part 200, or even in parallel to the drawing plane, so parallel to the plugging direction.

10 The locking clip 300 is preferably a plastic part which has a certain level of elasticity, is light and is moreover also electrically insulating. The advantage of the described design of the locking clip 300 can be seen in that it is designed as a separate part. This enables not only simple  
15 handling, but it can also be exchanged easily if damaged and can be replaced by an undamaged locking clip 300. It furthermore extensively encloses the housing part 200, which ensures a secure locking, even secondary locking, of the second housing part 200 to the first housing part 100. Not  
20 only is a precise and firmly orientated guiding of the locking clip on the second housing part 200 and the latch elements on the first housing part 100 possible by the grooves formed in the inner sides of its legs 301, 302, which interact with corresponding protrusions 210 on the second  
25 housing part 200, but a particularly stable locking is also hereby achieved.

**Patentkrav**

1. Elektrisk stikforbindelse med en første husdel (100) og med  
5 en anden husdel (200), idet der i den første eller anden  
husdel (100, 200) er anbragt knivkontaktelementer (105) og i  
hhv. den anden eller første husdel er anbragt  
fjederkontaktelementer, som er tilpasset  
10 knivkontaktelementerne (105) og kan stikkes ind i disse, med  
en låsebøjle (300), der, idet den griber om den første eller  
anden husdel, mens de to husdele (100, 200) er stukket ind i  
hinanden, kan låses fast til hhv. den anden eller første  
husdel (200, 100) parallelt med stikretningen, idet der i den  
anden husdel (200) er anbragt føringselementer parallelt med  
15 stikretningen til føring af låsebøjle (300) bøjlearme, idet  
der er i den første husdel (100) er tilvejebragt  
indgrebselementer til indgreb med modindgrebselementer på  
bøjlearmene, og idet låsebøjlen (300) er U-formet, idet  
bøjlearmene er to U-ben (301, 302), der er anbragt vinkelret  
20 på en basis, **kendetegnet ved, at** U-benene (301, 302) som  
føringselementer på den inderside der vender mod den anden  
husdel (200), har noter (310), som den anden husdels  
føringselementer, der er udformet som fremspring (210),  
glidende griber ind i.

25

2. Elektrisk stikforbindelse ifølge krav 1, **kendetegnet ved,**  
**at** U-benene (301, 302) i enderne har indgrebskroge (320) som  
modindgrebselementer, der virker sammen med indgrebselementer  
udformet som fremspring (120) på den første husdel (100).

30

3. Elektrisk stikforbindelse ifølge krav 2, **kendetegnet ved,**  
**at** indgrebskrogene (320) og fremspringene (120) på de sider,  
der vender mod hinanden, har skråt udformede glideflader (322,

122) tilpasset efter hinanden.

4. Elektrisk stikforbindelse ifølge krav 1, **kendetegnet ved, at** låsebøjlen (300) består af plast.

5

5. Elektrisk stikforbindelse ifølge krav 1, **kendetegnet ved, at** de to husdele (100, 200) har primære låsemekanismer (180, 280, 290), og låsebøjlen (300) virker som sekundær låsemekanisme.

10

6. Elektrisk stikforbindelse ifølge krav 5, **kendetegnet ved, at** de primære låsemekanismer dannes af: en tunge (280) placeret på den anden husdel (200) med en indgrebskrog (290), der griber ind i en åbning (180), som er anbragt i den første husdel (100).

15

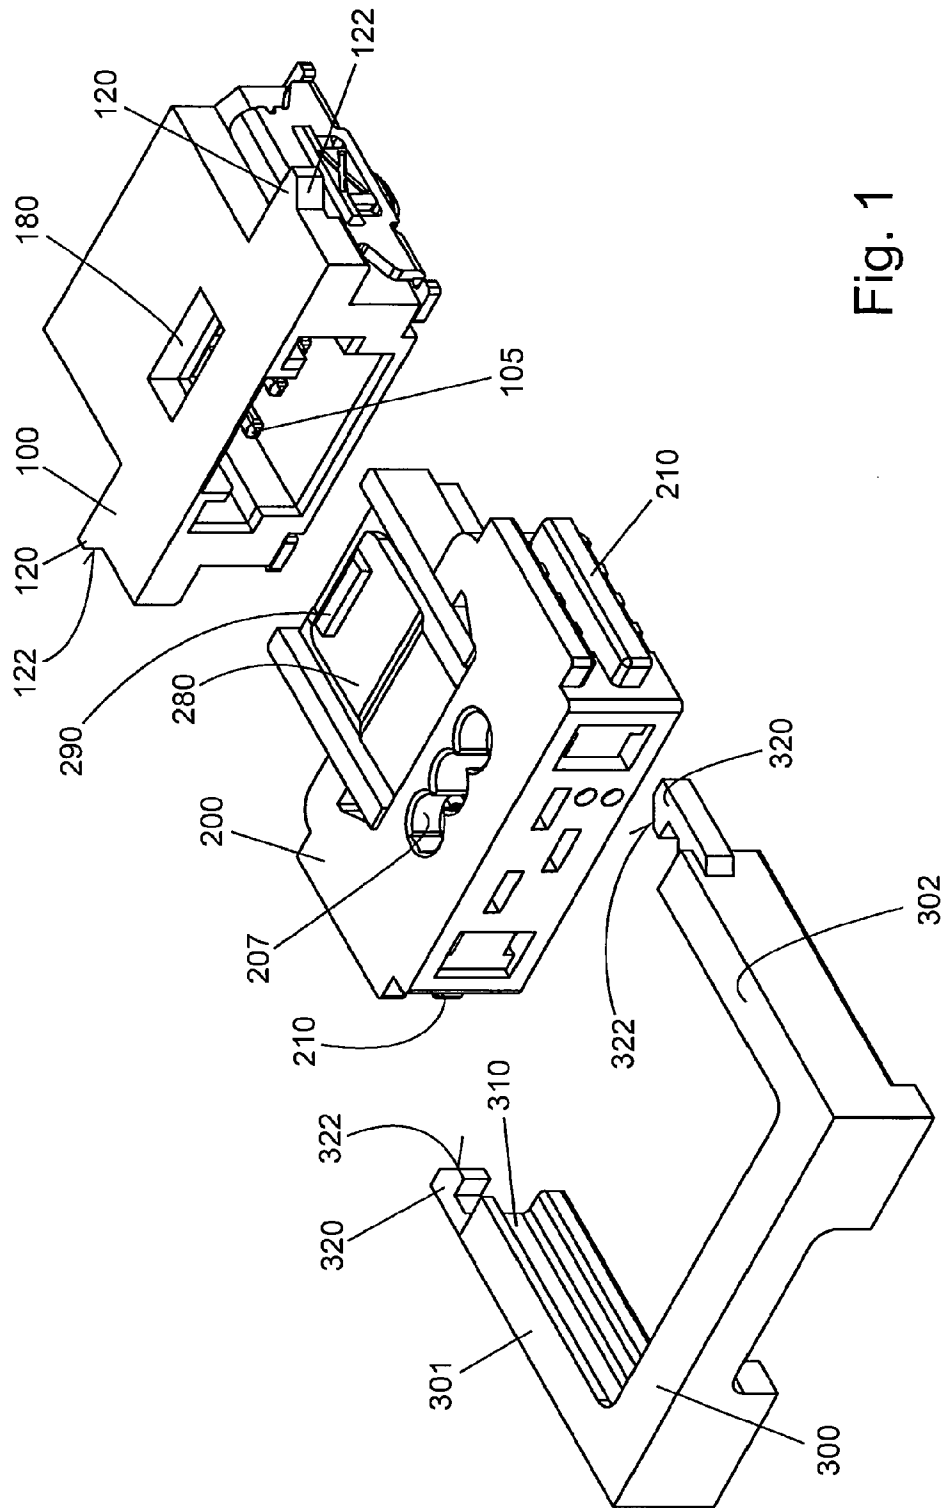


Fig. 1

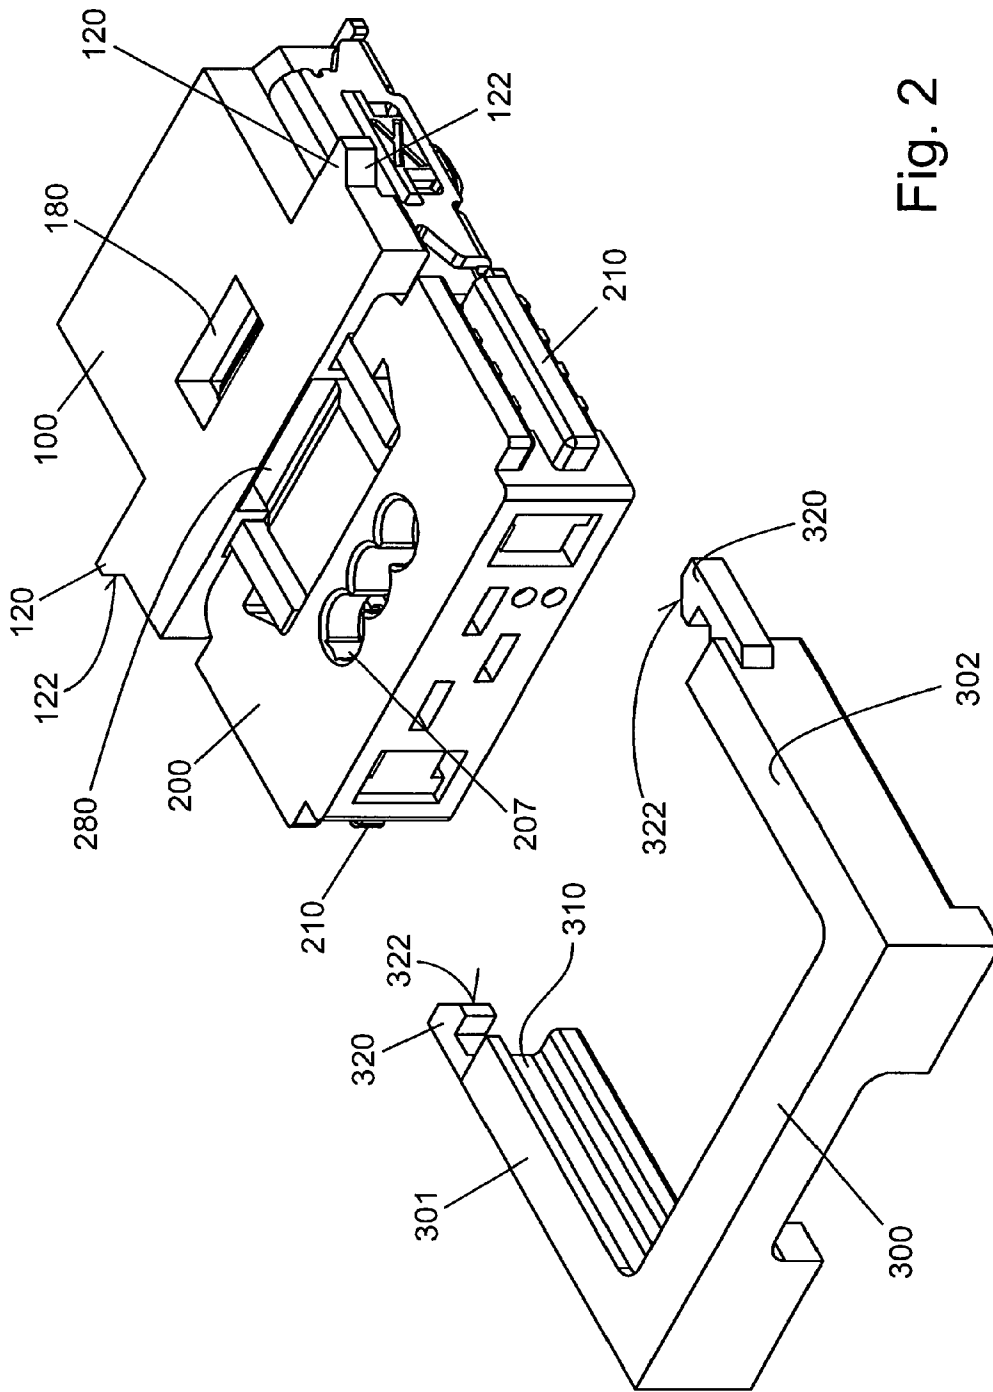


Fig. 2

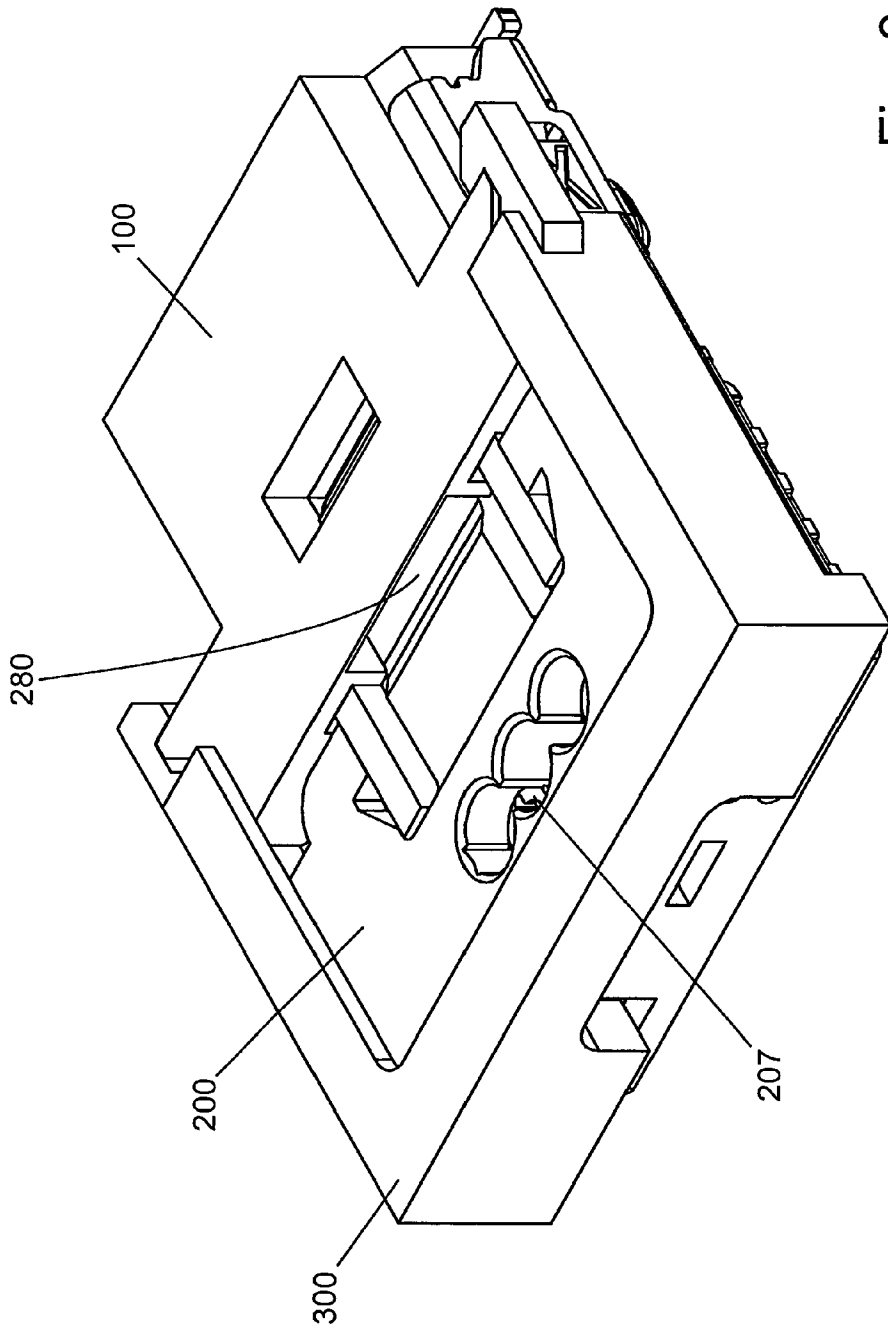


Fig. 3