

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199935777 A1

(54) Title
Positive displacement pump

(51)⁶ International Patent Classification(s)
F04C 029/02 F04C 018/02

(21) Application No: **199935777**

(22) Application Date: **1999.06.21**

(30) Priority Data

(31) Number	(32) Date	(33) Country
60090136	1998.06.22	US

(43) Publication Date : **2000.01.06**

(43) Publication Journal Date : **2000.01.06**

(71) Applicant(s)
Tecumseh Products Company


(72) Inventor(s)
Edward A. Cooksey; Daniel J. Hadesh; Edwin L. Gannaway



(74) Agent/Attorney
**WATERMARK PATENT and TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN
VIC 3122**

ABSTRACT OF THE INVENTION

A compressor assembly including a compression mechanism, a rotating crankshaft operably coupled to the compression mechanism, the crankshaft provided with a longitudinally-extending oil conveyance passageway, the oil conveyance passageway in fluid communication with relatively moving interfacing bearing surfaces of the compression mechanism, and an oil pump assembly. The oil pump assembly includes an oil pump body having an interior surface and being rotatable relative to the crankshaft, a vane disposed within the pump body and rotating with the crankshaft, the vane having at least one end in sliding engagement with the interior surface of the oil pump body, and a port plate disposed within the pump body and having rotatably opposite first and second positions. The vane is in sliding engagement with an adjacent surface of the port plate, and the port plate is provided with an inlet and an outlet. The pump body receives oil from a source of oil, the oil received in the pump body directed by the vane into the port plate inlet, the port plate outlet in fluid communication with the oil conveyance passageway, the oil directed into the port plate inlet urged toward the port plate outlet in response to relative movement between the vane and the port plate, whereby oil is pumped from the source of oil through the oil conveyance passageway.

5
10
15



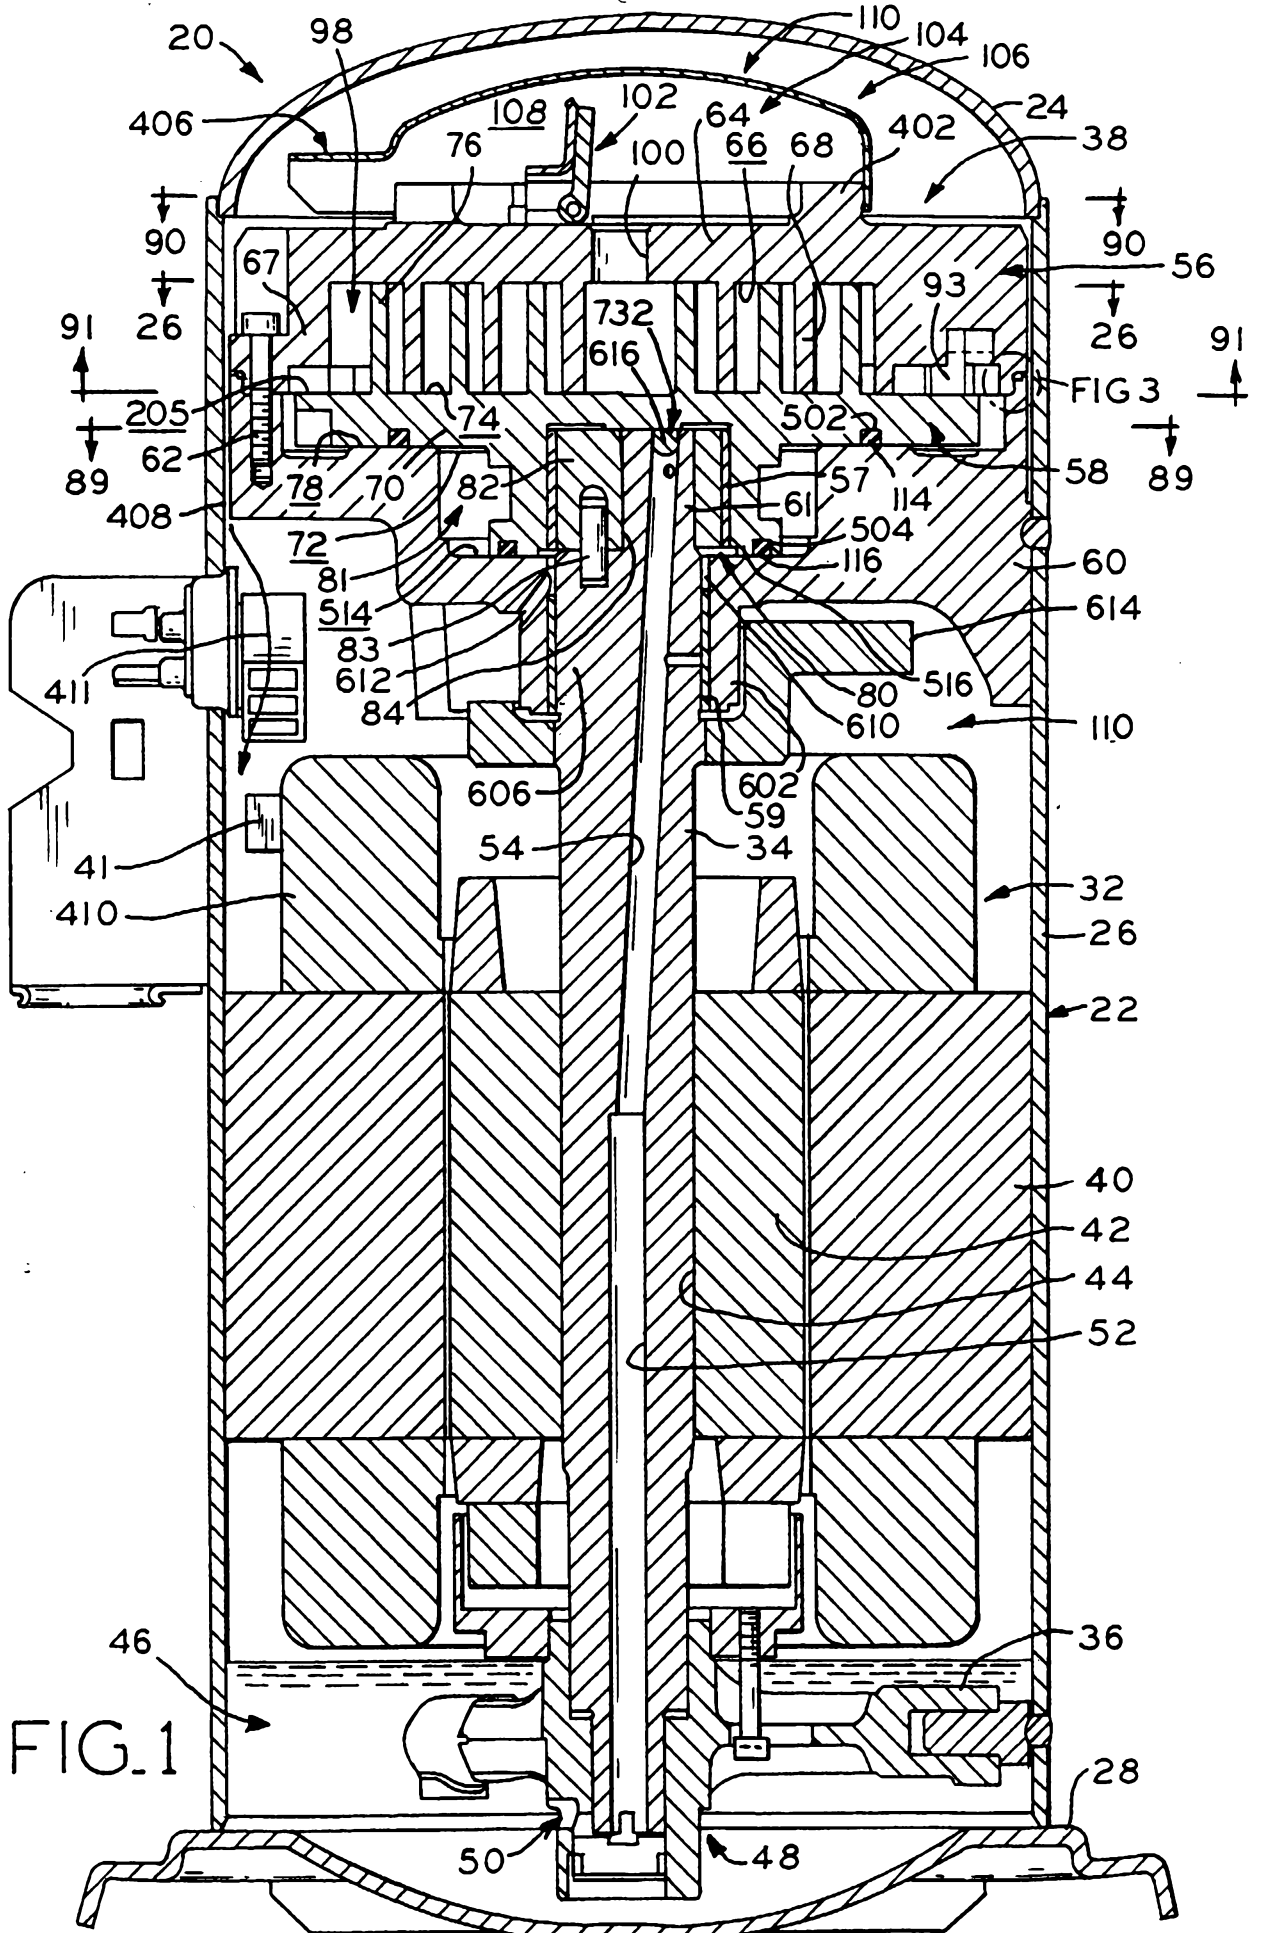

AUSTRALIA

Patents Act 1990

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Application Number:

Lodged:

Invention Title: POSITIVE DISPLACEMENT PUMP

The following statement is a full description of this invention, including the best method of performing it known to us :-

Edward A. Cooksey
Daniel J. Hadesh
Edwin L. Gannaway

POSITIVE DISPLACEMENT PUMP

BACKGROUND OF THE INVENTION

The invention generally relates to hermetic compressors and more particularly to positive displacement oil pumps for hermetic compressors.

Oil pumps of various types are typically employed in hermetic compressors to provide
5 sufficient lubrication to a multitude of interfacing bearing surfaces within the compressor. These types of pumps may be, for example, impeller pumps, centrifugal pumps or positive displacement pumps, the present invention related to the lattermost type. Positive displacement pumps are considered by many in the field to be the preferred type of pump for compressor applications, in part for the reason that these pumps can generate higher oil
10 pressure than other types of pumps.

Previous positive displacement pumps include designs which cannot effectively be interchanged between compressor applications which have crankshafts which rotate in opposite directions, or in compressor applications having a reversibly rotating crankshaft. Such a pump design is intended to pump lubrication to the various interfacing bearing
15 surfaces of a compressor only when the compressor crankshaft is rotating in a single, given direction.

Many compressors driven by an electric motor are intended to rotate only in a single direction (referred to hereinbelow as "unidirectionally-rotating"), but may, due to miswiring of the electric motor during assembly, be caused to run in a reverse direction. Under such
20 circumstances, some previous, unidirectionally-rotating positive displacement pumps will not operate to provide lubrication to the interfacing bearing surfaces, and the compressor may seize or experience excessive wear during the reverse rotation.

Further, many unidirectionally-rotating compressors are subject to unintended reverse rotation upon shutdown of the compressor, as discharge pressure gases within the
25 compressor, or within the refrigerant system into which the compressor is incorporated, expand through the compression mechanism thereof. This phenomenon is well known,

particularly in scroll compressors. As discharge gases expand on shutdown of the compressor, they backflow into the discharge port of the interleaved scroll wraps, and cause the orbiting scroll to orbit in the direction opposite that in which the gases were initially compressed. Thus, on shut down, the compressor may behave like an expansion motor, the compressed gases causing rotation of the crankshaft in a direction opposite that in which the electric motor drives the shaft. Objectionable noise and vibration usually accompany such reverse rotation of the orbiting scroll, and are well known problems. Much effort has been made to prevent of reverse rotation of the orbiting scroll; these efforts may, for example, include the provision of check valves over the discharge port to prevent reversely flowing discharge gases from reentering the space between the interleaved scroll wraps. Indeed, a scroll compressor embodiment described hereinbelow includes such a check valve. Where reverse rotation of a compressor having a previous, unidirectionally operable positive displacement pump is not entirely prevented, however, sufficient lubrication to the interfacing bearing surfaces of the compressor may not be achieved during the period of reverse rotation. During such reverse rotation, even for brief periods on shutdown of the compressor, the interfacing bearing surfaces, which remain in sliding contact with each other, may not be provided with adequate lubrication, and may be subject to excessive wear or seizure.

Moreover, in some unidirectionally-rotating compressors, during periods of brief power interruption during which the compressor is caused to be reversely rotated by expanding discharge gases, the compressor may continue rotation in the reverse direction, driven by the motor, if power is restored to the motor while the compressor is still reversely rotating under influence of the expanding discharge gases. In such situations, the compressor may run in the reverse direction for quite some time and, if no provision is made for pumping lubricant to its interfacing bearing surfaces during reverse rotation, the compressor will likely seize.

Positive displacement pumps are often at least partially submerged in the oil located in the oil sump provided in the lower portion of the compressor housing, and are driven by the rotating crankshaft coupled to the rotor of the electric motor, the end of the shaft disposed in, and rotatable relative to a pump body. Oil is forced by the pump through an axial passageway provided through the crankshaft, the passageway in fluid communication with points of

lubrication in the compression mechanism. In previous pumps, a radially-extending passage communicating with the axial oil passageway in the crankshaft is provided to lubricate the interface between the shaft and the pump body. The pump body may, in some compressors, also serve as a bearing which rotatably and/or axially supports the shaft relative to the compressor housing. Here, too, a radially-extending passage communicating with the axial oil passageway in the crankshaft is provided to lubricate the interface between the shaft and the pump body. The tolerance between the peripheral surface of the crankshaft and the pump body must be held to rather close tolerances, and the provision of the radially-extending passage requires additional machining and cost.

10 A positive displacement pump which provides lubrication to the interfacing bearing surfaces of a compressor which rotates in two directions, whether by design (hereinafter referred to as "bidirectionally-rotating") or a unidirectionally-rotating compressor caused to rotate in the reverse direction due to reexpansion of discharge gases, miswiring of the motor or a brief power interruption as described above, is highly desirable.

15 Further, a means of accommodating tolerances between the crankshaft and pump body of a compressor, and providing lubrication between the crankshaft and the pump body and/or a crankshaft-supporting bearing which comprises a pump body without requiring the additional machining associated with a radially-extending oil passage in the shaft, is also highly desirable.

20 SUMMARY OF THE INVENTION

Although the compressor described hereinbelow is a unidirectionally-rotating scroll compressor, it is to be understood that the positive displacement pump of the present invention has applications in other types of compressors or expansion motors, such as, for example, unidirectionally or bidirectionally-rotating rotary or reciprocating piston compressors, or bidirectionally-rotating scroll machines. To better facilitate understanding of the compressor embodiment described hereinbelow, however, U.S. Letters Patent 5,306,126 (Richardson), issued to the assignee of the present invention, is incorporated herein by reference and provides a detailed description of the operation of a typical scroll compressor.

30 The present invention, as it relates to the below-described embodiment, provides a positive displacement type oil pump which is provided at the lower end of a crankshaft and

extends into an oil sump defined by a compressor housing. Two embodiments of the inventive oil pump are disclosed hereinbelow and in the figures. In the first embodiment, the positive displacement pump is supported by an outboard shaft bearing. In the second embodiment, the pump is supported by an anti-rotational spring that is attached to the compressor housing or some other support. The pump is comprised of an oil pump body, a shaft extension (second embodiment), a vane, a reversing port plate, a retention pin, a wave washer, a retainer plate and a snap ring. The outboard bearing of the first embodiment and the anti-rotational spring of the second embodiment respectively serve as the oil pump body. A slot is formed at the lower end of the crankshaft to receive the rotary vane which is caused to rotate by the rotation of the crankshaft during compressor operation.

With the pump submerged in the oil sump and with the crankshaft rotating during compressor operation, the pump collects oil via at least one passage and the rotary vane, much like a wiper or rotary piston, acts upon the collected oil in combination with the enclosed area formed by the oil pump body and reversing port plate to force the oil into and through an anchor-shaped oil passage provided in the reversing plate. The oil travels upward into an inner axial bore formed in the crankshaft and the crankshaft extension. The axial oil passage extends to the uppermost portion of the crankshaft to deliver lubricating oil thereto.

Various parts of the compressor mechanism, such as rotational or thrust bearings, associated with the scroll compressor are lubricated via lateral or radially-extending openings and passages or grooves formed in and/or along the crankshaft. The oil pump of the present invention may provide a certain amount of leakage to permit the communication of oil to lower bearing surfaces without detracting from the primary oil flow of the pump or the need for radially-extending passages in the lower end of the shaft. The rotary vane of the present invention may be a spring loaded rotary vane to provide a more positive contact between both ends of the vane member and the inner surface of the oil pump body so as to decrease leakage and improve the efficiency of the oil pump.

The present invention provides a compressor assembly including a compression mechanism, a rotating crankshaft operably coupled to the compression mechanism, the crankshaft provided with a longitudinally-extending oil conveyance passageway, the oil conveyance passageway in fluid communication with relatively moving interfacing bearing

surfaces of the compression mechanism, and an oil pump assembly. The oil pump assembly includes an oil pump body having an interior surface and being rotatable relative to the crankshaft, a vane disposed within the pump body and rotating with the crankshaft, the vane having at least one end in sliding engagement with the interior surface of the oil pump body, and a port plate disposed within the pump body and having rotatably opposite first and second positions. The vane is in sliding engagement with an adjacent surface of the port plate, and the port plate is provided with an inlet and an outlet. The pump body receives oil from a source of oil, the oil received in the pump body directed by the vane into the port plate inlet, the port plate outlet in fluid communication with the oil conveyance passageway, the oil directed into the port plate inlet urged toward the port plate outlet in response to relative movement between the vane and the port plate, whereby oil is pumped from the source of oil through the oil conveyance passageway.

The present invention also provides a pump assembly including a rotating shaft provided with a longitudinally extending passageway, a pump body disposed about a shaft and having an interior surface, relative rotation existing between the shaft and the pump body, a vane disposed within the pump body, the vane rotating with the shaft, the vane having at least one end in sliding engagement with the interior surface of the pump body, and a port plate disposed within the pump body. The vane is in sliding engagement with an adjacent surface of the port plate. The port plate is provided with an inlet and an outlet, the port plate inlet receiving liquid directed thereinto by the vane from a source of liquid, the outlet in fluid communication with the shaft passageway. Liquid urged from the port plate inlet toward the port plate outlet in response to relative movement between the vane and the port plate, whereby liquid is pumped from the source of liquid through the passageway. The shaft has a surface surrounded by a surface of the pump body, providing an interface between the shaft surface and the surrounding pump body surface. The pump assembly has means for providing liquid leaked from the pump assembly along a surface of the shaft to this interface, whereby the interface is lubricated by the leaked liquid.

The present invention also provides a compressor assembly including a compression mechanism, a rotating crankshaft operably coupled to the compression mechanism, the crankshaft provided with a longitudinally-extending oil conveyance passageway, the oil

conveyance passageway in fluid communication with relatively moving interfacing bearing surfaces of the compression mechanism, and an oil pump assembly. The oil pump assembly includes a pump body disposed about the crankshaft and having an interior surface, relative rotation existing between the crankshaft and the pump body, a vane disposed within the pump
5 body, the vane rotating with the crankshaft, the vane having at least one end in sliding engagement with the interior surface of the pump body, and a port plate disposed within the pump body, the vane in sliding engagement with an adjacent surface of the port plate. The port plate is provided with an inlet and an outlet, the port plate inlet receiving oil directed thereinto by the vane from a source of oil, the outlet in fluid communication with the
10 crankshaft oil conveyance passageway. Oil is urged from the port plate inlet toward the port plate outlet in response to relative movement between the vane and the port plate, whereby oil is pumped from the source of oil through the oil conveyance passageway. The crankshaft has a surface surrounded by a surface of the pump body, an interface is thus provided between the crankshaft surface and the surrounding pump body surface. The pump assembly has means
15 for providing oil leaked from the pump assembly along a surface of the crankshaft to the interface, whereby the interface is lubricated by the leaked oil.

BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other features and objects of this invention, and the manner of attaining them, will become more apparent and the invention itself will be better
20 understood by reference to the following description of an embodiment of the invention taken in conjunction with the accompanying drawings, wherein:

Fig. 1 is a scroll sectional view of the scroll compressor of the present invention;

Fig. 2 is a top view looking inside the housing of the scroll compressor of Fig. 1;

Fig. 3 is an enlarged, fragmentary sectional view of a first embodiment of a sealing
25 structure between the fixed scroll member and the frame member of the compressor of Fig. 1;

Fig. 4 is a bottom view of the fixed scroll member of the scroll compressor of Fig. 1;

Fig. 5 is a top view of the fixed scroll member of Fig. 4;

Fig. 6 is a fragmentary sectional view showing the mounting feature of the fixed scroll
member of Fig. 4;

30 Fig. 7 is a fragmentary sectional view of the fixed scroll member of Fig. 4;

Fig. 8 is a sectional side view of the fixed scroll member taken along line 8-8 of Fig. 5;

Fig. 9 is an enlarged fragmentary bottom view of the innermost position of the involute scroll wrap of the fixed scroll member of Fig. 4;

5 Fig. 10 is a bottom view of the orbiting scroll member of the scroll compressor of Fig. 1;

Fig. 11 is a top view of the orbiting scroll member of Fig. 10;

Fig. 12 is a fragmentary sectional side view of the orbiting scroll member of Fig. 10 showing the inner hub portion with an axial oil passage;

10 Fig. 13 is an enlarged fragmentary top view of the innermost portion of the scroll wrap of the orbiting scroll member of Fig. 10;

Fig. 14 is a sectional side view of the orbiting scroll member of Fig. 10 taken along line 14-14 of Fig. 11;

15 Fig. 15 is an enlarged fragmentary sectional side view of the orbiting scroll member of Fig. 10 showing an axial oil passage;

Fig. 16 is an enlarged fragmentary sectional side view of a first embodiment of a seal disposed intermediate the orbiting scroll member and the main bearing or frame of the scroll compressor of Fig. 1;

20 Fig. 17 is an enlarged fragmentary sectional side view of a second embodiment of a seal disposed intermediate the orbiting scroll member and the main bearing or frame of the scroll compressor of Fig. 1;

Fig. 18 is a top view of one embodiment of a one piece seal located intermediate the outer peripheries of the fixed scroll member and the main bearing or frame of a scroll compressor;

25 Fig. 19 is an enlarged, fragmentary sectional side view illustrating an alternative to the sealing structure embodiment depicted in Fig. 3;

Fig. 20 is a top perspective view of a first embodiment of the Oldham ring of the scroll compressor of Fig. 1;

Fig. 21 is a bottom perspective view of the Oldham ring of Fig. 20;

30 Fig. 22 is a top view of the Oldham ring of Fig. 20;

Fig. 23 is a first side view of the Oldham ring of Fig. 20;

Fig. 24 is a second side view of the Oldham ring of Fig. 20:

Fig. 25 is a top view of a second embodiment of the Oldham ring of the scroll compressor of Fig. 1;

5 Fig. 26 is a sectional top view of the compressor assembly of Fig. 1 along line 26-26, its Oldham coupling and the fixed scroll member recess in which is disposed shown shaded;

Fig. 27 is a top view of a first embodiment of a discharge valve member for use in the discharge check valve assembly of the scroll compressor of Fig. 1;

Fig. 28 is a left side view of the discharge valve member of Fig. 27;

10 Fig. 29 is a front view of a first embodiment of a discharge valve retaining member for use in the discharge check valve assembly of the compressor of Fig. 1;

Fig. 30 is a top view of the discharge valve retaining member of Fig. 29;

Fig. 31 is a left side view of the discharge valve retaining member of Fig. 29;

15 Fig. 32 is an end view of a roll spring pin used in one embodiment of the discharge check valve assembly;

Fig. 33 is a front view of the roll spring pin of Fig. 32;

Fig. 34 is a side view of a bushing for use in said one embodiment of the discharge check valve assembly;

20 Fig. 35 is a top view of a second embodiment of a discharge valve member for use with the discharge check valve assembly;

Fig. 36 is a rear view of the discharge valve member of Fig. 35;

Fig. 37 is a right side view of the discharge valve member of Fig. 35;

Fig. 38 is a top view of a third embodiment of a discharge valve member for use in the discharge check valve assembly;

25 Fig. 39 is a rear view of the discharge valve member of Fig. 38;

Fig. 40 is a right side view of the discharge valve member of Fig. 38;

Fig. 41 is a sectional side view of the fixed scroll member of the compressor of Fig. 1 with one embodiment of a discharge check valve assembly;

30 Fig. 42 is a sectional side view of the fixed scroll member of the compressor of Fig. 1 with an alternative embodiment of the discharge check valve assembly;

Fig 43 is a front view of a second embodiment of a discharge valve retaining member for use in the discharge check valve assembly of the compressor of Fig. 1;

Fig 44 is a left side view of the discharge valve retaining member of Fig. 43;

Fig 45 is a top view of the discharge valve retaining member of Fig. 43;

5 Fig. 46 is a side view of a first embodiment of a discharge gas flow diverting mechanism;

Fig. 47 is a top view of the discharge gas flow diverting mechanism of Fig. 46;

Fig. 48 is a front view of the discharge gas flow diverting mechanism of Fig. 46;

10 Fig. 49 is a side view of a second embodiment of a discharge gas flow diverting mechanism;

Fig. 50 is a top view of the discharge gas flow diverting mechanism of Fig. 49;

Fig. 51 is a front view of the discharge gas flow diverting mechanism of Fig. 49;

Fig. 52 is a side view of a third embodiment of a discharge gas flow diverting mechanism;

15 Fig. 53 is a top view of the discharge gas flow diverting mechanism of Fig. 52;

Fig. 54 is a front view of the discharge gas flow diverting mechanism of Fig. 52;

Fig. 55 is a side view of the crankshaft of the scroll compressor of Fig. 1;

Fig. 56 is a sectional side view of the crankshaft of Fig. 55 along line 56-56;

Fig. 57 is a bottom view of the crankshaft of Fig. 55;

20 Fig. 58 is a top view of the crankshaft of Fig. 55;

Fig. 59 is an enlarged fragmentary side view of the crankshaft of Fig. 55 showing the toroidal shaped oil channel or gallery associated with the bearing lubrication system of the compressor of Fig. 1;

25 Fig. 60 is an enlarged fragmentary sectional side view of the upper portion of the crankshaft of Fig. 55;

Fig. 61A is a bottom view of the eccentric roller of the scroll compressor of Fig. 1;

Fig. 61B is a side view of the eccentric roller of Fig. 61A;

Fig. 61C is a side view of the eccentric roller of Fig. 61B from line 61C-61C;

Fig. 62 is a sectional side view of the eccentric roller of Fig. 61A along line 62-62;

Fig. 63A is a first enlarged, fragmentary sectional side view of the compressor assembly of Fig. 1;

Fig. 63B is a second enlarged, fragmentary sectional side view of the compressor assembly of Fig. 1;

5 Fig. 64 is a fragmentary sectional end view of the compressor assembly of Fig. 63A along line 64-64;

Fig. 65 is a first fragmentary sectional side view of the lower portion of the scroll compressor of Fig. 1 showing a first embodiment of a positive displacement oil pump;

10 Fig. 66 is a second fragmentary sectional side view of the positive displacement oil pump of Fig. 65;

Fig. 67 is a bottom view of the scroll compressor of Fig. 1 illustrated with the lower bearing and oil pump removed;

Fig. 68 is an exploded lower view of the lower bearing and positive displacement oil pump assembly of Fig. 65;

15 Fig. 69 is a sectional side view of the lower bearing and pump housing of the positive displacement oil pump assembly of Fig. 65;

Fig. 70 is an enlarged fragmentary sectional side view of the lower portion of the pump housing of Fig. 69;

20 Fig. 71 is an enlarged fragmentary sectional side view of the upper portion of the lower bearing of Fig. 69;

Fig. 72 is an enlarged fragmentary sectional side view of the oil pump housing of Fig. 69 showing the oil pump inlet;

Fig. 73 is a bottom view of the lower bearing and oil pump housing of Fig. 69;

Fig. 74 is a top view of the pump vane or wiper of the oil pump of Fig. 68;

25 Fig. 75 is a side view of the pump vane of Fig. 74;

Fig. 76 is a top view of the reversing port plate of the oil pump of Fig. 68;

Fig. 77 is a right side view of the reversing port plate of Fig. 76;

Fig. 78 is a bottom view of the reversing port plate of Fig. 76;

Fig. 79 is a top perspective view of the reversing port plate of Fig. 76;

Fig. 80 is an exploded side view of a second embodiment of a positive displacement oil pump;

Fig. 81 is a sectional side view of the oil pump of Fig. 80, assembled;

Fig. 82 is a force diagram for a swing link radial compliance mechanism;

5 Fig. 83 is a graph showing the values of flank contact force versus orbiting radius variation due to fixed scroll to crankshaft center offset for tangential gas forces varying from 100 to 1000 lbf.;

Fig. 84 is a graph showing the values of flank sealing force versus crankshaft angle for several values of tangential gas force for a fixed scroll to crankshaft center offset of 0.010 10 inch;

Fig. 85 is a graph showing the values of tangential gas force variation versus crankshaft angle for a highly loaded compressor;

Fig. 86 is a graph showing the flank sealing force versus the crankshaft angle for a fixed scroll to crankshaft center offset of 0.020 inch and a tangential gas force variation as 15 shown in Fig. 85;

Fig. 87 is a graph showing the calculated values of peak to peak crankshaft torque load variation versus crankshaft angle for various fixed scroll to crankshaft center offset values;

Fig. 88 is a graph showing the calculated values of peak to peak crankshaft torque 20 load variation versus radial compliance angle for various fixed scroll to crankshaft center offset values;

Fig. 89 is a top view of the compressor shown in Fig. 1, along line 89-89 thereof, showing crankshaft center axis to fixed scroll centerline offset;

Fig. 90 is a top view of the compressor shown in Fig. 1, along line 90-90 thereof, 25 showing the axial centerline of the fixed scroll member;

Fig. 91 is a bottom view of the compressor shown in Fig. 1, along line 91-91 thereof, showing the axial centerline of the fixed scroll member; and

Fig. 92 is a greatly enlarged fragmentary bottom view of the compressor as shown in Fig. 91, showing the crankshaft center axis to fixed scroll centerline offset.

Corresponding reference characters indicate corresponding parts throughout the several views. The exemplifications set out herein illustrate a preferred embodiment of the invention, in one form thereof, and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

5 DETAILED DESCRIPTION OF THE INVENTION

In an exemplary embodiment of the invention as shown in the drawings, scroll compressor 20 is shown in one vertical shaft embodiment. This embodiment is only provided as an example to which the invention is not limited.

Referring now to Fig. 1, scroll compressor 20 is shown having housing 22 consisting
10 of upper portion 24, central portion 26 and lower portion 28. In an alternative form central portion 26 and lower portion 28 may be combined as a unitary lower housing member. Housing portions 24, 26, and 28 are hermetically sealed and secured together by such processes as welding or brazing. Lower housing member 28 also serves as a mounting flange for mounting compressor 20 in a vertical upright position. The present invention is also
15 applicable in horizontal compressor arrangements. Within housing 22 is electric motor 32, crankshaft 34, which is supported by lower bearing 36, and scroll mechanism 38. Motor 32 includes stator 40 and rotor 42 which has aperture 44 into which is received crankshaft 34. Oil collected in oil sump or reservoir 46 provides a source of oil and is drawn into positive displacement oil pump 48 at inlet 50 and is discharged from oil pump 48 into lower oil
20 passageway 52. Lubricating oil travels along passageways 52 and 54, whereby it is delivered to bearings 57, 59 and between the intermeshed scroll wraps as described further below.

Scroll compressor mechanism 38 generally comprises fixed scroll member 56,
orbiting scroll member 58, and main bearing frame member 60. Fixed scroll member 56 is fixably secured to main bearing frame member 60 by a plurality of mounting bolts or
25 members 62. Fixed scroll member 56 comprises generally flat end plate 64, having substantially planar face surface 66, sidewall 67 and an involute fixed wrap element 68 which extends axially downward from surface 66. Orbiting scroll member 58 comprises generally flat end plate 70, having substantially planar back surface 72 and substantially planar top face surface 74, and involute orbiting wrap element 76, which extends axially upward from top

surface 74. With compressor 20 in a de-energized mode, back surface 72 of orbiting scroll plate 70 engages main bearing member 60 at thrust bearing surface 78.

Scroll mechanism 38 is assembled with fixed scroll member 56 and orbiting scroll member 58 intermeshed so that fixed wrap 68 and orbiting wrap 76 operatively interfit with each other. To insure proper compressor operation, face surfaces 66 and 74 and wraps 68 and 76 are manufactured so that when fixed scroll member 56 and orbiting scroll member 58 are forced axially toward one another, the tips of wraps 68 and 76 sealingly engage with respective opposite face surfaces 74 and 66. During compressor operation, back surface 72 of orbiting scroll member 58 becomes axially spaced from thrust surface 78 in accordance with strict machining tolerances and the amount of permitted axial movement of orbiting scroll member 58 toward fixed scroll member 56. Situated on the top of crankshaft 34 about offset crankpin 61 is cylindrical roller 82, which comprises swinglink mechanism 80. Referring to Fig. 61A, roller 82 is provided with offset axial bore 84 which receives crankpin 61 and offset axial bore 618 which receives limiting pin 83, which is interference-fitted into and extends from hole 620 provided in the upper axial surface of crankshaft journal portion 606 (Fig. 56). Roller 82 is allowed to pivot slightly about crankpin 61, its motion relative thereto limited by limiting pin 83, which fits loosely in roller bore 618 (Fig. 61C). When crankshaft 34 is caused to rotate by motor 32, cylindrical roller 82 and Oldham ring 93 cause orbiting scroll member 58 to orbit with respect to fixed scroll member 56. In this manner swinglink mechanism 80 functions as a radial compliance mechanism to promote sealing engagement between the flanks of fixed wrap 68 and orbiting wrap 76.

With compressor 20 in operation, refrigerant fluid at suction pressure is introduced through suction tube 86 (Fig. 2), which is sealingly received into counterbore 88 (Fig. 4, 8) in fixed scroll member 56. The sealing of suction tube 86 with counterbore 88 is aided by the use of O-ring 90 (Fig. 8). Suction port 88 provided in fixed scroll member 56 receives suction tube 86 and annular O-ring 90 in a groove for proper sealing of suction tube 86 with fixed scroll 56. Suction tube 86 is secured to compressor 20 by suction tube adapter 92 which is brazed or soldered to suction tube 86 and opening 94 of housing 22 (Fig. 2). Suction tube 86 includes suction pressure refrigerant passage 96 through which refrigerant fluid is

communicated from a refrigeration system (not shown), or other such system, to suction pressure chamber 98 which is defined by fixed scroll member 56 and frame member 60.

Suction pressure refrigerant travels along suction passage 96 and enters suction chamber 98 for compression by scroll mechanism 38. As orbiting scroll member 58 is caused to orbit with respect to fixed scroll member 56, refrigerant fluid within suction chamber 98 is captured and compressed within closed pockets defined by fixed wrap 68 and orbiting wrap 76. As orbiting scroll member 58 continues to orbit, pockets of refrigerant are progressed radially inwardly towards discharge port 100. As the refrigerant pockets are progressed along scroll wraps 68 and 76 towards discharge port 100 their volumes are progressively decreased, thereby causing an increase in refrigerant pressure. This increase in pressure internal the scroll set results in an axial force which acts outwardly to separate the scroll members. If this axial separating force becomes excessive, it may cause the tips of the scroll wraps to become spatially removed from the adjacent scroll plates, resulting in leakage of compressed refrigerant from the pockets and loss of efficiency. At least one axial biasing force, discussed hereinbelow, is applied against the back of the orbiting scroll member to overcome the axial separating force within the scroll set to maintain the pockets of compression. However, should the axial biasing force become excessive, further inefficiencies will result. Accordingly, all forces which act upon the scroll set must be considered and taken into account when designing an effective compressor design which effects a sufficient, yet not excessive, axial biasing force.

Upon completion of the compression cycle within the scroll set, refrigerant fluid at discharge pressure is discharged upwardly through discharge port 100, which extends through face plate 64 of fixed scroll 56, and discharge check valve assembly 102. To more readily exhaust the high pressure refrigerant from between the scroll wraps, surface 66 of fixed scroll member 56 may be provided with kidney shaped recess 101 as shown in Fig. 9, within which discharge port 100 is located. Alternatively, and for the same purpose, surface 74 of orbiting scroll member 58' may be provided with kidney shaped recess 101' as shown in Fig. 11. The refrigerant is expelled from between the scroll wraps through discharge port 100 into discharge plenum chamber 104, which is defined by the interior surface of discharge gas flow diverting mechanism 106 and top surface 108 of fixed scroll member 56. The compressed

refrigerant is introduced into housing chamber 110 where it exits through discharge tube 112 (Fig. 2) into the refrigeration or air-conditioning system into which compressor 20 is incorporated.

To illustrate the relationship between the various fluids at varying pressures which occur inside compressor 20 during normal operation, we shall examine the example of the compressor in a typical refrigeration system. When refrigerant flows through a conventional refrigeration system during the normal refrigeration cycle, the fluid drawn into the compressor at suction pressure undergoes changes as the load associated with the system varies. As the load increases, the suction pressure of the entering fluid increases, and as the load decreases, the suction pressure decreases. Because the fluid which enters the scroll set, and eventually the pockets of compression formed therein, is at suction pressure, as the suction pressure varies, so varies the pressure of the fluid within the pockets of compression. Accordingly, the intermediate pressure of the refrigerant within the pockets of compression correspondingly increases and decreases with the suction pressure. The change in suction pressure results in a corresponding change in the axial separating forces within the scroll set. As the suction pressure decreases the axial separating force within the scroll set decreases and the requisite level of axial biasing force needed to maintain scroll set integrity decreases. Clearly this is a dynamic situation in which the operating envelope of the compressor may vary with the suction pressure. Because the axial compliance force is derived from the pockets of compression and therefore tracks the fluctuations in the suction pressure, an effective operating envelope for compressor 20 is maintained. The actual magnitude of the axial compliance force is in part determined by the location of aperture 85 (Fig. 12) and the volume of chamber 81.

Annular chamber 81 is defined by back surface 72 of orbiting scroll 58 and the upper surface of bearing 60. Annular chamber 81 forms an intermediate pressure cavity that is in communication, via aperture 85, with fluid contained in pockets of compression formed in the scroll set. The fluid in the pockets of compression is at a pressure intermediate discharge and suction pressures. Although, oil and/or the natural sealing properties of contact surfaces may provide sufficient sealing, in the embodiment shown, continuous seals 114 and 116, which may each be annular as shown, isolate intermediate pressure cavity 81 from radially adjacent

volumes, which are respectively at suction and discharge pressure. Seal 114 is substantially longer in circumference than seal 116.

As shown in Fig. 12, aperture, passage or conduit 85 is provided in plate portion 70 of orbiting scroll member 58 and provides fluid communication between the pockets of compression and intermediate pressure cavity 81. Although this particular arrangement is described herein, it is by way of example only and not limitation.

O-ring seal 118 is provided between the fixed scroll member 56 and frame 60 which separates the discharge and suction sides of the compressor. Referring to Fig. 3, it is shown that fixed scroll member 56 and frame 60 are provided with abutting axial surfaces 120, 122, respectively. Outboard of the abutting engagement of surfaces 120, 122, radial surfaces 124, 126 of fixed scroll 56 and frame 60, respectively, are in sliding engagement. Frame 60 is provided with an axial annular surface 128 and fixed scroll 56 is provided with a stepped axial surface 130 which faces surface 128 of the frame. Frame 60 is also provided with an outer annular lip 132 which extends upwardly from surface 128 but does not extend so far as to abut surface 130 of the fixed scroll. Surfaces 126, 128, 130 and the inner surface of lip 132 define a four-sided chamber in which a conventional O-ring seal 118 is disposed. O-ring 118 is made of conventional sealing material such as, for example, EPDM rubber or the like. O-ring 118 is contacted by surfaces 128 and 130 and is squeezed therebetween, i.e., the seal provided by the above-described configuration of fixed scroll and frame surfaces and seal 118 is an axial seal. In the assembly of the fixed scroll 56 to the frame, O-ring 118 is disposed on surface 128 of the frame, held in place by lip 132, and the fixed scroll is assembled thereto. As surfaces 120, 122 are abutted, seal 118 is squeezed into its sealing configuration between surfaces 128 and 130 and, hence, the suction and discharge portions of the compressor are sealably separated.

Figure 18 shows an alternative sealing structure comprising O-ring seal 118', which is provided with a plurality of eyelets 134 on its inside diameter and, as shown in Fig. 19, seals fixed scroll 56' and frame 60' together. The eyelets encircle bolts 62 (Fig. 1), which fasten fixed scroll 56' to frame 60'. In this alternative embodiment, fixed scroll 56' is provided with axial surface 120' which abuts axial surface 122' of frame 60'. Radial surface 124' of frame 60' slidably engages radial surface 126' of fixed scroll 56'. Fixed scroll 56' is provided with

an annular step which defines axial surface 130', and frame 60' is provided with an annular step having frustoconical surface 128'. As fixed scroll 56' is assembled to frame 60', with eyelets 134 disposed appropriately about the bolt holes in through which bolts 62 extend, O-ring 118' is brought into sealing contact with exterior radial surface 136 and annular axial surface 130' of frame 56', and with frustoconical surface 128' of frame 60'. Hence, it is shown that in the alternative sealing arrangement, the O-ring seal is in both axial and radial sealing engagement with the fixed scroll and frame.

Figs. 20 through 24 show one embodiment of an Oldham coupling used in compressor 20. Oldham ring 93 is disposed between fixed scroll 56 and orbiting scroll 58 and comprises two pairs of somewhat elongate tabs, 204, 206 and 208, 210, which respectively extend from opposite axial sides 224 and 226 of the Oldham coupling. Each of tabs 204, 206, 208 and 210 have a rectangular cross section and the tabs of each pair are aligned in a common direction. As seen in Fig. 22, tabs 204, 206 of one pair are aligned in a direction that is generally perpendicular to the direction in which tabs 208, 210 of the other pair are aligned. Referring to Fig. 26, Oldham coupling 93 is disposed in recessed portion 202 of fixed scroll 56. In Fig. 26, recessed portion 202 and Oldham coupling 93 are both shown shaded by perpendicularly oriented lines; overlapping portions of recessed portion 202 and Oldham coupling 93 are thus shaded by a checked pattern formed by their respective, superimposed shading lines. Figs. 41, 42 and 91 also show recess 202 of fixed scroll 56. As also shown in Fig. 26, fixed scroll 56 is provided with, on approximately opposite radial sides, elongated recesses or slots 212 and 214 in which Oldham coupling tabs 204 and 206 are slidably disposed. Also as shown in Fig. 26, elongate slots 212 and 214 extend in a direction parallel to plane 220, along which suction tube counterbore 88 is directed. Plane 220 is generally perpendicular to plane 222, which is the plane in which orbiting scroll 58 tips at its largest tipping moment. As seen in Fig. 26, orbiting scroll 58 is provided with a pair of elongated recesses or slots 216, 218 in which tabs 208 and 210 are slidably received. It can be readily understood that orbiting scroll 58 is keyed to fixed scroll 56 by Oldham coupling 93 such that it does not rotate relative thereto. Rather, orbiting scroll 58 eccentrically orbits relative to fixed scroll 56, its orbiting motion guided by tabs 204, 206, 208 and 210 which slide within recesses 212, 214, 216, and 218. It will be noted in Fig. 26 that as tabs 204 and 206

respectively assume a position at one end of their respective slots 212 and 214 (the shown position), the outer circumferential surface of Oldham coupling 93 on the side of plane 222 on which suction port 88 is located (lower right-hand side of Fig. 26), conforms very closely to the adjacent, radially interior wall 203 of recess 202. Similarly, as tabs 204 and 206
5 respectively assume a position at the opposite end of their respective slots 212 and 214 (position not shown), the outer circumferential surface of Oldham coupling 93 on the side of plane 222 opposite that on which suction port 88 is located (upper left-hand side of Fig. 26), conforms very closely to the adjacent, radially interior wall 203 of recess 202. Thus, it will be understood by those skilled in the art that recess 202 is closely sized to accommodate the
10 reciprocating movement of Oldham coupling 93 along axis 240, which lies in plane 220. The space necessary to accommodate Oldham coupling 93 is thereby minimized.

Referring again to Figs. 20 through 24, it can be seen that each of opposite axial sides 224 and 226 of Oldham ring 93 is provided with pad surfaces 228 through 236. Pad surfaces 228a, 232a, 234a and 236a are disposed on side 224; on opposite side 226 of Oldham ring 93,
15 directly below and matching the shapes of the pad surfaces on side 224, are corresponding surfaces 228b, 230b, 232b, 234b and 236b. In each of Figs. 20 through 25, the pad surfaces are shown shaded or cross hatched to clarify their general shape and position. Fig. 25 shows alternative Oldham ring 93' which is substantially identical to Oldham ring 93 except that it is prepared by a sintered powder metal process rather than a metal machining process. It can be
20 seen the primary distinction of Oldham ring 93' is that the material area surrounding each of the tabs is slightly enlarged.

As shown in Fig. 1, it can be seen that Oldham ring 93, 93' is disposed between fixed scroll member 56 and orbiting scroll member 58. Also, surface 74 of orbiting scroll member 58 has an outlying, peripheral surface portion 205, which lies outside of its scroll wrap 76,
25 and which faces lower side 226 of Oldham ring 93, 93'. Similarly, recessed area 202 of fixed scroll 56 has downwardly facing surface 238 (Fig. 91) which faces upper side 224 of Oldham ring 93, 93'. Pads 228 through 236 on opposite sides of Oldham ring 93, 93' slidingly contact surfaces 205 and 238. Referring to Figs. 22 and 25, pad surfaces 228a and 228b have portions which lie on opposite sides of plane 220.

Figs. 22, 24 and 25 show axis 240 which extends centrally through the thickness of Oldham coupling 93, 93', and which lies in plane 220. During compressor operation, orbiting scroll member 58 tends to tip in plane 222, about an axis in plane 220 which is parallel with axis 240. As orbiting scroll 58 tips in plane 222, outlying portion 205 of surface 74 will be
5 alternatingly urged into contact with pad surface portions on side 226 of Oldham ring 93, 93' on only opposite sides of plane 220. Referring to Figs. 1, 22, 24 and 25, as orbiting scroll member 58 tips in plane 222 in a clockwise direction as viewed in Fig. 24 about an axis generally parallel to axis 240 and proximal plane 220, a portion of surface portion 205 is swung upward and into abutting contact with Oldham ring 93, 93' abutting pads 234b and
10 236b and a portion of 228b. This action urges opposite side pad surfaces 234a and 236a and a portion of 228a (all on the left hand side of plane 220 in Figs. 22, 25) into abutting contact with the adjacent portion axial surface 238 in fixed scroll recessed area 202. Conversely, as orbiting scroll member 58 tips in plane 222, in a counterclockwise direction as viewed in Fig. 24 about an axis generally parallel to axis 240 and proximal plane 220, the radially opposite
15 portion of surface portion 205 is swung upward and into abutting contact with the Oldham coupling, abutting pads 230b, 232b and a portion of 228b. This action urges opposite side pad surfaces 230a and 232a and a portion of 228a (all on the right hand side of plane 220 in Figs. 22, 25) into abutting contact with the adjacent portion axial surface 238 in fixed scroll recess 202. The tipping of orbiting scroll 58 in plane 222 oscillates between the above-
20 described clockwise and counterclockwise motions during compressor operation. Thus it can be seen that the travel of Oldham coupling 93, 93' is aligned to support surface 205 of the orbiting scroll member and prevent its tipping. As will be understood with reference to Fig. 26, surface 205 of the orbiting scroll member is supported by the Oldham coupling at locations which oppose the maximum values of the oscillating tipping moments on the
25 orbiting scroll, thereby preventing wobbling of the orbiting scroll member.

Upon compressor shutdown, orbiting scroll member 58 is no longer orbitally driven by motor 32 and crankshaft 34 and is free to move in response to gas pressures acting thereon, including the pressure differential between discharge port 100 and suction port 88. Further, upon compressor shut-down, a pressure differential which exists between the fluid contained
30 in the discharge chamber and the fluid contained in the scroll set, which is at a pressure lower

than that contained in the discharge chamber. As the two volumes seek pressure equilibrium, a reverse flow of fluid refrigerant from the discharge chamber back into the scroll set.

Unimpeded, this pressure differential acts upon orbiting scroll member 58 so as to cause it to orbit in a reverse manner with respect to fixed scroll member 56. Such reverse orbiting
5 results in refrigerant flowing into discharge port 100 in a reverse direction and exiting through suction port 88 into the refrigerant system. This problem of reverse scroll rotation during compressor shutdown has long been associated with scroll compressors. Valve assembly 102 is provided to alleviate this problem by using the fluid flowing from the discharge chamber into the scroll set to act on the discharge check valve so as to quickly move the check valve to
10 a closed position covering the discharge port. In this manner, reverse orbiting is prevented and more gradual equilibrium may be achieved.

Shown in Figs. 1 and 27-45 are various components and embodiments of discharge check valve assemblies 102, 102' which may be used with compressor 20. Each of these embodiments comprises a lightweight plastic or metallic pivoting valve that is positioned
15 adjacent to and directly over discharge port 100 provided in fixed scroll member 56 and is held in place by valve retaining member 310 or 324. Alternative valve members 302, 302' and 302'' are shown in Figs. 27, 28; 35-37; 38-40, respectively. The valve member may be provided with either of pivot ears 309 or a bore 322 for receiving a roll spring pin 320, on which are provided bushings 318. Ears 309 or bushings 318 are received in bushing recesses
20 318, 318' in the valve retaining member.

With the compressor in operation, refrigerant fluid at suction pressure is introduced through suction tube 86, which is sealingly received into counterbore 88 provided in fixed scroll member 56 and is communicated into suction pressure chamber 98 which is defined by fixed scroll member 56 and frame member 60. The suction pressure refrigerant is
25 compressed by scroll mechanism 38. As orbiting scroll member 58 is caused to orbit with respect to fixed scroll member 56, refrigerant fluid within suction chamber 98 is compressed between fixed wrap 68 and orbiting wrap 76 and conveyed radially inwards towards discharge port 100 in pockets of progressively decreasing volume, thereby causing an increase in refrigerant pressure.

Refrigerant fluid at discharge pressure is discharged upwardly through discharge port 100 and exerts an opening force against rear face 306 of valve member 302, 302', 302", causing it to move to or remain in an open position. The refrigerant is expelled into discharge plenum or chamber 104 as defined by discharge gas flow diverting mechanism 106 and top surface 108 of fixed scroll member 56. From the discharge gas flow diverting mechanism the compressed refrigerant is introduced into housing chamber 110 where it exits through discharge tube 112 into a refrigeration system in which compressor 20 is incorporated.

Discharge check valve assembly 102, 102' prevents the reverse flow of refrigerant upon compressor shutdown, thereby preventing the reverse orbiting of scroll mechanism 38.

Referring to Figs. 42-45, check valve assembly 102 comprises rectangular valve member 302 having front face 304, rear face 306, and pivot portion 308, valve member retaining member 324, bushings 318, and spring pin 320. Rear face 306 faces and preferably has an area greater than discharge port 100. Pin 320 extends through hole 322 in pivot portion 308 and is fitted with bushings 318 on opposite sides of valve member 302, with the radial flanges of bushings 318 adjacent the valve member. Bushings 318 are rotatably disposed in two opposite-side bushing recesses 316 of member 324. During compressor operation, refrigerant acts upon front and rear faces 304 and 306, thereby causing valve member 302 to pivot relative to member 324, which is fixed relative to fixed scroll member 56. Valve retaining member 324 mounts over and around the valve member and includes two mounting extensions 312, which may be secured to the fixed scroll member such as by bolts. In assembly, spring pin 320 is received in bore 322 of valve member 302 and bushings 318 are attached at the ends of the pin. Valve retaining member is positioned over the valve member with the two bushings being received in the two recesses and the two mounting extensions positioned adjacent mounting bores provided in the upper surface of fixed scroll member 56. The valve assembly is then secured to the fixed scroll by two mounting bolts or the like. Valve members 302' (Figs. 35-37) and 302" (Figs. 38-40) have integral bushings or ears 309 and no spring pin; each may be used with retaining member 310 or 324 as described above.

Valve 302 is urged against valve stop 314, 314' by the force of discharge refrigerant acting on rear face 306. Notably, valve 302 is not bistable, and would tend to return, under the influence of gravity, to its closed position if the discharge refrigerant force acting on rear

face 306 were removed. During compressor shutdown, refrigerant in the discharge pressure housing chamber 110 of the compressor moves towards the suction pressure chamber 98 through discharge port 100. With relief hole 326 provided in valve stop 314, refrigerant travels through stop 314 and acts against the large surface area of front face 304 of valve member 302, causing it to quickly pivot towards the discharge port and engage the surrounding surface 108 of fixed scroll member 56 such that front face 304 covers and substantially seals the opening of discharge port 100. Relief hole 326 also prevents "stiction", which tends to cause the valve member to stick to the stop, which may occur during compressor operation. In this manner refrigerant is prevented from flowing in a reverse direction from discharge pressure housing chamber 110 to suction chamber 98 and through suction passage 96. A discharge check valve employing valve retainer member 310 functions in a similar manner, which stop 314' providing a large area of valve front face 304 exposed to reversely-flowing discharge gases on compressor shut-down. The fuller interface of face 304 with stop 314 vis-a-vis stop 314' is expected to provide better valve wear.

15 With housing chamber 110 effectively sealed off from suction chamber 98 the pressure differential is effectively eliminated thereby preventing reverse orbiting of orbit scroll member 58. The pressurized refrigerant contained within scroll compression chambers between the interleaved scroll wraps acts upon scroll mechanism 38 to cause the wraps of orbiting scroll member 58 to radially separate from the wraps of fixed scroll member 56.

20 With scroll members 56 and 58 no longer sealed with one another, the refrigerant contained therein is permitted to leak through scroll member wraps 68 and 76 and the pressure within scroll mechanism 38 reaches equilibrium.

25 During normal scroll compressor operation, discharge pressure refrigerant is discharged through the discharge port causing the discharge check valve to move to an open position. A biasing spring (not shown) may be provided to prevent cycling of the discharge check valve and resulting chatter due to pressure pulsations which occur during compressor operation.

As shown in Fig. 1, discharge gas flow diverting mechanism 106 is attached to fixed scroll member 56 and surrounds annular protuberance 402 of the fixed scroll member.

30 Figures 46, 47, and 48 illustrate a first embodiment of the discharge gas flow diverting

mechanism. Figures 49, 50, and 51 illustrate a second embodiment of the gas flow diverting mechanism. Figures 52, 53, and 54 illustrate a third embodiment of the gas flow diverting mechanism. The gas flow diverting mechanism may be attached to the fixed scroll member as by crimping the whole or portions of lower circumference 404 into an annular recess
5 provided in annular protuberance 402. In the alternative, a series of notches may be formed in the annular protuberance to permit a series of crimps along the lower circumference of the gas flow diverting mechanism. Other means, such as interference fit, locking protuberances, etc., may be employed to secure the gas flow diverting mechanism to the fixed scroll member. Also, as shown in third embodiment gas flow diverting mechanism 106" (Fig. 53), the gas
10 diverting mechanisms may be provided with a plurality of holes 414 which are aligned above a plurality of tapped holes 416 provided in fixed scroll member surface 108 (Fig. 5), the gas diverting mechanism attached to the fixed scroll member with threaded fasteners (not shown).

During compressor operation, compressed refrigerant fluid is forced from discharge port 100 through discharge check valve 102 and into discharge chamber 104, which is defined
15 by the inner surface of the gas flow diverting mechanism and upper surface 108 of the fixed scroll member. Gas flow diverting mechanism 106 may be positioned so that discharge gas exiting chamber 104 through outlet 406 is directed downward through gap 408 (Figs. 1, 2) formed between housing 22, fixed scroll member 56 and frame 60, and is further directed into housing chamber 110 along path 411 to optimally flow over and about the motor overload
20 protector 41 which is attached to stator windings 410. Hence, the gas diverting mechanism provides an additional measure of motor protection by ensuring that hot discharge gases are immediately directed towards the overload protector.

As shown in the embodiment of Figs 49 through 51, gas flow diverting mechanism outlet 406' may be provided with a downwardly turned hood 412 to further direct the
25 outwardly flowing discharge gas downward toward gap 408.

Notably, discharge check valve assembly 102 is oriented toward gas diverting mechanism outlet such that, when the valve is open, front face 304 is exposed to the reverse inrush of discharge pressure gas from chamber 110 to chamber 104 through outlet 406 upon compressor shutdown, thereby facilitating quick closing of the valve.

The scroll compressor of Fig. 1 is provided with an intermediate pressure chamber 81 into which is introduced refrigerant gas at an intermediate pressure which urges orbiting scroll member 58 into axial compliance with fixed scroll member 56. Intermediate pressure chamber 81 is defined by surfaces of the orbiting scroll member 58 and the main bearing or frame 60 which lie between a pair of annular seals 114, 116 respectively disposed in grooves 502, 504 provided in downwardly-facing axial surfaces 72, 506 of orbiting scroll member 58 and which are in sliding contact with interfacing surfaces of frame 60. Referring to Figs. 1, 10 and 14, it can be seen that intermediate pressure chamber 81 is generally defined as the annular volume between a step provided in the frame 60 and the downwardly depending hub portion 516 of the orbiting scroll 58. Seals 114 and 116 respectively seal the intermediate pressure from the suction pressure region and the discharge oil pressure region.

Referring to Fig. 12, it can be seen that downwardly depending hub portion 516 of the orbiting scroll member 58 has outer radial surface 508 which adjoins planar surface 72. Surface 508 extends from surface 72 to bottommost axial surface 506 of the hub portion 516. Radial surface 508 is provided with wide annular groove 510 having upper annular surface 512. Aperture 85 extends from surface 512 to surface 74, at which it opens into an intermediate pressure region between the scroll wraps of the orbiting and fixed scroll members. As seen in Fig. 12, aperture 85 may be a single straight passageway which extends at an angle from surface 512 to surface 74. Alternatively, aperture 85 may comprise a first axial bore (not shown) extending from surface 74 in parallel with surface 508 into a portion of hub 516 radially inboard of groove 510, and a radial crossbore (not shown) extending from the first bore to the radial surface of groove 510. For ease of manufacturing, it is preferable to provide a single, angled aperture as shown in Fig. 12.

Referring now to Fig. 17, it can be seen that seal 116 is provided in groove 504 and is in sliding contact with surface 514 of frame 60 which interfaces surface 506 of hub portion 516. The portion of surface 506 radially inboard of groove 504, i.e., to the right as shown in Fig. 17, is at discharge pressure and is ordinarily filled with oil. As seen in Fig. 17, seal 116 is generally C-shaped having outer portion 518 and inner portion 520 disposed within the annular channel provided in outer portion 518, the channel facing radially inboard. Outer seal portion 518 may be a polytetrafluoroethylene (PTFE) material, or other suitable low-friction

material, which provides low friction sliding contact with surface 514. The interior of inner seal portion 520 is exposed to discharge pressure oil, which causes seal 116 to expand axially and radially outward in groove 504, thereby ensuring sealing contact between the sealing surfaces of seal 116 and the uppermost and outermost surfaces of groove 504 and surface 514 of the frame.

Referring now to Figs. 14 and 16, it can be seen that planar surface 72 of orbiting scroll member 58 is provided with annular groove 502 in which is disposed seal 114. Seal 114 includes outer portion 522 having a c-shaped channel which is open radially inwardly, and an inner portion 524 disposed within the c-channel. The C-channel of portion 522 opens radially inwardly so as to be exposed to intermediate pressure fluid within intermediate pressure chamber 81, which urges seal 114 radially outward in groove 502 and axially outward against the opposing axial surfaces of groove 502 and surface 78 of frame 60 on which seal 114 slidingly engages. Outer seal portion 522 may be made of PTFE material, or other suitable low-friction material, thereby allowing low friction sliding engagement with surface 78. Inner seal portion 114 may be Parker Part No. FS16029, having a tubular cross section. Grooves 504 and 502 may be provided with seals 114 and 116 of a common cross-sectional design, which may be as illustrated in either Fig. 16 or Fig. 17. That is, the cross-sectional design of seal 114 may be adapted for use in groove 504. Conversely, cross-sectional design of seal 116 may be adapted for use in groove 502. The pressure within intermediate pressure chamber 81 may be regulated by means of a valve as disclosed in pending U.S. Application Serial No. 09/042,092, filed March 13, 1998, which is expressly incorporated herein by reference.

Referring to Fig. 1, main bearing or frame 60 is provided with downwardly depending main bearing portion 602 which is provided with bearing 59 in which journal 606 of crankshaft 34 is radially supported. Crankshaft journal portion 606 is provided with radial crossbore 608 (Figs. 55, 56) which extends from the outer surface of crankshaft journal portion 606 to upper oil passageway 54 within the crankshaft. A portion of the oil conveyed through passageway 54 is provided through crossbore 608 to lubricate bearing 59. Oil flowing from crossbore 608 through bearing 59 may flow downward along the outside of crankshaft journal portion 606 where it may be radially distributed by a rotating

counterweight 614, after which it is returned to sump 46. From crossbore 608, oil may also flow upwards along bearing 59 and along the outside of journal portion 606 and into annular oil gallery 610, which is in communication with housing chamber 110 and sump 46 through passageway 612 in frame 60. Passageway 612 is oriented in frame 60 such that the rotating counterweight 614 will pick up and sling the oil coming through passageway 612 to disperse the oil in the radial side of the compressor opposite the inlet of discharge tube 112. The terminal end opening 732 of oil passageway 54 is sealed with plug 616 which is flush with or somewhat below the terminal end surface of crankpin 61.

Radial oil passage 622 in roller 82 and radial oil passage 624 in crankpin 61 are maintained in mutual communication (Fig. 61C), although roller 82 may pivot slightly about crankpin 61, its pivoting motion is limited by the sides of bore 618 engaging the sides of limiting pin 83. The remaining oil which flows through oil passageway 54 in the crankshaft, which flows beyond crossbore 608, flows through communicating oil passages 622 and 624 to lubricate bearing 57. Because oil passage 54 is oriented at an angle relative to the axis of rotation of shaft 34, oil passage 54 forms a type of centrifugal oil pump which may be used in conjunction with pump assembly 48 disposed in oil sump 46 and described further hereinbelow. The pressure of the oil which reaches radial oil passages 608 and 624 is thus greater than the pressure of the oil in sump 46, which is substantially discharge pressure. Oil flowing through bearing 57 may flow upwards into oil receiving space or gallery 55 (Figs. 15, 63B) which is in fluid communication with an intermediate pressure region between the scroll wraps through oil passage 626. The oil in oil gallery 55 is at discharge pressure, and flows through passageway 626 by means of the pressure differential between gallery 55 and the intermediate pressure region between the scrolls. The oil received between the scrolls through passageway 626 serves to cool, seal and lubricate the scroll wraps. The remaining oil which flows along bearing 57 flows downward into annular oil gallery 632, which is in communication with annular oil gallery 610 (Fig. 1).

As best shown in Fig. 64, axial bore 84 of roller 82 is not quite cylindrical, and forms, along one radial side thereof, clearance 633 between that side of the bore and the adjacent cylindrical side of the crankpin 61, which extends therethrough. Clearance 633 provides part of a vent passageway which, during conditions when intermediate pressure between the scroll

wraps is greater than discharge pressure, would prevent a backflow gas flow condition through roller bearing 57. With reference now to the flowpath represented by arrows 635 of Fig. 63A, if intermediate pressure is greater than discharge, such as during startup operation of a compressor, refrigerant may be vented through passageway 626, into oil gallery 55, and through clearance 633 between bore 84 and the outer surface of crankpin 61 into a region defined by countersink 628 provided in the lower axial surface of the roller 82 about bore 84 and crankpin 61. This region is in communication with a radial slot 630 provided in the lower axial surface of roller 82. This vented refrigerant may flow into annular oil gallery 632 and back to housing chamber 110 of the compressor through passageway 612 in frame 60. In this manner, venting of refrigerant during startup operation assures that oil gallery 55 does not pressurize to the point of restricting oil flow to bearing 57 or, as indicated above, flush the oil from bearing 57 with the venting refrigerant during compressor startup.

As seen in Figs. 14, 15 and 63, downwardly-facing surface 636 of the orbiting scroll member inside the central cavity of hub portion 516 is provided with a short cylindrical protuberance or "button" 634 which projects downwardly approximately 2-3 mm from surface 636. Button 634 is, in one embodiment, approximately 10-15 mm in diameter and its axial surface abuts portions of the interfacing uppermost axial surfaces of crankpin 61 and/or roller 82, which are generally flush with one another. Button 634 provides the function of locally loading crankpin 61 and/or roller 82 so as to minimize frictional contact over the entire upper axial roller and crankpin surfaces and thus serves as a type of thrust bearing. The interface of button 634 and crankpin 61 and/or roller 82 is near the centerlines of hub portion 516 and roller 82, where the relative velocity between the button and the crankpin and roller assembly is lowest, thereby mitigating wear therebetween.

Positive displacement type oil pump 48 is provided at the lower end of crankshaft 34 and extends into oil sump 46 defined by compressor housing 22. A first embodiment of the oil pump is disclosed in Figures 65 through 79 and an alternative second embodiment is disclosed in Figures 80 and 81. In the first embodiment, as shown in the fragmentary sectional side views of Figs. 65 and 66, positive displacement pump 48 is disposed about lower end 702 of crankshaft 34 and is supported by outboard bearing 36.

The pump is comprised of oil pump body 704, vane or wiper 706, which may be made injection molded of a material such as Nylatron™ GS, for example, circular reversing port plate or disc 708, the planar upper, axial surface of which is in sliding contact with the lower surface of vane 706, retention pin 710, wave washer 713, circular retainer plate 715 and snap ring 712. The pump components are arranged within pump body 704 in the order shown in Fig. 68, and wave washer 713 urges the pump components into compressive engagement with each other. An annular groove is provided in the lower end of the pump body to receive snap ring 712. Slot 714, as shown in Figs. 55-57, is provided in lower end 702 of shaft 34 and receives rotary vane 706, which is longer than the diameter of lower shaft end 702, and which is caused to rotate by the rotation of the crankshaft. The vane slides from side to side within the slot and contacts the surface of pump cylinder 716 formed in pump body 704. As best shown in Figs. 65 and 73, pump cylinder 716 is larger in diameter than, and is eccentric relative to, portion 709 of bearing 36. Further, the centerline of pump cylinder 716 is offset with respect to the center line of crankshaft 34 and lower axial oil passage 52.

The diameter of portion 709 of bearing 36 is somewhat larger in diameter than lower shaft end 702, thereby providing a small clearance therebetween, through which oil may leak from pump 48, as will be described further hereinbelow, to lubricate the lower journal portion 719 of shaft 34, which is radially supported by journal portion 717, and axially supported by surface 726, of bearing 36.

As shaft 34 rotates, vane 706 reciprocates in shaft slot 714, its opposite ends 744, 746 (Figs. 74, 75) sliding on the cylindrical wall of pump cylinder 716. Having opposite ends 744, 746 facilitates multi-direction operation of vane 706. The vane may alternatively be formed with a spring (not shown) in the middle or may be of a two-piece design with two vane end portions connected by a separate, intermediate spring (not shown). The intermediate spring urges the vane ends outward toward the inner surface of the pump body for a tighter more efficient pumping operation. Such alternative configurations would better seal vane ends 744, 746 to the cylindrical wall of pump cylinder 716, thereby reducing pump leakage. The pump relies on some amount of leakage, however, to provide lubrication of lower bearing 36. Oil leakage past vane 706 as it is rotated in pump cylinder 716 travels upward through the small clearance between lower shaft portion 702 and portion 709 of bearing 36, providing

a source of lubricant to the journal and thrust bearings above. Hence, lower bearing 36 of compressor 20 is lubricated by leakage from pump 48 rather than by oil pumped thereby through lower shaft passageway 52.

As shown in Fig. 66, oil from sump 46 enters the pump via inlet 50 and is acted upon by a side surface of rotating vane or wiper 706. The vane forces oil into anchor-shaped inlet 718 provided in the planar, upper axial surface of reversing port plate 708, where, due to the decreasing volume, the oil is forced to travel into the central reversing port outlet 720 and upwards into axial oil passage inlet 722, past scallops 750, 752 in the sides of vane 706. In effect, due to the eccentric nature of the pump and the action of the rotating vane, central port outlet 720 is at a pressure lower than that at the anchor-shaped inlet. The anchor shape of the reversing port plate permits effective pumping operation regardless of the direction of rotation of the crankshaft, for oil will be allowed to enter inlet 718 at or near either of its two anchor "points". Hence, oil will be provided to the compressor's lubrication points even during reverse rotation of the compressor upon shutdown, should that occur. Circumferential retention pin channel 711 is provided in the planar, lower axial surface of reversing port plate 708 to slidably receive retention pin 710. Pin 710 is fixed relative to the pump body, retained within notch 754 provided in the cylindrical wall of pump cylinder 716 (Figs. 68, 73) below pump inlet 50. This permits rotational repositioning of the reversing port plate to properly accommodate multi-direction operation, opposite end surfaces of channel 711 brought into abutment with pin 710 as shaft 34 changes rotational direction. Port plate 708 thus having rotatably opposite first and second positions.

Lower bearing thrust washer 724 rests on lower bearing thrust surface or shoulder 726 to provide a thrust bearing surface for crankshaft 34. Oil leakage from pump mechanism 48 travels upward through the interface between lower shaft end 702 and lower bearing portion 709, as described above, to provide lubricating oil to the interface between crankshaft thrust surface 726 and thrust washer 724, and crankshaft journal portion 719 and bearing journal portion 717. Grooves (not shown) are formed in thrust washer 724 to assist in the delivery of lubricating oil to thrust surface 726. In addition, slots (not shown) may be provided in the pump body to assist oil leakage from the pump mechanism to the thrust surface. Also, slot, flat or other relief 728 (Figs. 55, 56) may be provided in the crankshaft journal portion 719 to

provide further rotational lubrication to the interfacing surfaces of the lower journal bearing. In this manner, leakage from the pump, rather than the primary pump flow traveling along the crankshaft axial oil passageway, provides both rotational and thrust lubrication to the lower bearing surfaces. This concentrates the delivery of primary pump oil flow to destinations
5 further up the crankshaft. The pump thus provides a means of lubricating the lower bearing of the compressor which allows relatively loose tolerances of the interfacing surfaces of the pump body and shaft and simple machining of the crankshaft.

As shown in Fig. 1, oil from pump 48 travels upwards along lower axial oil passageway 52 and offset upper oil passageway 54. The offset configuration of the upper oil
10 passageway 54 provides an added centrifugal pumping effect on the primary oil flow of the pump. The upper opening 732 of passageway 54 is provided with plug 616. Part of the oil flow through passageway 54 is discharged through radial passageway 608 in shaft journal portion 606 (Figs. 55, 56) and is delivered to bearing 59. The remainder of the oil flow through passageway 54 is discharged through radial passageway 624 in crankpin 61 and
15 communicating radial passageway 622 in roller 82, and is delivered to bearing 57 (Fig. 63B). Oil flows upwards along bearing 57 and into oil gallery 55, which is defined by the upper surfaces of crankpin 61 and eccentric roller 82, and the surface 636 of orbiting scroll member 58. Oil is delivered to the scroll set via axial passage 626 provided in the orbiting scroll member.

20 Oil pump 48' of the second embodiment, as shown in the exploded view of Fig. 80 and the sectional view of Fig. 81, functions essentially as described above but is different structurally as it is designed for use in compressors having no lower bearing. Oil pump 48' includes anti-rotational spring 738, which is attached to compressor housing 22 or some other fixed support. Spring 738 supports oil pump body 704' axially within housing 22, and against
25 rotation with shaft extension 740, which includes axial inner oil passage 742 and is attached to the lower end of a crankshaft (not shown). Slot 714', similar to slot 714 of shaft 34, is provided in shaft extension 740; vane 706' is slidably disposed in the slot for reciprocation therein, the vane rotatably driven by the slot as described above. Instead of wave washer 713, retainer plate 715 and snap ring 712, pump assembly 48' may alternatively comprise split
30 spring washer 712' to urge the pump components into compressive engagement with each

other. Pump assembly 48 may be similarly modified. Vane 706', reversing port plate 708' and retention pin 710' are substantially identical to their counterparts of the first embodiment pump assembly, and pump assembly 48' functions as described above.

Those skilled in the art will appreciate that pump assemblies 48, 48', although described above as being adapted to a scroll compressor, may also be adapted to other types of applications, such as, for example, rotary or reciprocating piston compressors.

Compressor assembly 20 may be provided with an offset between fixed scroll centerline 802 and crankshaft centerline S. This offset affects the crank arm and radial compliance angle so as to flatten cyclic variations in crankshaft torque and flank sealing force between the scroll wraps. The compressor may incorporate either a slider block radial compliance mechanism or, as shown in the above-described embodiments, a swing link radial compliance mechanism. The following nomenclature is used in the following discussion:

- e orbiting radius (eccentricity);
- b distance from crankpin 61 centerline P to orbiting scroll center of mass O;
- 15 d distance from crankpin 61 centerline P to eccentric swing link center of mass R;
- r distance from crankpin 61 centerline P to crankshaft 34 centerline S;
- D offset distance from fixed scroll wrap centerline to crankshaft centerline
- F force;
- 20 M mass;
- O orbiting scroll center line and center of mass;
- P crankpin 61 center line;
- R swing link center of mass;
- S crankshaft 34 centerline and rotation axis;
- 25 RPM revolutions per minute;

Subscripts

Greek symbols

- | | | | |
|------|--------------------|----------|--|
| b | swing link | θ | radial compliance (phase) angle |
| § | flank sealing | α | swing link center of mass angular offset |
| ib | swing link inertia | ξ | Crankshaft angle |
| 30 P | drive pin | | |

- s orbiting scroll
- tg tangential, gas
- rg radial, gas
- tp tangential, eccentric pin
- 5 rp radial, eccentric pin

There are three characteristics which distinguish the scroll compressors from other gas compression machines, respectively the quiet operation, the ability to pump liquid, and high energy efficiency. The scroll compressor has an advantage over reciprocating or rotary compressors in that it does not suffer mechanical damage during liquid ingestion. This is because the scrolls are provided with a radial compliance mechanism that allows the scrolls to disengage in the event of liquid compression. In such a case, the compressor turns merely into a pump. Typical radial compliance mechanisms also split the driving force into a tangential force meant to balance the friction and compression forces and a radial component to ensure the flank contact between wraps and thus the sealing between compression pockets.

Another advantage is the smoother variation of the crankshaft torque as the compressing gas is distributed in multiple pockets with only two openings each crankshaft cycle. The crankshaft torque is directly proportional to the compression force and the torque arm, respectively the distance between the compression force vector and crankshaft rotation axis. A means of further leveling the crankshaft torque variation is to provide varying distance to the vector, with a minimum value of this distance coinciding with the maximum compression force. However, a corresponding increasing variation in flank sealing force may result. The swing link radial compliance mechanism can level this variation as well.

A radial compliance mechanism often used in scroll compressors is a slider block. The ability of the slider block version to reduce the torque variation in scroll compressors is presented in Equation 1, below. The slider block allows the orbiting scroll to move the center of mass during crankshaft rotation. A side effect of the center of this movement is that the centrifugal force and thus the radial flank sealing force varies with crankshaft angle.

The radial compliance mechanism considered in the present study is a swinglink as described above as with respect to the illustrated embodiments. The force diagram for this swing link is presented in Figure 82.

The force balance in X and Y directions as well as the moments about orbiting scroll centerline O (Fig. 82) are presented in Equations 1-3:

$$\sum F_x = 0 = F_{is} - F_{fs} - F_{fg} - F_{rp} + F_{ib} * \text{Cos}(\alpha) \quad (1)$$

$$\sum F_y = 0 = F_{tg} - F_{tp} - F_{rg} + F_{ib} * \text{Sin}(\alpha) \quad (2)$$

5 where:

$$F_{is} = M * (2 * \pi * \text{RPM} / 60)^2 * e$$

and

$$F_{ib} = M_b * (2 * \pi * \text{RPM} / 60)^2 * \sqrt{e^2 + ((d-b) * \text{Cos}(\pi - \delta))^2}$$

$$\sum M_o = 0 = F_{rp} * b * \text{Cos}(\theta) - F_{tp} - F_{rg} * b * \text{Sin}(\theta) + F_{ib} * e * \text{Sin}(\alpha) \quad (3)$$

The fixed scroll may be physically translated by an offset defining a locus shown in

10 Figure 82. Consequently the orbiting radius (eccentricity) will vary with the crankshaft angle.

With reference to Figs.89, 90, as proven in Equation 1, fixed scroll centerline 802 to crankshaft center S offset D causes flank contact force variation only because of the variation in centrifugal force. The swing link brings an additional effect. The centrifugal force changes in same manner the flank sealing force, respectively a positive offset increases the

15 distance between the orbiting scroll center of mass O and crankshaft rotation axis S, thus the flank contact force is increased. However, the positive fixed scroll to crankshaft center offset D causes an increase of the radial compliance angle θ . The increased radial compliance angle decreases the flank contact force due to the radial component of the drive force. Thus, the swing link mechanism has an inherent compensating effect.

20 The fixed scroll to crankshaft center offset (assumed along line e of Fig. 82) causes a change of the radial compliance angle. Table I shows the relation between offset values and the radial compliance angle.

TABLE I

Offset, inches	-0.10	-0.08	-0.06	-0.04	-0.02	0.00	0.02	0.04	0.06	0.08	0.10
Compliance angle, degree	-14.1	-10.2	-6.8	-3.8	-1.1	1.4	3.7	5.9	8.0	10.0	12.0

Figure 83 is a graph in which the values of the flank contact force versus orbiting radius variation due to the offset for different instantaneous values of the tangential gas force obtained by solving the system of Equations 1-3 are plotted.

Figure 83 shows the flank contact force for a gas tangential force varying from 100 to 1000 lbf. The gas radial force is assumed to be 10% the gas tangential force value. Other numerical values substituted in Equations 1-3 are for a typical four ton scroll compressor. The variable on the X axis represents the fixed scroll offset. A positive offset corresponds to the orbiting scroll center line moving further from the crankshaft centerline. Equations 1-3 show the following changes have opposite effects: (1) in general, an increase of the tangential force increases the flank sealing force; and (2) an increase of the orbiting scroll and swing link centrifugal forces increases the flank sealing force.

The curves in Figure 83 show also that the fixed scroll to crankshaft center offset effect on flank sealing force depends on the amplitude of the tangential gas force. For gas tangential force less than 400 lbf, the flank contact force increases by increasing the orbiting radius. For gas tangential force greater than 400 lbf, the flank contact force decreases by increasing the orbiting radius. There is negligible change in the value of flank sealing force for a gas tangential force of 400 lbf. For a fixed scroll to crankshaft center offset of -0.075 inch, the flank contact force is constant.

The value of the orbiting radius, e , varies with crankshaft angle in a sinusoidal manner. The flank sealing force presented in Figure 83 is plotted vs. the crankshaft angle, ξ , in Figure 84 for a 0.010 inch fixed scroll to crankshaft center offset D . The orbiting scroll eccentricity is a function of crankshaft angle and it is calculated as follows:

$$e(\xi) = D \cdot \sin(\xi)$$

where ξ is the crankshaft angle.

Figure 84 shows the variation of flank sealing force with crankshaft angle for several values of tangential gas force for a radial compliance angle θ of the 0.010 inch offset. The flank sealing force is inversely proportional to the tangential gas force. However, the offset effect changes qualitatively when increasing the tangential gas force. For an optimal choice of the phase angle, the fixed scroll to crankshaft center offset reduces the maximum sealing

force and increases the minimum sealing force. This selective effect can be seen for the phase angle case depicted in Figure 84 at a crankshaft angle value of about 180 degrees.

For example, the tangential gas force variation versus crankshaft angle as determined for a scroll compressor operating at a highly loaded condition is plotted in Figure 85. The radial gas force, F_{rg} , for this condition is about 10% the average tangential gas force, F_{tg} .

Figure 86 shows the flank sealing force versus the crankshaft angle for a fixed scroll to crankshaft center offset D of 0.020 inch and a tangential gas force variation as shown in Figure 85. Eight different values for the phase between offset and pressure variation are considered. This figure shows the offset effect emphasized in Figure 84 for the tangential gas variation illustrated in Figure 85. The flank sealing force is inversely proportional to the variation of the gas tangential force. Flank sealing force variation can be reduced for a phase angle about 90 degrees. Figure 87 shows the values calculated for torque versus crankshaft angle.

For a better understanding of the fixed scroll to crankshaft center offset effect on torque variation, the peak-to-peak variations are plotted in Figure 88 for several offset values versus the phase angle. In Figure 88 one can determine for a given offset the phase angle range where a flattening of the crankshaft torque variation can be obtained. Next, from Figure 86 the specific phase angle to minimize flank sealing force variation can be obtained.

From the foregoing it has been concluded that the effect of the fixed scroll to crankshaft center offset is more complex in the case of a swing link than in the case of a slider block. It is shown that the centrifugal force has an opposite effect than the radial compliance angle upon the flank sealing force. An appropriate choice of the fixed scroll offset will reduce the torque variation and at the same time reduce the variation of the flank contact force. This implies a reduced value of the maximum flank contact force while the minimum flank contact force still suffices for sealing. The lower value of the maximum sealing force means less friction loading, thus an opportunity for a more efficient compressor as well as a quieter scroll compressor.

While this invention has been described as having certain embodiments, the present invention can be further modified within the spirit and scope of this disclosure. This

application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles.

"Comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:
~~What is claimed is:~~ xxxxxxxx

1. A compressor assembly comprising:

a compression mechanism;

a rotating crankshaft operably coupled to said compression mechanism, said

5 crankshaft provided with a longitudinally-extending oil conveyance passageway, said oil conveyance passageway in fluid communication with relatively moving interfacing bearing surfaces of said compression mechanism; and

an oil pump assembly comprising:

an oil pump body having an interior surface and being rotatable relative to said

10 crankshaft;

a vane disposed within said pump body, said vane rotating with said crankshaft, said vane having at least one end in sliding engagement with said interior surface of said oil pump body; and

a port plate disposed within said pump body and having rotatably opposite first and
15 second positions, said vane in sliding engagement with an adjacent surface of said port plate, said port plate provided with an inlet and an outlet, said pump body receiving oil from a source of oil, the oil received in said pump body directed by said vane into said port plate inlet, said port plate outlet in fluid communication with said oil conveyance passageway, the oil directed into said port plate inlet urged toward said port plate outlet in response to relative
20 movement between said vane and said port plate, whereby oil is pumped from said source of oil through said oil conveyance passageway.

2. The compressor assembly of Claim 1, wherein said compression mechanism comprises a pair of scroll members having interleaved involute wrap elements.

3. The compressor assembly of Claim 1, wherein said crankshaft rotates in at least one of first and second opposite directions, said vane correspondingly rotates in first and second opposite directions, and in both said first and second vane directions oil is urged from said port plate inlet toward said port plate outlet in response to relative movement between
5 said vane and said port plate.

4. The compressor assembly of Claim 3, wherein said port plate is urged into one of its said first position by said vane rotated in its said first direction and its said second position by said vane rotated in its said second direction.

5. The compressor assembly of Claim 4, wherein said port plate is provided with a circumferential groove having first and second ends, and further comprising a retention pin fixed relative to said pump body, said retention pin received in said circumferential groove, said first and second groove ends abutting said retention pin in said first and second port plate positions, respectively.

6. The compressor assembly of Claim 4, wherein said port plate inlet is substantially anchor-shaped, said port plate inlet having a circumferentially extending inlet groove with first and second ends and a radially extending groove communicating with said circumferentially extending inlet groove intermediate its said first and second ends, said radially extending groove in communication with said port plate outlet.

7. The compressor assembly of Claim 6, wherein said port plate inlet and outlet are each formed in said surface of said port plate adjacent said vane.

8. The compressor assembly of Claim 6, wherein said vane is rotated in one of its first and second directions and the oil received in said pump body is directed by said vane into said port plate inlet at a respectively corresponding one of said first and second circumferentially extending inlet groove ends.

9. The compressor assembly of Claim 1, wherein said source of oil is an oil sump containing oil, said pump body is at least partially submerged in the oil in said sump, said pump body provided with an inlet through which oil from said sump enters said pump body, and said sump is in fluid communication with said vane and said surface of said port plate adjacent said vane through said pump body inlet.

10. The compressor assembly of Claim 1, wherein said pump body comprises an outboard bearing, said crankshaft supported by said outboard bearing.

11. The compressor assembly of Claim 1, wherein said crankshaft has a lower end, said lower end is disposed in said pump body and includes an inlet to said oil conveyance passageway, said lower end is provided with a diametrical slot, and said vane is slidably disposed in said slot.

12. The compressor assembly of Claim 11, wherein said crankshaft includes a shaft extension, said shaft extension including said lower end.

13. The compressor assembly of Claim 1, wherein said pump body comprises a first portion having a substantially cylindrical inner surface coaxial with said crankshaft and a second portion including said interior surface of said pump body, said pump body interior surface substantially cylindrical and eccentric relative to said crankshaft, said first and second
5 portions positioned adjacent one another, said pump body interior surface is larger in diameter than said inner surface of said first portion, said port plate and said vane are disposed in said second portion, and said vane has first and second ends in sliding engagement with said pump body interior surface.

14. The compressor assembly of Claim 13, wherein said crankshaft extends through said first recess portion and has a lower end which extends into said second portion, said lower end including an inlet to said oil conveyance passageway, said lower end provided with a diametrical slot, said vane slidably disposed in said slot, and said vane reciprocates
5 laterally relative to said crankshaft within said slot.

15. The compressor assembly of Claim 14, wherein said crankshaft includes a shaft extension, said shaft extension including said lower end.

16. The compressor assembly of Claim 1, wherein said vane has first and second opposite ends, each said end in sliding communication with said interior surface of said pump body.

17. The compressor assembly of Claim 16, wherein said vane consists essentially of a single portion in part defined by said first and second opposite ends.

18. The compressor assembly of Claim 17, wherein said vane is provided with at least one scallop in an elongate surface intermediate said first and second ends, oil urged from said port plate port plate into said oil conveyance conduit past said scallop.

19. The compressor assembly of Claim 16, wherein said vane comprises first and second portions respectively having said first and second ends and a spring disposed between said first and second portions, said first and second ends urged into contact with said interior surface of said pump body by said spring.

20. The compressor assembly of Claim 1, wherein said crankshaft is supported by at least one bearing surface formed in said pump body, a clearance between a portion of said crankshaft and an interfacing surface of said pump body providing an oil leakage path from said vane to said bearing surface, whereby said bearing surface is lubricated by leakage from
5 said pump.

21. The compressor assembly of Claim 20, wherein said bearing surface is a radial bearing surface, one of said crankshaft and said bearing surface provided with a relief along which said leakage oil is distributed to the interface of said radial bearing surface and said crankshaft.

22. A compressor assembly comprising:
a compression mechanism;
a rotating crankshaft operably coupled to said compression mechanism, said crankshaft provided with a longitudinally-extending oil conveyance conduit, said oil
5 conveyance conduit in fluid communication with relatively moving interfacing surfaces of said compression mechanism; and

an oil pump assembly comprising:
an oil pump body, relative rotation existing between said crankshaft and said pump body; and

10 means disposed within said oil pump body for urging oil received in said pump body into and through said oil conveyance conduit regardless of the direction of rotation of said crankshaft.

23. The compressor assembly of Claim 22, wherein said crankshaft is supported by a bearing surface of said pump body, said compressor assembly comprising means for lubricating an interface between a surface of said crankshaft and said bearing surface with oil leaked from said oil pump.

24. A pump assembly comprising:
a rotating shaft provided with a longitudinally extending passageway;
a pump body disposed about a shaft and having an interior surface, relative rotation existing between said shaft and said pump body;

5 a vane disposed within said pump body, said vane rotating with said shaft, said vane having at least one end in sliding engagement with said interior surface of said pump body; and

a port plate disposed within said pump body, said vane in sliding engagement with an adjacent surface of said port plate, said port plate provided with an inlet and an outlet, said
10 port plate inlet receiving liquid directed thereinto by said vane from a source of liquid, said outlet in fluid communication with said shaft passageway, liquid urged from said port plate inlet toward said port plate outlet in response to relative movement between said vane and said port plate, whereby liquid is pumped from said source of liquid through said passageway;

said shaft having a surface surrounded by a surface of said pump body, providing an
15 interface between said shaft surface and said surrounding pump body surface, said pump assembly having means for providing liquid leaked from said pump assembly along a surface of said shaft to said interface, whereby said interface is lubricated by said leaked liquid.

25. A compressor assembly comprising:

a compression mechanism;

a rotating crankshaft operably coupled to said compression mechanism, said crankshaft provided with a longitudinally-extending oil conveyance passageway, said oil
5 conveyance passageway in fluid communication with relatively moving interfacing bearing surfaces of said compression mechanism; and

an oil pump assembly comprising:

a pump body disposed about said crankshaft and having an interior surface, relative rotation existing between said crankshaft and said pump body;

10 a vane disposed within said pump body, said vane rotating with said crankshaft, said vane having at least one end in sliding engagement with said interior surface of said pump body; and

a port plate disposed within said pump body, said vane in sliding engagement with an adjacent surface of said port plate, said port plate provided with an inlet and an outlet, said
15 port plate inlet receiving oil directed thereinto by said vane from a source of oil, said outlet in fluid communication with said crankshaft oil conveyance passageway, oil urged from said port plate inlet toward said port plate outlet in response to relative movement between said


vane and said port plate, whereby oil is pumped from said source of oil through said oil conveyance passageway;


20 said crankshaft having a surface surrounded by a surface of said pump body, providing an interface between said crankshaft surface and said surrounding pump body surface, said pump assembly having means for providing oil leaked from said pump assembly along a surface of said crankshaft to said interface, whereby said interface is lubricated by said leaked oil.

DATED this 21st day of June 1999.

TECUMSEH PRODUCTS COMPANY

WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN. VIC. 3122.



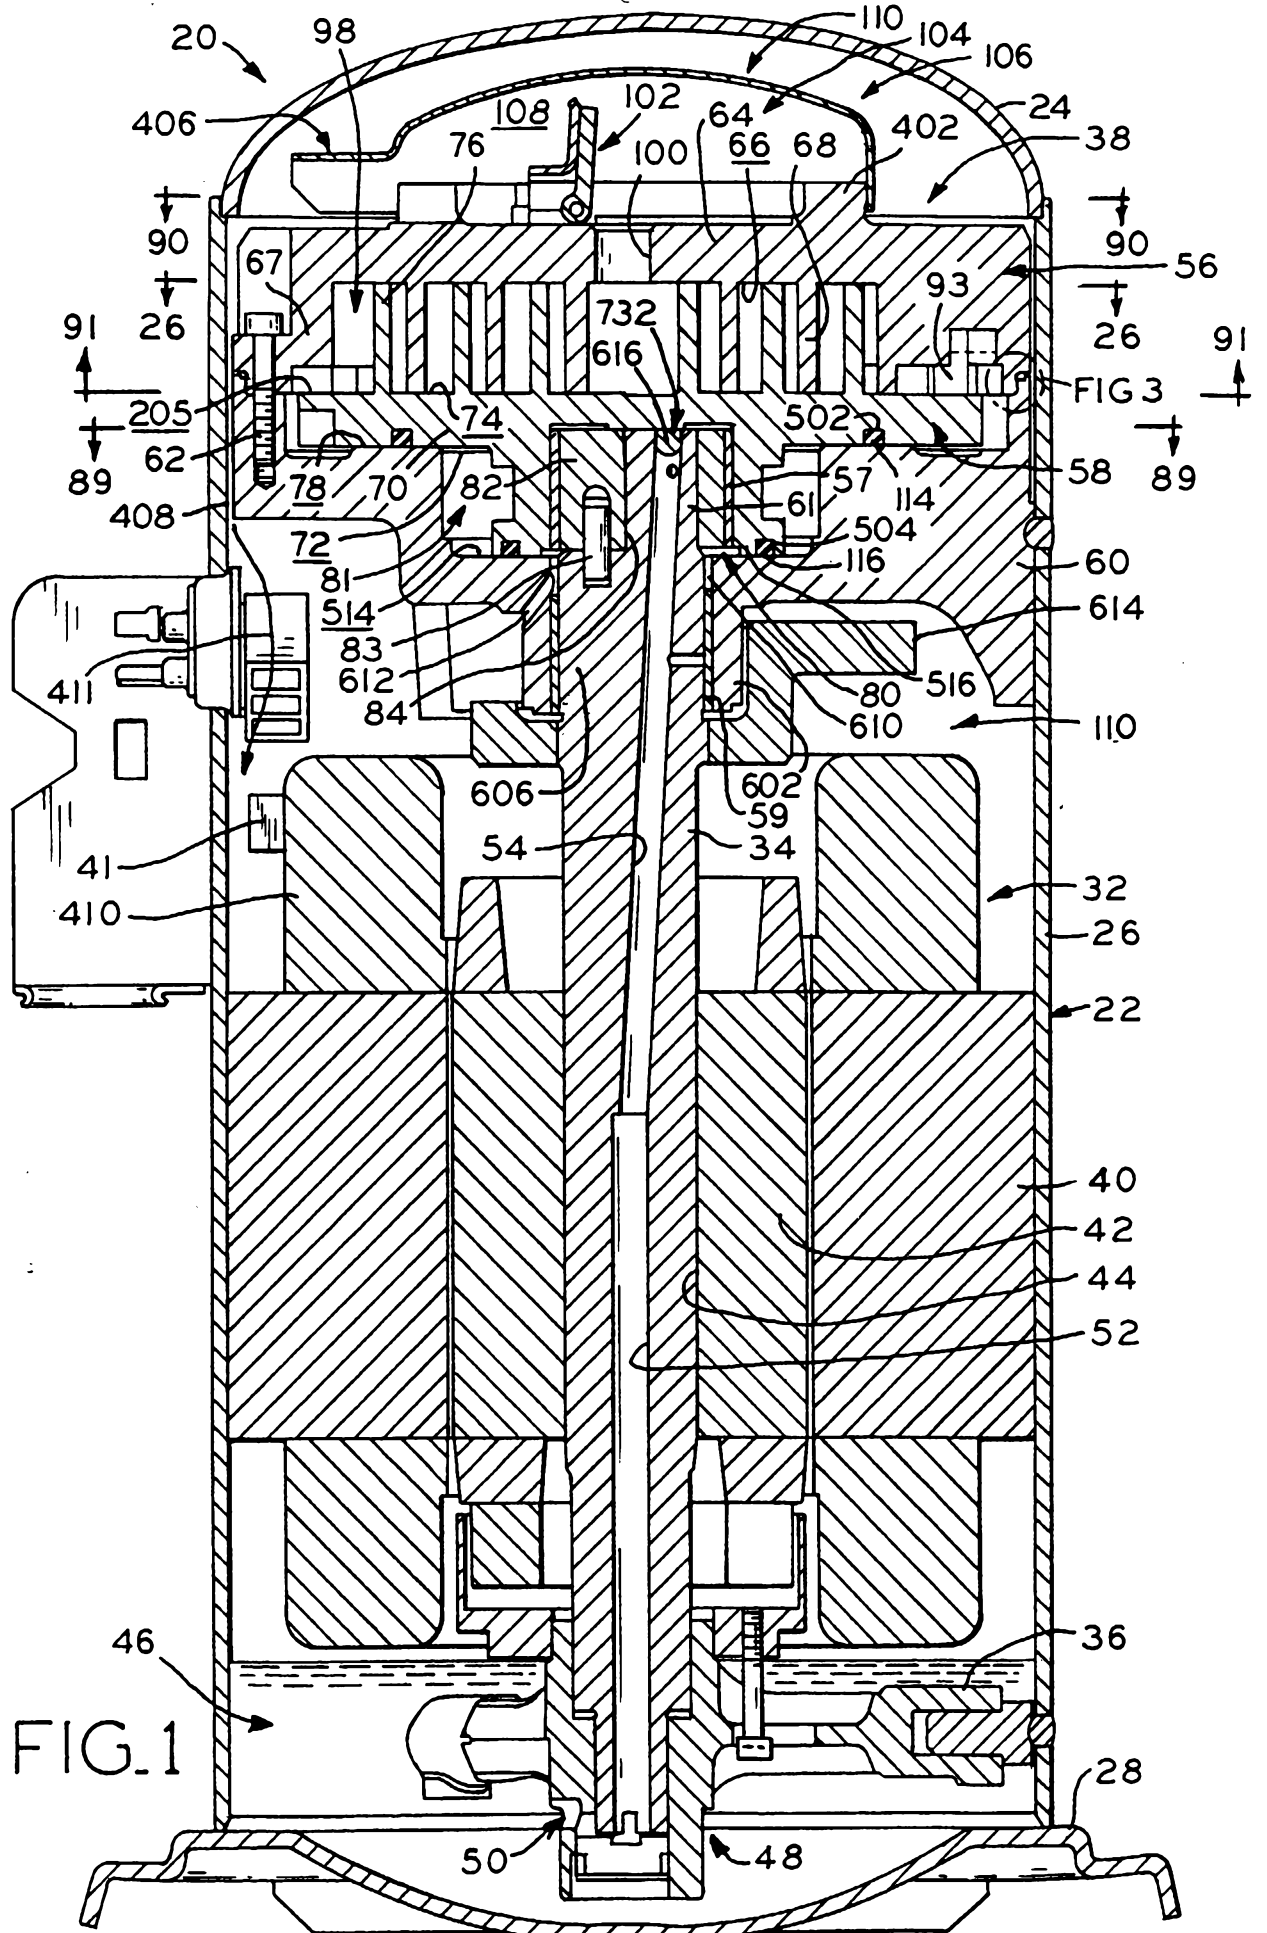

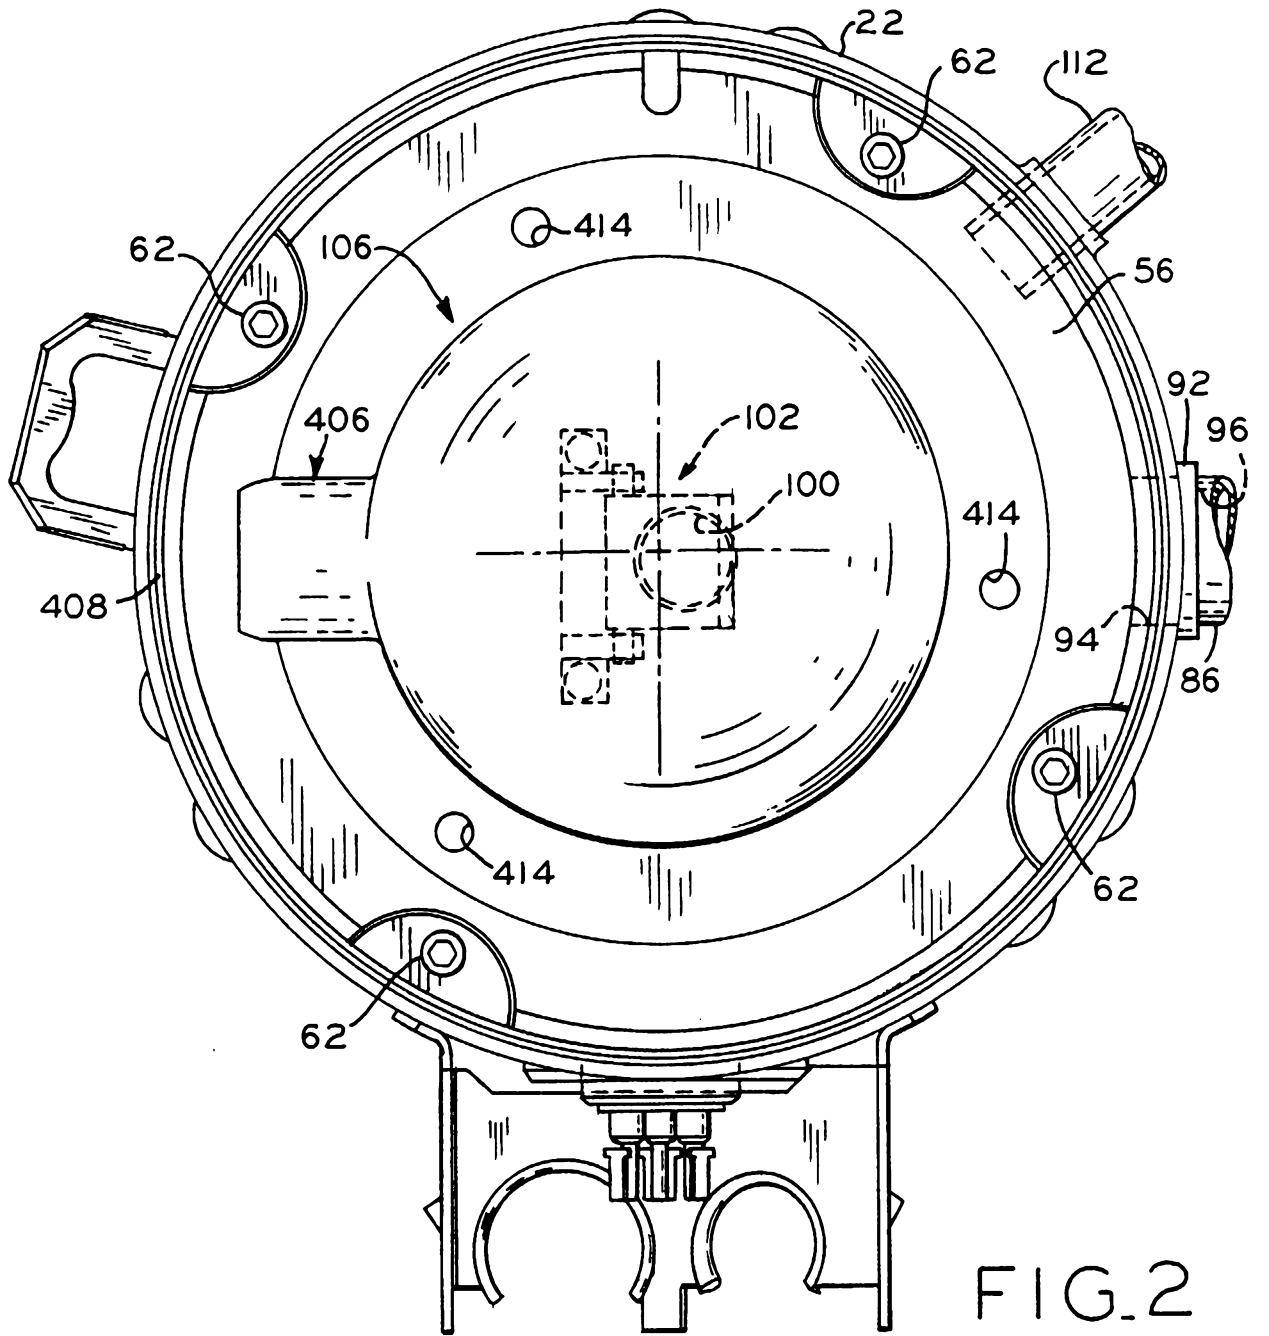


FIG. 2

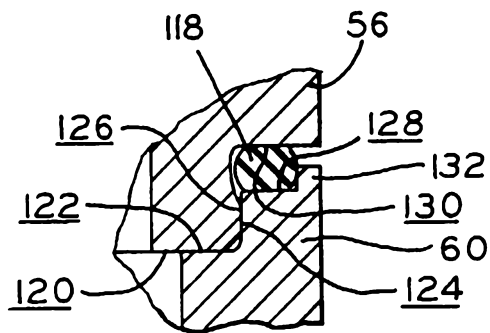



FIG. 3



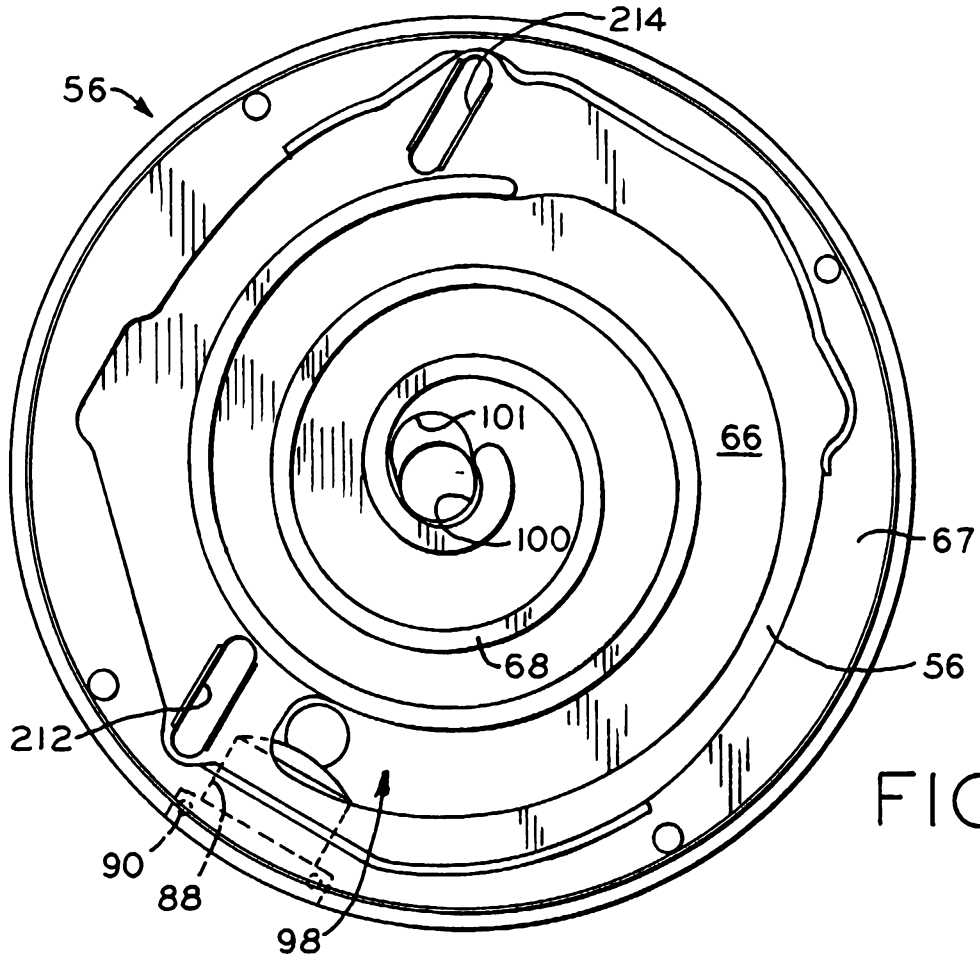


FIG. 4

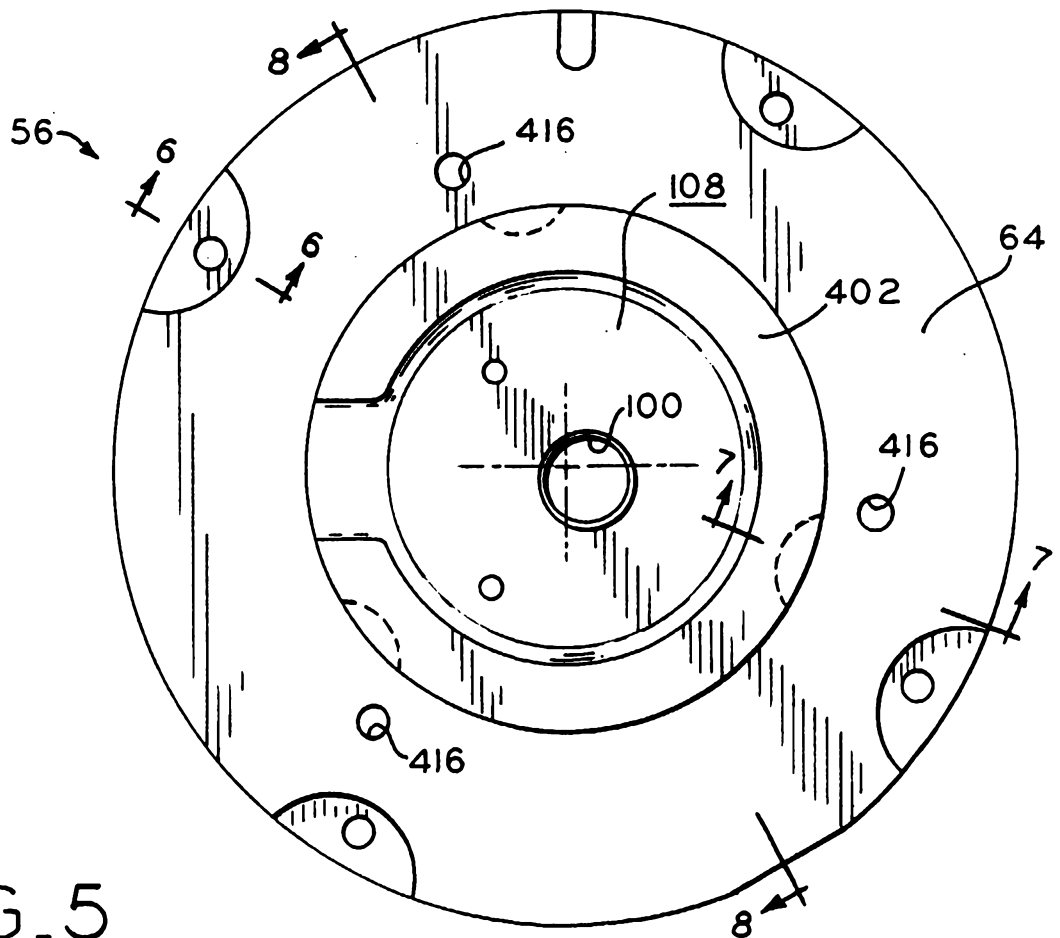

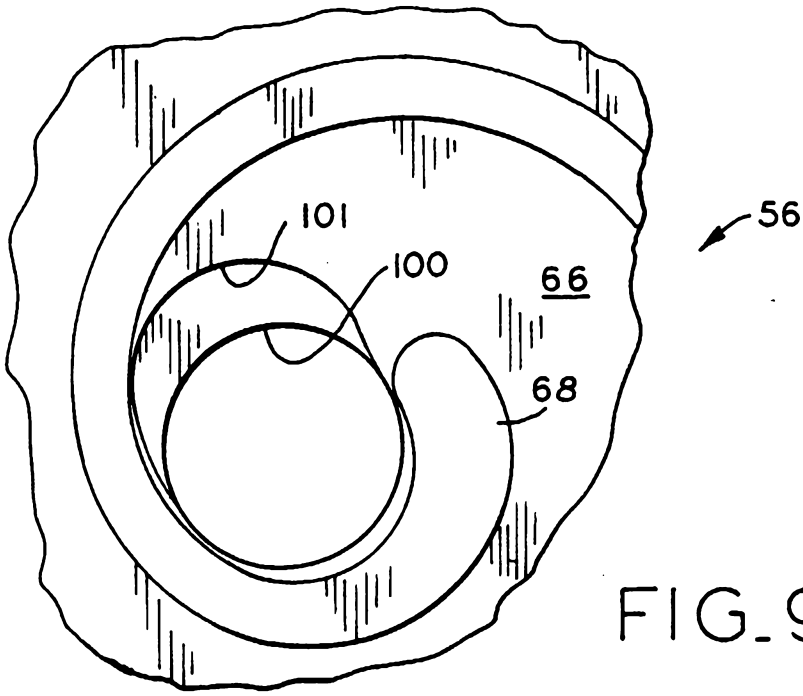
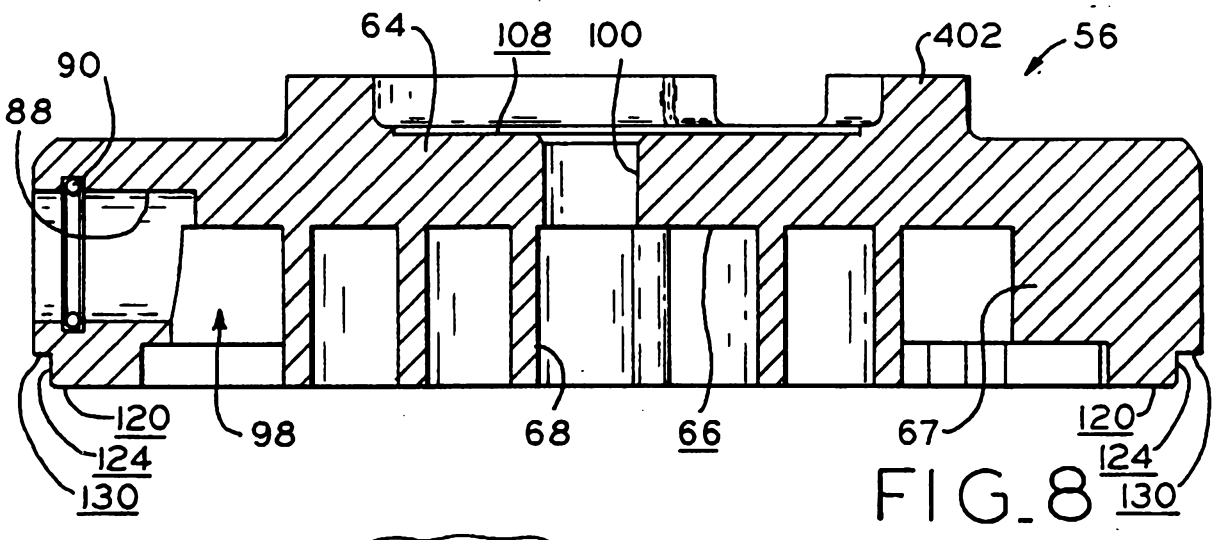
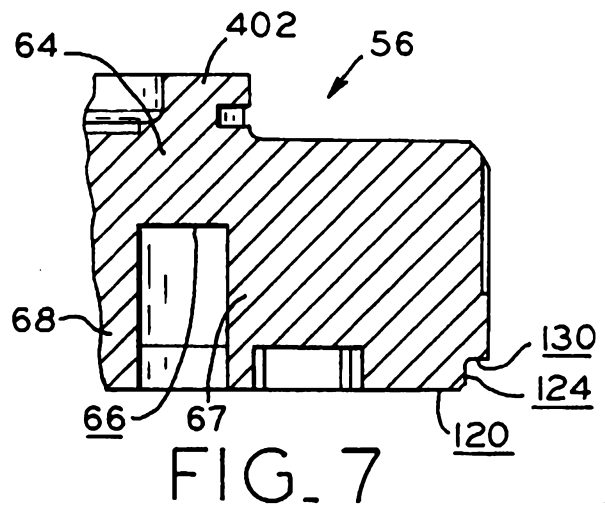
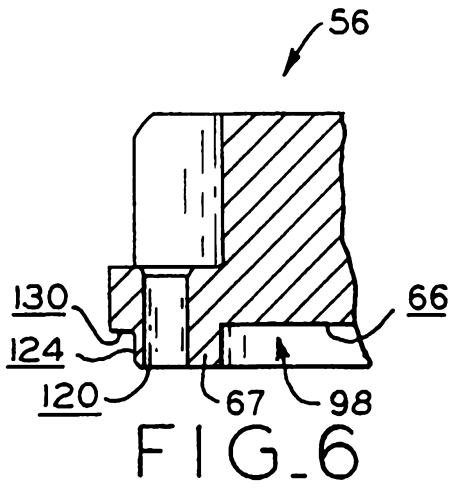


FIG. 5





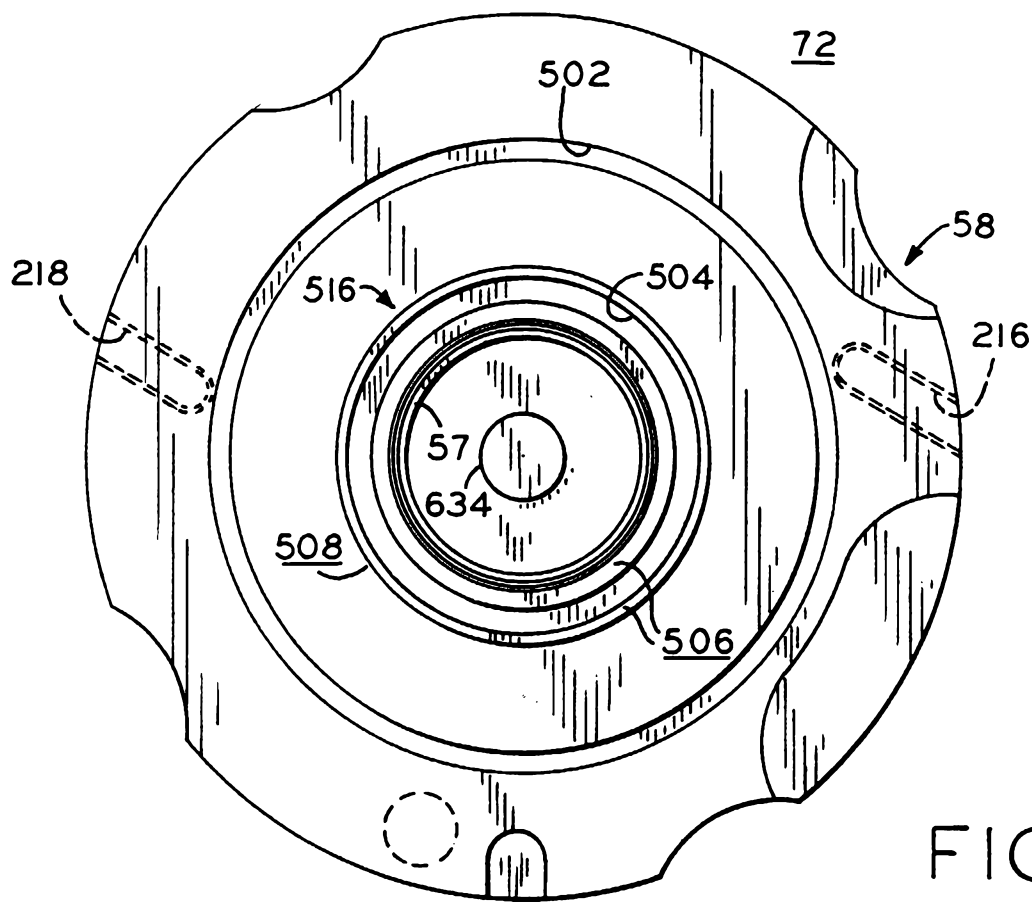


FIG. 10

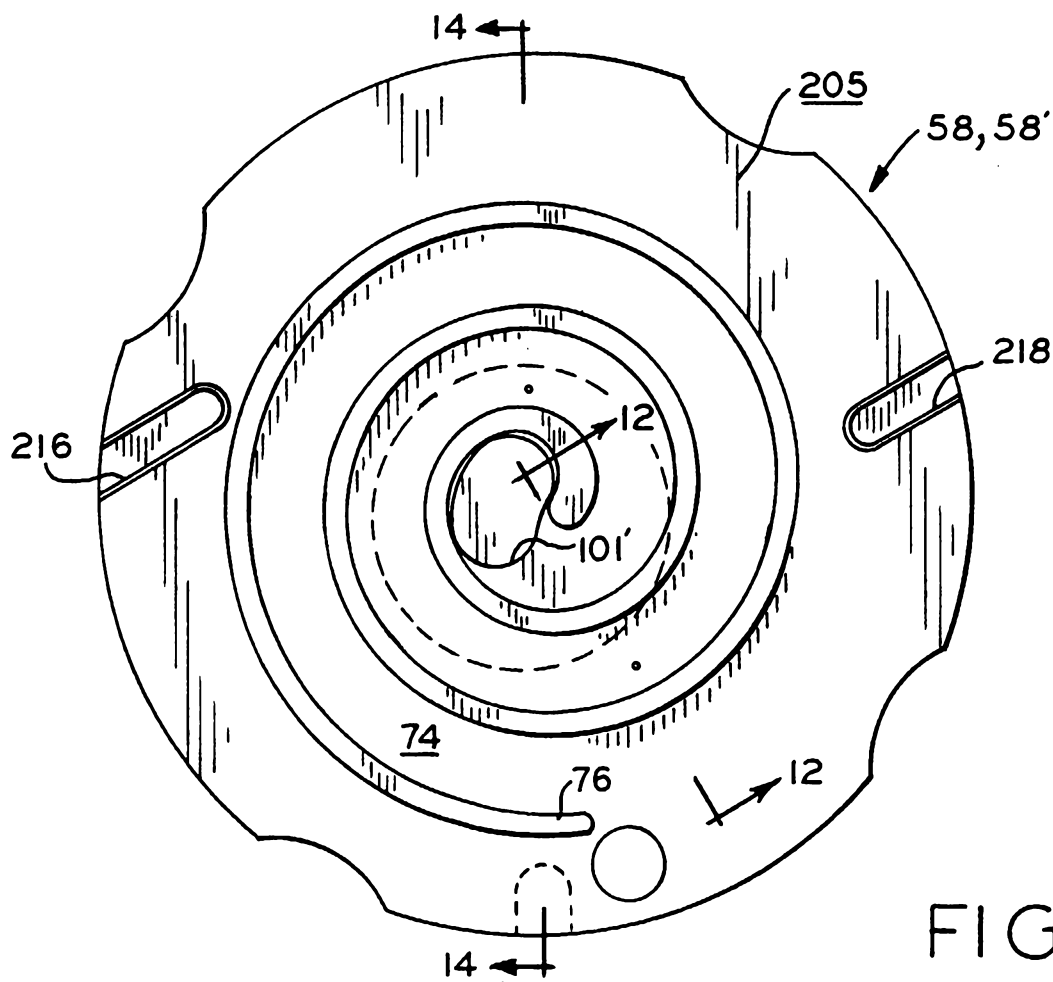

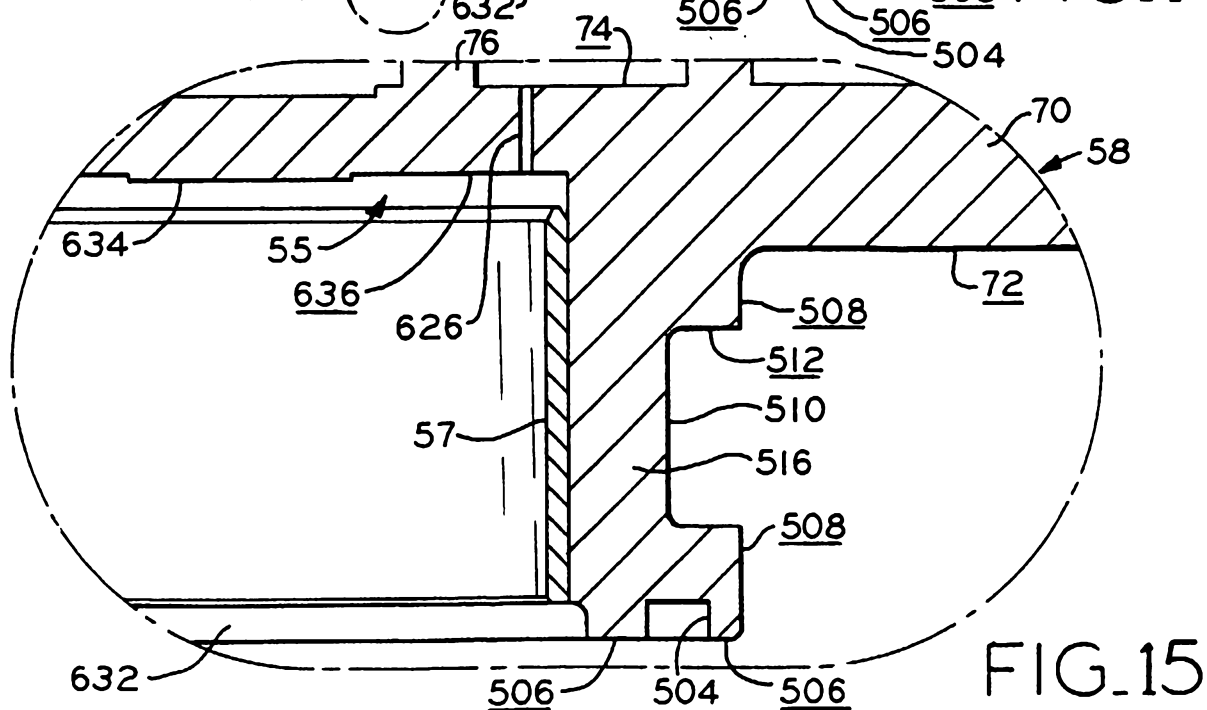
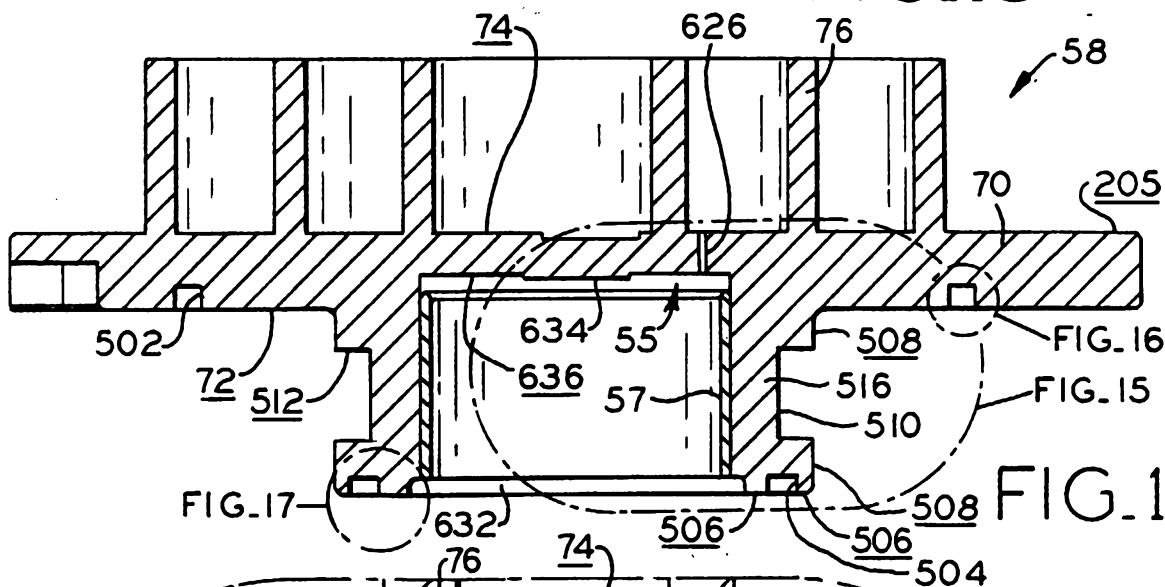
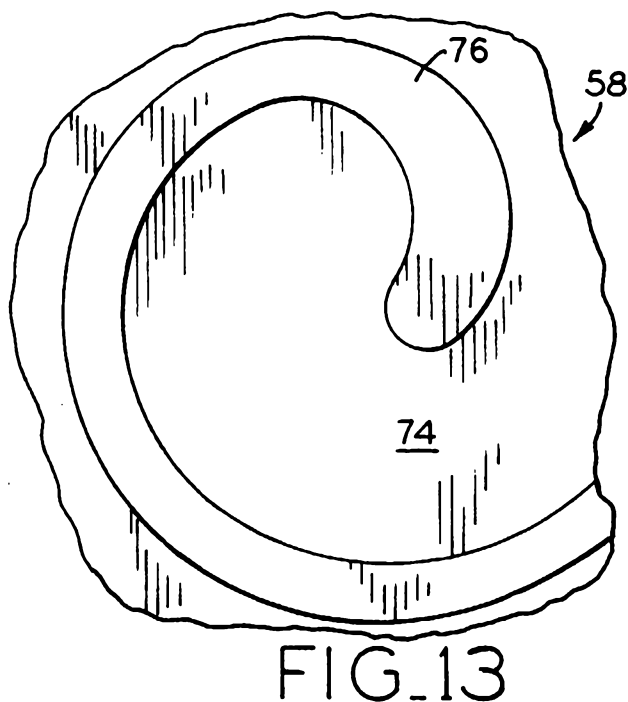
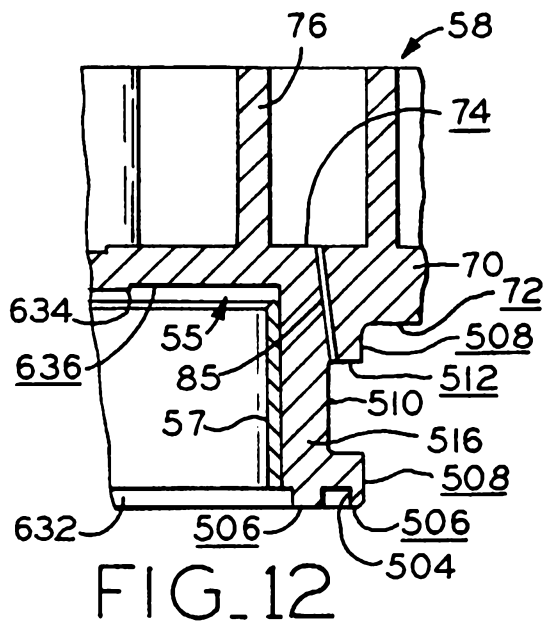


FIG. 11

...
P
N
A
S
B
E
...



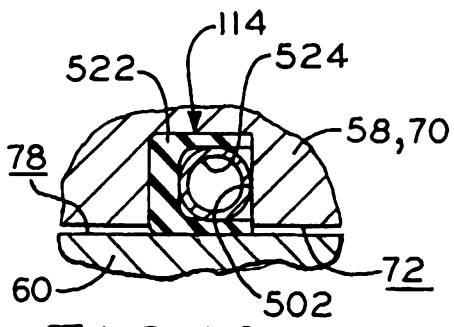


FIG. 16

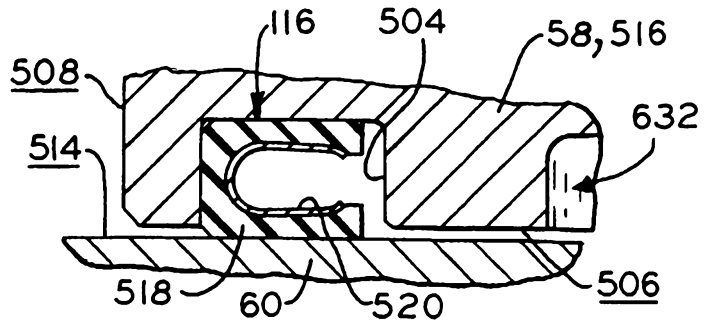


FIG. 17

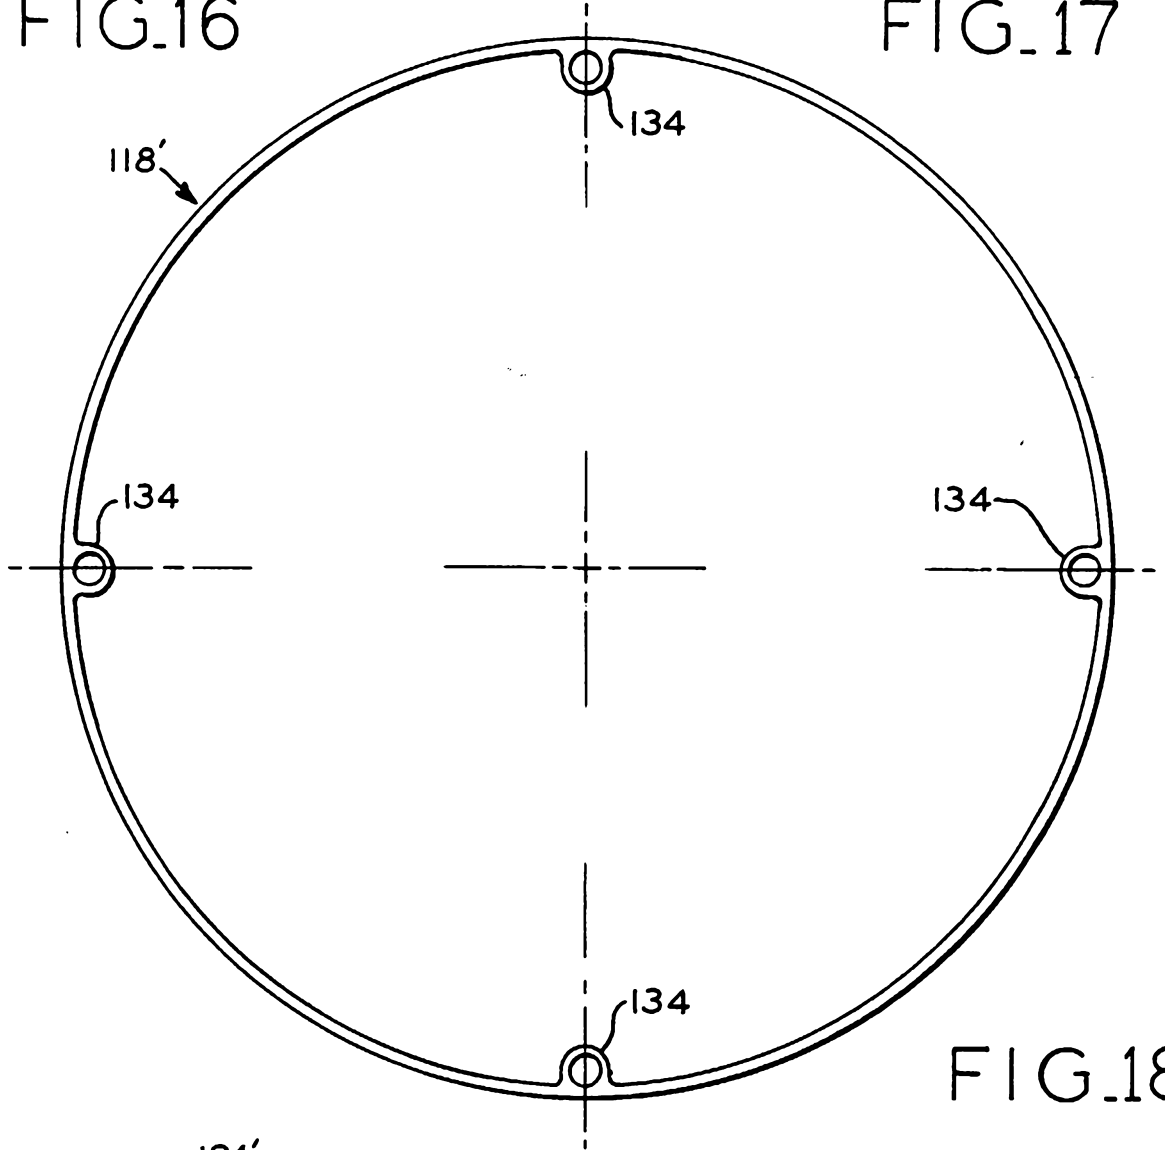


FIG. 18

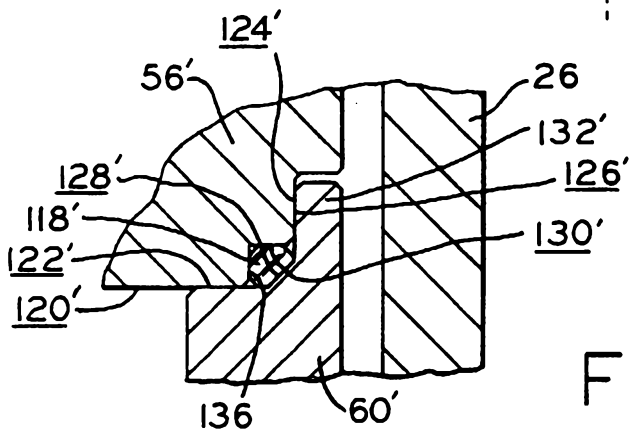



FIG. 19



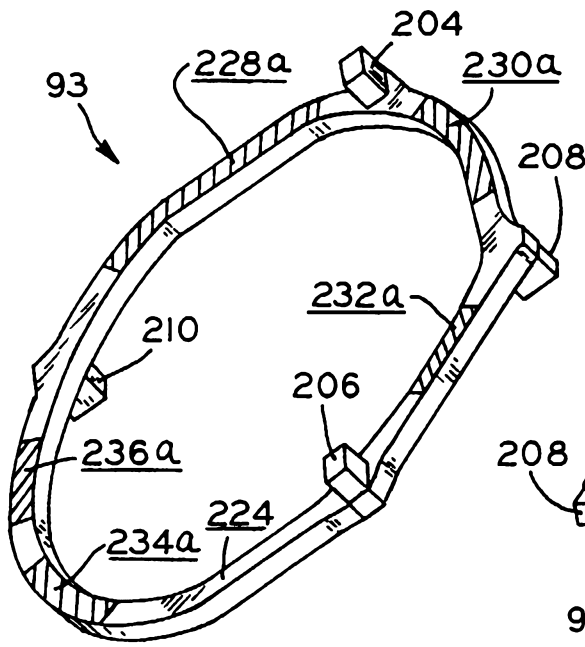


FIG. 20

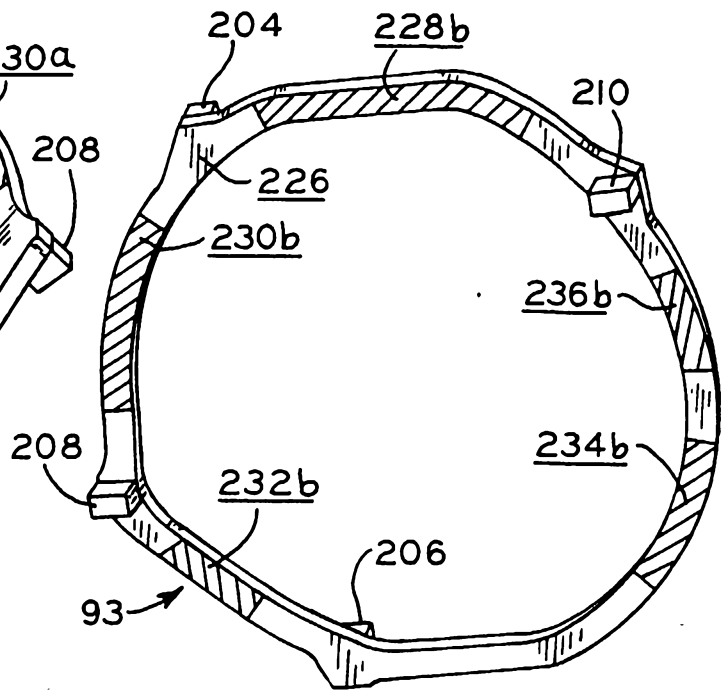


FIG. 21

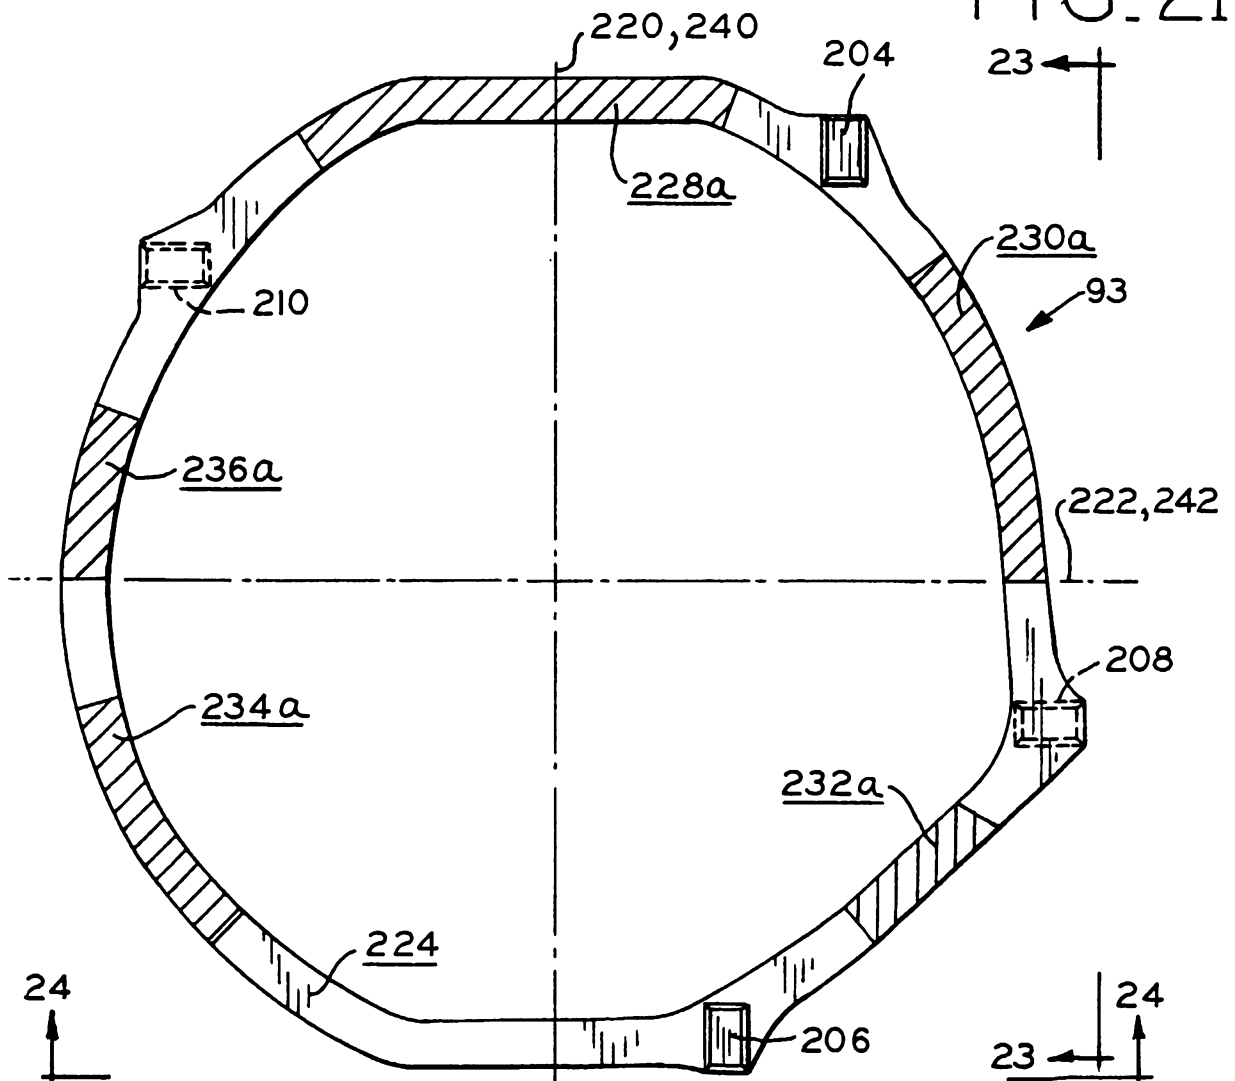



FIG. 22



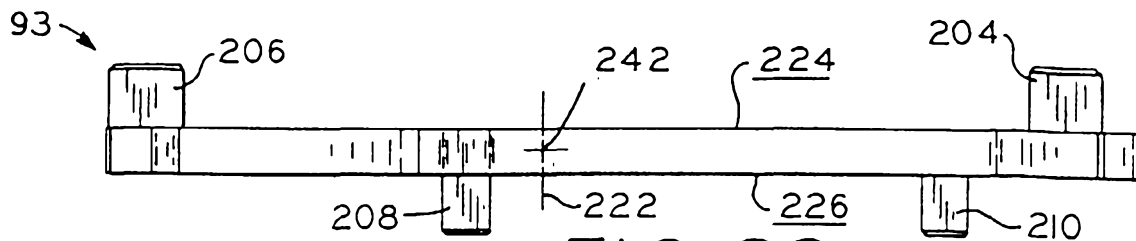


FIG. 23

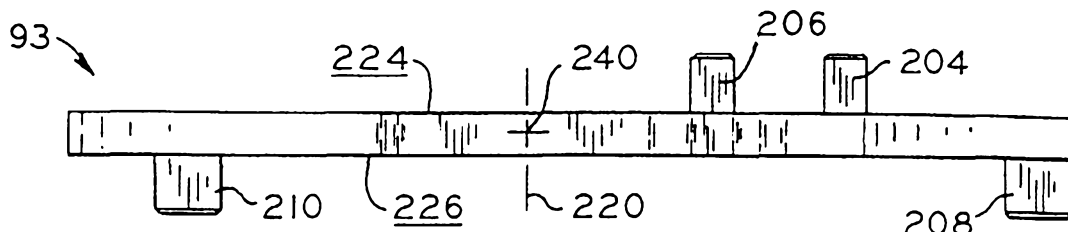


FIG. 24

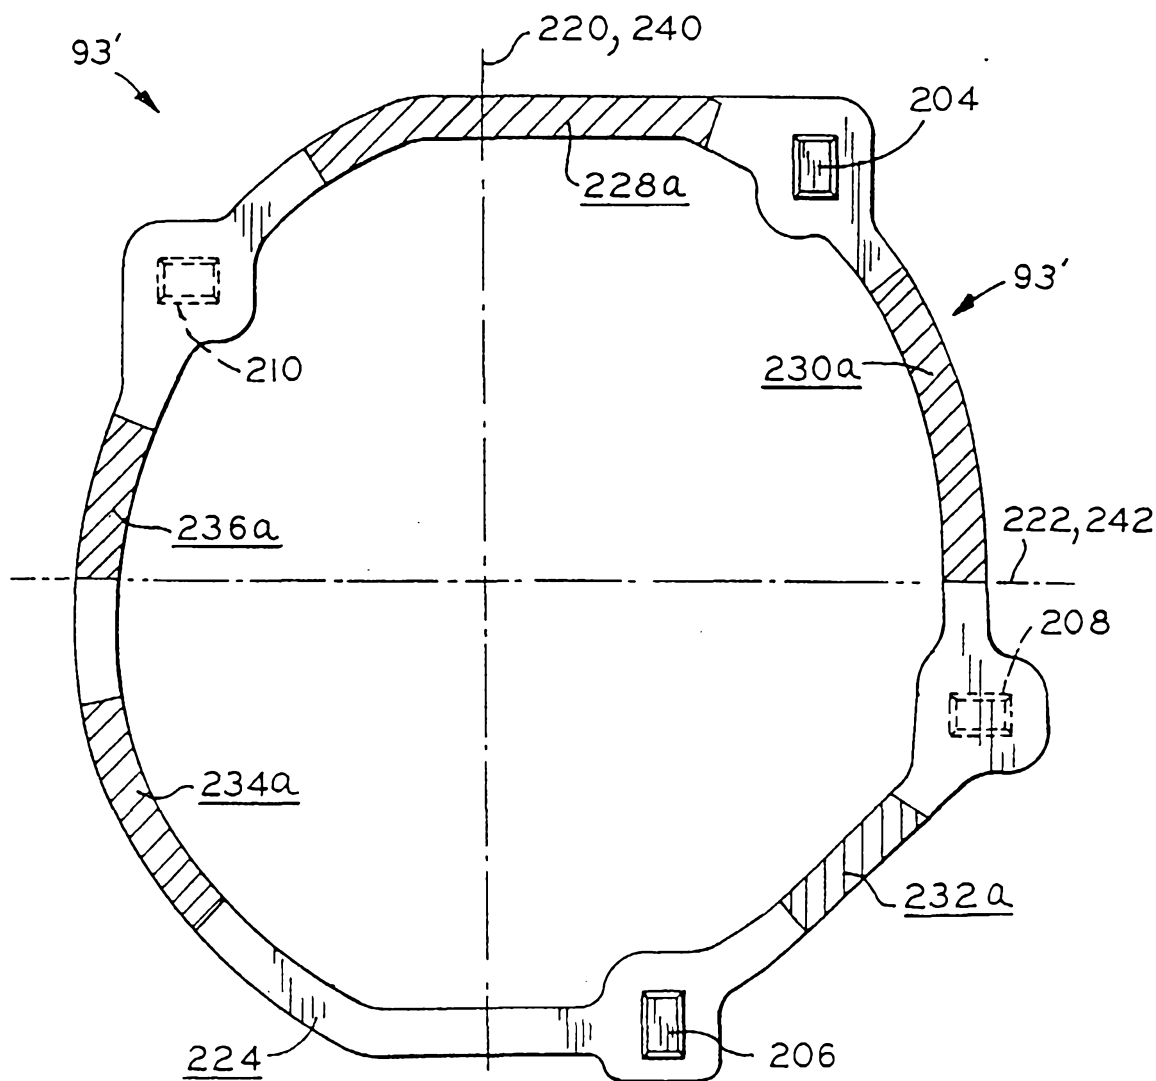


FIG. 25

21 08 99 35777

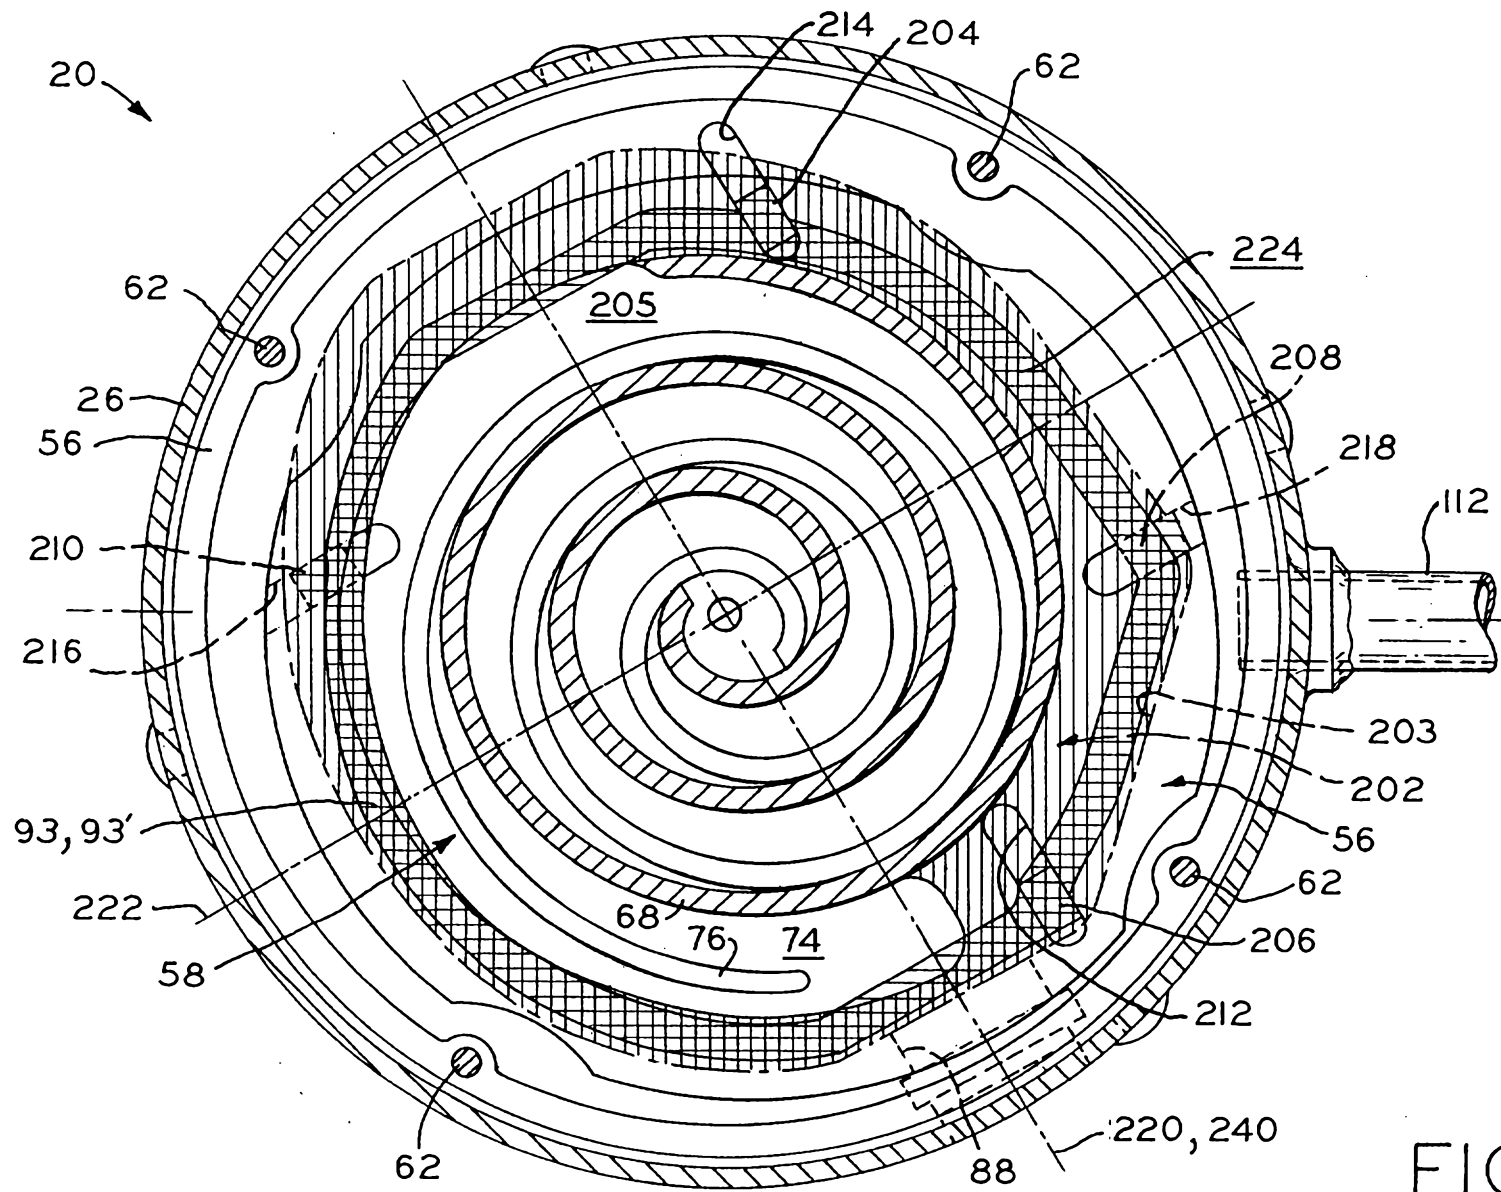


FIG. 26




FIG. 32




FIG. 33

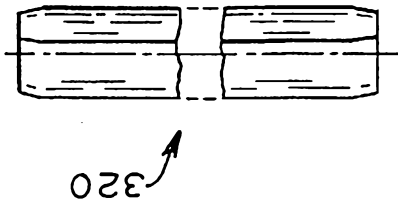


FIG. 34




FIG. 30

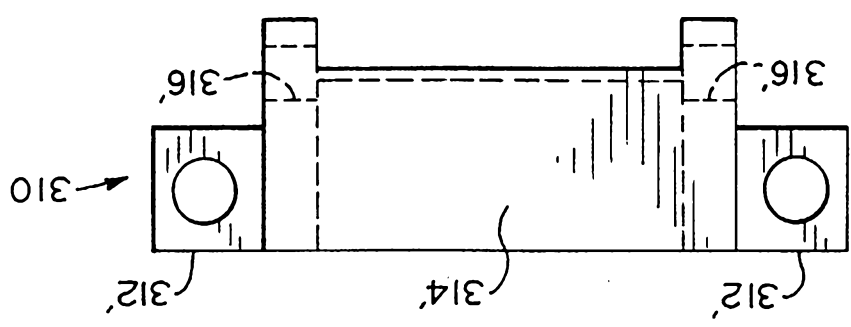


FIG. 29

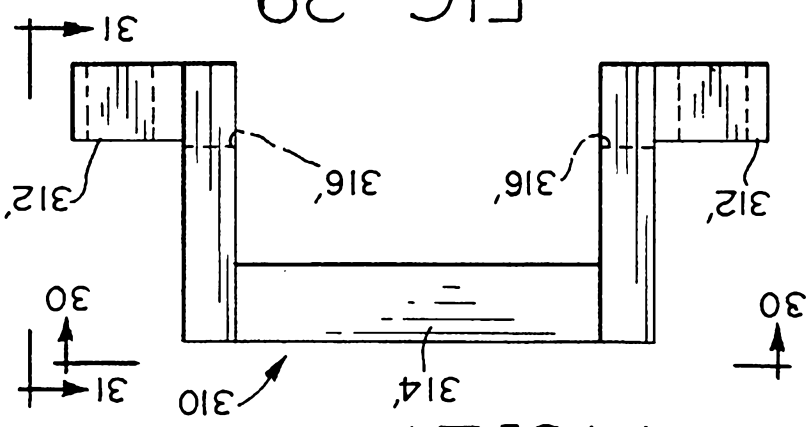


FIG. 31

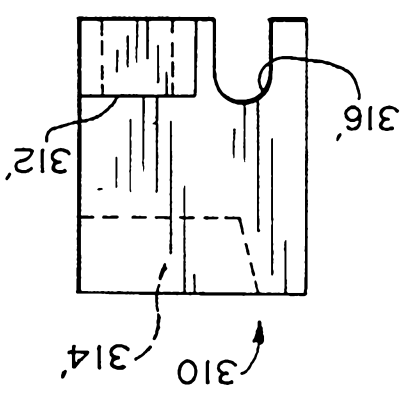


FIG. 27

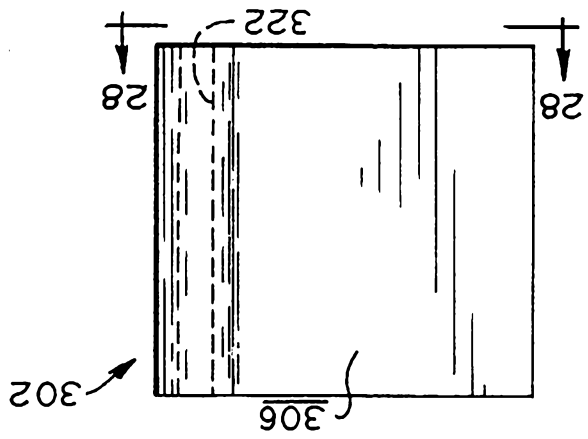
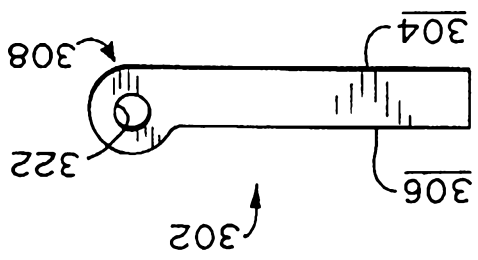


FIG. 28



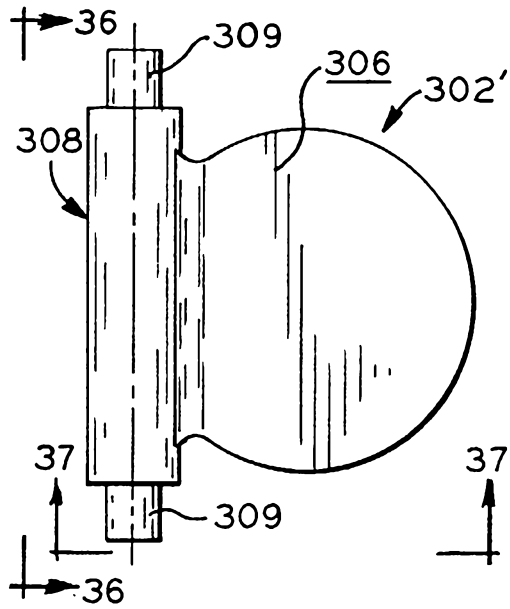


FIG. 35

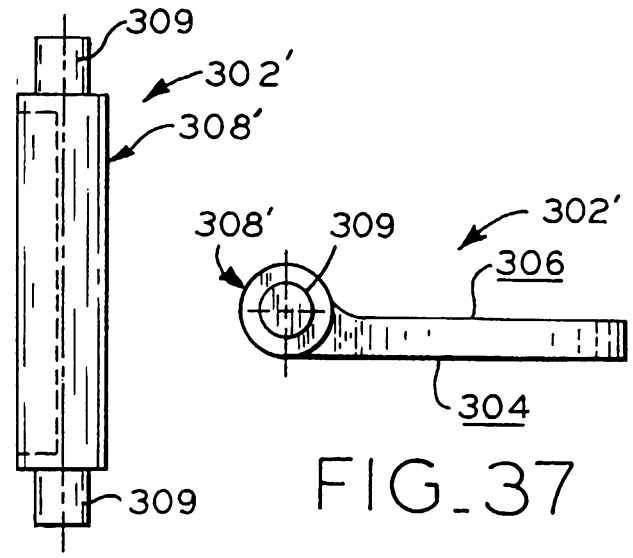


FIG. 36

FIG. 37

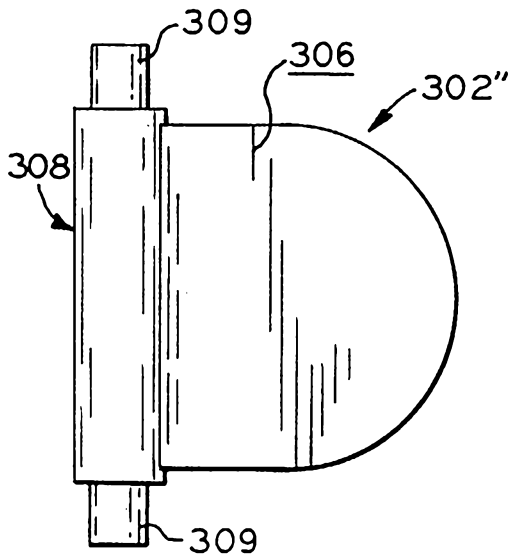


FIG. 38

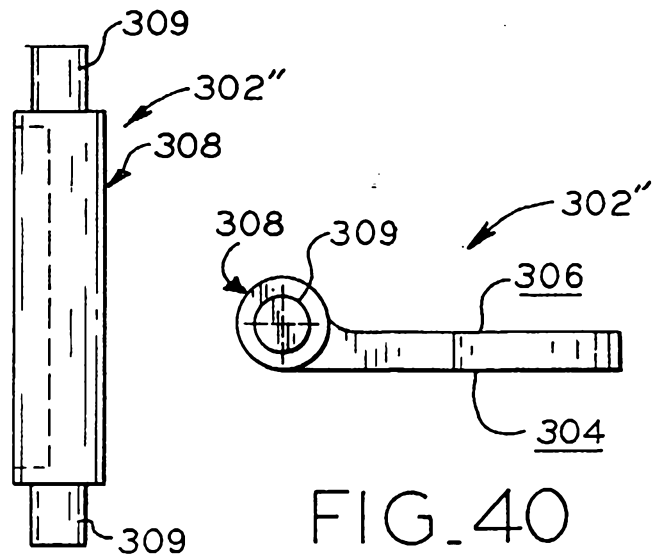



FIG. 39

FIG. 40



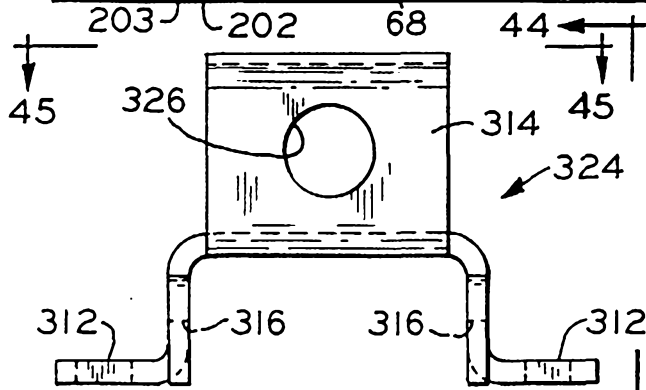
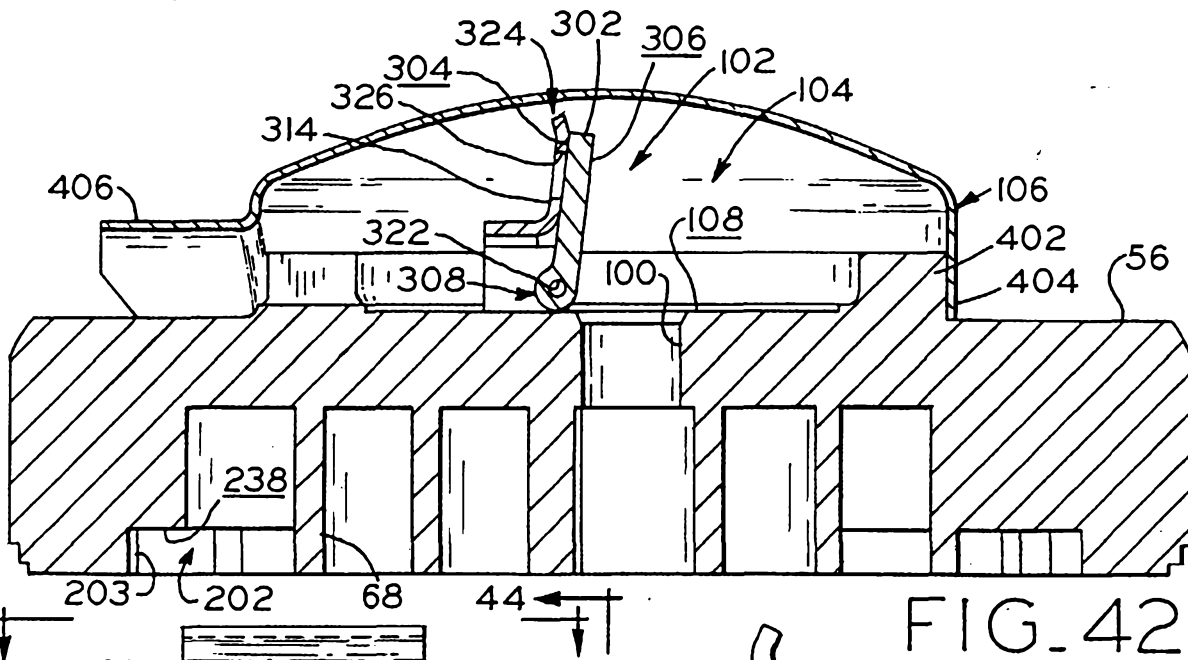
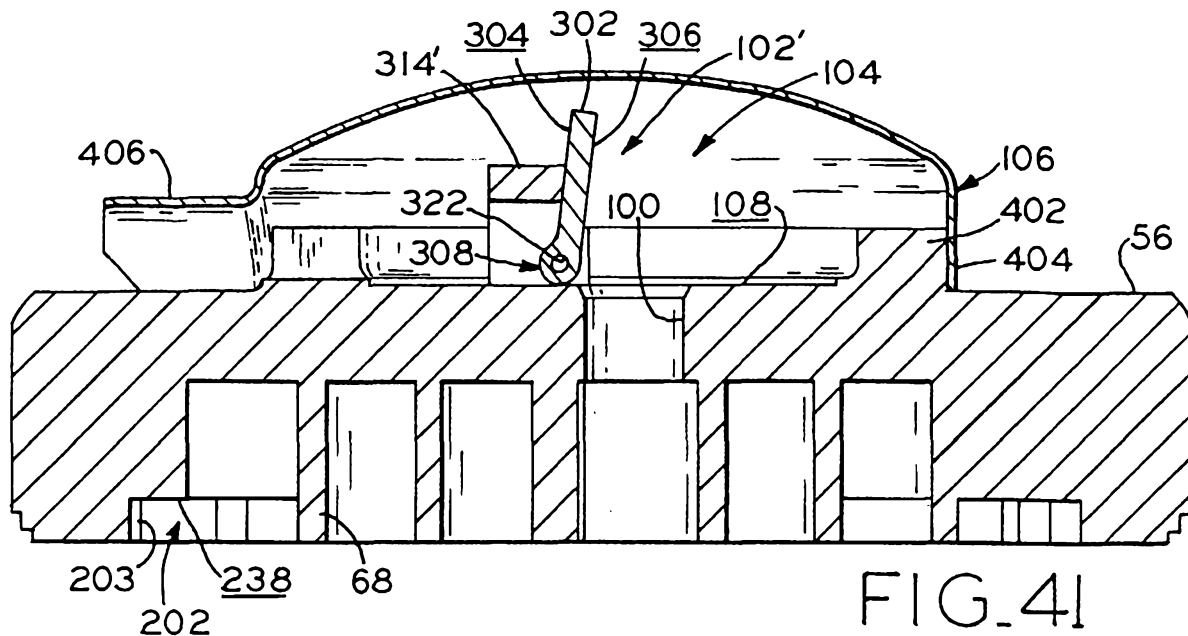


FIG. 43

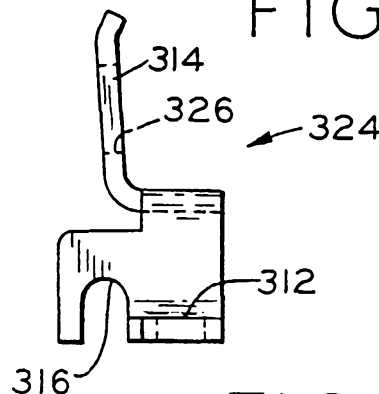


FIG. 44

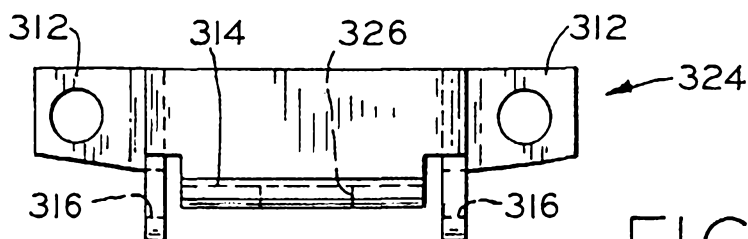


FIG. 45

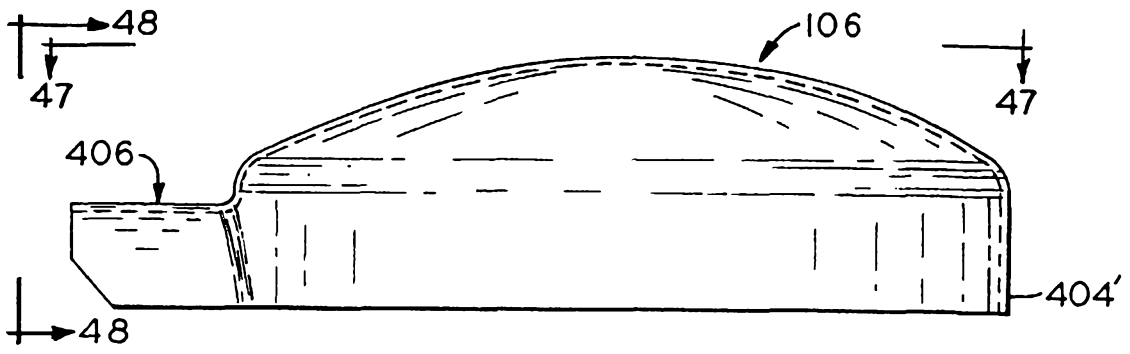


FIG. 46

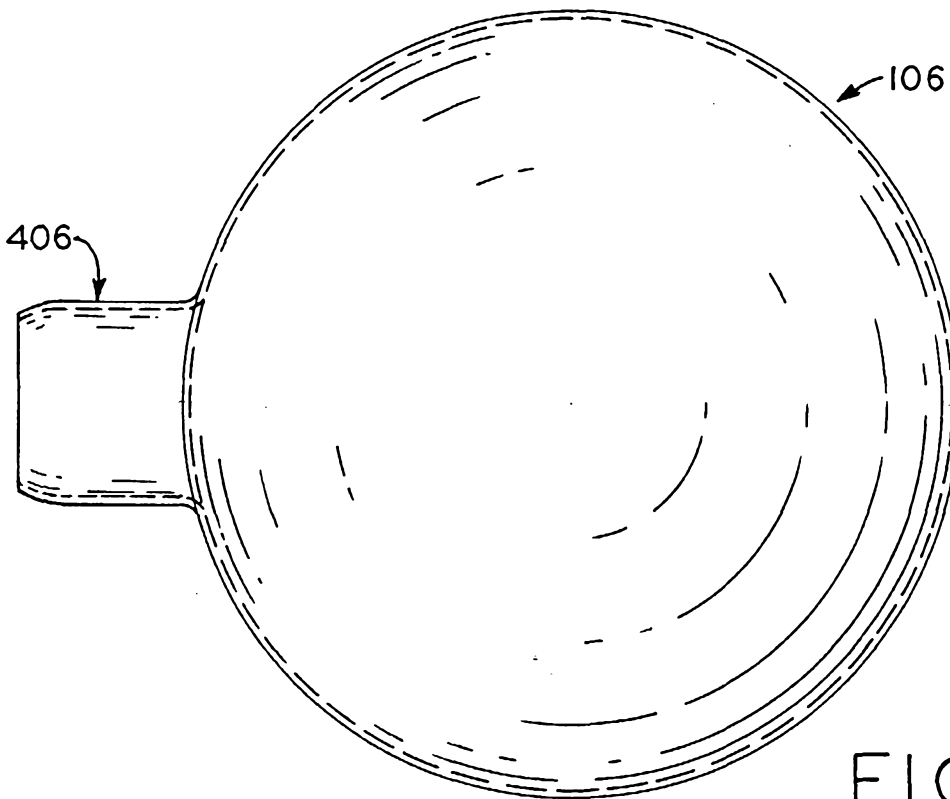


FIG. 47

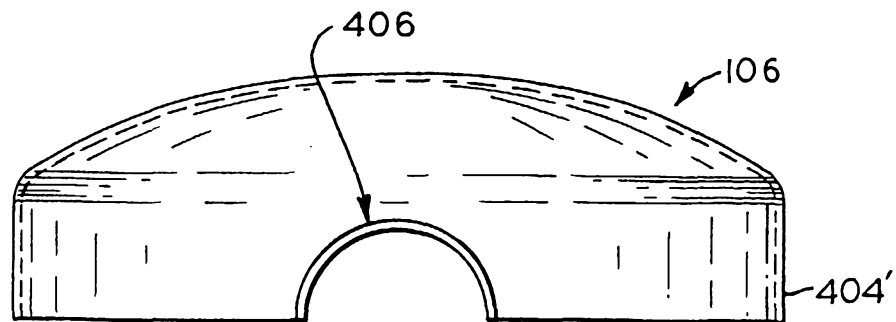


FIG. 48

REF
A
B
C
D

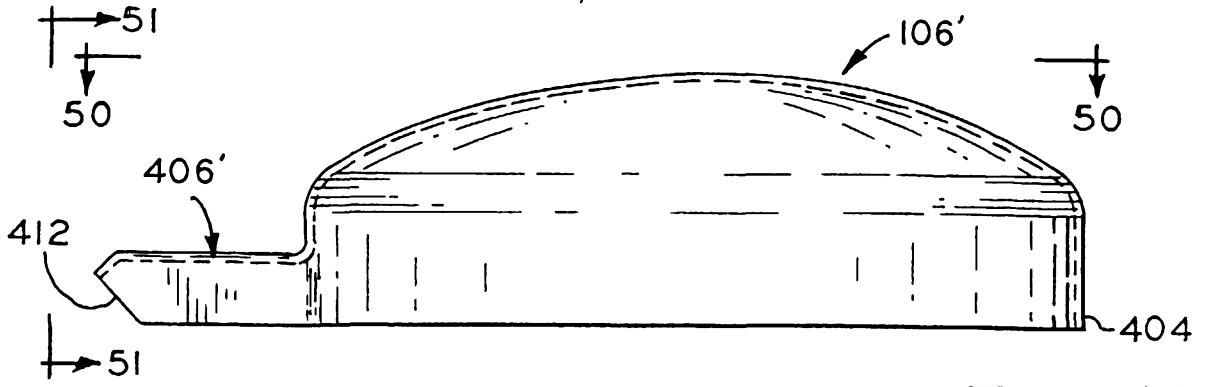


FIG. 49

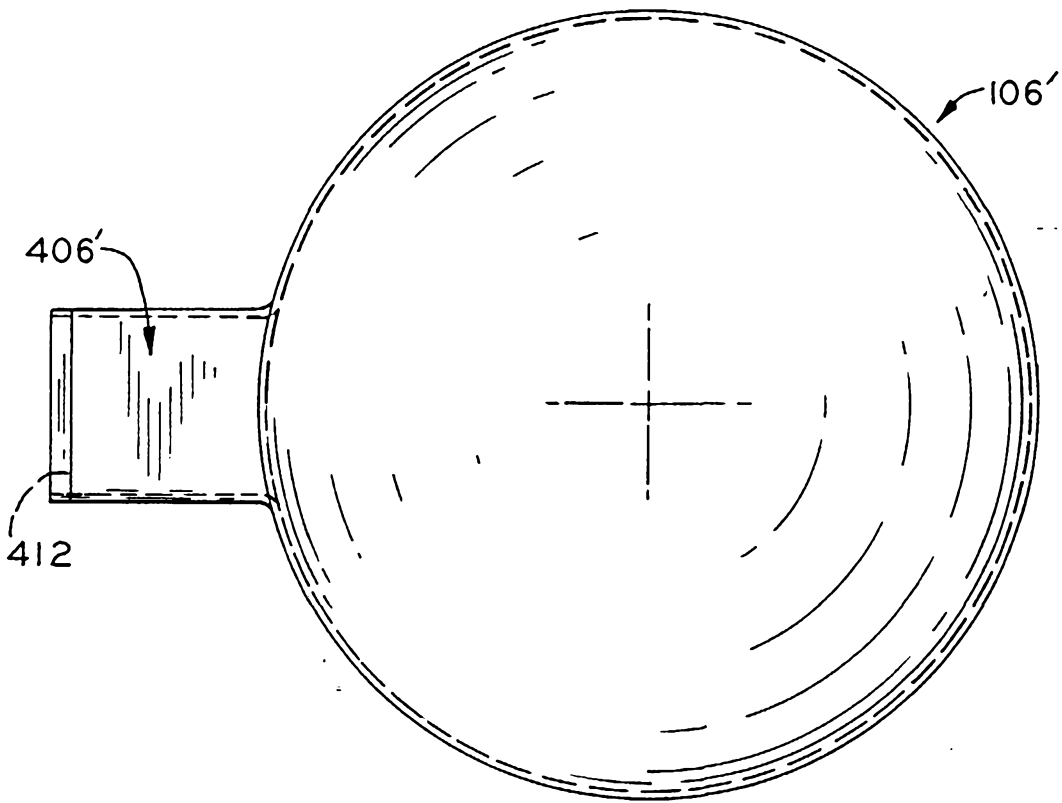


FIG. 50


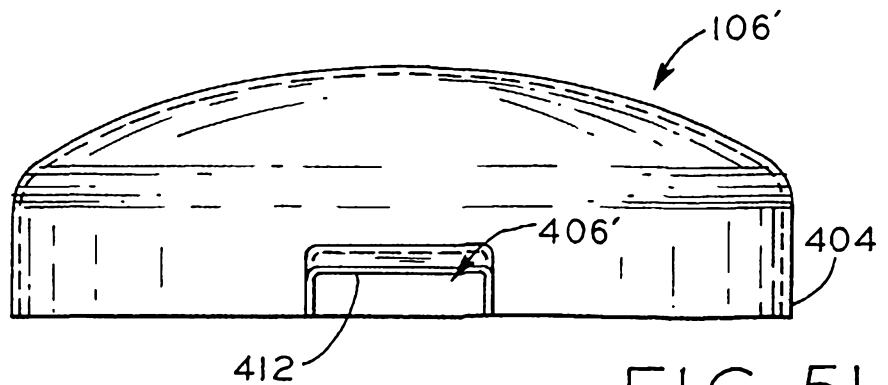


FIG. 51



16/31

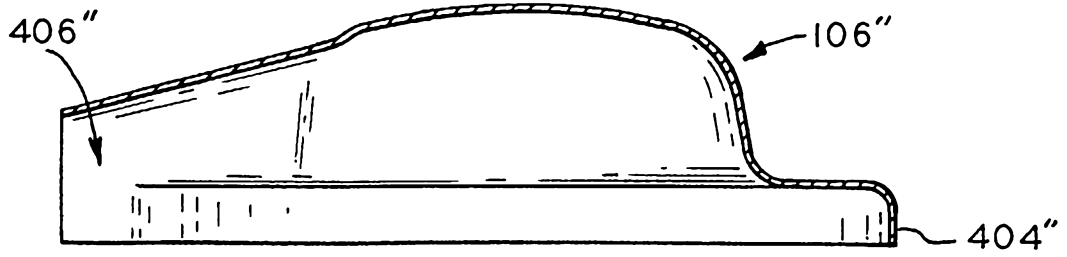


FIG. 52

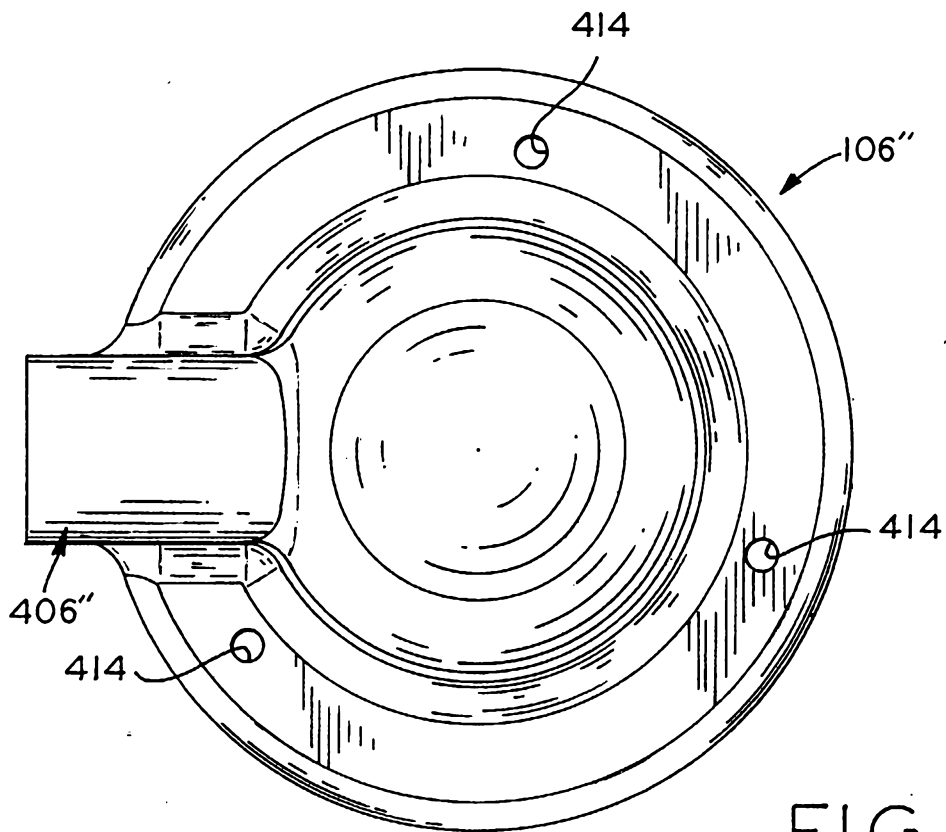


FIG. 53

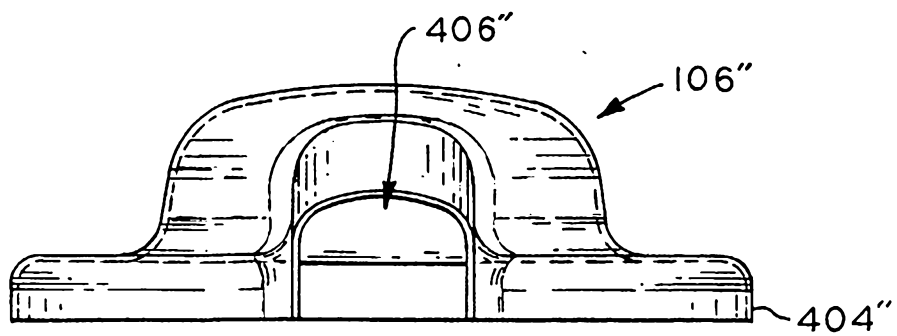



FIG. 54



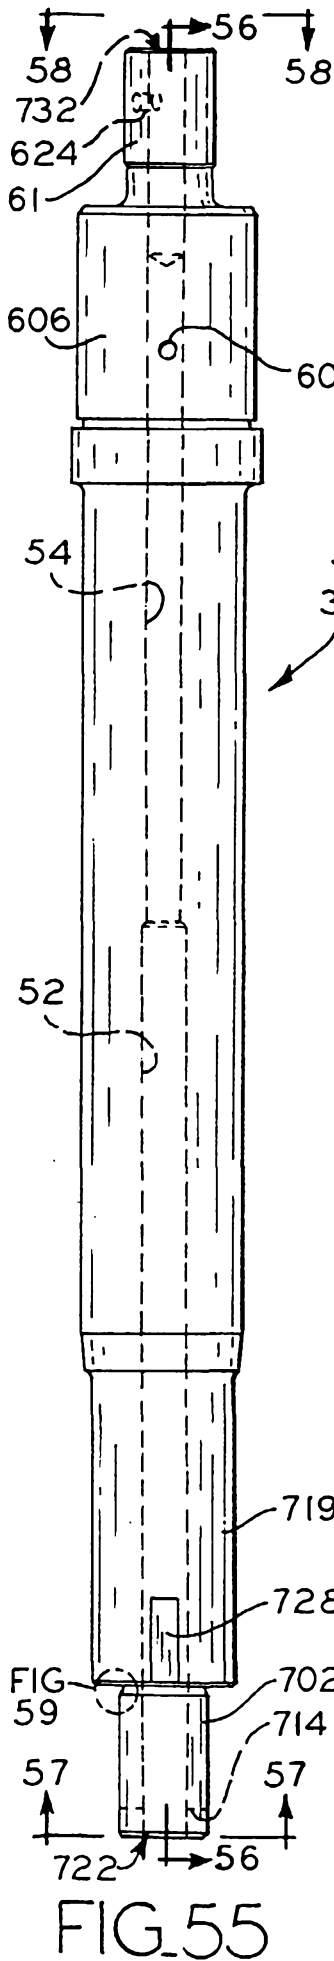


FIG. 55

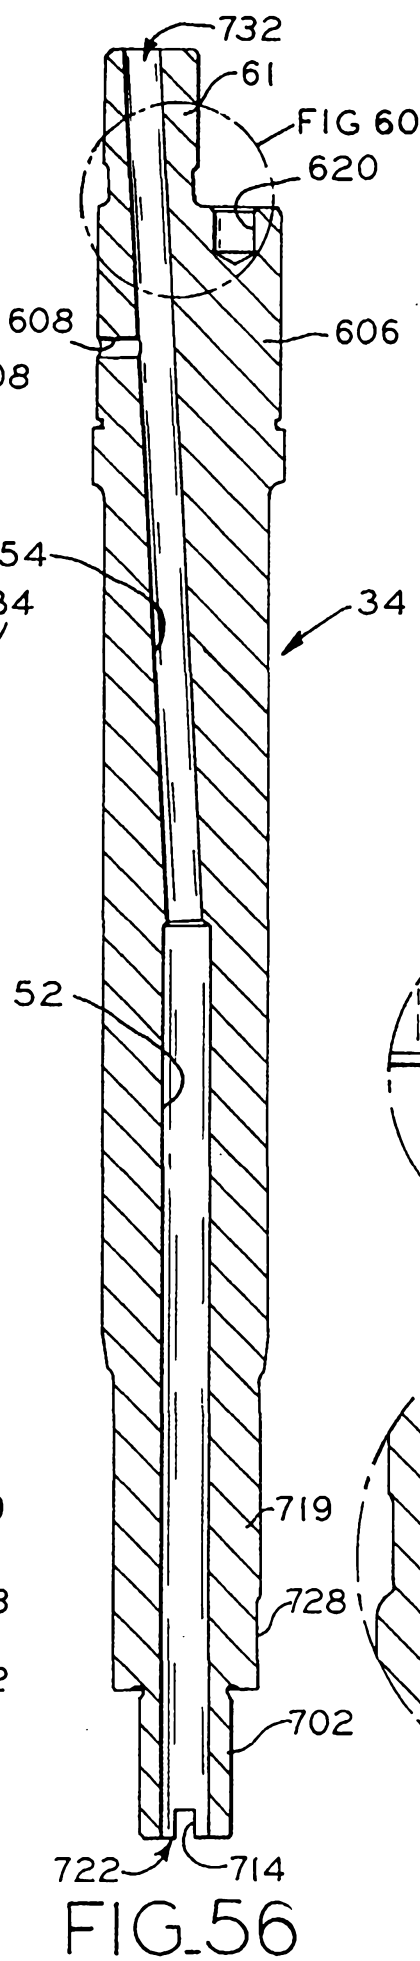


FIG. 56

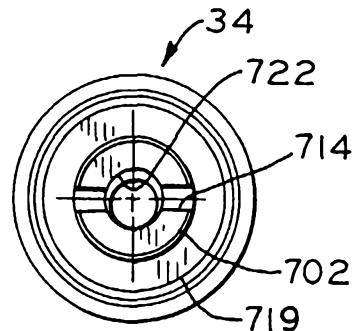


FIG. 57

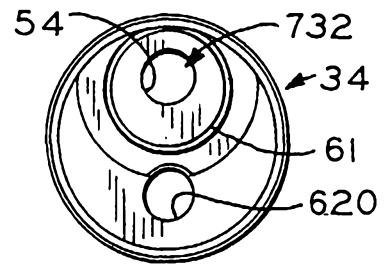


FIG. 58

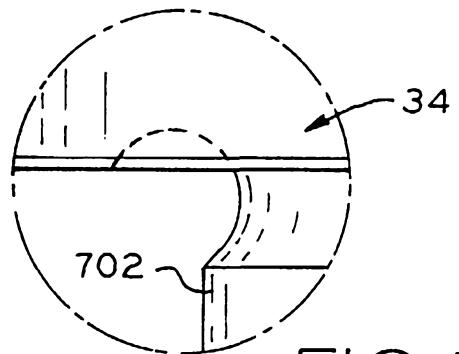


FIG. 59

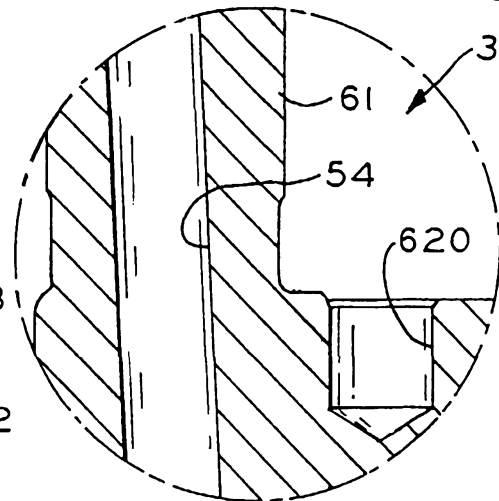



FIG. 60



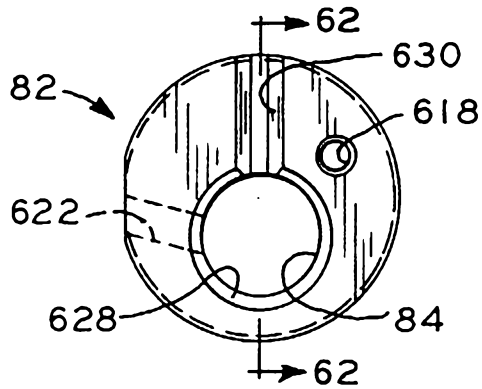


FIG. 61A

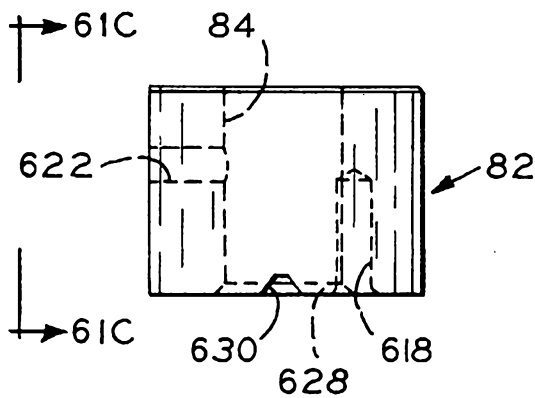


FIG. 61B

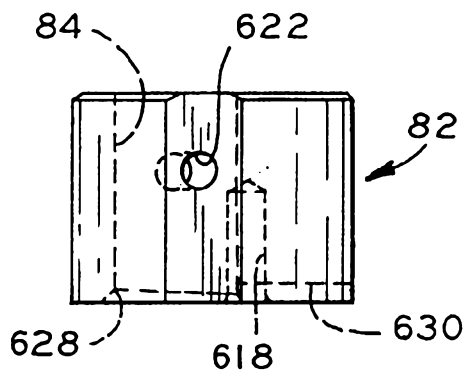


FIG. 61C

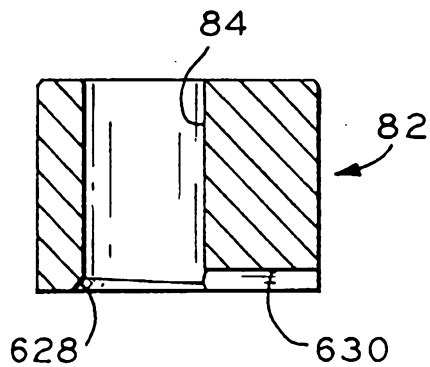



FIG. 62



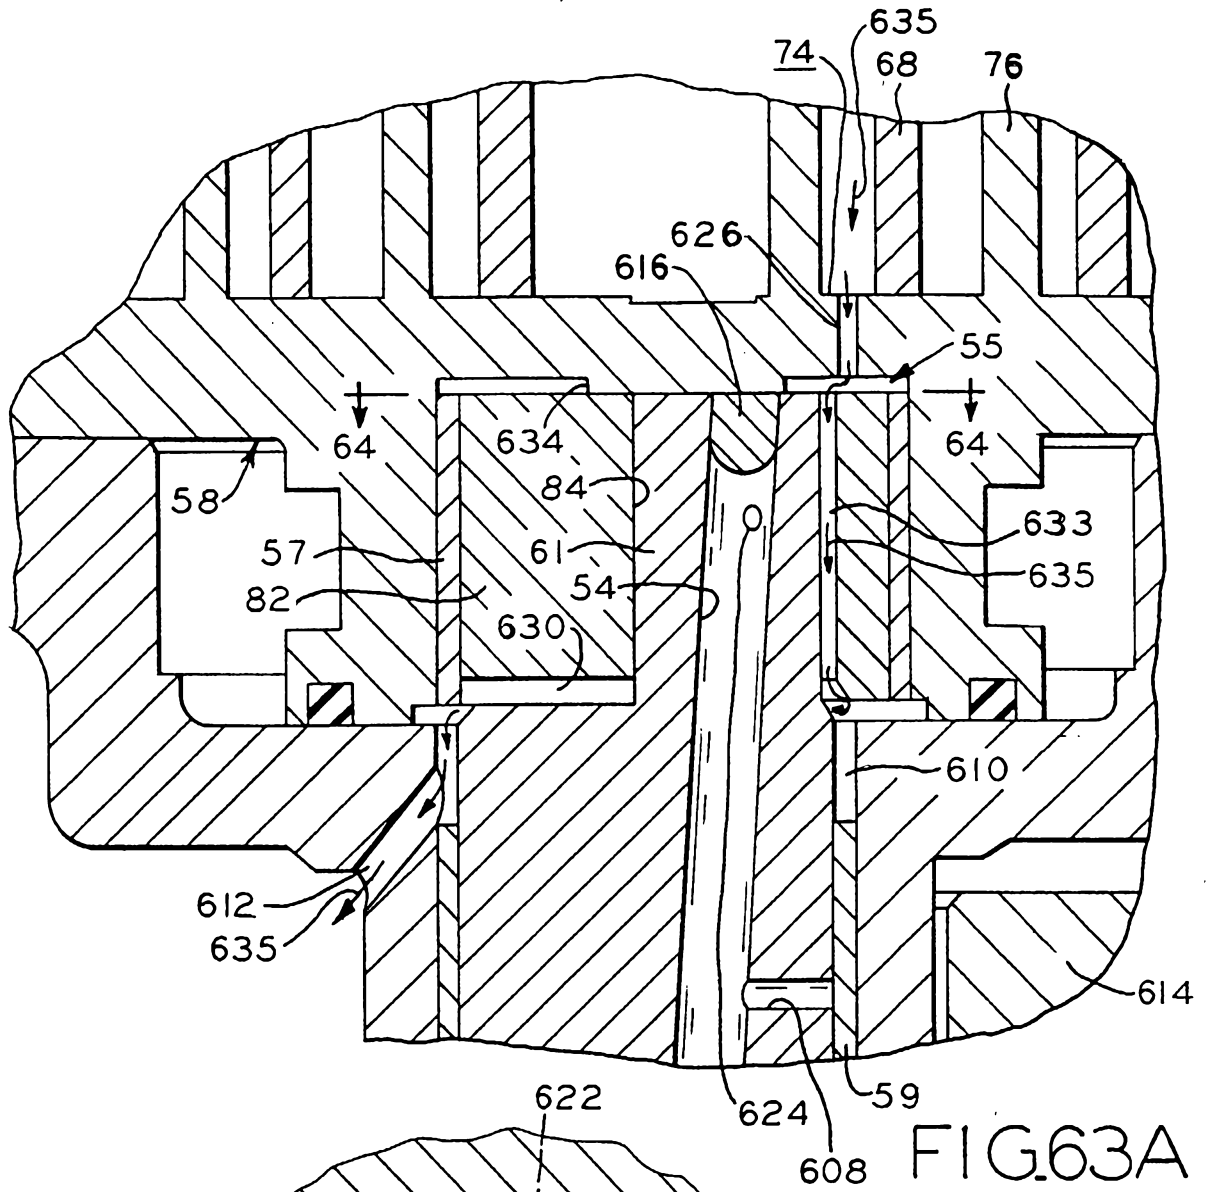


FIG. 63A

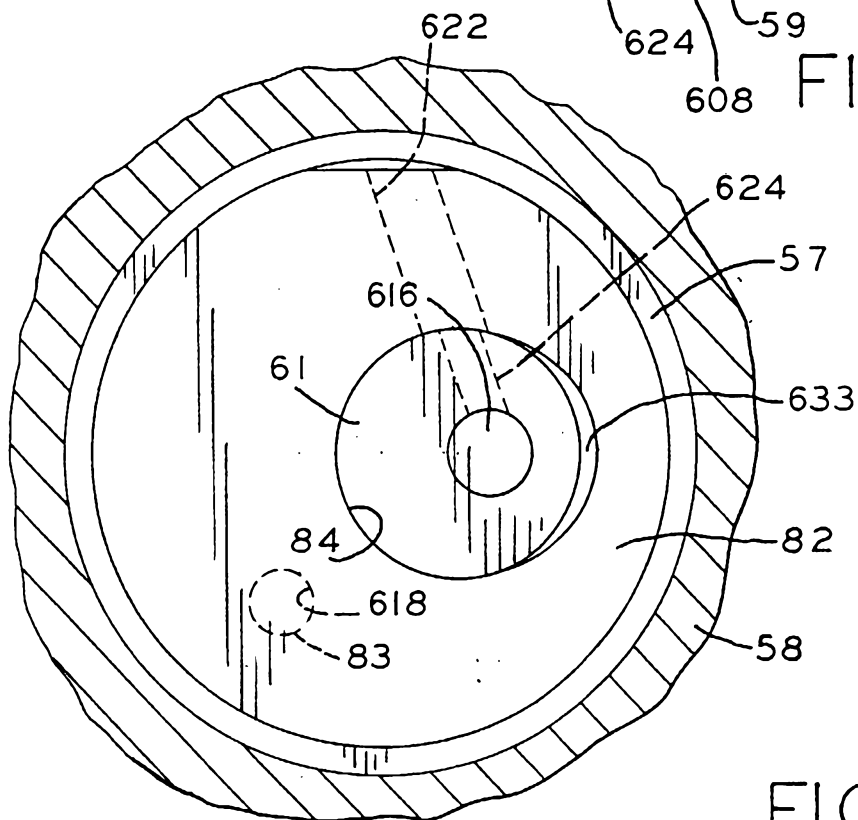



FIG. 64



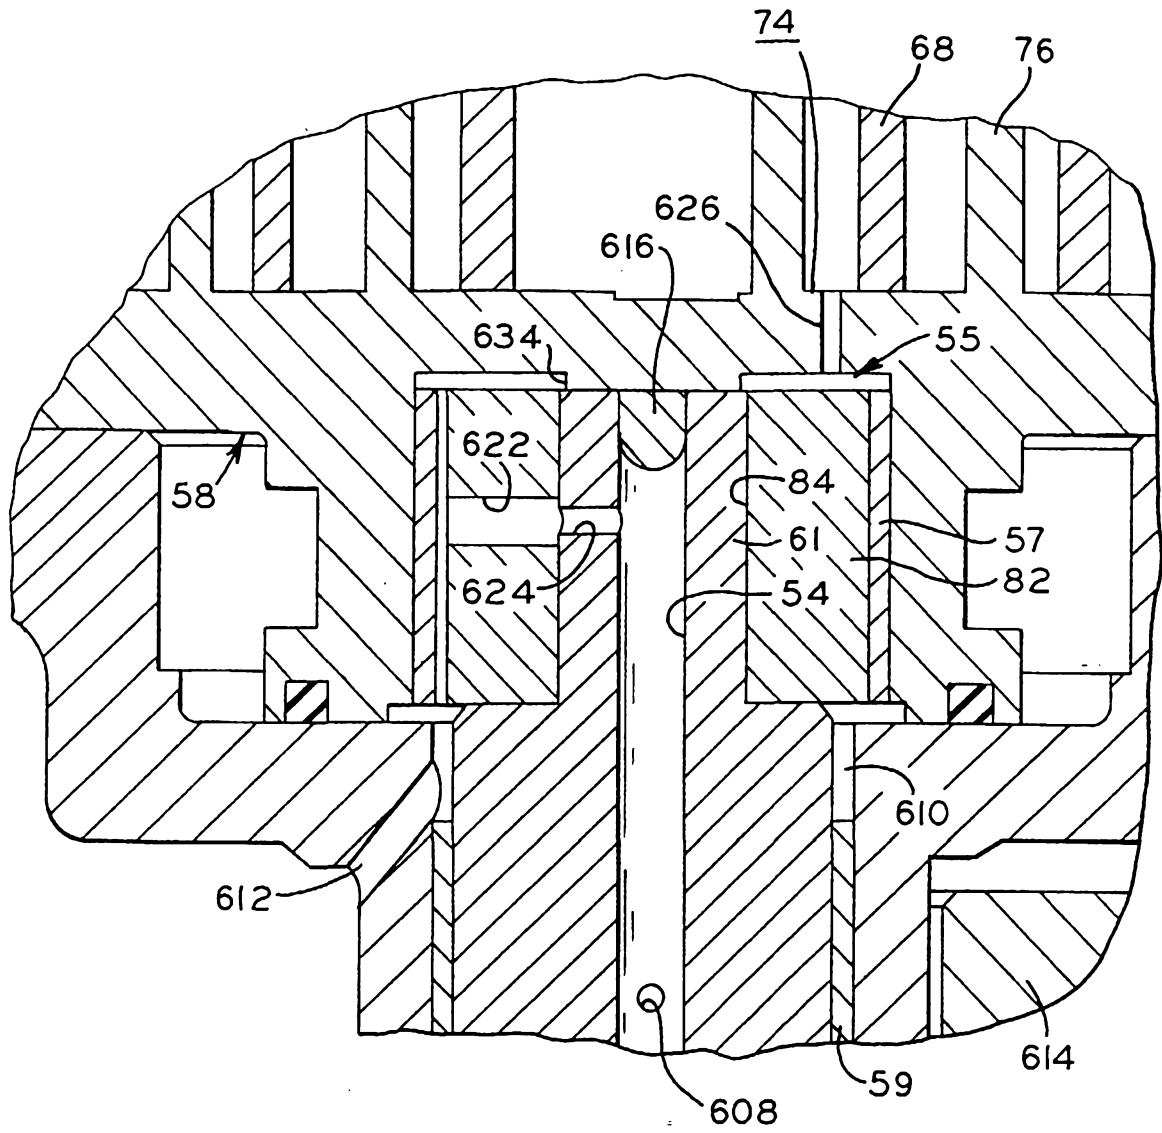



FIG. 63B



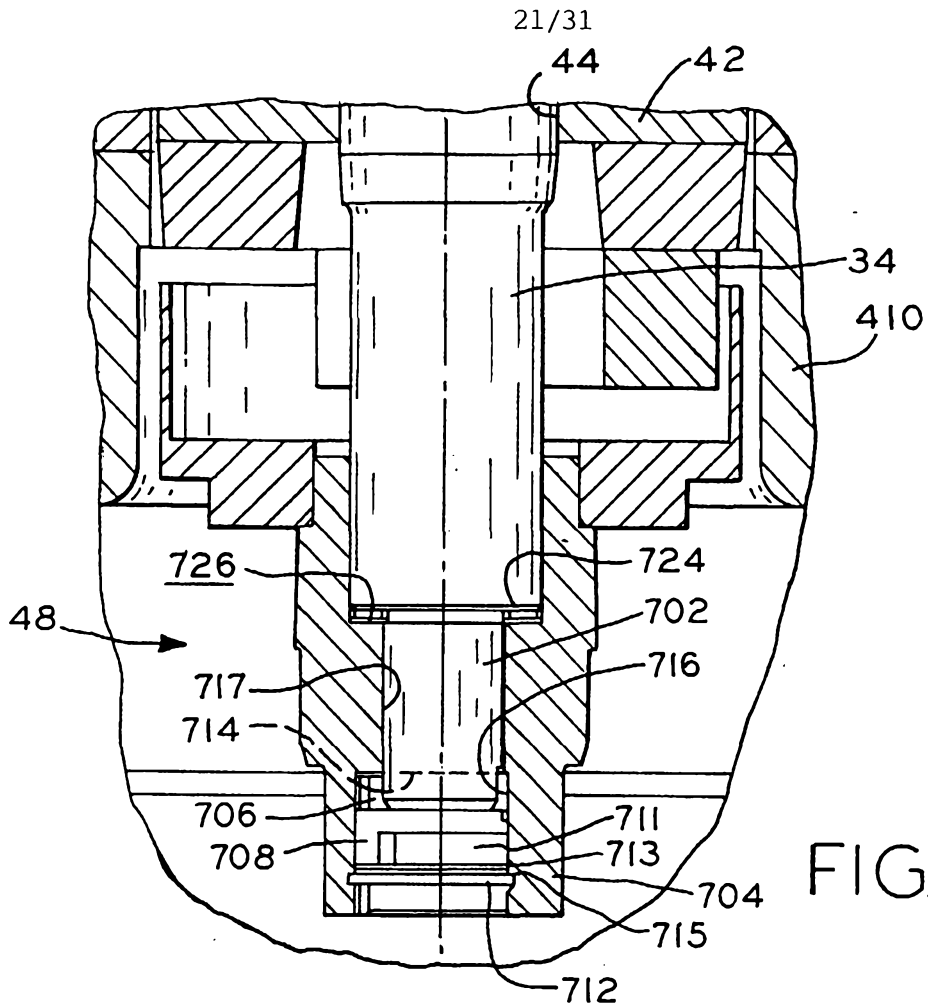


FIG. 65

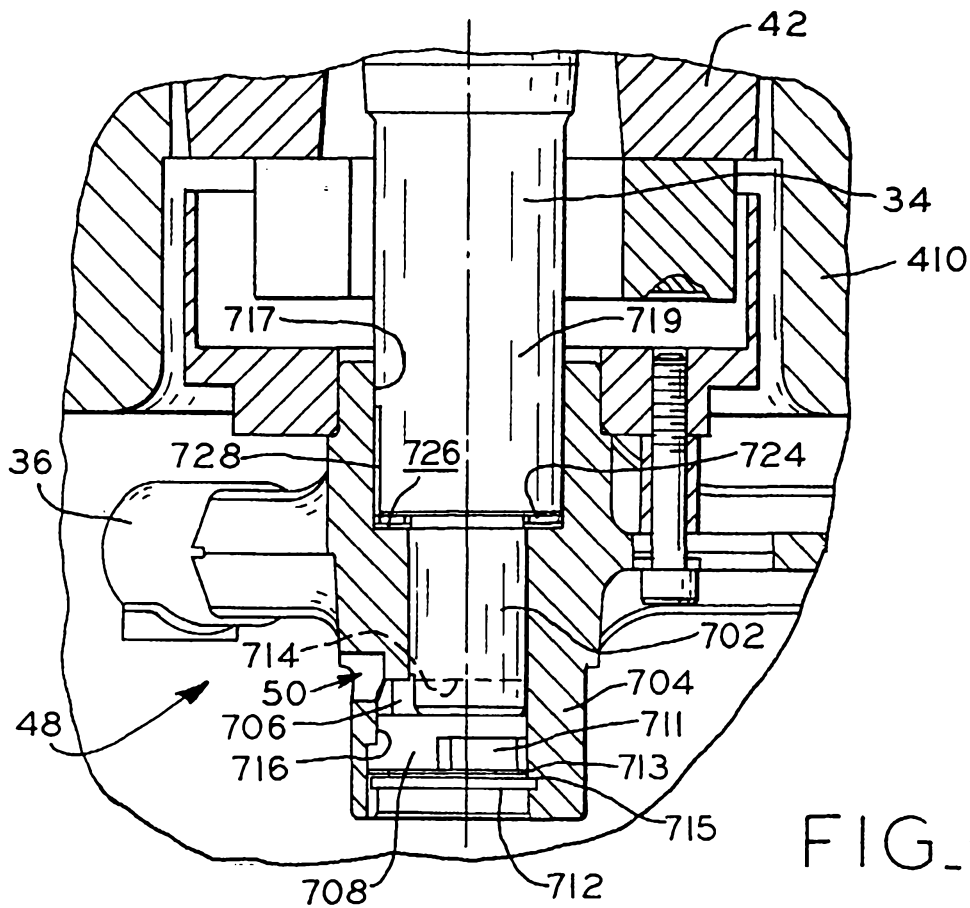


FIG. 66




FIG. 67

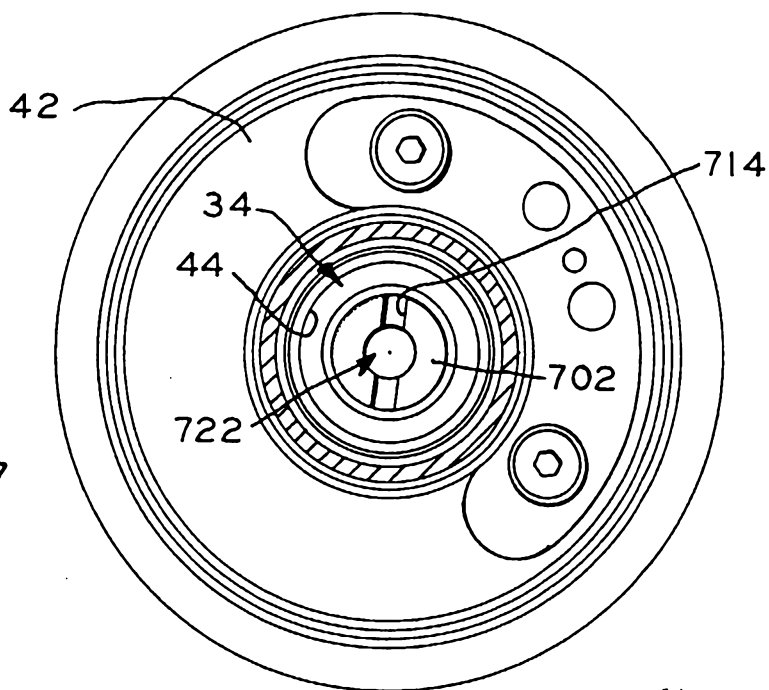
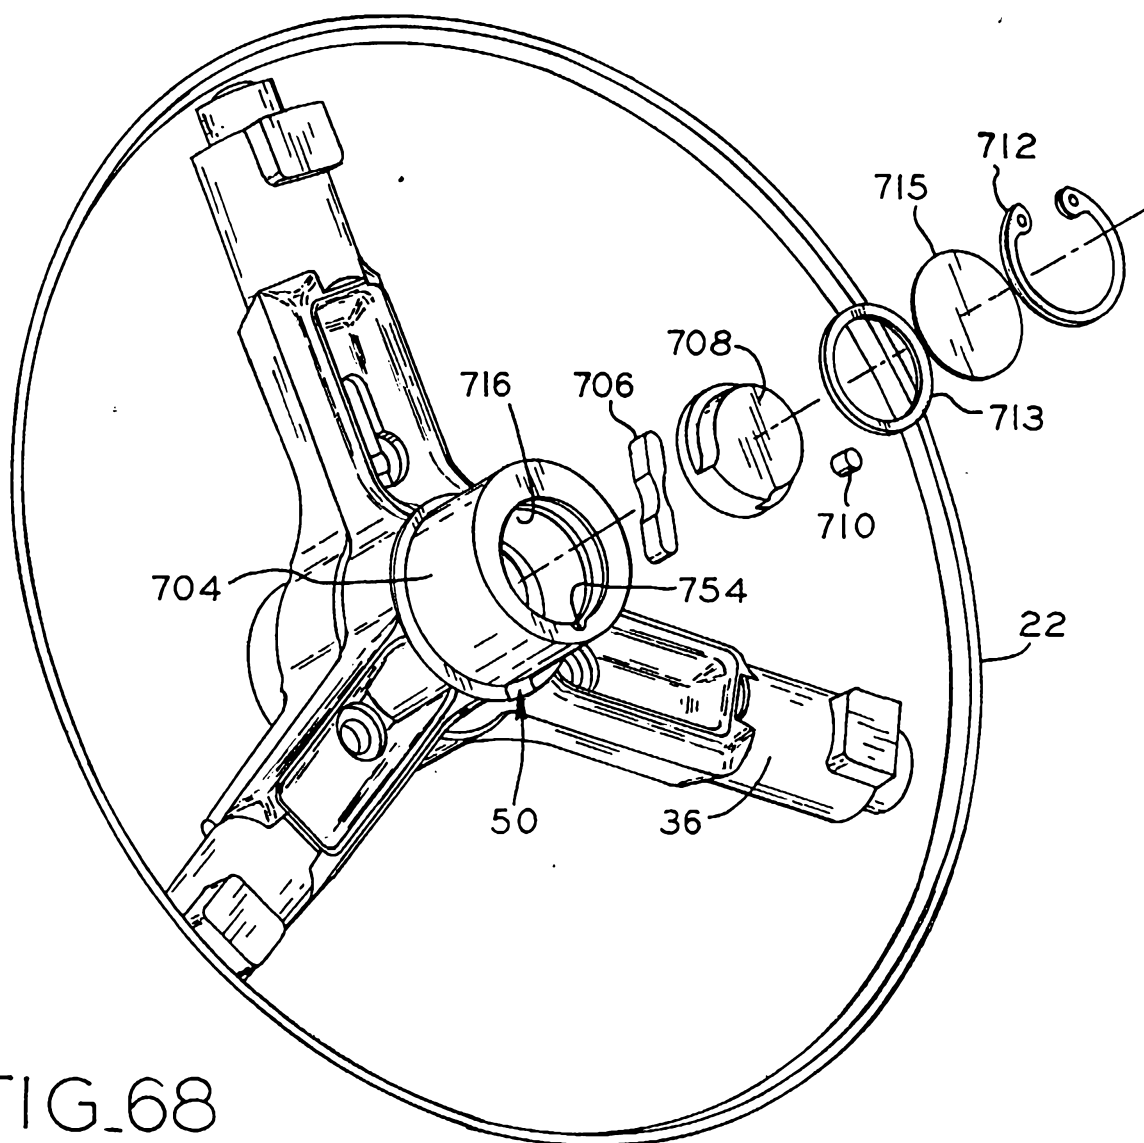


FIG. 68



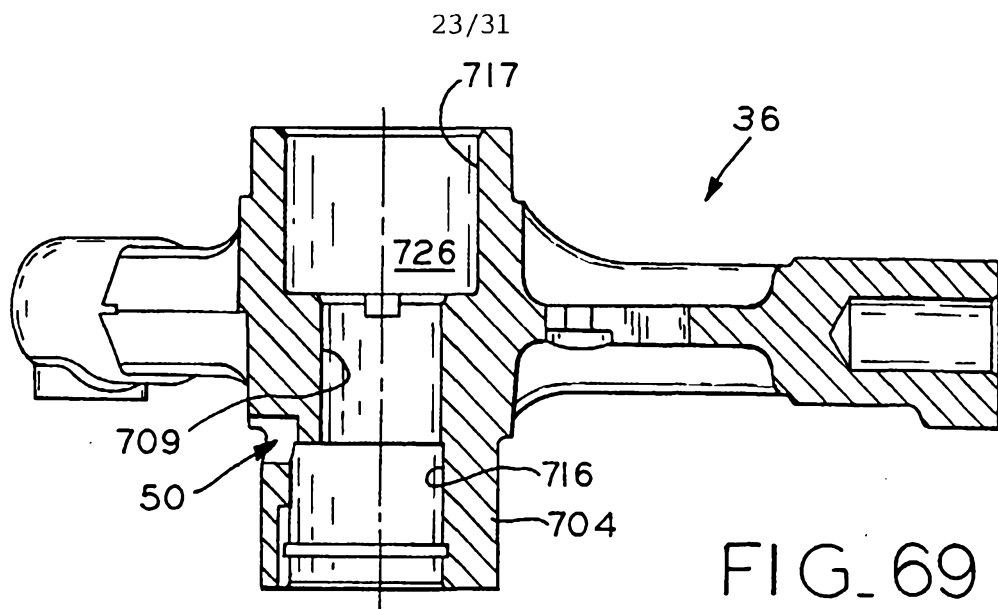


FIG. 69

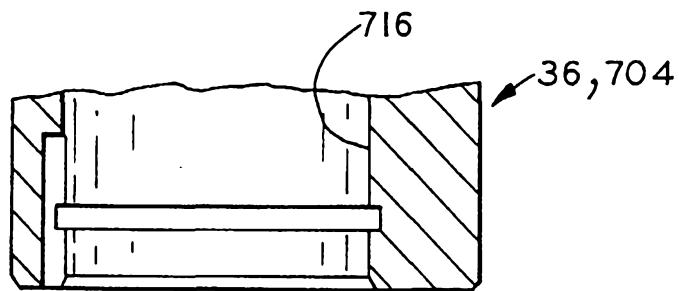


FIG. 70

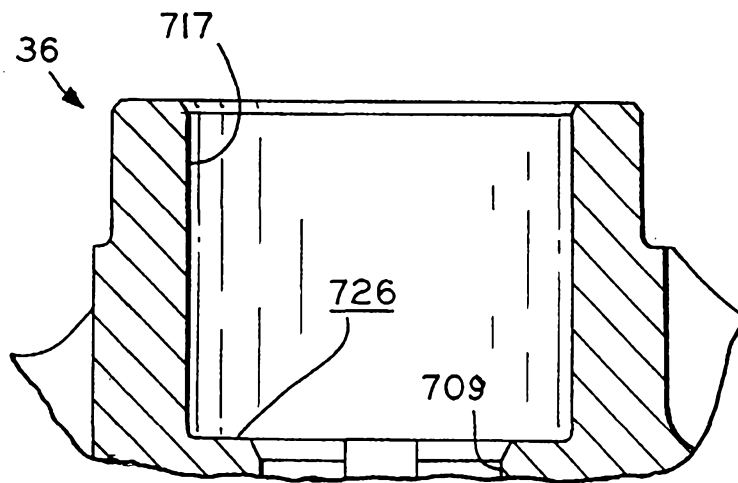


FIG. 71

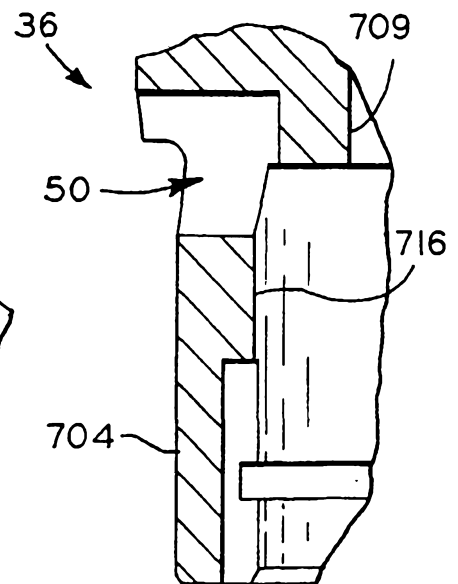



FIG. 72



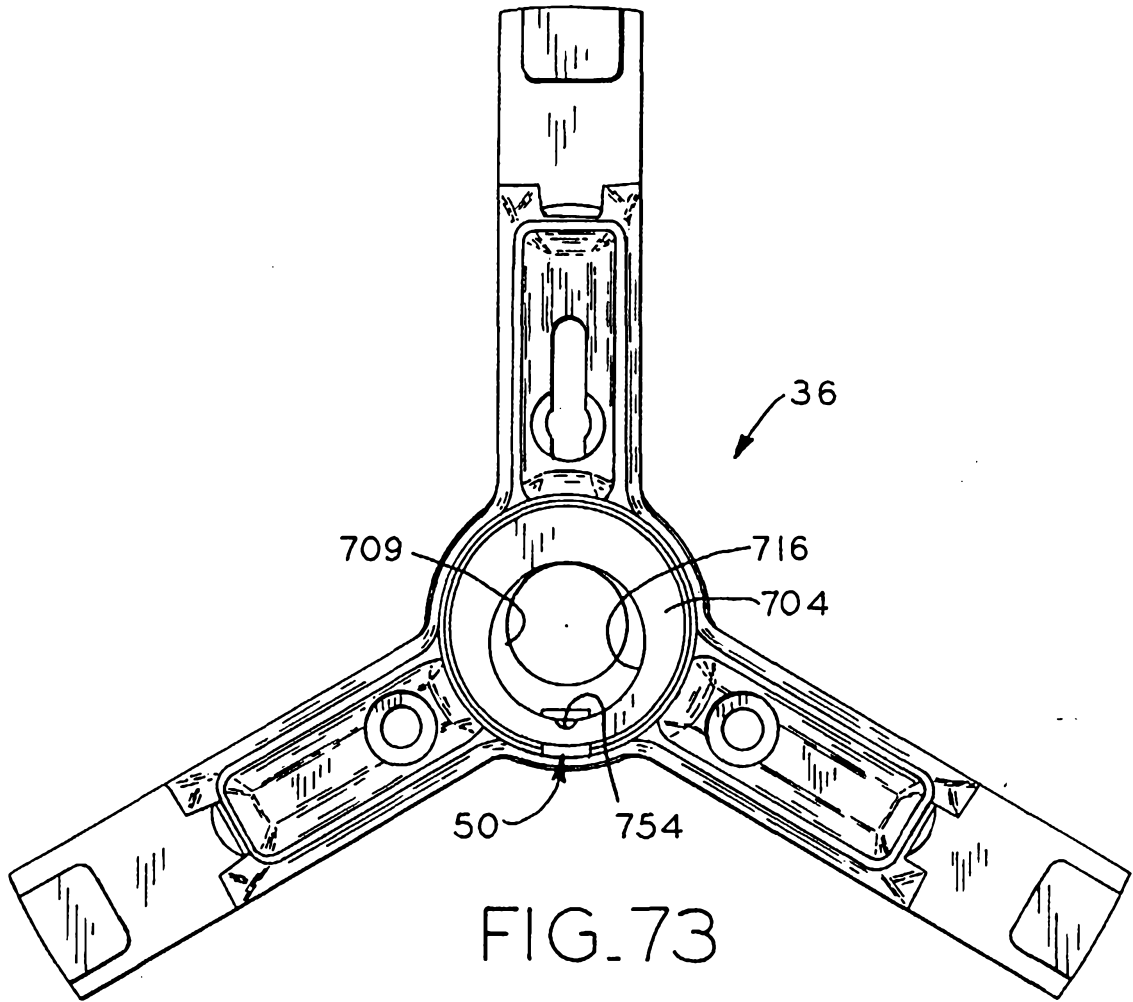


FIG. 73

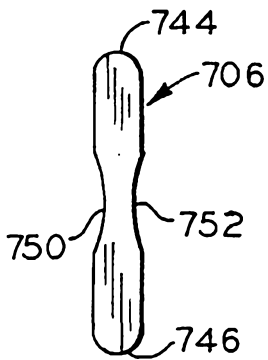


FIG. 74

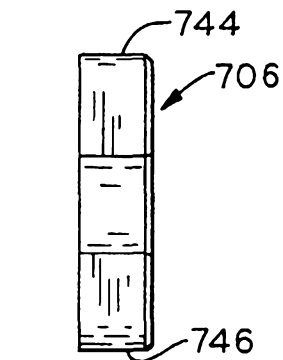


FIG. 75

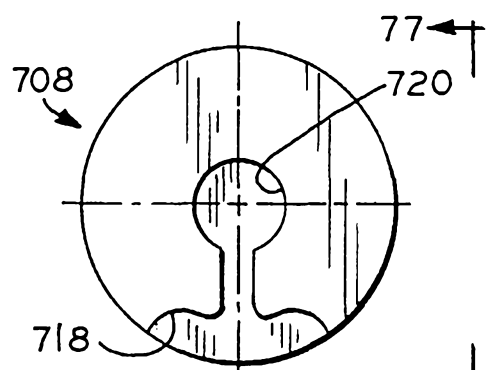


FIG. 76

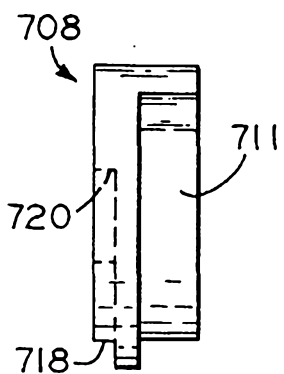


FIG. 77

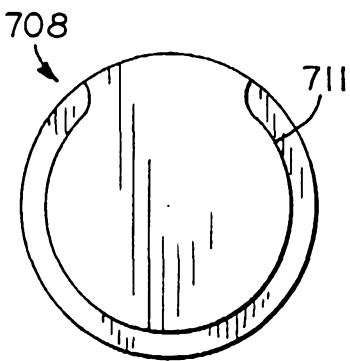


FIG. 78

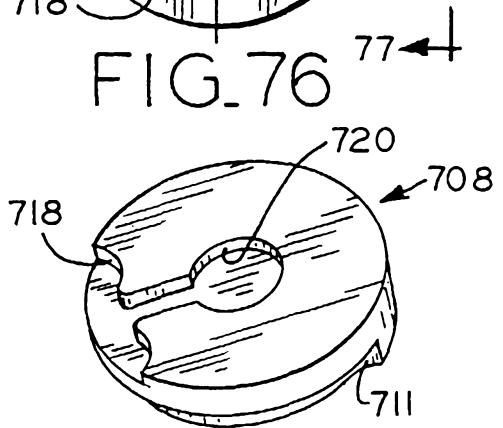



FIG. 79



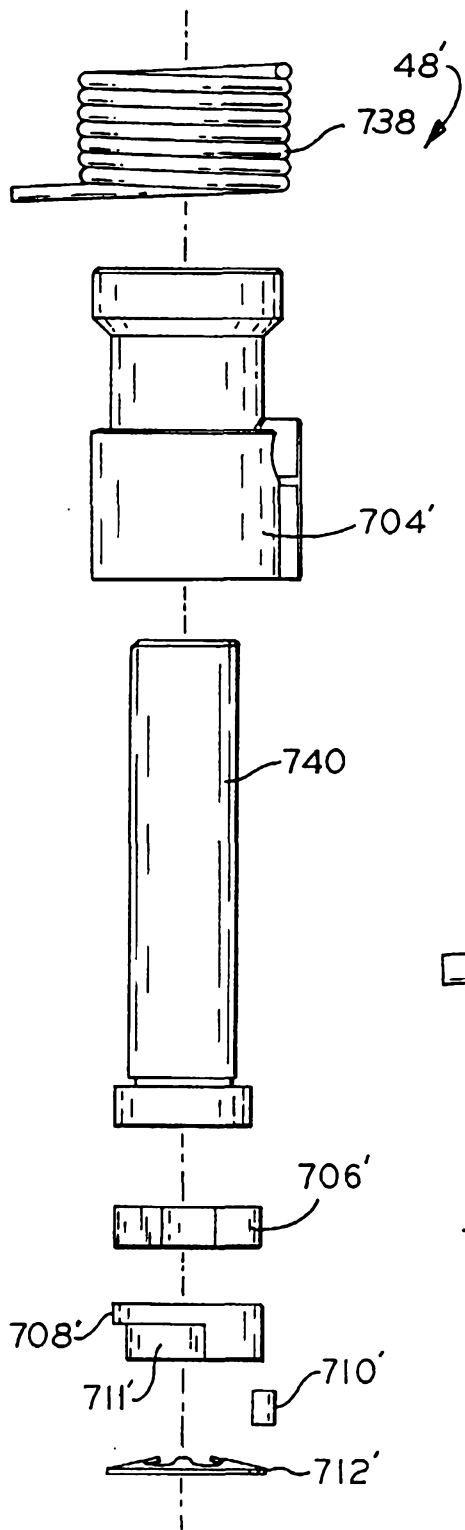


FIG. 80

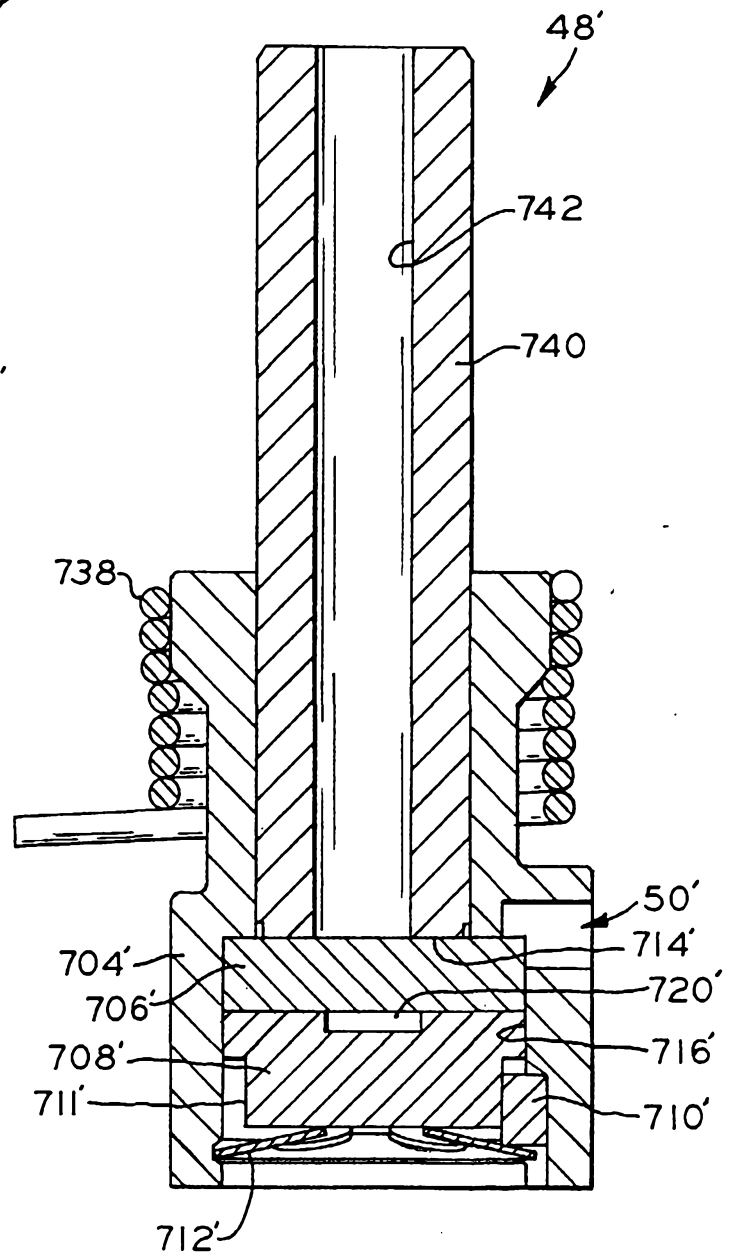


FIG. 81

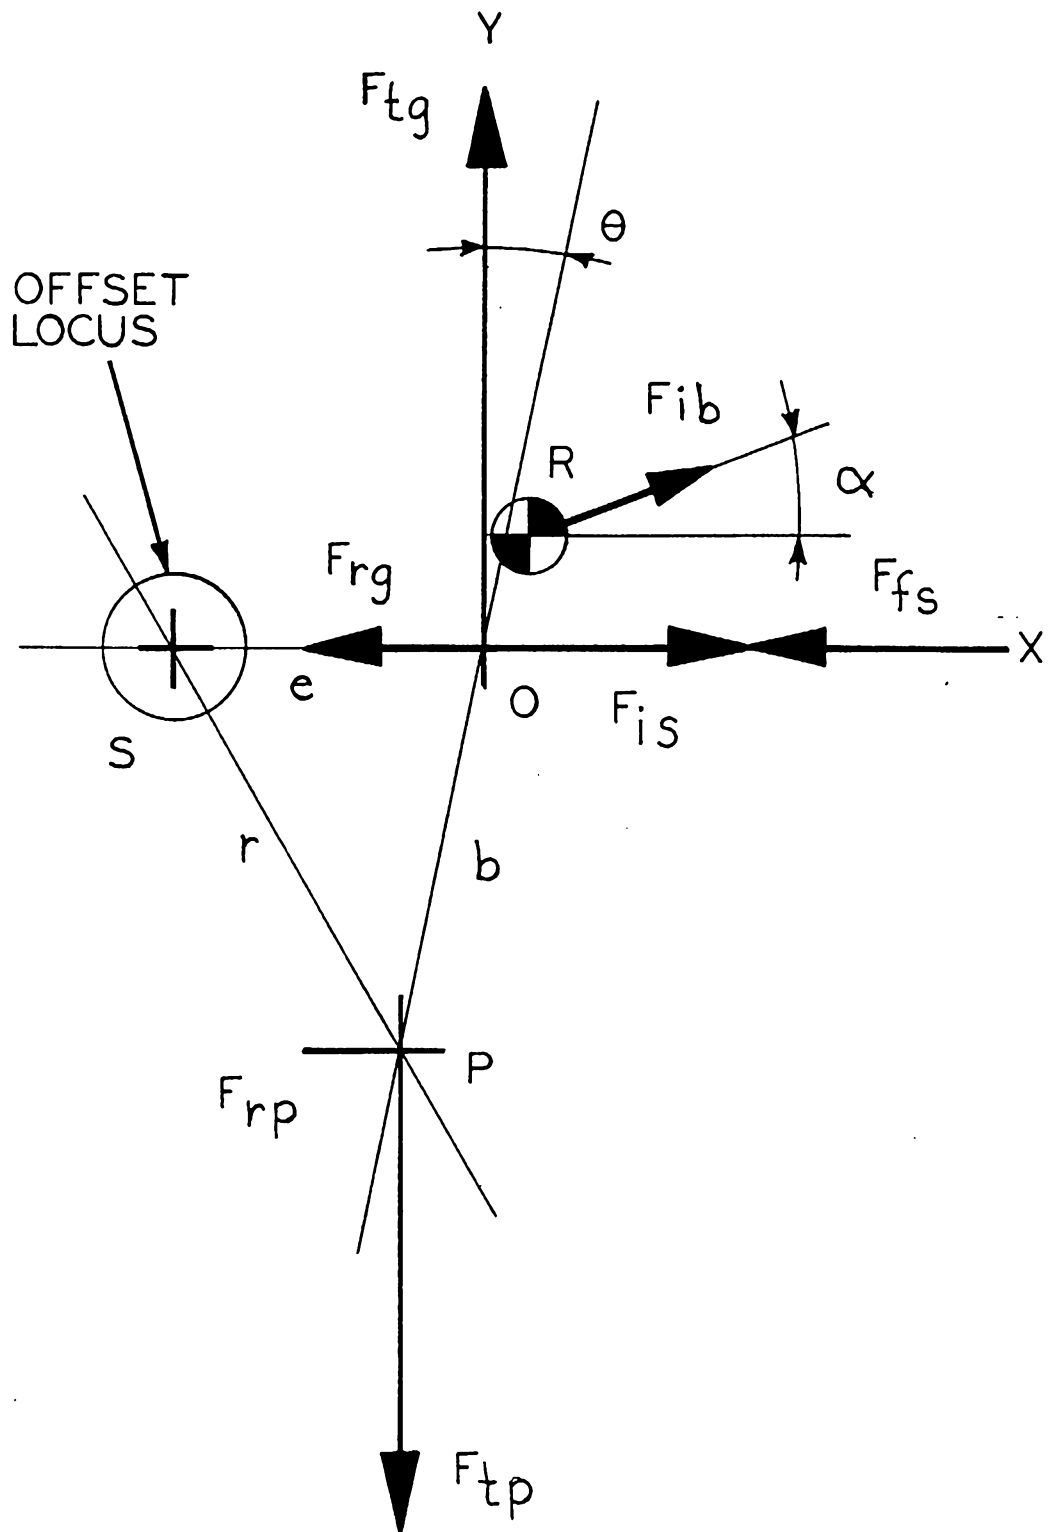


FIG. 82

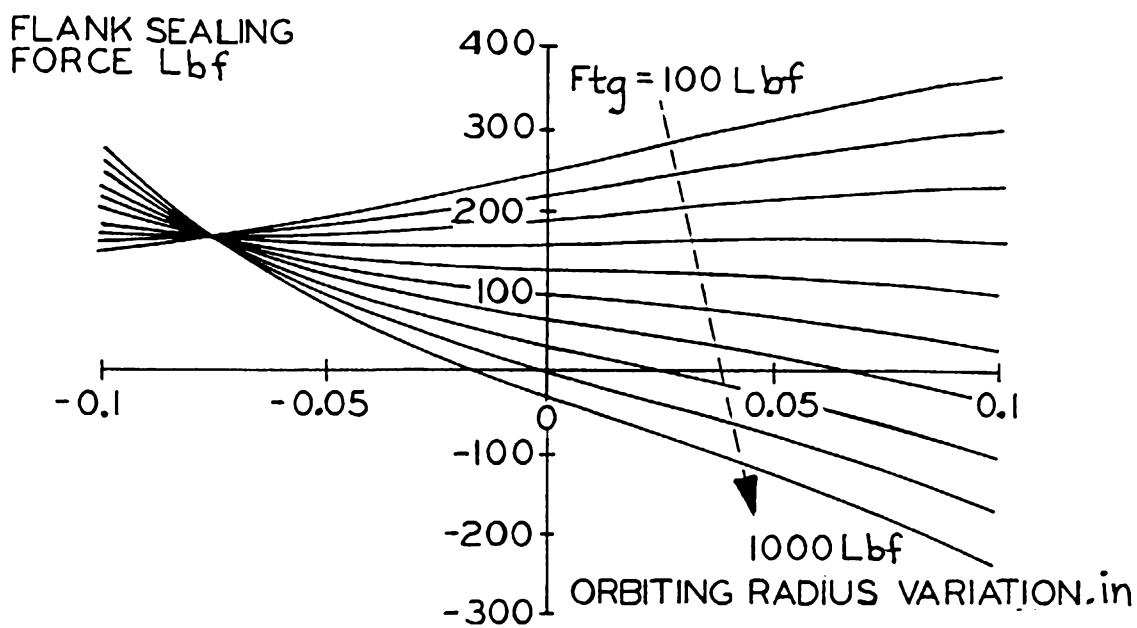


FIG. 83

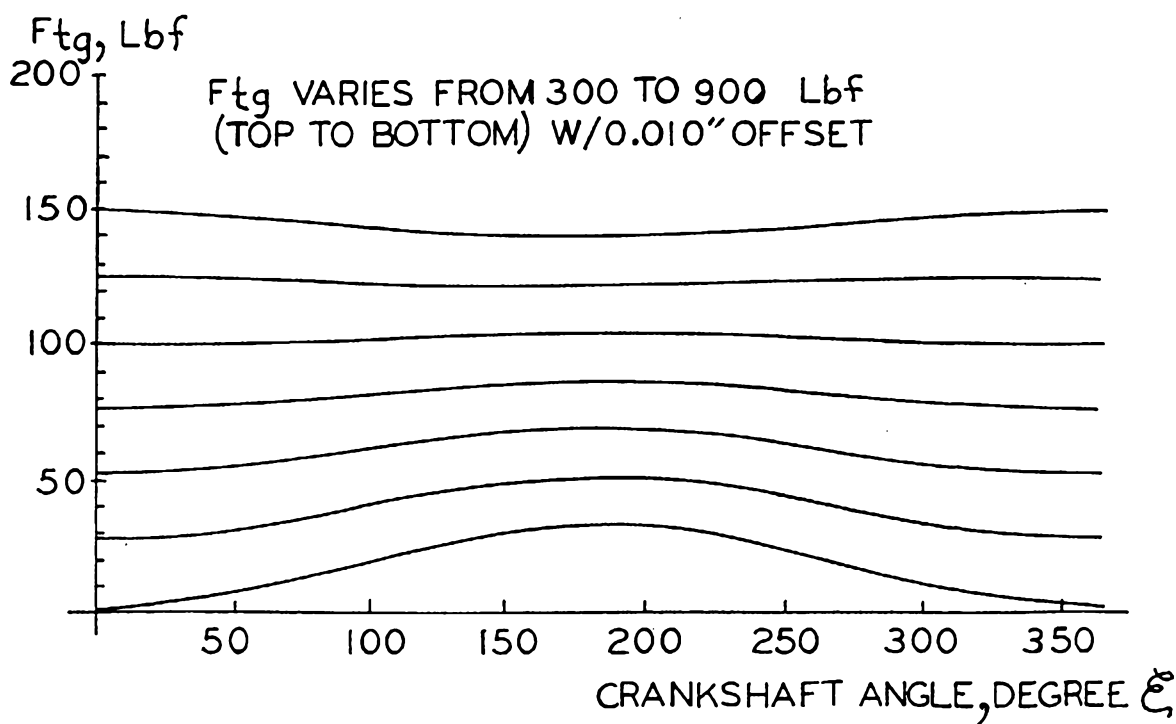


FIG. 84

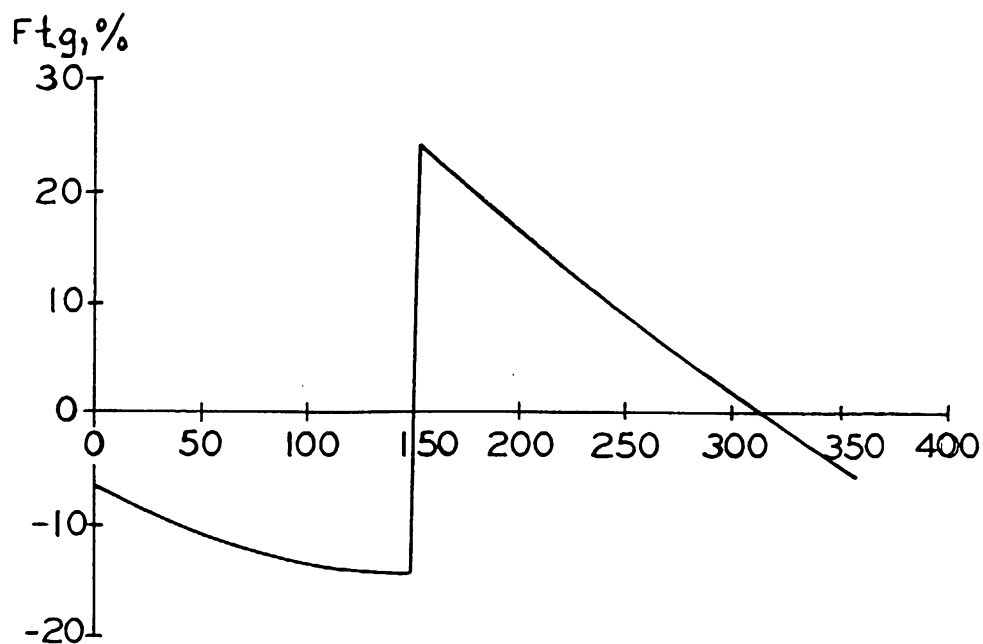


FIG. 85

FLANK SEALING FORCE, %

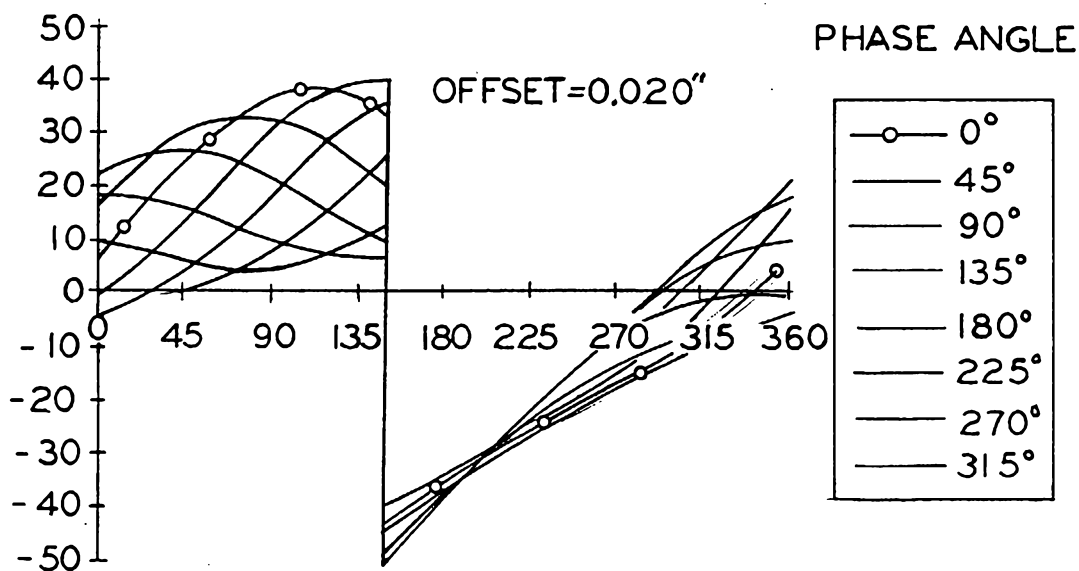
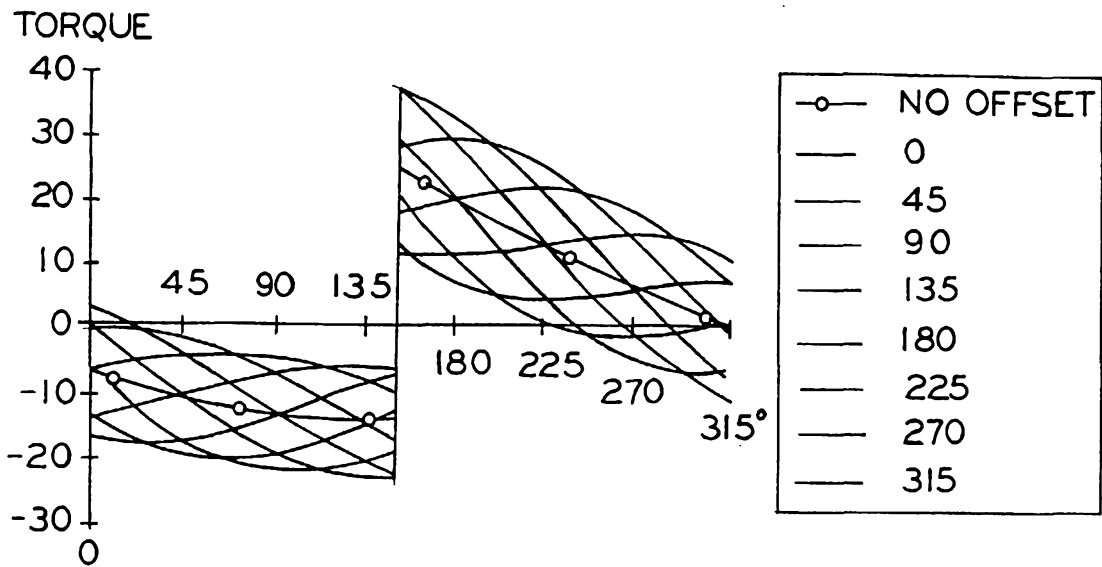
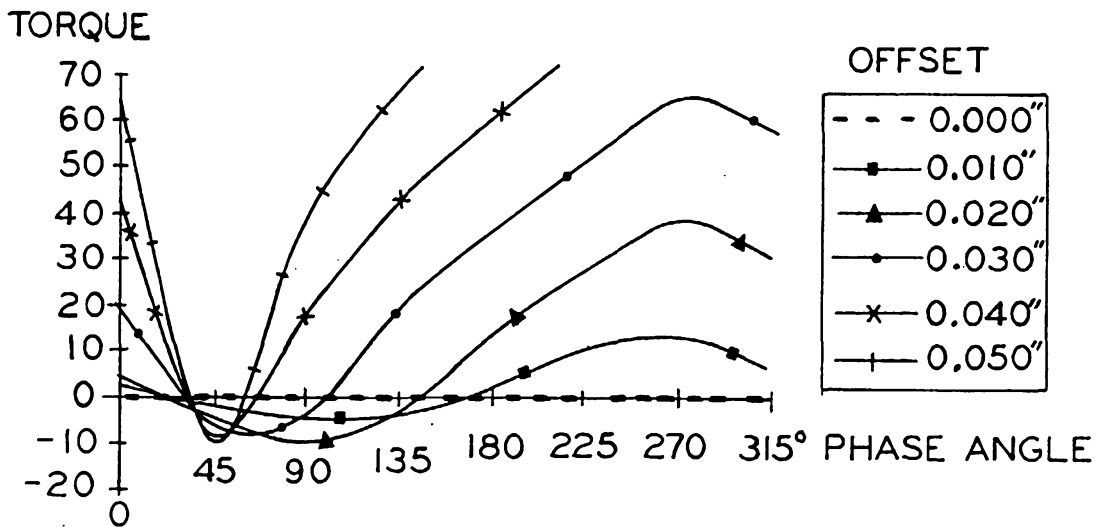



FIG. 86



FIG_87



FIG_88



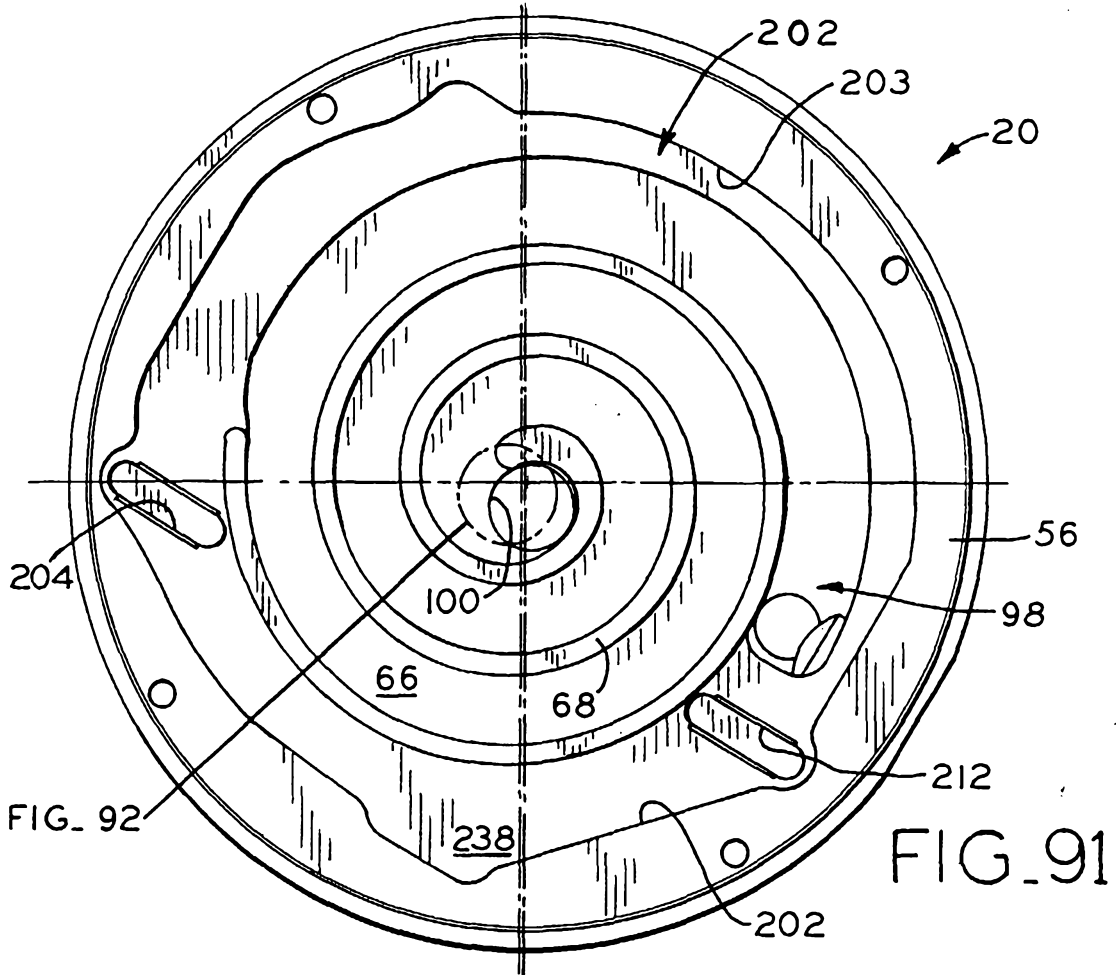


FIG. 92

FIG. 91

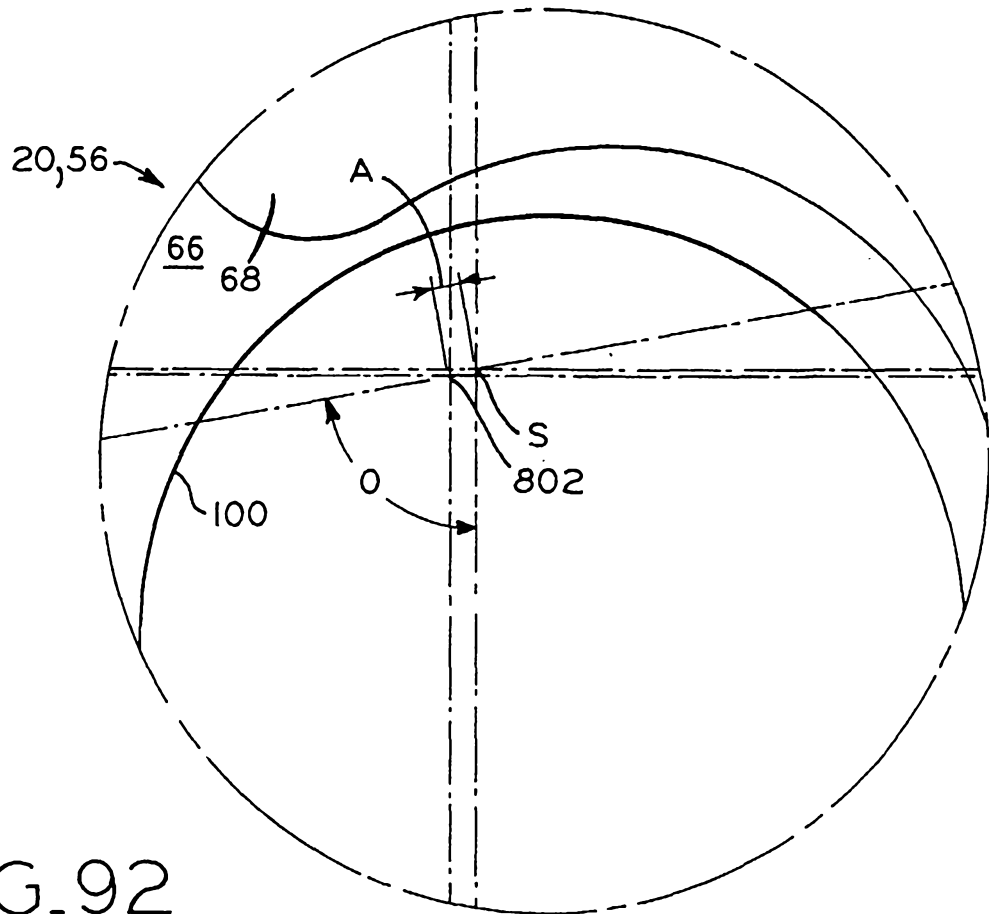


FIG. 92

