

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2008208099 B2**

- (54) Title
Vacuum cleaner
- (51) International Patent Classification(s)
A47L 9/20 (2006.01)
- (21) Application No: **2008208099** (22) Date of Filing: **2008.01.25**
- (87) WIPO No: **WO08/091203**
- (30) Priority Data
- | (31) Number | (32) Date | (33) Country |
|-------------------|-------------------|--------------|
| 0700541-6 | 2007.03.02 | SE |
| 60/886,856 | 2007.01.26 | US |
- (43) Publication Date: **2008.07.31**
- (44) Accepted Journal Date: **2012.06.28**
- (71) Applicant(s)
Aktiebolaget Electrolux
- (72) Inventor(s)
Beskow, Jonas;Jonsson, Stefan
- (74) Agent / Attorney
Halfords IP, 1 Market Street, Sydney, NSW, 2000
- (56) Related Art
WO 85/02528 A1
US 2007/0125049 A1
DE 1001465 B
US 5951746 A
WO 2004/100752 A1

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2008 (31.07.2008)

PCT

(10) International Publication Number
WO 2008/091203 A1

- (51) International Patent Classification:
A47L 9/20 (2006.01)
- (21) International Application Number:
PCT/SE2008/000068
- (22) International Filing Date: 25 January 2008 (25.01.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/886,856 26 January 2007 (26.01.2007) US
0700541-6 2 March 2007 (02.03.2007) SE
- (71) Applicant (for all designated States except US): AKTIEBOLAGET ELECTROLUX [SE/SE]; S:t Göransgatan 143, S-105 45 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): JONSSON, Stefan [SE/SE]; Rålambsvägen 21, S-112 59 Stockholm (SE). BESKOW, Jonas [SE/SE]; Linnégatan 17 A, S-114 47 Stockholm (SE). NYQVIST, Henrik [SE/SE]; Knypplerskevägen 24, S-168 38 Bromma (SE).
- (74) Agent: MAGNUS, Laurin; AB Electrolux, Group Intellectual Property, S-105 45 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: VACUUM CLEANER

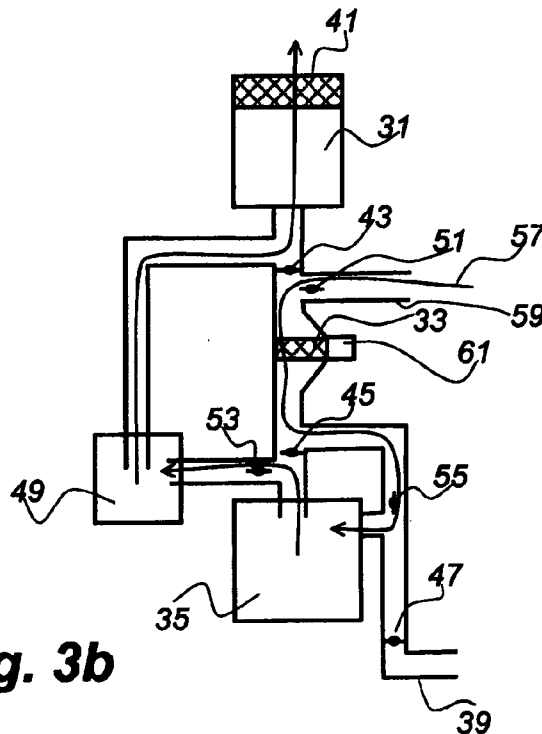


Fig. 3b

(57) Abstract: A vacuum cleaner comprising a main separating unit (35), typically a cyclone (13), a vacuum source (31) for creating a negative air pressure, and a downstream filter (33). The vacuum cleaner is switchable from a vacuum cleaning mode to a filter cleaning mode, where the vacuum source is connected to the downstream filter to force an airstream (57) therethrough in a reverse direction in order to remove dust from the downstream filter, and has an auxiliary separating unit (49). In the vacuum cleaning mode, the auxiliary separating unit is bypassed, and in the filter cleaning mode, the auxiliary separating unit is connected between the downstream filter and the vacuum source to separate dust, released by the downstream filter, from the airstream. This allows the downstream filter to be automatically cleaned.

WO 2008/091203 A1



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

VACUUM CLEANER

Technical field

The present disclosure relates to a vacuum cleaner comprising a main separating unit, a vacuum source for creating a negative air pressure, and a downstream filter, the vacuum cleaner being configured to operate in a vacuum cleaning mode, wherein the vacuum source is connected to the separating unit to force a dust laden airstream therethrough in order to separate dust from the airstream, and the downstream filter is connected between the separating unit and the vacuum source to receive the airstream in a forward direction for filtering remaining dust therefrom, and the vacuum cleaner being switchable to a filter cleaning mode, wherein the vacuum source is connected to the downstream filter to force an airstream therethrough in a reverse direction in order to remove dust from the downstream filter. The present invention does also relate to a method for cleaning a downstream filter of a vacuum cleaner.

15

Background

Such a vacuum cleaner is disclosed in WO 2005/053497 A1. In that document two downstream filters are used, and when one is clogged by fine dust the user is allowed to let the filters switch places and to clean the clogged filter using the separating unit and the other downstream filter. The cleaned filter is then ready for use when the other filter becomes clogged.

One problem with this vacuum cleaner is that the user may forget cleaning the filter or may find the process somewhat cumbersome.

25

Summary

An object of the present disclosure is to wholly or partly obviate this problem. This object is achieved by means of a vacuum cleaner according to claim 1 and by means of a method according to claim 16.

More specifically a vacuum cleaner of the initially mentioned kind then comprises an auxiliary separating unit, wherein in the vacuum cleaning mode, the auxiliary separating unit is bypassed, and in the filter cleaning mode, the auxiliary separating unit is connected between the downstream filter and the

30

vacuum source to separate dust, released by the downstream filter, from the airstream.

The use of an auxiliary separator allows cleaning of a clogged downstream filter without the use of another downstream filter, as the auxiliary separator may provide for a separator configuration with a much better separation performance. This is due to the fact that a much higher separator flow resistance may be allowed in the filter cleaning mode. The auxiliary filter need not be moved, and the process may be simpler from the user's point of view. It may even be carried out automatically.

In the vacuum cleaning mode, the auxiliary separating unit is bypassed such that there is no substantial air flow there through. This can be achieved in different ways, for example, the auxiliary separating unit can be disconnected altogether, or substantial air flow through the auxiliary separating unit can be prevented by a higher flow resistance thereof than of an alternative air flow passage through the main separating unit.

Normally the vacuum cleaner will be arranged to operate in one of the two modes "vacuum cleaning mode" and "filter cleaning mode" at a time. However, it would also be possible to direct a fraction of the air stream through the main separating unit and another fraction through the auxiliary separating unit and thereby arrange the vacuum cleaner to operate in the two modes "vacuum cleaning mode" and "filter cleaning mode" at the same time.

The auxiliary separating unit may, in the filter cleaning mode, be connected in series with the main separating unit, e.g. with the auxiliary separating unit connected downstream in relation to the main separating unit. This may provide excellent separation.

The auxiliary separating unit may have a higher separation ratio for a given dust than the main separating unit as higher flow resistance is allowed. The auxiliary separating unit can be especially adapted for separating from an air stream the type of dust that is caught by the downstream filter during vacuum cleaning.

The main separating unit may comprise a cyclone separator, and the auxiliary separating unit may comprise a cyclone separator having a vortex chamber with a smaller average diameter than a vortex chamber of the cyclone separator of the main separating unit.

The main separating unit may comprise one or several cyclone separators of equal or different vortex diameter. The several cyclones of the main separating unit may be connected in series and/or in parallel.

The auxiliary separating unit may comprise one or several cyclone separators of equal or different vortex diameter. The several cyclones of the auxiliary separating unit may be connected in series and/or in parallel.

According to at least one embodiment of the invention, the auxiliary
5 separating unit comprises three cyclone separators which are connected in series. The three cyclones may have three different average vortex diameters, wherein the cyclones can be arranged in the air stream with decreasing vortex diameter. Thereby the separation unit, which comprises the three cyclones, achieves a sequential separation, wherein mainly a certain
10 fraction of the dust is separated in each cyclone/step.

The downstream filter may consist of a micro pore filter.

The vacuum cleaner is a stationary vacuum cleaner, or a moveable vacuum cleaner, such as of the canister or upright type.

The vacuum cleaner may further comprise means for rapping or
15 vibrating the downstream filter in the filter cleaning mode.

Brief description of the drawings

Fig 1 shows a vacuum cleaner.

20 Fig 2 illustrates schematically a cyclone.

Fig 3a illustrates a vacuum cleaner in a vacuum cleaning mode.

Fig 3b illustrates the vacuum cleaner of fig 3a in a filter cleaning mode.

Fig. 4 illustrates an example embodiment of an auxiliary separating unit
and a dust bin of a vacuum cleaner.

25

Detailed description

Fig 1 shows a vacuum cleaner 1 of the canister or cylinder type. The vacuum cleaner comprises a main part 3, having a vacuum source and a separating unit (not shown). The main part may comprise wheels 5 to provide
30 improved moveability, and may, via a flexible tube 7 and a stiff tube 9, be connected to a nozzle 11 that is capable of picking up dust from floors and carpets, etc.

The present disclosure is relevant also for upright types of vacuum cleaners, where the main part is provided integrated with the stiff tube, and for
35 stationary vacuum cleaners which may be provided as fixed installations in buildings.

Fig 2 illustrates schematically a cyclone 13 which may be used as a separating unit in the vacuum cleaner of the present disclosure. The cyclone 13 has an inlet slot 15, through which dust laden air enters into a vortex chamber 17, which may have a substantially circular cross section perpendicularly to the vertical direction, as illustrated in fig 2. The dust laden air enters along a tangential direction at the periphery of the vortex chamber 17, and is sucked out of the vortex chamber 17 through an outlet tube 19, which is inserted in the centre of the vortex chamber 17. This makes the dust laden air flow in a vortex 21 through the vortex chamber 17. Dust particles 23 are therefore subjected to a centrifugal force depending on v^2/R , where v is the flow velocity and R is the diameter of the vortex chamber cross section, which forces the particles towards the vortex chamber side wall. Once a dust particle 23 reaches the wall, it is caught in a secondary airstream directed downwards in the figure, and falls through an opening 25 in the bottom part of the vortex chamber 17 and into a dust chamber 27.

The dust chamber 27 may be conveniently emptied by the user of the vacuum cleaner, and the use of a cyclone of this kind may obviate the need for conventional vacuum cleaner filter bags.

In the illustrated cyclone 13, the vortex chamber 17 has a cross-section which tapers in the downward direction and has a minimum cross section at the opening. More particularly, the vortex chamber has a frustoconical shape. However, it should be noted that other tapering forms as well as cylindrical, non-tapering forms may be considered in a cyclone vortex chamber.

Often, a cyclone or a separating unit of another type will have a trade-off between separation efficiency and flow resistance, the higher the efficiency the higher the resistance. Therefore, e.g. if a cyclone capable of providing a very high separation efficiency/ratio for a standard dust would be used, the flow resistance would be too high to provide an acceptable airflow in the nozzle (11, fig 1) of the vacuum cleaner with a regular vacuum source. Therefore the vacuum cleaner would not be capable of picking up dust from a floor or a carpet in an acceptable manner. An example of a standard dust is DMT TEST DUST TYPE 8® referred to in DIN IEC 60312.

In practice therefore, a cyclone with a lower flow resistance is used, and any remaining dust which is sucked out through the outlet tube 19 is instead removed with a downstream filter in order to protect the vacuum source. Usually it is the finer dust fraction that remains to be filtered, as heavier particles are subjected to greater centrifugal forces. The term

downstream filter refers to the filter being placed after the main separator but before the vacuum source in a vacuum cleaning mode.

There will now be described a vacuum cleaner with means for cleaning such a downstream filter, whereby clogging of the filter can be avoided to a
5 great extent.

The vacuum cleaner is then switched from the usual vacuum cleaning mode to a filter cleaning mode. This may be done manually or automatically.

Fig 3a illustrates schematically a vacuum cleaner in a vacuum cleaning mode, when the vacuum cleaner is used for vacuum cleaning, and fig 3b
10 illustrates the vacuum cleaner of fig 3a in a filter cleaning mode.

Referring to both fig 3a and fig 3b, the vacuum cleaner has a vacuum source 31, typically comprising a fan driven by an electric motor, which creates a negative air pressure in order to make the vacuum cleaner collect dust. The vacuum source 31 is, via a downstream filter 33 connected to a
15 main separating unit 35, which may comprise a cyclone as described above. Thereby a dust laden airstream 37 is drawn through an inlet 39, which is typically connected to the flexible tube (7, fig 1) if the vacuum cleaner is of the canister type. Most of the dust is thereby separated from the airstream 37. Any remaining dust is filtered by the downstream filter 33, through which the
20 airstream passes in a forward direction, in order to protect the vacuum source 31 from the remaining dust, which typically consists of finer dust fractions. The airstream then passes through the vacuum source 31, and may finally be filtered by a motor filter 41 to separate e.g. graphite or carbon particles released by the motor of the vacuum source 31. The airstream of fig 3a is
25 accomplished by opening a first set of valves 43, 45, 47. The vacuum cleaner further has an auxiliary separating unit 49. However, in the vacuum cleaning mode, this auxiliary unit is bypassed. A second set of valves 51, 53, and 55 are closed in the vacuum cleaning mode. In some embodiments the flow resistance of the auxiliary unit 49 is sufficiently higher than that of the main separating unit 35, such that there will be no substantial air flow through the
30 auxiliary unit 49 and that the valve 53 can be dispensed with.

In fig 3b, the vacuum cleaner has been switched to a filter cleaning mode. In the filter cleaning mode, the downstream filter is cleaned such that its flow resistance may be reduced by removing dust that may otherwise clog
35 the filter. The vacuum cleaner is switched to the filter cleaning mode by closing the first set of valves 43, 45, 47 and opening the second set of valves 51, 53, 55. Then an ambient air airstream 57 is drawn through a filter cleaning

opening 59 and passes through the downstream filter 33 in a reverse direction, such that the downstream filter may release dust into the airstream 57. This process may optionally be enhanced by means of a rapper or vibrator 61, which vibrates or raps the downstream filter 33.

5 Note that the layout of figs 3a and 3b is only a schematic example. Other layouts are possible within the scope of the present disclosure and the functions of the valves may be achieved differently.

The airstream then passes through the main separator 35 and through the auxiliary separator 49 such that the released dust is again separated from the airstream. The airstream then passes through the vacuum source 31 and the motor filter 41.

This process cleans the downstream filter 33, such that it does not often need to be replaced.

15 In Fig. 3b, an ambient air stream 57 is drawn through a filter cleaning opening 59. However, it is also possible to dispense with the filter cleaning opening 59 and to direct ambient air from the inlet 39 to the downstream filter 33 such that the air stream will pass the downstream filter 33 in a reversed direction. It would also be possible to shut all air inlets of the vacuum cleaner during the filter cleaning mode and to force air, which is already inside the vacuum cleaner, through the downstream filter 33 in the reversed direction.

20 In fig 3b, the main separator 35 and the auxiliary separator 49 are series connected with the auxiliary separator downstream in relation to the main separator. However, other configurations are possible, for example, the order between the separators may be replaced. It is further possible to bypass or disconnect the main separator 35 in the filter cleaning mode such there is no substantial air flow there through.

In the filter cleaning mode, the flow resistance of the used separators may be higher, as there is no need to collect dust comprising heavier particles from a floor or carpet. This allows a higher separation ratio, and thus makes it possible to efficiently separate the fine dust fractions released from the downstream filter.

If the main and auxiliary separators are series connected in the filter cleaning mode, they may but need not have similar properties, as two series connected separators have a higher separation ratio than a single separator.

35 If only the auxiliary separator 49 is used in the filter cleaning mode, this separator may preferably have higher separation performance for a given dust (e.g. a standard dust) and a flow generated by a given vacuum source

than the main separator 35, at the cost of higher flow resistance. Higher separation performance in a cyclone may be provided by means of a cyclone, as described earlier, having a vortex chamber (17, fig 2) with a smaller average cross section diameter. Alternatively, for instance, the inlet slot (15, fig 2) may be made less wide to concentrate the flow at the vortex chamber periphery.

It is also possible to use two or more series connected sub-separators as the auxiliary separator.

In Fig. 4 one example of an auxiliary separating unit 49 having several sub-separators and a dust bin 58 for a vacuum cleaner according to the invention is shown. The example auxiliary separator comprises three sub-separators, which each comprises an individual filter cleaning cyclone 490. Each of the filter cleaning cyclones 490 can be of the type described above with reference to Fig. 2 and comprises an inlet slot 15, a vortex chamber, an outlet tube 19 and an opening 25 in the bottom part for separated dust. The opening in the bottom part of each cyclone 490 is connected to a separate dust chamber 27 of a dust bin 58, respectively. Each dust chamber 27 has an entrance opening, by which the respective dust chamber 27 is connected to the bottom opening 25 of the corresponding filter cleaning cyclone 490. Furthermore, the dust bin 58 includes a dust chamber 27 for the main separating unit, which comprises a vacuum clearing cyclone (not shown). The four dust chambers 27 constitute separate compartments of the single dust bin 58. Thereby all the four dust chambers 27 can conveniently be emptied simultaneously by emptying the single dust bin 58, for example by removing the dust bin 58 from the vacuum cleaner using a handle 62 and pouring and/or shaking out the dust collected therein. The respective dust chambers 27 can be substantially fluid tight receptacles, wherein the entrance openings are connected to the bottom opening 25 of the corresponding filter cleaning cyclone 490 in a substantially fluid tight manner.

When a vacuum cleaner having an auxiliary separating unit 49 and a dust bin 58 according to Fig. 4 is operated in the filter cleaning mode, an air stream 60, which contains dust released from the downstream filter 33 (not shown), passes, in sequence, through the three, in series connected filter cleaning cyclones 490. The successive cyclones 490 are arranged to filter out a different fraction of the dust respectively. As seen in the flow direction of the air stream 60, the first filter cleaning cyclone is arranged to filter out the most coarse particles, the second cyclone is arranged to filter out intermediate

particles, and the third, last cyclone is arranged to filter out the finest particles. This can be achieved by arranging the cyclones with different average vortex diameters, wherein the average diameter of the first filter cleaning cyclone 490 is larger than that of the second, which in turn is larger than that of the third, last filter cleaning cyclone 490. The size of each dust chamber 27 of the dust bin 58 is adapted to the amount and fraction of the dust that is separated by the corresponding cyclone 490 or the vacuum cleaning cyclone.

Due to that each subsequent connected filter cleaning cyclone thus has a higher separation efficiency/ratio than the previous, the pressure drop over each said subsequent filter cleaning cyclones 490 is higher than that over the previous. In this regard, the embodiment with the sealed dust bin having separate dust chambers 27 for each filter cleaning cyclone 490 is advantageous. In embodiments having a common dust chamber for several, in series connected filter cleaning cyclones and/or where the dust bin is less sealed, care has to be taken in choosing cyclones with respect to their respective pressure drop in order to avoid a reversed air stream going from the common dust chamber into the first cyclone through the dust outlet opening 25 in the bottom thereof. Thereby the first filter cleaning cyclone disadvantageously draws at least part of the air through the dust outlet opening 15 instead of all air through the inlet 15. Furthermore, the second and third filter cleaning cyclones would be bypassed and would thus not contribute to separation of the auxiliary separation unit 49.

The skilled person would also realize that such a described dust bin 58 can be used in any type of vacuum cleaner that is provided with several cyclone separators, wherein the dust bin has a separate chamber/compartments for each cyclone present in the vacuum cleaner. Thus, the use of this type of dust bin is not limited to the use in the described vacuum cleaner comprising filter cleaning cyclones, but could also be used in a vacuum cleaner having several vacuum cleaning cyclones only.

Of course, many other examples and lay outs of auxiliary separating units having several sub-separators are possible within the scope of the invention. For example, in series connected sub-separators in the form of cyclones need not have different average vortex diameter, but can be of equal size and performance. Furthermore, many different constructions of dust bins are possible, for example can each sub-separator be provided with a individual dust bin, which can be separately emptied, for example by being separately removable.

An electrostatic filter may also be considered as the auxiliary filter.

The downstream filter 33 in this configuration may be cleaned regularly, either manually or automatically, e.g. when the user finishes or begins a vacuum cleaning. It is also possible to provide a pressure sensor
5 that measures the pressure drop over the downstream filter in order to determine when filter cleaning is needed. The duration in which the vacuum cleaner is in the filter cleaning mode, or in other words, how long the filter is subjected to filter cleaning, can be a fixed time, decided on manually or depend on the pressure drop over the filter, for example.

10 The downstream filter need not be able to carry a lot of dust as it can be cleaned regularly. Micro pore filters such as filter made of expanded PTFE (polytetrafluorethylen), e.g. GORE-TEX (trademark) may be considered. On such filters the dust is collected on top of the filter surface, rather than in the depth of the filter as in a conventional filter. A micro pore filter may therefore
15 be easily cleaned.

In summary, the present disclosure relates to a vacuum cleaner comprising a main separating unit, typically a cyclone, a vacuum source for creating a negative air pressure, and a downstream filter. The vacuum cleaner is switchable from a vacuum cleaning mode to a filter cleaning mode,
20 where the vacuum source is connected to the downstream filter to force an airstream therethrough in a reverse direction in order to remove dust from the downstream filter, and has an auxiliary separating unit. In the vacuum cleaning mode, the auxiliary separating unit is bypassed, and in the filter cleaning mode, the auxiliary separating unit is connected between the down-
25 stream filter and the vacuum source to separate dust, released by the downstream filter, from the airstream. This allows the downstream filter to be automatically cleaned.

The invention is not restricted to the described embodiments, and may be varied and altered within the scope of the appended claims.

CLAIMS

1. A vacuum cleaner (1) comprising a main separating unit (35), a vacuum source (31) for creating a negative air pressure, and a downstream filter (33);
5 the vacuum cleaner being configured to operate in a vacuum cleaning mode, wherein the vacuum source (31) is connected to the main separating unit (35) to force a dust laden airstream (37) therethrough in order to separate dust from the airstream, and the downstream filter (33) is connected between
10 the main separating unit (35) and the vacuum source (31) to receive the airstream in a forward direction for filtering remaining dust therefrom; and
the vacuum cleaner being switchable to a filter cleaning mode, wherein the vacuum source (31) is connected to the downstream filter (33) to force an airstream (57) therethrough in a reverse direction in order to remove dust
15 from the downstream filter; c h a r a c t e r i z e d by
an auxiliary separating unit (49), wherein
in the vacuum cleaning mode, the auxiliary separating unit (49) is bypassed, and
in the filter cleaning mode, the auxiliary separating unit (49) is
20 connected between the downstream filter (33) and the vacuum source (31) to separate dust, released by the downstream filter, from the airstream.
2. A vacuum cleaner according to claim 1, wherein, in the filter cleaning mode, the auxiliary separating unit is connected in series with the main separating unit.
- 25 3. A vacuum cleaner according to claim 2, wherein, in the filter cleaning mode, the auxiliary separating unit is connected downstream in relation to the main separating unit.
4. A vacuum cleaner according to any of the preceding claims, wherein the auxiliary separating unit has a higher separation ratio for a given dust than
30 the main separating unit.
5. A vacuum cleaner according to any of the preceding claims, wherein the auxiliary separating unit comprises several sub-separators.
6. A vacuum cleaner according to any of the preceding claims, wherein the main separating unit comprises a cyclone separator.
- 35 7. A vacuum cleaner according to claim 5, wherein the auxiliary separating unit comprises a cyclone separator having a vortex chamber with

a smaller average diameter than a vortex chamber of the cyclone separator of the main separating unit.

8. A vacuum cleaner according to claims 5 and 6, wherein the auxiliary separating unit comprises three sub separators, which are connected in series and which each comprises a filter cleaning cyclone separator, respectively.

9. A vacuum cleaner according to claim 8, further comprising a dust bin having several dust chambers for collecting dust separated by the cyclone separators, wherein each cyclone separator is connected to a dust chamber, respectively.

10. A vacuum cleaner according to any of the preceding claims, wherein the downstream filter (33) is a micro pore filter.

11. A vacuum cleaner according to any of the preceding claims, wherein the vacuum cleaner is a stationary vacuum cleaner.

12. A vacuum cleaner according to any of claims 1-10, wherein the vacuum cleaner is a moveable vacuum cleaner.

13. A vacuum cleaner according to claim 12, wherein the vacuum cleaner is of the canister type.

14. A vacuum cleaner according to claim 12, wherein the vacuum cleaner is of the upright type.

15. A vacuum cleaner according to any of the preceding claims, further comprising means (61) for rapping or vibrating the downstream filter in the filter cleaning mode.

16. Method for cleaning a downstream filter (33) of a vacuum cleaner, wherein

the vacuum cleaner comprises a main separating unit (35), an auxiliary separating unit and the downstream filter (33), and wherein

the downstream filter (33) is used during a vacuum cleaning method, comprising the steps of

- forcing a dust laden air stream (37) through the main separating unit in order to separate dust from the air stream,
- forcing the air stream leaving the main separating unit (35) through the downstream filter (33) in a forward direction for filtering remaining dust therefrom;

comprising the steps of

- forcing an air stream (57) through the downstream filter (33) in a reverse direction in order to remove dust from the downstream filter,

-forcing the air stream (57) through the auxiliary separating unit (49) in order to separate dust, released by the downstream filter, from the airstream.



Fig. 1

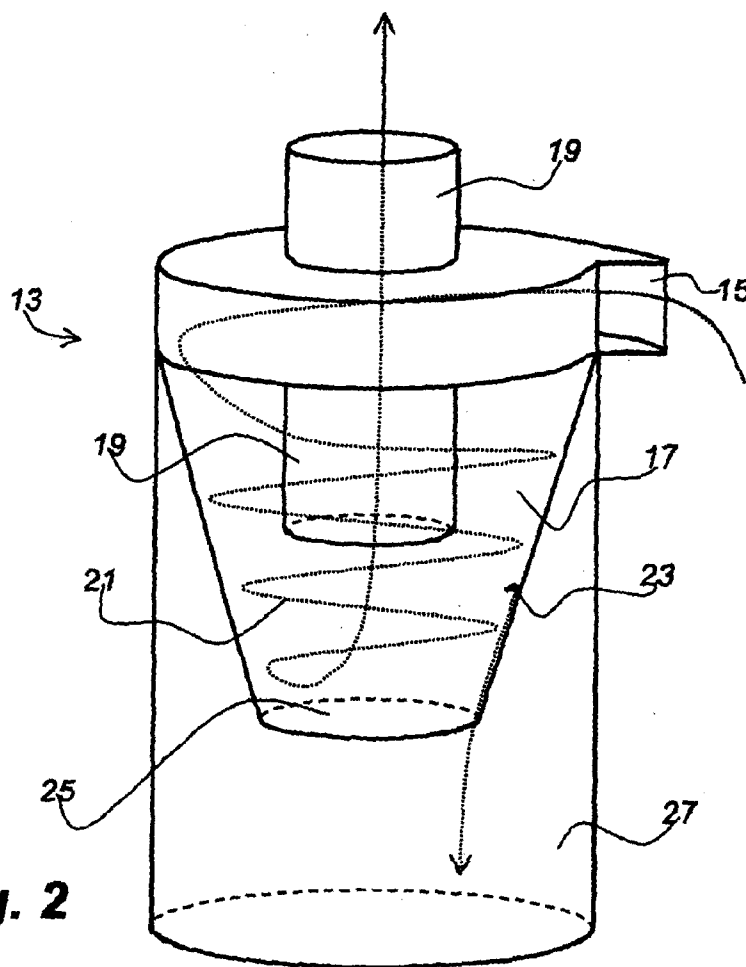


Fig. 2

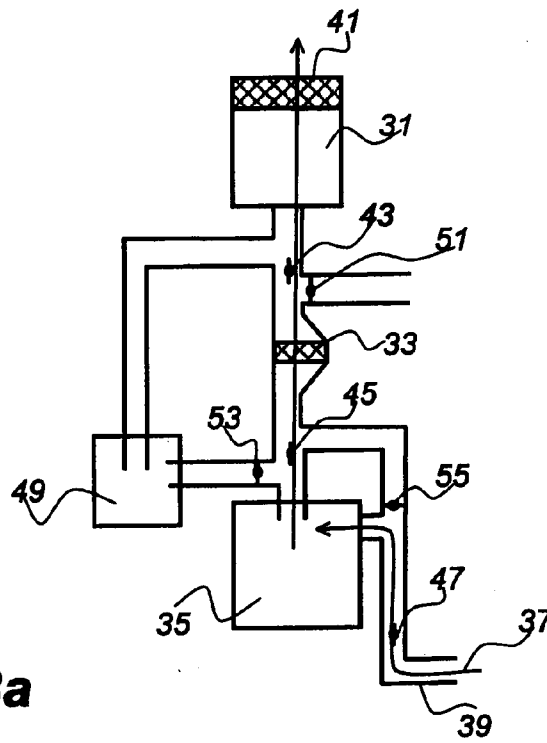


Fig. 3a

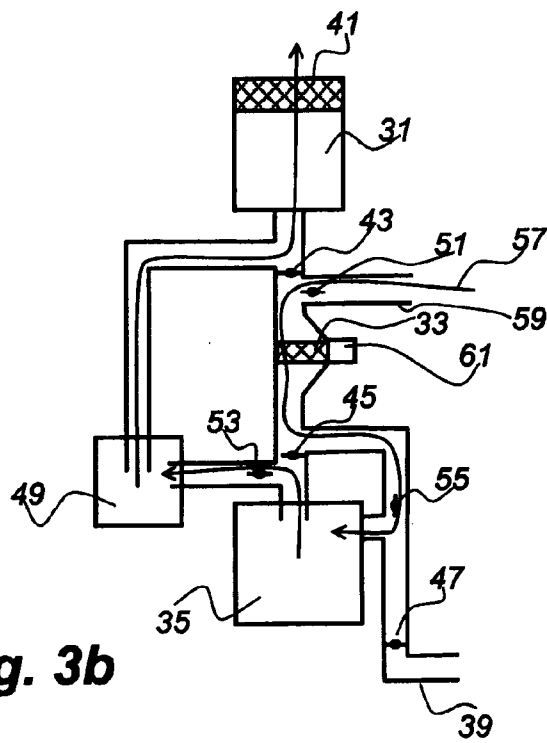


Fig. 3b

