




(86) Date de dépôt PCT/PCT Filing Date: 2011/01/07  
 (87) Date publication PCT/PCT Publication Date: 2011/07/14  
 (45) Date de délivrance/Issue Date: 2015/09/15  
 (85) Entrée phase nationale/National Entry: 2012/07/05  
 (86) N° demande PCT/PCT Application No.: JP 2011/050213  
 (87) N° publication PCT/PCT Publication No.: 2011/083863  
 (30) Priorité/Priority: 2010/01/08 (JP2010-003376)

(51) Cl.Int./Int.Cl. *H04W 56/00* (2009.01)  
 (72) Inventeurs/Inventors:  
 IWAMURA, MIKIO, JP;  
 UMESH, ANIL, JP  
 (73) Propriétaire/Owner:  
 NTT DOCOMO, INC., JP  
 (74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : PROCÉDE DE COMMUNICATION MOBILE, STATION DE BASE RADIO ET STATION MOBILE  
 (54) Title: MOBILE COMMUNICATION METHOD, RADIO BASE STATION, AND MOBILE STATION

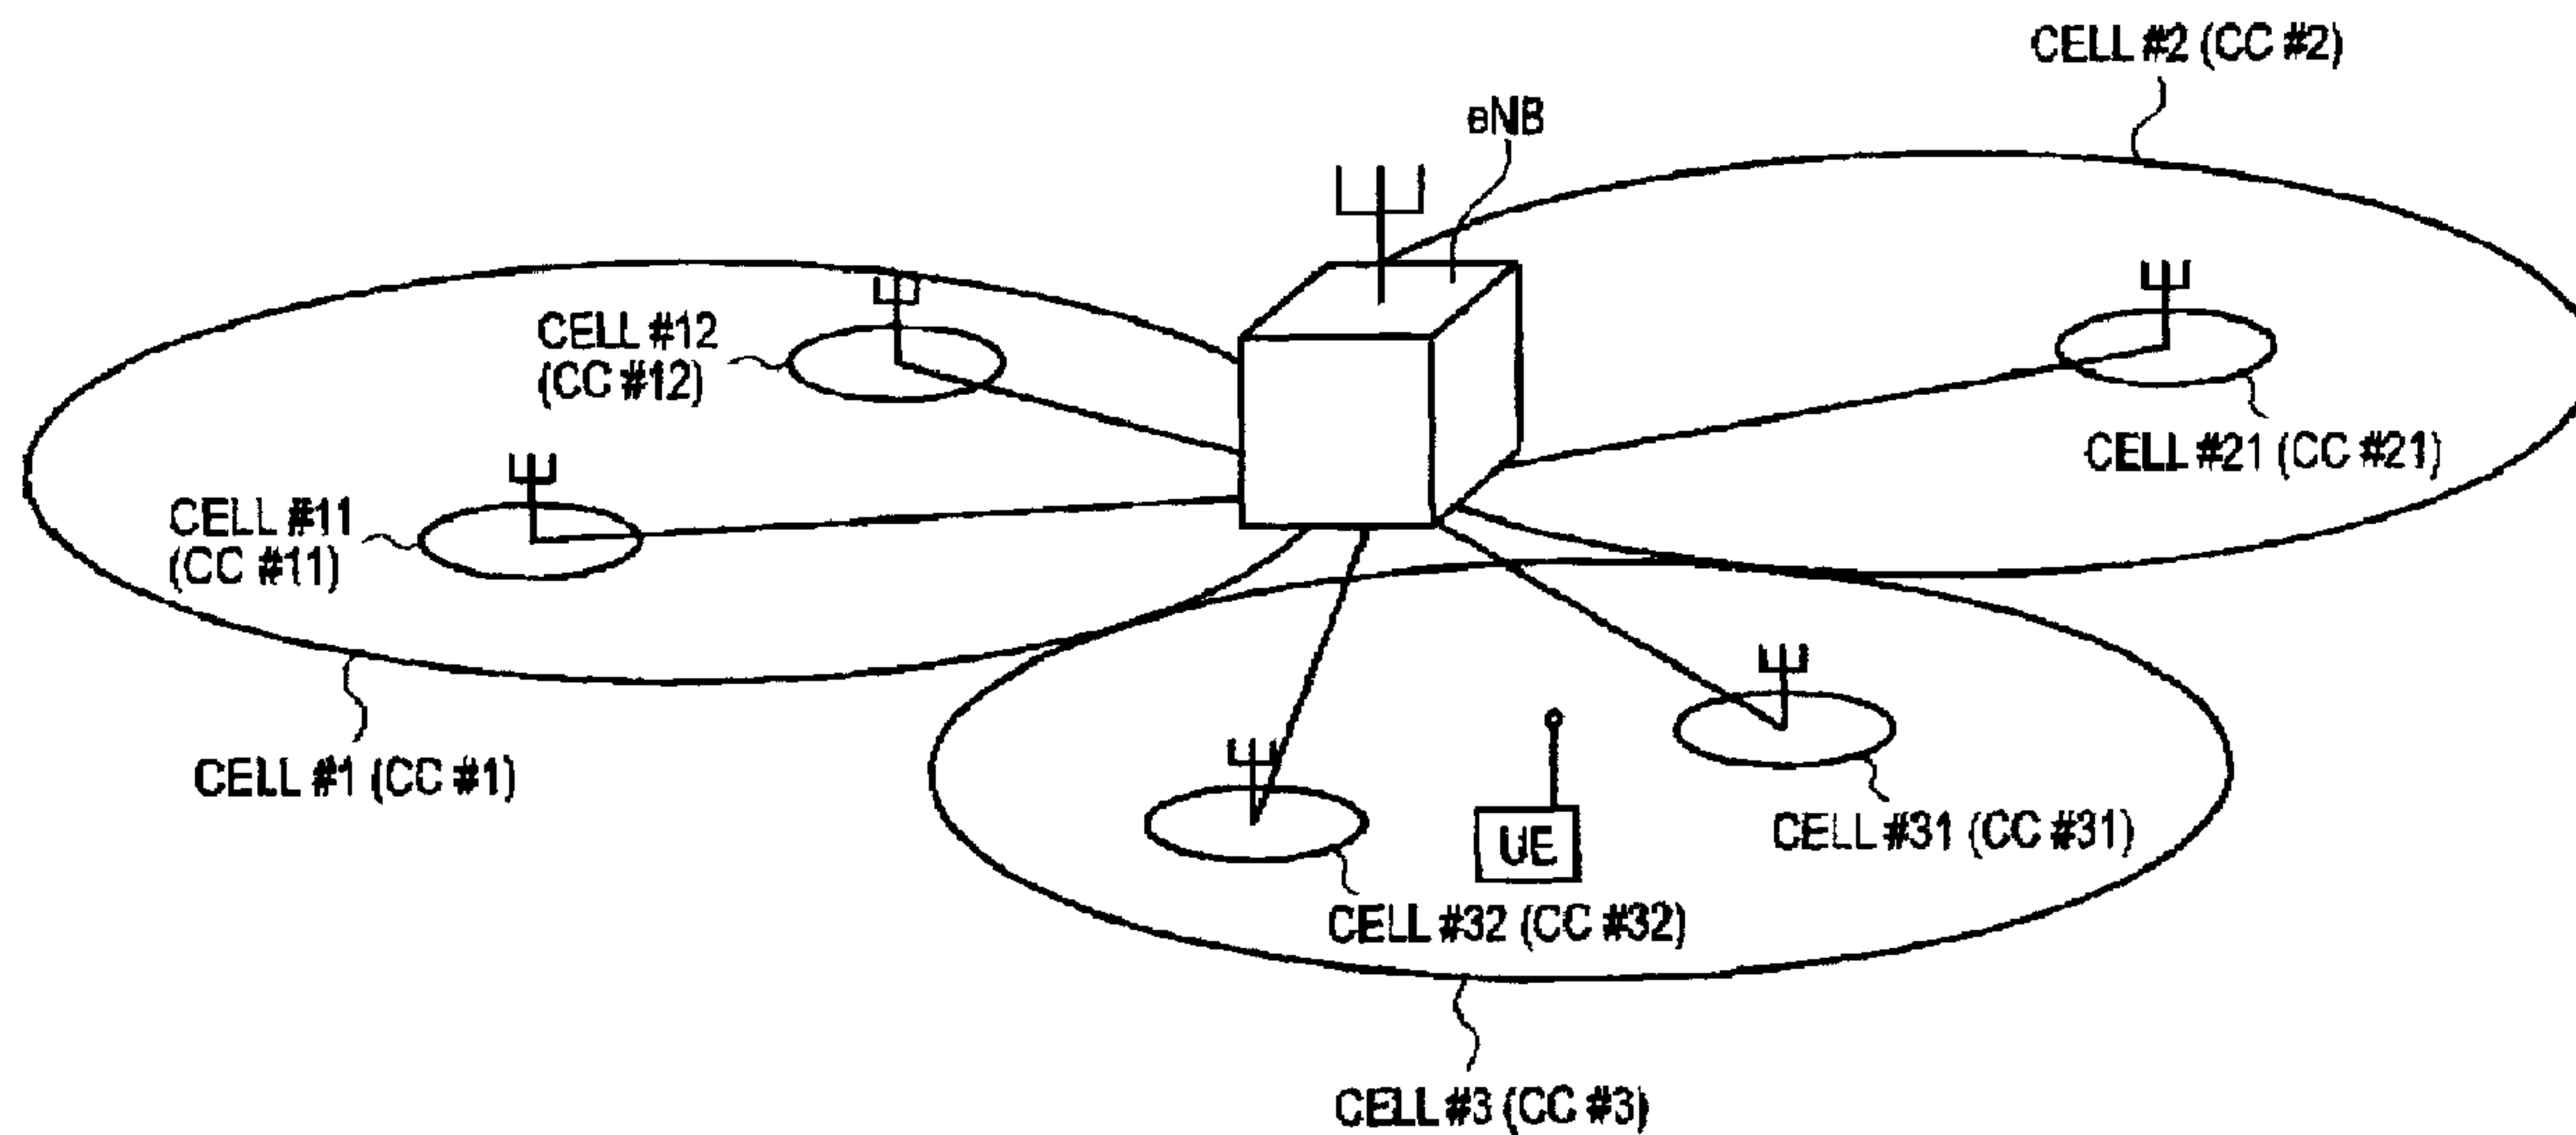

(57) Abrégé/Abstract:

The present invention relates to a mobile communication method, in which a mobile station UE transmits uplink signals to a radio base station eNB using a plurality of "Component Carriers" having different carrier frequencies, includes a step A of transmitting, by the radio base station eNB, TA to be applied to the plurality of "Component Carriers", to the mobile station UE, and a step B of adjusting, by the mobile station UE, transmission timings of the uplink signals on the plurality of "Component Carriers" based on the received TA.

## [ABSTRACT]

The present invention relates to a mobile communication method, in which a mobile station UE transmits uplink signals to a radio base station eNB using a plurality of “Component Carriers” having different carrier frequencies, includes a step A of transmitting, by the radio base station eNB, TA to be applied to the plurality of “Component Carriers”, to the mobile station UE, and a step B of adjusting, by the mobile station UE, transmission timings of the uplink signals on the plurality of “Component Carriers” based on the received TA.

JNTTD-804-PCT

1

**[DESCRIPTION]****[Title of Invention]****MOBILE COMMUNICATION METHOD, RADIO BASE STATION,  
AND MOBILE STATION**

5

**[Technical Field]**

[0001] The present invention relates to a mobile communication method, a radio base station, and a mobile station.

10 **[Background Art]**

[0002] In an LTE (Long Term Evolution)-Advanced scheme for which the 3GPP is developing its use, "CA (Carrier Aggregation)" has been discussed.

15 [0003] When the CA is being performed in a mobile station UE, the mobile station UE is configured to transmit an uplink signal to a radio base station eNB by using a plurality of "Component Carriers (CCs)" having different carrier frequencies.

20 **[Summary of Invention]****[Technical Problem]**

[0004] However, a problem was that as shown in Fig. 1, when CA is performed in a mobile station UE by using "Component Carriers (for example, CC #1 and CC #11)" in cells having a different coverage (for  
25 example, a cell #1 and a cell #11), and as shown in Fig. 2, when CA is performed in a mobile station UE by using a "Component Carrier (for example, CC #1)" in a cell #1 in which a repeater is not used, and a "Component Carrier (for example, CC #2)" in a cell #2 in which a  
30 repeater #2 is used, the reception timing of an uplink signal in the radio base station eNB varies immensely in each "Component Carrier".

[0005] Therefore, the present invention has been achieved in view of the above problem, and an object thereof is to provide a mobile communication method, a radio base station, and a mobile station by  
35 which the reception timing of an uplink signal in a radio base station

JNTTD-804-PCT

2

eNB can be maintained within a constant range even when CA is performed.

[Solution to Problem]

5 [0006] A first characteristic of the present embodiment is summarized in that a mobile communication method, in which a mobile station transmits uplink signals to a radio base station using a plurality of carriers having different carrier frequencies, the method comprising, a step A of transmitting, by the radio base station, transmission timing  
10 adjustment information to be applied to the plurality of carriers, to the mobile station, and a step B of adjusting, by the mobile station, transmission timings of the uplink signals on the plurality of carriers based on the received transmission timing adjustment information.

15 [0007] A second characteristic of the present embodiment is summarized in that a radio base station, which is configured to receive uplink signals transmitted using a plurality of carriers having different carrier frequencies from a mobile station, comprising, a transmission unit configured to transmit transmission timing  
20 adjustment information to be applied to the plurality of carriers to the mobile station.

[0008] A third characteristic of the present embodiment is summarized in that a mobile station, which is configured to transmit uplink signals  
25 to a radio base station using a plurality of carriers having different carrier frequencies, comprising, a reception unit configured to receive transmission timing adjustment information to be applied to the plurality of carriers from the radio base station, and a transmission unit configured to adjust transmission timings of the uplink signals on  
30 the plurality of carriers based on the received transmission timing adjustment information.

[Advantageous Effects of Invention]

[0009] As described above, according to the present invention, it is  
35 possible to provide a mobile communication method, a radio base

station, and a mobile station by which the reception timing of an uplink signal in a radio base station eNB can be maintained within a constant range even when CA is performed.

5 [Brief Description of Drawings]

[0010] [Fig. 1] Fig. 1 is a diagram showing the entire configuration of a mobile communication system according to a first embodiment of the present invention.

10 [Fig. 2] Fig. 2 is a diagram illustrating the entire configuration of the mobile communication system according to the first embodiment of the present invention.

[Fig. 3] Fig. 3 is a functional block diagram of a radio base station according to the first embodiment of the present invention.

15 [Fig. 4] Fig. 4 is a functional block diagram of a mobile station according to the first embodiment of the present invention.

[Fig. 5] Fig. 5 is a diagram explaining a transmission timing of an uplink signal by the mobile station according to the first embodiment of the present invention.

20 [Description of Embodiments]

[0011] (Mobile communication system according to first embodiment of the present invention)

25 With reference to Fig. 1 to Fig. 5, the configuration of a mobile communication system according to a first embodiment of the present invention will be described.

[0012] The mobile communication system according to the present embodiment is a mobile communication system of the LTE-Advanced scheme, and is configured to enable CA by a mobile station UE.

30

[0013] For example, the mobile communication system according to the present embodiment may have a configuration as shown in Fig. 1, or a configuration as shown in Fig. 2, or any other configuration.

35 [0014] In the configuration shown in Fig. 1, a cell #1, a cell #2, and a

JNTTD-804-PCT

4

cell #3 are provided as macro cells, and a cell #11, a cell #12, a cell #21, a cell #31, and a cell #32 are provided as flared cells subordinate to a radio base station eNB.

- 5 [0015] In this case, the cell #11 and the cell #12 are provided within the coverage of the cell #1, the cell #21 is provided within the coverage of the cell #2, and the cell #31 and the cell #32 are provided within the coverage of the cell #3.
- 10 [0016] Furthermore, CC (Component Carrier) #1 is used in the cell #1, CC #2 is used in the cell #2, CC #3 is used in the cell #3, CC #11 is used in the cell #11, CC #12 is used in the cell #12, CC #21 is used in the cell #21, CC #31 is used in the cell #31, and CC #32 is used in the cell #32.
- 15 [0017] For example, the CC #1, the CC#2, and the CC #3 are "Component Carriers" having a carrier frequency in the 2-GHz band, and the CC#11, the CC #12, the CC #21, the CC #31, and the CC #32 may be "Component Carriers" having a carrier frequency in the 3.5-GHz band.
- 20 [0018] For example, the bandwidth of the "Component Carriers" may be any one of 6 RB (Resource Blocks), 15 RB, 25 RB, 50 RB, 75 RB, or 100 RB. Note that 1 RB equals 180 kHz.
- 25 [0019] Furthermore, in the configuration illustrated in Fig. 2, a cell #1 and a cell #2 are provided as macro cells subordinate to the radio base station eNB. The CC #1 is used in the cell #1, and the CC #2 is used in the cell #2.
- 30 [0020] For example, both the CC #1 and the CC #2 may be "Component Carriers" having a carrier frequency in the 2-GHz band (or 3.5-GHz band). Alternatively, the CC #1 may be a "Component Carrier" having a carrier frequency in the 2-GHz band (or 3.5-GHz band), and the CC #2 may be a "Component Carrier" having a carrier frequency in the
- 35 3.5-GHz band (or 2-GHz band).

[0021] In this case, a repeater (that is, booster) is not installed in the cell #1, and a repeater #2 is installed in the cell #2.

5 [0022] As illustrated in Fig. 3, the radio base station eNB includes a reception unit 11, a transmission unit 12, a TA management unit 13, and a CA control unit 14.

10 [0023] The reception unit 11 is configured to receive an uplink data signal or an uplink control signal, which have been transmitted through PUSCH (Physical Uplink Shared Channel) on a plurality of "Component Carriers" having different carrier frequencies, from a mobile station UE.

15 [0024] The CA control unit 14 is configured to manage whether each mobile station UE performs CA.

[0025] The TA management unit 13 is configured to assign and manage TA (Timing Advance, transmission timing adjustment information) that should be applied to each CC used in each mobile station UE in which CA is performed.

20 [0026] In this case, the TA management unit 13 may be configured to assign the same TA to a plurality of "Component Carriers" processed by the same receiver (IFFT: Inverse Fast Fourier Transform; inverse Fourier transformer) within each mobile station UE in which CA is performed.

30 [0027] That is, the TA management unit 13 may be configured to assign only a single TA to a mobile station UE in which only "contiguous CA" is performed. In this case, the "contiguous CA" is CA processed by a single receiver (IFFT).

35 [0028] In "Component Carriers" processed by the same receiver (IFFT), if separate TAs are used, the orthogonality among the OFDM

subcarriers spanning the "Component Carriers" is no longer maintained, and therefore, the same TA must be used. Therefore, the above configuration is achieved.

- 5 [0029] On the other hand, the TA management unit 13 may be configured to assign different TAs to a plurality of "Component Carriers" processed by different receivers (IFFT) within each mobile station UE in which CA is performed.
- 10 [0030] That is, the TA management unit 13 is configured to independently assign TA to each of the plurality of "Component Carriers" for which a "non-contiguous CA" is to be performed, in a mobile station UE in which the "non-contiguous CA" is performed. In this case, the "non-contiguous CA" is CA processed by a plurality of  
15 receivers (IFFT).
- [0031] The transmission unit 12 is configured to transmit the TA assigned to each of the plurality of "Component Carriers", to the mobile station UE in which CA is performed.
- 20 [0032] Furthermore, the transmission unit 12 may be configured to transmit the aforementioned TA to the mobile station UE in which CA is performed using "CE (Control Element)" in a "MAC (Media Access Control) layer".
- 25 [0033] The transmission unit 12 may be configured to transmit the aforementioned TA to the mobile station UE in which CA is performed, via an "Anchor Carrier".
- 30 [0034] In this case, an Anchor Carrier may be defined as a carrier, from among a plurality of "Component Carriers", to which a PDCCH (Physical Downlink Control Channel) signal is transmitted, or a carrier to which a PHICH (Physical HARQ Indicator Channel) signal is transmitted, or a carrier to which a downlink signal, in which a  
35 "Semi-persistent Scheduling" has been applied, is transmitted, or a



carrier to which a PHICH signal corresponding to a PUSCH signal (uplink data signal), in which a "Semi-persistent Scheduling" has been applied, is transmitted, or a carrier to which a paging signal is transmitted, or a carrier to which a DCCH (Dedicated Control Channel) signal is transmitted, or else a carrier for which measurement (Measurement) is performed. Alternatively, the Anchor Carrier may be defined by a combination of the aforementioned definitions.

10 [0035] The aforementioned DCCH signal may include a "Measurement Report (measurement report)", a "Handover Command (handover command signal)", or a "Handover Complete (handover complete signal)".

15 [0036] Furthermore, the "Anchor Carrier" may be called the "Main Carrier".

[0037] The transmission unit 12 may be configured to transmit the aforementioned TA to the mobile station UE in which CA is performed, via any carrier other than the Anchor Carrier.

[0038] Furthermore, the transmission unit 12 may be configured to specify a carrier for transmitting the aforementioned TA, by an individual control signal or a broadcast signal.

25 [0039] As illustrated in Fig. 4, the mobile station UE includes a TA reception unit 21 and a transmission unit 22.

[0040] The TA reception unit 21 is configured to receive TA, which is to be applied to each of a plurality of "Component Carriers", from the radio base station eNB.

[0041] The TA reception unit 21 may be configured to extract the aforementioned TA from a received "Control Element" which indicates a "TA Command" in the "MAC layer".

35

- [0042] Furthermore, the TA reception unit 21 may also be configured to receive the aforementioned TA through the anchor carrier.
- 5 [0043] The transmission unit 22 is configured to transmit an uplink data signal or an uplink control signal to the radio base station eNB through PUSCH or PUCCH on a plurality of "Component Carriers" having different carrier frequencies.
- 10 [0044] Here, the transmission unit 22 is configured to adjust the transmission timing of the uplink signal in each of the plurality of "Component Carriers", based on the TA received by the TA reception unit 21.
- 15 [0045] Note that the transmission unit 22 may adjust the transmission timing of the uplink signal in each of the plurality of "Component Carriers" processed by the same receiver (IFFT) within the mobile station UE, such that the transmission timing becomes the same.
- 20 [0046] That is, when the "contiguous CA" is performed in the mobile station UE, the transmission unit 22 may adjust the transmission timing of the uplink signal in each of the plurality of "Component Carriers", such that the transmission timing becomes the same.
- 25 [0047] On the other hand, the transmission unit 22 may adjust the transmission timing of the uplink signal in each of the plurality of "Component Carriers" processed by different receivers (IFFT) within the mobile station UE, such that the transmission timing is different.
- 30 [0048] That is, when the "non-Contiguous CA" is performed in the mobile station UE, the transmission unit 22 may adjust the transmission timing of the uplink signal in each of the plurality of "Component Carriers", such that the transmission timing is different.
- 35 [0049] Specifically, as illustrated in Fig. 5, the transmission unit 22 is

configured to transmit the uplink signal at a time point earlier, by as much as a time designated by the TA, than a reference time point T in each subframe.

5 [0050] Furthermore, from among a plurality of "Component Carriers" having different carrier frequencies by which CA is performed, which "Component Carriers" correspond to the "contiguous CA", and which "Component Carriers" correspond to the "non-contiguous CA" may be indicated by the radio base station eNB.

10

[0051] In other words, it is possible for the radio base station eNB to set a group of "Component Carriers", which are regarded as the "contiguous CA", to the mobile station UE. Then, it is possible for the radio base station eNB to assign identification numbers by each group and to designate TA different depending on the group based on the  
15 identification number.

[0052] Furthermore, even when the "non-contiguous CA" is performed, it may be possible to apply the same TA in a certain operation mode.

20

[0053] Consequently, it is possible for the radio base station eNB to set a group of "Component Carriers", to which the same TA is applied, to the mobile station UE, to assign the identification number by each group, and to designate the TA different depending on the group based  
25 on the identification number.

[0054] Here, the TA reception unit 21 may also be configured to extract the aforementioned TA and the identification number of the group, to which the TA should be applied, from the received "Control Element"  
30 which instructs the "TA Command" in the "MAC layer".

[0055] In accordance with the mobile communication system according to the first embodiment of the present invention, since it is possible to assign the TA to each CC used in the mobile station UE in which the  
35 CA is performed, even when the CA is performed, the reception timing

JNTTD-804-PCT

10

of the uplink signal in the radio base station eNB can be kept in a constant range.

5 [0056] Furthermore, in accordance with the mobile communication system according to the first embodiment of the present invention, only one TA is assigned to the mobile station UE in which only the "contiguous CA" is performed, so that it is possible to avoid the transmission of redundant TA.

10 [0057] Furthermore, in accordance with the mobile communication system according to the first embodiment of the present invention, "Component Carriers", to which the same TA can be applied, are grouped and only one TA is assigned to the group, so that it is possible to avoid the transmission of redundant TA.

15

[0058] The characteristics of the present embodiment as described above may be expressed as follows:

20 [0059] A first characteristic of the present embodiment is summarized in that a mobile communication method, in which a mobile station UE in which CA is performed transmits uplink signals to a radio base station eNB using a plurality of "Component Carriers" (for example, CC #1, CC #2, CC #3, CC #11, CC #12, CC #21, CC #31, CC #32 and the like) having different carrier frequencies, includes: a step A of  
25 transmitting to the mobile station UE, by the radio base station eNB, TA (transmission timing adjustment information) to be applied to the plurality of "Component Carriers"; and a step B of adjusting, by the mobile station UE, transmission timings of the uplink signals on the plurality of "Component Carriers" based on the received TA.

30

[0060] In the first characteristic of the present embodiment, in the step A, the radio base station eNB may transmit the same TA to a plurality of "Component Carriers" processed by the same receiver (IFFT) in the mobile station UE.

35

[0061] In the first characteristic of the present embodiment, in the step A, the radio base station eNB may transmit different TAs to a plurality of "Component Carriers" processed by different receivers (IFFTs) in the mobile station UE.

5

[0062] In the first characteristic of the present embodiment, in the step A, the radio base station eNB may transmit identification information of a group of "Component Carriers", to which the same TA should be applied, and the same TA to the mobile station UE.

10

[0063] A second characteristic of the present embodiment is summarized in that a radio base station eNB, which is configured to receive uplink transmitted using a plurality of "Component Carriers" having different carrier frequencies from a mobile station UE, includes: a transmission unit 12 configured to transmit TA to be applied to the plurality of "Component Carriers" to the mobile station UE.

[0064] In the second characteristic of the present embodiment, the transmission unit 12 may be configured to transmit the same TA to a plurality of "Component Carriers" processed by the same receiver in the mobile station UE.

[0065] In the second characteristic of the present embodiment, the transmission unit 12 may be configured to transmit different TAs to a plurality of "Component Carriers" processed by different receivers in the mobile station UE.

[0066] In the second characteristic of the present embodiment, the transmission unit 12 may be configured to transmit identification information of a group of "Component Carriers", to which the same TA should be applied, and the same TA to the mobile station UE.

[0067] A third characteristic of the present embodiment is summarized in that a mobile station UE, which is configured to transmit uplink

35

signals to a radio base station eNB using a plurality of "Component Carriers" having different carrier frequencies, includes: a TA reception unit 21 configured to receive TA to be applied to the plurality of "Component Carriers" from the radio base station eNB; and a  
5 transmission unit 22 configured to adjust transmission timings of the uplink signals on the plurality of "Component Carriers" based on the TA received in the TA reception unit 21.

[0068] In the third characteristic of the present embodiment, the TA  
10 reception unit 21 may be configured to receive, for a plurality of "Component Carriers" processed by the same receiver in the mobile station UE, the same TA.

[0069] In the third characteristic of the present embodiment, the TA  
15 reception unit 21 may be configured to receive, for a plurality of "Component Carriers" processed by different receivers in the mobile station UE, different TAs.

[0070] It is noted that the operation of the above-described the radio  
20 base station eNB or the mobile station UE may be implemented by a hardware, may also be implemented by a software module executed by a processor, and may further be implemented by the combination of the both.

[0071] The software module may be arranged in a storage medium of  
25 an arbitrary format such as RAM(Random Access Memory), a flash memory, ROM (Read Only Memory), EPROM (Erasable Programmable ROM), EEPROM (Electrically Erasable and Programmable ROM), a register, a hard disk, a removable disk, and CD-ROM.

[0072] The storage medium is connected to the processor so that the  
30 processor can write and read information into and from the storage medium. Such a storage medium may also be accumulated in the processor. The storage medium and processor may be arranged in  
35 ASIC. Such the ASIC may be arranged in the radio base station eNB

JNTTD-804-PCT

13

or the mobile station UE. Further, such a storage medium or a processor may be arranged, as a discrete component, in the radio base station eNB or the mobile station UE.

5 [0073] Thus, the present invention has been explained in detail by  
using the above-described embodiments; however, it is obvious that for  
persons skilled in the art, the present invention is not limited to the  
embodiments explained herein. The present invention can be  
implemented as a corrected and modified mode without departing from  
10 the gist and the scope of the present invention defined by the claims.  
Therefore, the description of the specification is intended for  
explaining the example only and does not impose any limited meaning  
to the present invention.

**WHAT IS CLAIMED IS:**

[Claim 1]

A mobile communication method, in which a mobile station  
5 transmits uplink signals to a radio base station using a plurality of  
carriers having different carrier frequencies, the method comprising:

a step of assigning, by the radio base station, identification  
information to each group of the plurality of carriers;

a step of transmitting, by the radio base station, Control Element in  
10 a MAC layer designating transmission timing adjustment information with  
the identification information, to the mobile station; and

a step of adjusting, by the mobile station, a transmission timing of  
the uplink signals in the plurality of carriers based on the transmission  
timing adjustment information designated by the identification  
15 information, the identification information being extracted from the  
received Control Element.

[Claim 2]

A radio base station, configured to:

20 receive uplink signals transmitted using a plurality of carriers  
having different carrier frequencies from a mobile station,

assign identification information to each group of the plurality of  
carriers, and

transmit, to the mobile station, Control Element in a MAC layer  
25 designating transmission timing adjustment information with the  
identification information,



wherein the mobile station adjusts a transmission timing of the uplink signals in the plurality of carriers based on the transmission timing adjustment information designated by the identification information, and the identification information is extracted from the received Control  
5 Element.

[Claim 3]

A mobile station, configured to transmit uplink signals to a radio base station using a plurality of carriers having different carrier  
10 frequencies, the mobile station comprising:

a reception unit configured to receive Control Element in a MAC layer from the radio base station; and

a transmission unit configured to adjust transmission timings of the uplink signals in the plurality of carriers based on transmission timing  
15 adjustment information designated by identification information, the identification information being extracted from the received Control Element,

wherein the identification information is assigned to each group of the plurality of carriers by the radio base station.

FIG. 1


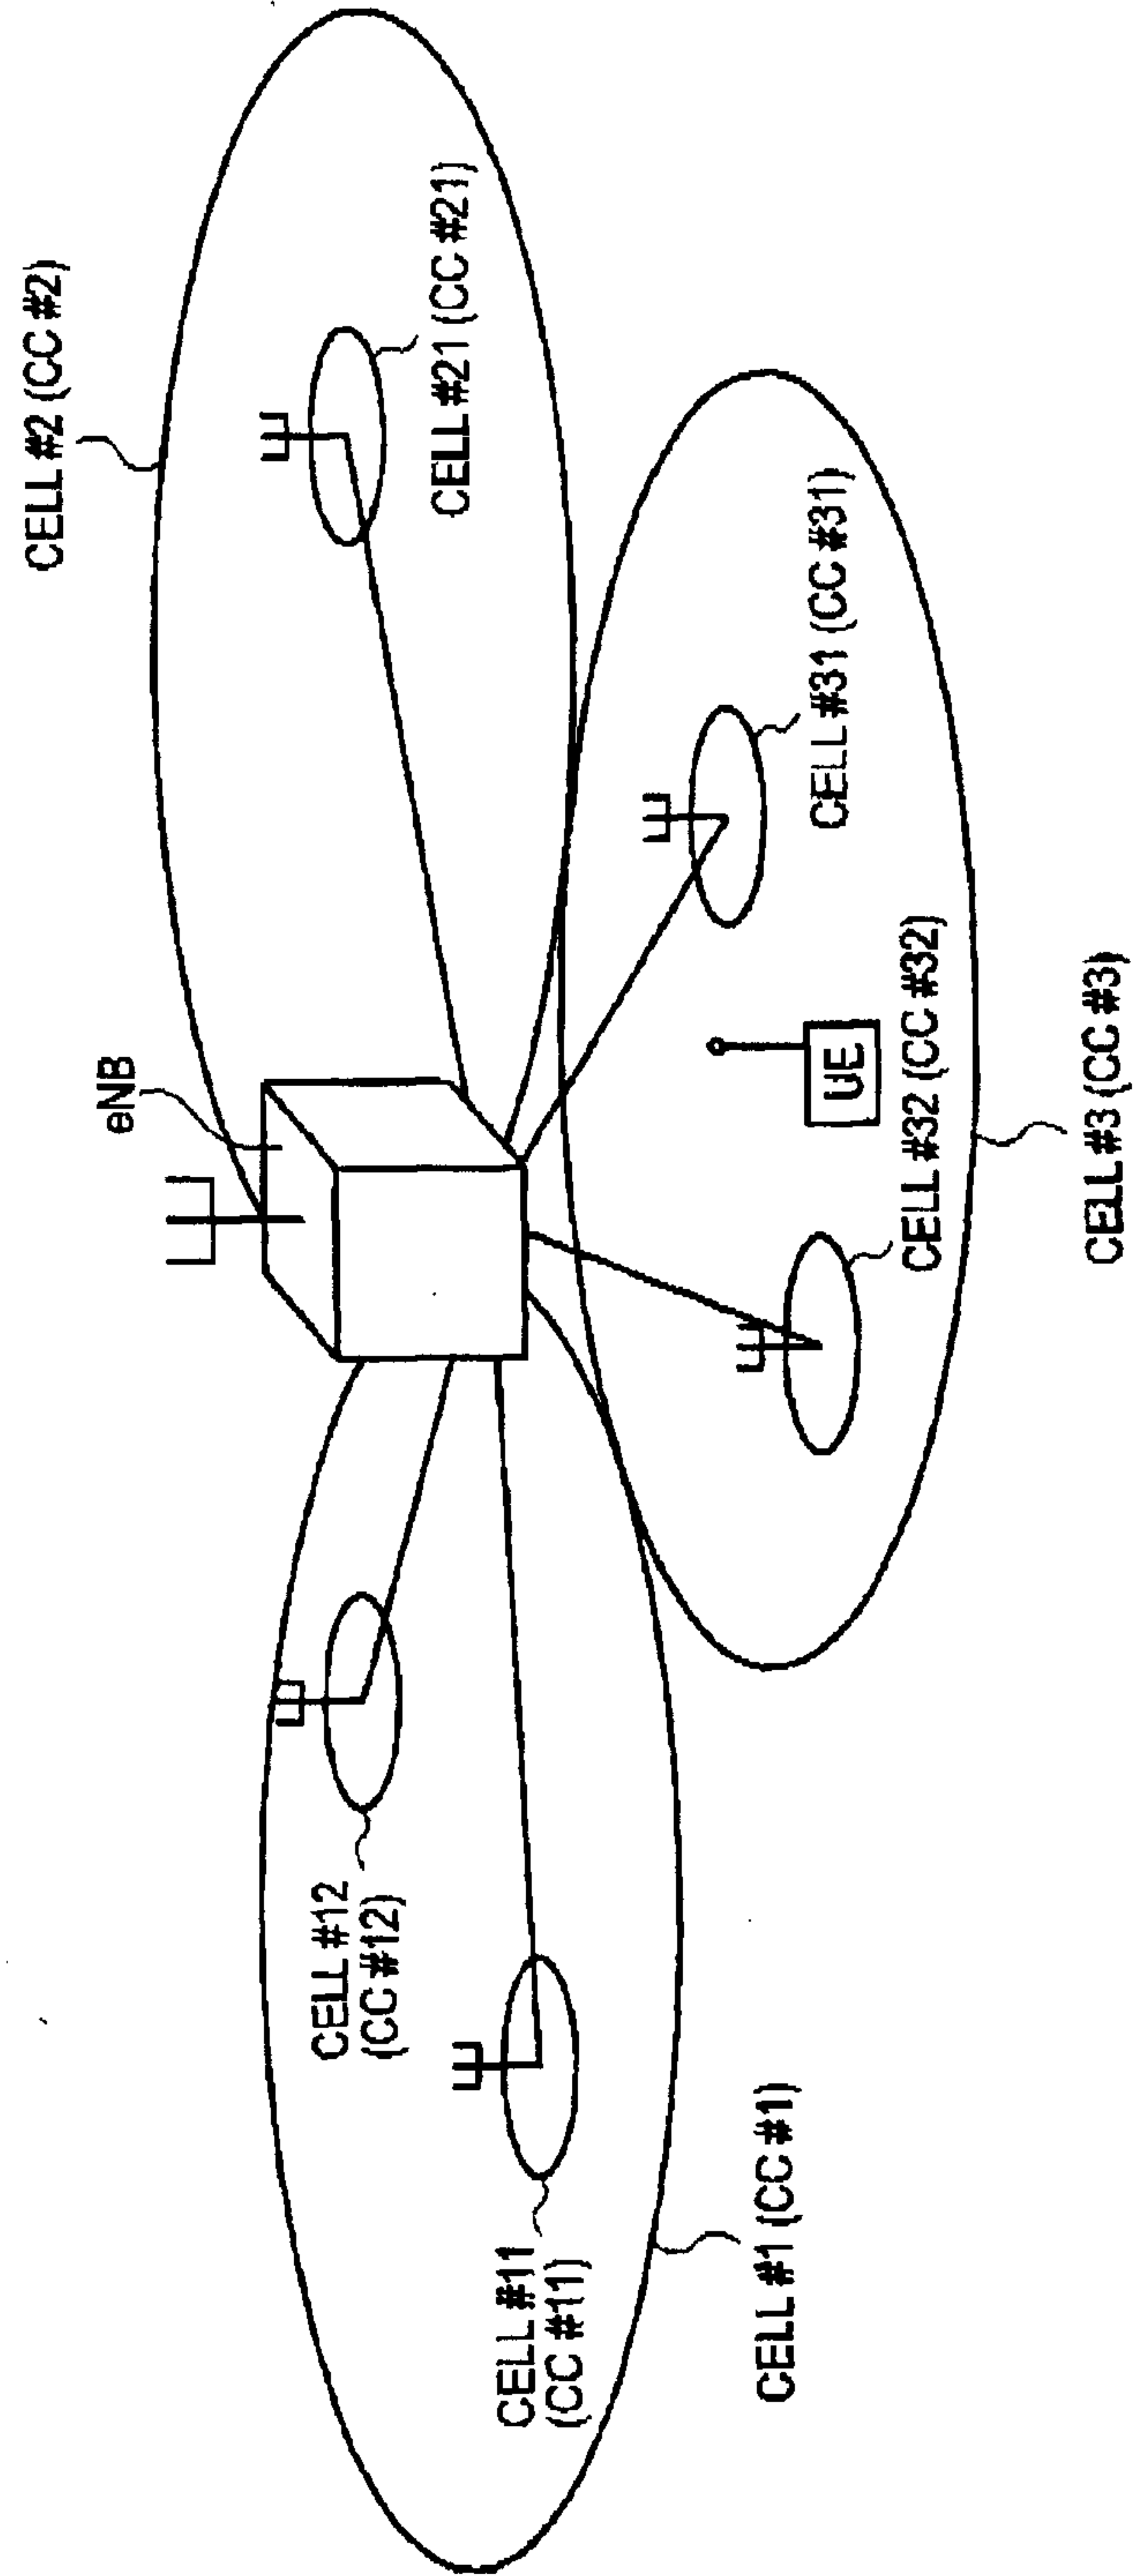



FIG. 2

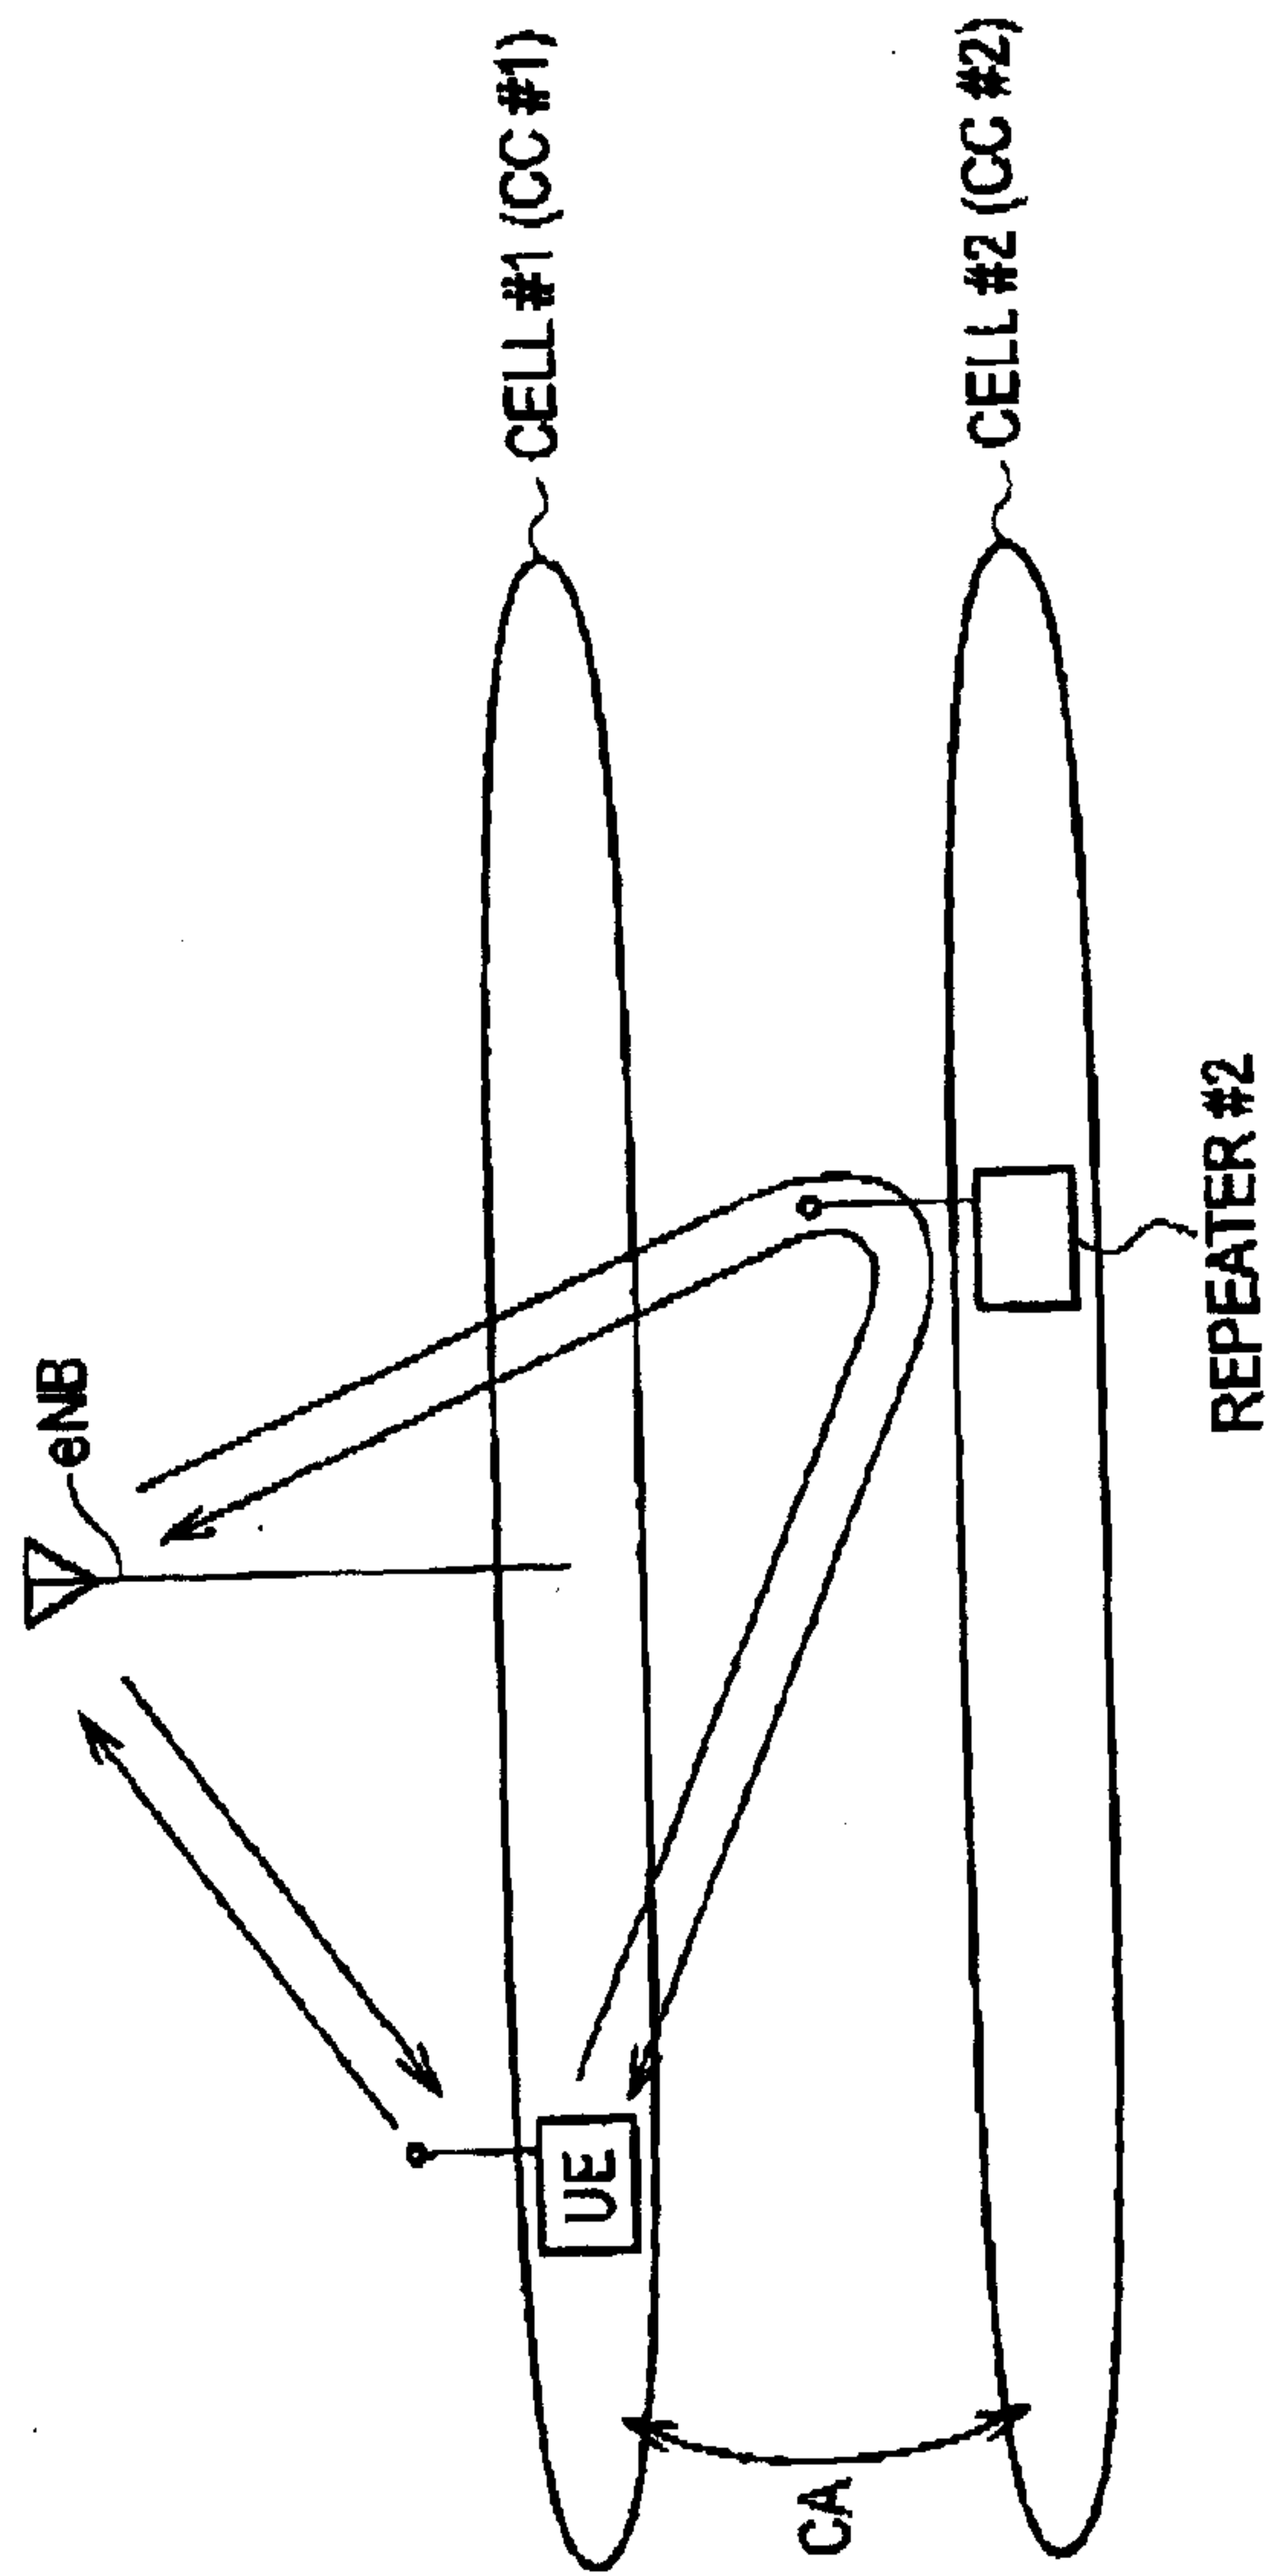

JNTTD-804-PCT

3/5


FIG. 3

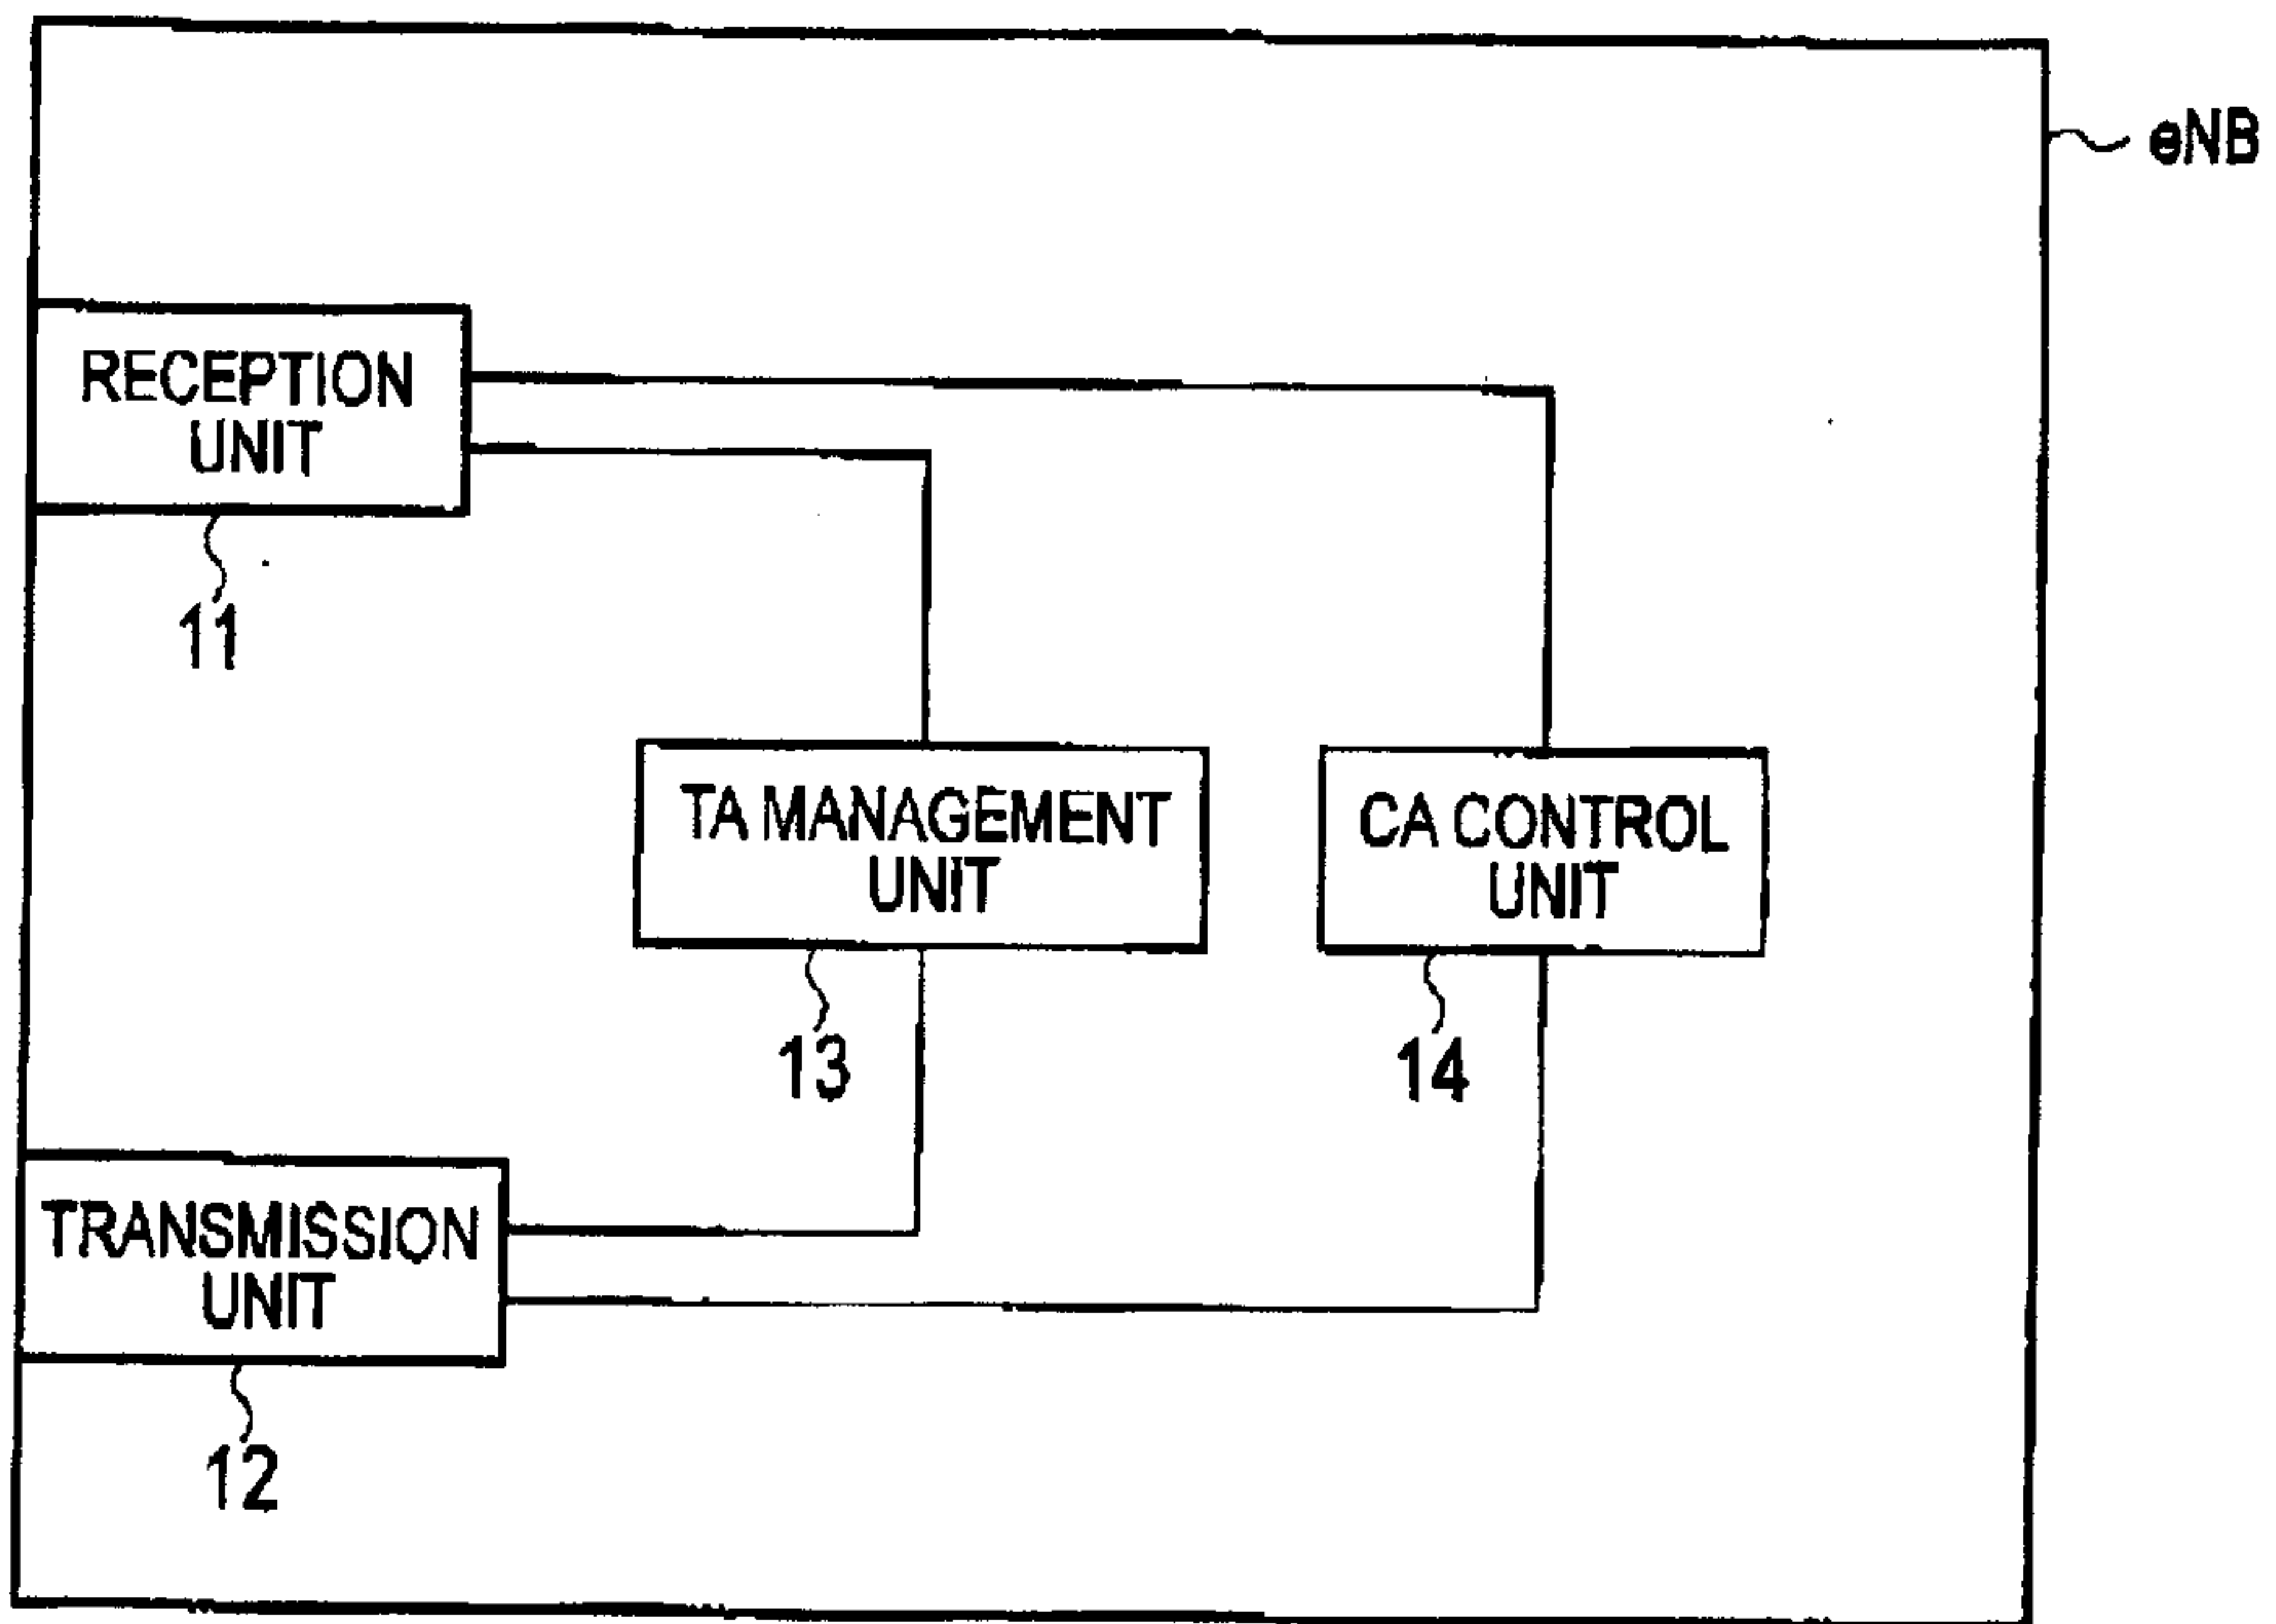

JNTTD-804-PCT

4/5

FIG. 4

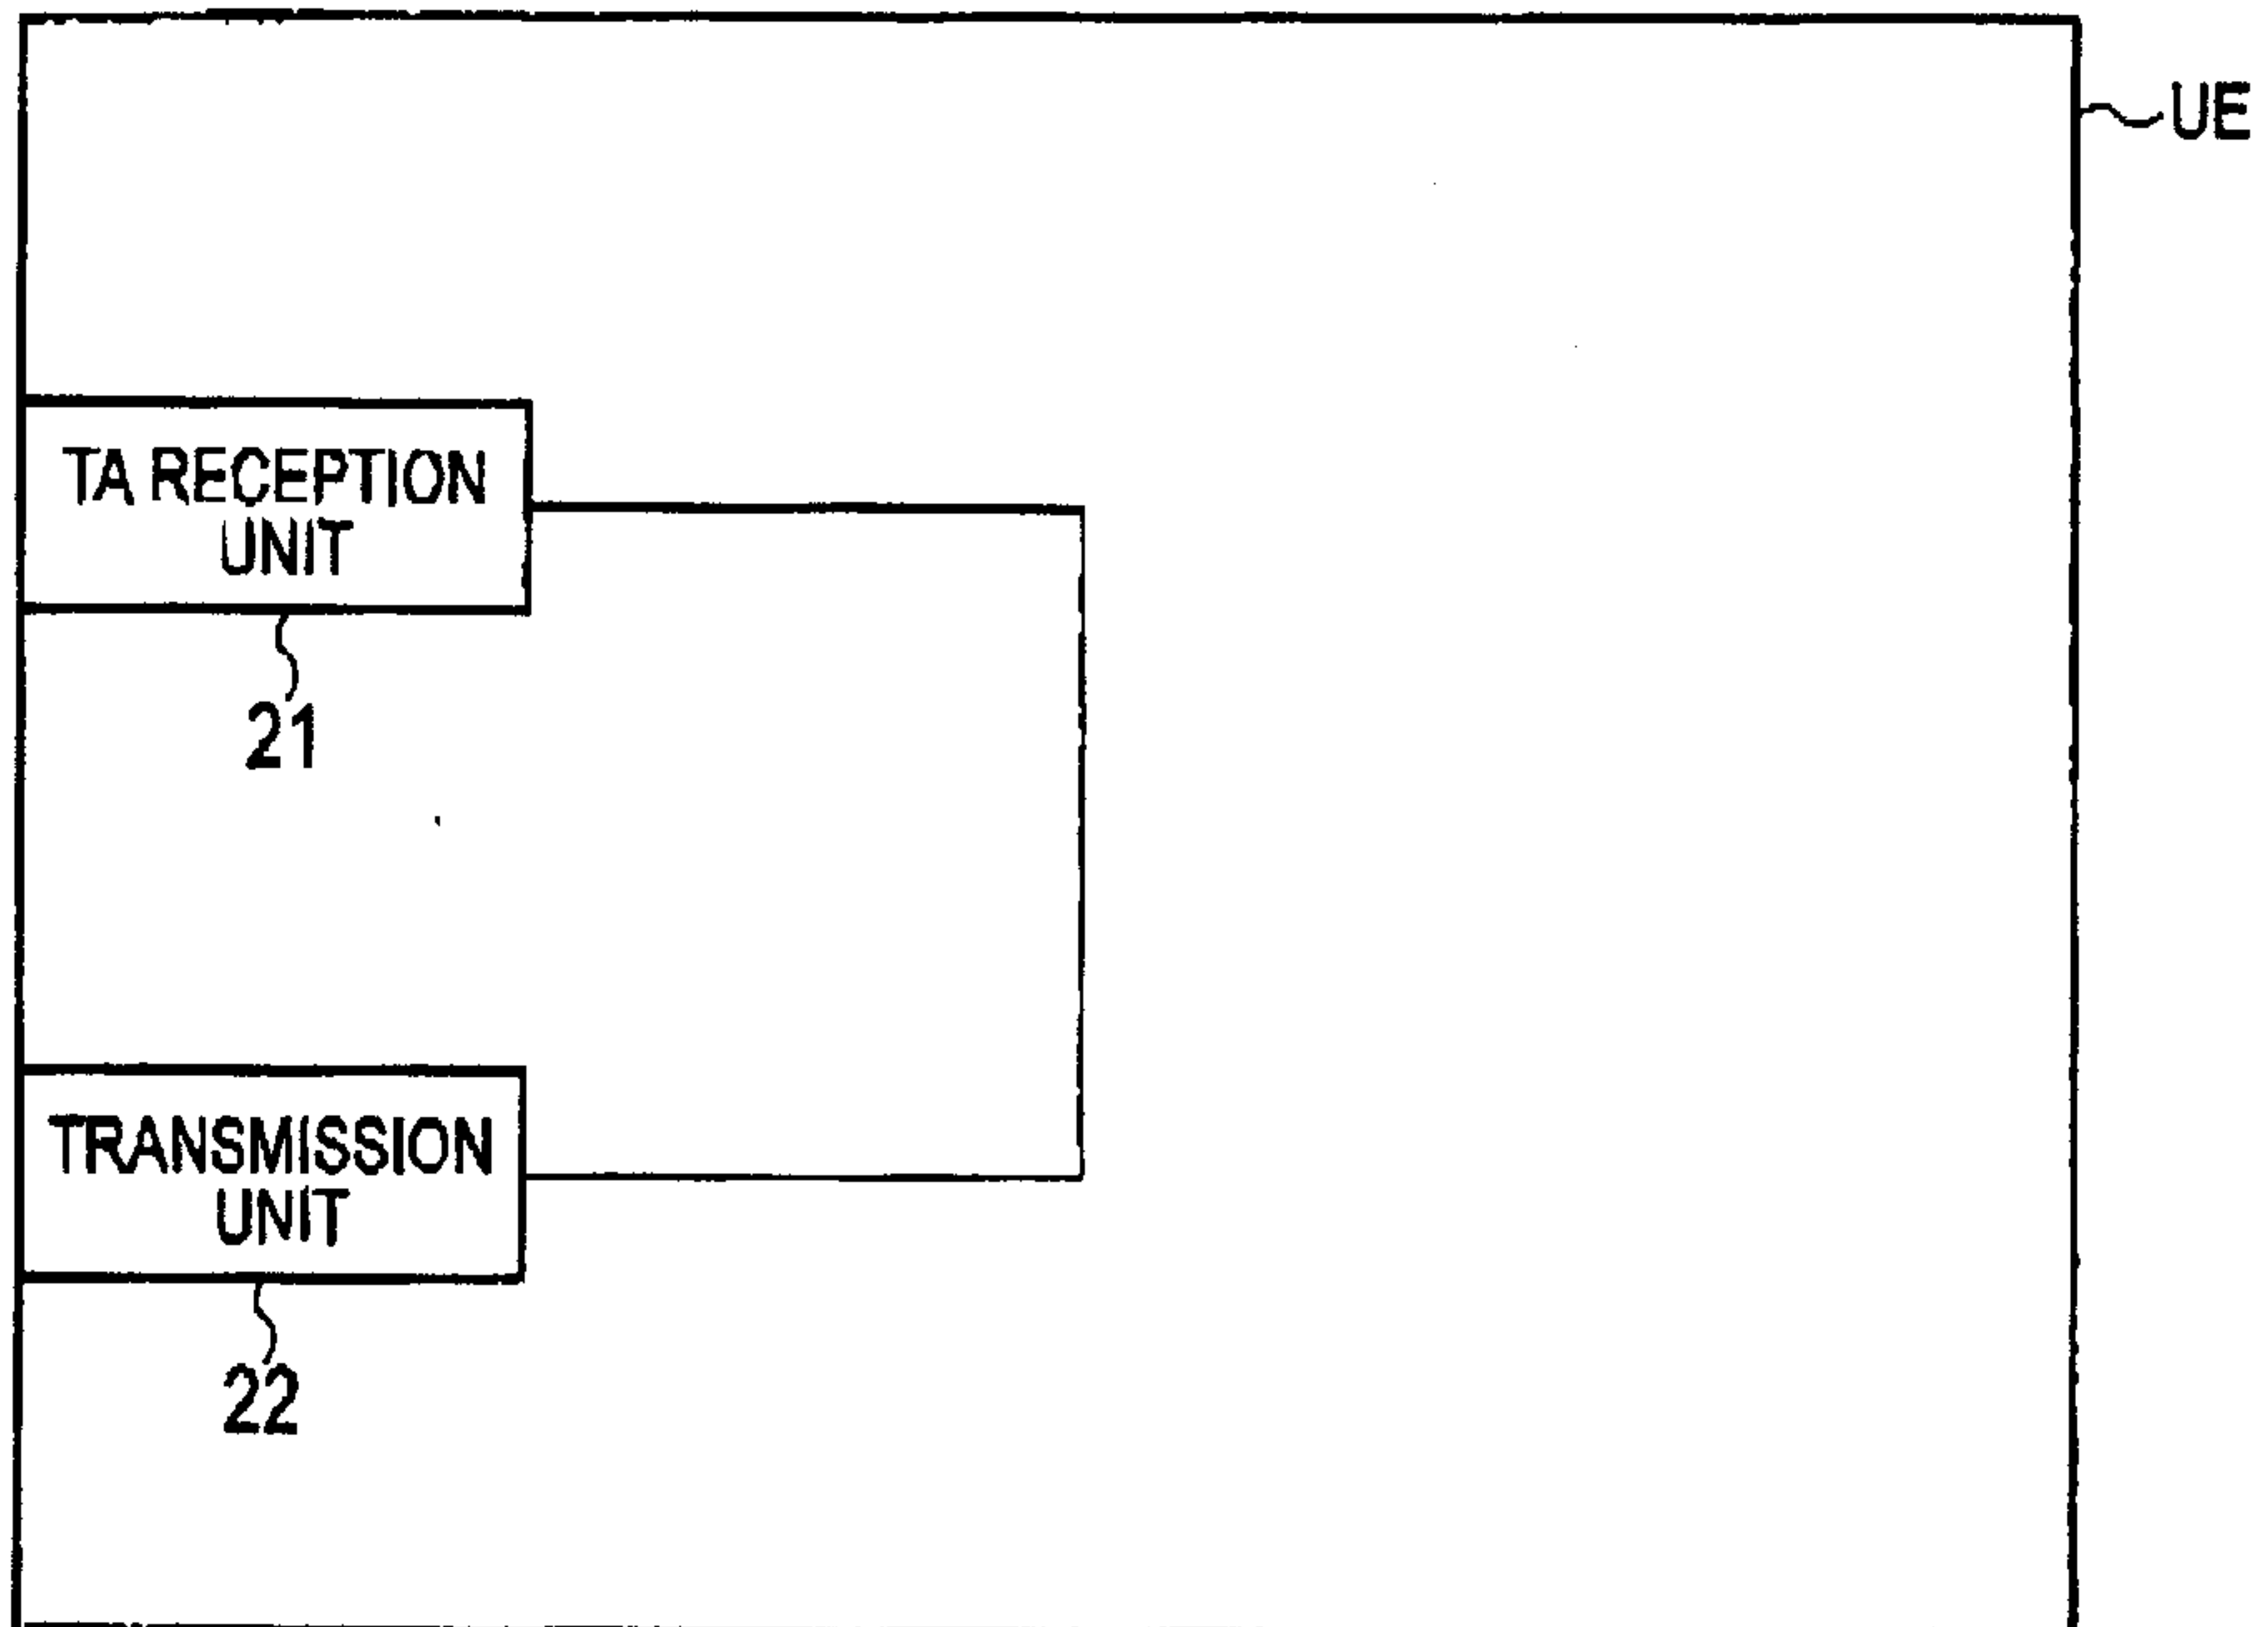

JNTTD-804-PCT

5/5

FIG. 5

