

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 August 2007 (16.08.2007)

PCT

(10) International Publication Number
WO 2007/091282 A1


- (51) **International Patent Classification:**
F16D 65/12 (2006.01)
- (21) **International Application Number:**
PCT/IT2006/000063
- (22) **International Filing Date:** 7 February 2006 (07.02.2006)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** **FRENI BREMBO S.p.A.** [IT/IT]; Via Brembo, 25, I-24035 Curno, Bergamo (IT).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **MOZZATI, Alberto** [IT/IT]; Via Don L. Seghezzi, 17/B, I-24030 Presezzo, Bergamo (IT). **GUASTAMACCHIA, David** [IT/IT]; Via Mantova, 9A, I-20064 Gorgonzola, Milano (IT).
- (74) **Agents:** **CHIMINI, Francesco** et al.; Jacobacci & Partners S.P.A., Piazza Delia Vittoria, 11, I-25122 Brescia (IT).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** BRAKE DISC

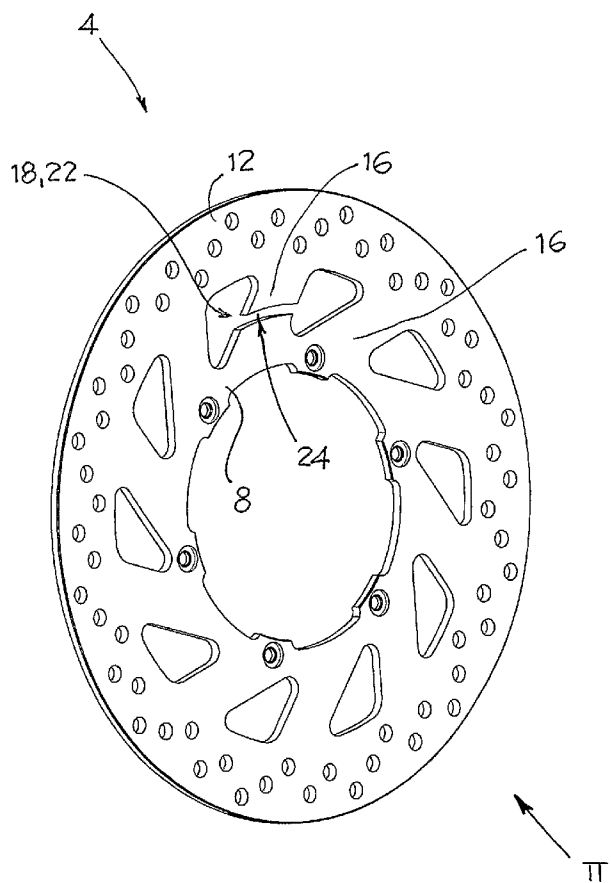

(57) **Abstract:** A brake disc (4) of the type comprising a braking band (12), a connecting portion (8) and connecting spokes (16) made in a single piece. In said disc (4) at least one spoke (16) exhibits an active section reduction (18) that is sufficient to prevent vibrations and whistling during the braking phase. The disc (4), according to the present invention, is not subject to vibrations and possesses a limited gyroscopic effect and mass.

WO 2007/091282 A1



Published:

— *with international search report*

(48) Date of publication of this corrected version:

24 July 2008

(15) Information about Correction:

see Notice of 24 July 2008