

**(12) PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 200050888 B2**  
**(10) Patent No. 777278**

(54) Title  
Delivery system

(51) <sup>6</sup> International Patent Classification(s)  
A61M 015/00

(21) Application No: 200050888

(22) Application Date: 2000.06.05

(87) WIPO No: W000/74754

(30) Priority Data

(31) Number	(32) Date	(33) Country
9913047	1999.06.05	GB
9916283	1999.07.13	GB

(43) Publication Date : 2000.12.28

(43) Publication Journal Date : 2001.03.08

(44) Accepted Journal Date : 2004.10.07

(71) Applicant(s)  
Innovata Biomed Limited

(72) Inventor(s)  
Philip Braithwaite

(74) Agent/Attorney  
Davies Collison Cave, Level 15, 1 Nicholson Street, MELBOURNE VIC  
3000

(56) Related Art  
EP 549605  
WO 1992/000771  
WO 1992/009322

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number  
WO 00/74754 A2

- (51) International Patent Classification: A61M 15/00 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/GB00/02017
- (22) International Filing Date: 5 June 2000 (05.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9913047.8 5 June 1999 (05.06.1999) GB  
9916283.6 13 July 1999 (13.07.1999) GB
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): INNOVATA BIOMED LIMITED [GB/GB]; The Ziggurat, Grosvenor Road, St. Albans AL1 3HW (GB).
- Published:  
*Without international search report and to be republished upon receipt of that report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*
- (72) Inventor; and  
(75) Inventor/Applicant (*for US only*): BRAITHWAITE, Philip [GB/GB]; ML Laboratories Plc, 13 Alexandra Way, Ashchurch Industrial Estate, Tewkesbury GL20 8NB (GB).
- (74) Agent: HARRISON GODDARD FOOTE; Tower House, Merrion Way, Leeds LS2 8PA (GB).



WO 00/74754 A2

(54) Title: DELIVERY SYSTEM

(57) Abstract: There is described a medicament delivery device which comprises a medicament reservoir, a medicament delivery passage and a metering member adapted to transfer a measured dose of medicament from the medicament reservoir to the delivery passage characterised in that the device is provided with a moisture proof barrier. The medicament delivery device is especially suited for use as an inhaler. There is therefore also described an inhaler which provides improved airflow for the dispersion of medicament and a method of treating patients suffering from a respiratory disorder.

### Delivery System

This invention relates to a novel form of medicament delivery system and to novel methods of treatment.

5

In particular the invention provides a medicament delivery device, such as an inhaler, which is adapted to be moisture resistant and/or provides improved air flow through the device.

10 It is well established that delivery devices adapted for the delivery of dry powder medicaments suffer from the problem of contact with moisture. Such problems are particularly when hygroscopic medicaments are used or when climatic conditions give rise to high humidity. Medicament inhalers are known to suffer from such and moisture contamination of dry powder inhalers has long been held to be undesirable  
15 since the dry powder medicament may become clogged, creating problems in delivering correct dosages of medicament. Furthermore, some inhaled medicaments are themselves inherently moisture sensitive. Therefore, there has long been a desire to provide a dry powder inhaler that is resistant to moisture, that is, one that protects a medicament reservoir from moisture contamination either from the environment or  
20 from exhalation by a patient using the device and various attempts have been made to mitigate the problem.

Most attempts which have been made aim to reduce the moisture which comes into contact with a medicament, such attempts generally comprise the use of an additional  
25 chamber containing a desiccant.

International Patent Application No WO 98/41261 describes an inhalation device which includes a chamber for containing a desiccant, e.g. silica gel. Whilst the use of a desiccant gel does remove some moisture, the system is disadvantageous in that,  
30 *inter alia*, the leak paths are too great for the available desiccant to cope with and



PROPERLY FORMED BY THE PATENT OFFICE

- 2a -

Another aspect of the invention provides an inhaler comprising:

a medicament reservoir;

an inhalation passage for the delivery of the medicament; and

a metering member, provided with at least one dispensing cup, adapted to transfer a  
5 measured dose of medicament from the medicament reservoir; wherein the metering  
member provides at least one measuring chamber for transferring medicament from the  
reservoir to said dispensing cup and the dispensing cup is provided with a duct to allow air  
to be sucked through the metering member upon inhalation by a patient.

10 Preferably, the device includes a moisture proof barrier. The moisture proof barrier is  
preferentially a physical barrier as opposed to a chemical barrier, e.g. a desiccant, although  
it is within the scope of the present invention that a desiccant may be included in addition  
to the moisture proof barrier if desirable.

15 In a preferred embodiment the moisture proof barrier is positioned so as to prevent the  
ingress of moisture into the medicament reservoir, so that moisture is prevented from  
coming into contact with the medicament. In an especially preferred embodiment of the  
delivery device of the invention, the moisture proof barrier is a moisture proof sealing  
means.

20

In a preferred embodiment, the sealing means of the delivery device will operate by the delivery device being adapted to move from an inoperable position, in which the medicament reservoir is sealed, to an operative position, in which the seal is reversibly broken so that measurement and/or delivery of a dose of medicament may take place. The sealing means will generally comprise a resilient sealing member positioned at the end of the reservoir adjacent the metering member. Furthermore, the metering member is preferentially biased towards the resilient sealing member to improve the seal provided. Preferably the resilient sealing member is in a fixed position whilst the metering member moves from an inoperable to an operable position and thus from a sealing to a non-sealing position.

The resilient sealing member preferably comprises a cover adapted to fit the base of the medicament reservoir, the sealing member being provided with an aperture to permit transmission of the medicament. The resilient sealing member may comprise any conventionally known material, for example a natural or synthetic rubber, a silicon or a PTFE material, although other similar materials can be contemplated within the scope of this invention

The moisture proof barrier may be applied to any conventionally known medicament delivery system. However, in a preferred embodiment, the medicament delivery device is an inhaler. Whilst the moisture proof barrier may be applied to any conventionally known inhaler, it is an especially preferred aspect of the invention for the inhaler to be a dry powder inhaler (DPI). DPI's are known which operate with predetermined doses of medicament, for example, the medicament may be contained in a gelatin capsule which is ruptured to release the medicament. However, a preferred inhaler of the invention is a DPI which comprises a medicament reservoir a metering member which is adapted to measure a selected amount of medicament for inhalation. Thus, in an especially preferred embodiment the metering member is rotatable from an operable to an inoperable position. The metering member may comprise a dispensing member and a moisture resistant member, e.g. a moisture resistant sleeve. In such an embodiment the moisture

resistant member is provided with one or more measuring chambers adapted to measure a predetermined dosage of medicament. Thus, in the operable position, the position of measuring chamber of the metering member corresponds with the aperture in the resilient sealing member so that medicament enters the measuring chamber. The moisture resistant member may then be rotated so that the reservoir is sealed again by the wall of the moisture resistant member. At the same time the medicament is transferred from the measuring chamber of the moisture resistant sleeve to the dispensing chamber of the dispensing member

10 An example of a preferred DPI is CLICKHALER, produced by Innovata Biomed in the UK. Such a device is described in European Patent No 0 539 469. Thus, the metering member may be a frusto conical member such as described in European Patent No 0 539 469.

15 Therefore, the metering member may comprise a frusto conical dispensing member with a corresponding moisture resistant sleeve, such that the sleeve overlies the dispensing member. Thus, the measuring chamber may comprise outer side walls which are provided by an aperture in the wall of the moisture resistant sleeve and the base of the measuring chamber may be provided by the frusto conical wall of the dispensing member. Preferably the moisture resistant sleeve is provided with a plurality of apertures and thereby a plurality of measuring chambers.

The use of the frusto-conical shape in the wall of the metering member containing the measuring chambers allows a good seal to be obtained between the metering member and a seat against which the frusto-conical wall mates.

Therefore, the frusto conical metering member may itself comprise a combination of a frusto conical dispensing member and a frusto conical moisture resistant sleeve which forms a snug fit over the dispensing member. The moisture resistant sleeve may itself be moveable eg rotatable, from a sealing to a non-sealing position as herein before described and vice versa. Such a moisture resistant sleeve may

comprise any conventionally known material but is preferentially a plastics material, e.g. the same material as the metering member.

5 The dispensing member and the moisture resistant sleeve can, preferentially, be adapted so as to act together as a medicament measuring/dispensing member. The preferred metering member comprises a dispensing member provided with one or more dispensing cups and a moisture resistant sleeve provided with one or more apertures. Preferably the dispensing member comprises a plurality of dispensing cups and the sleeve comprises a plurality of apertures. It is especially preferred that the  
10 the dispensing member comprises an equivalent number of dispensing cups to apertures in the sleeve.

We have especially found that if the moisture resistant sleeve comprises a frusto hemispherical cone, then an improved seal is achieved between the medicament  
15 reservoir and the sleeve. When a frusto hemispherical cone sleeve is used, the arcuate base of the reservoir is able to make more uniform contact with the curved surface of the cone and therefore an improved seal is achieved. Thus, it is especially preferred that the outer walls of the cone which are hemispherical. Furthermore, the inner walls of the cone are preferably contoured to form a good mate with the frusto  
20 conical dispensing member.

Thus, in operation, the metering member may be moved to a first position in which the medicament is transferred to a first measuring chamber in the moisture resistant sleeve, the device is then moved to a second position in which medicament is  
25 transferred from the measuring chamber to a dispensing cup in the dispensing member and then to a third position where medicament is delivered to the delivery passage.

The dispensing member may be a conventionally known member such as a frusto conical member described herein and in EP 0 539 469. However, we have also found  
30 the use of a moisture resistant sleeve permits a dispensing chamber to be provided



with an air inlet, e.g. an air duct. Previously, the use of an air inlet was felt to be undesirable since it might effect the accuracy of the measurement of the medicament dose. However, by use of a system wherein the medicament is first transferred to a measuring chamber and then subsequently to a dispensing cup, the cup in the  
5 dispensing member may be provided with an air inlet without any loss in accuracy of the dosage delivered. Furthermore, improved air flow provides greater likelihood of complete emptying of the dispensing cup and thereby provide an inhaler with improved performance. Clearly, an inhaler with such improved performance is advantageous per se, regardless of whether such an inhaler is moisture resistant.

10

One embodiment of the invention includes

a medicament reservoir, an inhalation passage for the delivery of the medicament and a metering member adapted to transfer a measured

dose of medicament from the medicament reservoir to the inhalation passage,

15

the metering member comprising a measuring member adapted to measure a pre-defined dosage of medicament and moveable from a measuring to a non-measuring position; and a dispensing member adapted to receive the measured dosage of medicament from the measuring member and to deliver the medicament to the inhalation passage, the dispensing member being moveable from a medicament  
20 receiving position to a medicament delivering position.

20

In the preferred embodiment the dispensing member is provided with one or more medicament dispensing cups, said cups being provided with a duct so as to provide a flow of air through the cup and into the inhalation passage upon operation of the  
25 device.

25

By the term dry powder we mean a medicament in finely divided form.

A variety of medicaments may be administered by using the device of the invention,  
30 optionally with a conventionally known pharmaceutically acceptable adjuvant, diluent or carrier. Such medicaments are generally antibiotics, bronchodilators or

30

other anti-asthma drugs. Such medicaments include, but are not limited to  $\beta_2$ -agonists, e.g. fenoterol, formoterol, pirbuterol, reproterol, rimiterol, salbutamol, salmeterol and terbutaline; non-selective beta-stimulants such as isoprenaline; xanthine bronchodilators, e.g. theophylline, aminophylline and choline theophyllinate; anticholinergics, e.g. ipratropium bromide; mast cell stabilisers, e.g. sodium cromoglycate and ketotifen; bronchial anti-inflammatory agents, e.g. nedocromil sodium; and steroids, e.g. beclomethasone dipropionate, fluticasone, budesonide and flunisolide; and combinations thereof.

10 Specific combinations of medicaments which may be mentioned include combinations of steroids, such as, beclomethasone dipropionate, fluticasone, budesonide and flunisolide; and combinations of  $\beta_2$ -agonists, such as, formoterol and salmeterol. It is also within the scope of this invention to include combinations of one or more of the aforementioned steroids with one or more of the  
15 aforementioned  $\beta_2$ -agonists.

The device of the invention is especially suitable for use in the treatment or alleviation of respiratory disorders. Thus according to the invention we also provide a method of administering a dry powder inhalation medicament using a device as  
20 hereinbefore described.

We further provide a method of treatment of a patient with a respiratory disorder which comprises the administration of a combination of medicaments using a device as hereinbefore described.

25 Preferred embodiments of the invention will now be described, by way of example only, and with reference to the accompanying drawings in which:

Figure 1 is a perspective view of an inhalation device according to a preferred embodiment of the invention;

Figure 2 is a schematic representation of the sealing and measuring mechanism.

Figure 3 is a perspective view of a moisture resistant sleeve comprising a frusto hemispherical cone, and

Figure 4 is a cross-sectional view of a moisture resistant sleeve comprising a frusto hemispherical cone.

5

With reference to Fig 1, a dry powder inhaler (1) comprises a medicament reservoir (2) comprising an essentially conical member; an inhalation passage (3) and a metering member (4). The inhalation passage (3) is connected to the medicament reservoir (2) by a reservoir support (5) and is itself connected to recess (6) which provides a seat for the metering member (4). The metering member (4) is rotatable about an axis (7) from a medicament receiving position, to a medicament delivery position and then to an emptying position to allowing any residual medicament to be emptied into a waste box (8).

15 The recess (6) is essentially frusto conical in shape to enable it to provide a seal for the metering member (4). The metering member (4) comprises a frusto conical moisture resistant sleeve (9) which forms a snug fit between recess (6) and a dispensing member (10). The dispensing member (10) is also provided with a back plate (11).

20

The moisture resistant sleeve (9) abuts against the resilient seal (9a) to form a moisture resistant seal.

The moisture resistant sleeve (9) is also provided with a plurality of measuring chambers which comprise apertures (12) dimensioned to measure a predetermined amount of medicament and to fit over cups (13) in the dispensing member (10).

25 Each of the cups (13) are also provided with a duct (14). The medicament reservoir (2) is also provided with a moisture resistant, eg foil, cover (15) at it's end (16) distal from the metering member (4).

30

With reference to Figure 2, in which Figure 2a the metering device is in a closed position,

Figure 2b the metering device is in a measuring position,

Figure 2c the metering device is in a seal transitory position,

5 Figure 2d the metering device is in a medicament transfer position,

Figure 2e the metering device is in a medicament delivery position; and

Figure 2f the metering device is returned to the closed position.

In Figure 2a the metering device 4 is in the closed position and the medicament  
10 reservoir (2) is isolated and a seal formed between the sealing member (17) and the  
surface (18) of the moisture resistant sleeve (9). In Figure 2b, the moisture resistant  
sleeve (9) is rotated in an anti clockwise direction so that the aperture (12)  
corresponds with the aperture/measuring chamber (19) in the sealing member (17).  
The aperture/measuring chamber (19) forms a cup with the surface (20) of the  
15 dispensing member (10).

In Figure 2c the moisture resistant sleeve (9) is further rotated so that the  
aperture/measuring chamber (19) sits below the sealing member (17). The internal  
edge (21) of the sealing member (17) scrapes any excess medicament from the  
20 aperture/measuring chamber (19) to leave a measured dose.

In Figure 2d the dispensing member (10) is rotated in an anticlockwise direction so  
that the dispensing cup (13) corresponds with the aperture (12) allowing medicament  
to transfer from the aperture (12) to the dispensing cup (13).

25 In Figure 2e both the dispensing member (10) and the moisture resistant sleeve (9)  
are rotated anticlockwise to expose them and the medicament to the inhalation  
passage (3). The patient can then inhale the medicament.

30 In Figure 2f the inhalation device remains in the closed position ready for use.

With reference to Figures 3 and 4, a moisture resistant sleeve (9) comprises a frusto hemispherical cone (22) wherein the outer surface (23) is arcuate. The inner surface (24) acts as a female member to form a snug fit with the frusto conical dispensing member (10). Downward pressure in the medicament reservoir (2) ensures a constant moisture tight seal between the sealing member (17) and the frusto hemispherical cone (22). Furthermore, referring to Figure 4c, the leading edge (25) of the sealing member (17) is capable of acting as a scraper or a cleaning edge, removing any excess medicament from the measuring chamber upon rotation of the metering member.

10

A variety of mechanisms may be used for the operation of the inhaler. One preferred mechanism is for movement from the closed to the measuring position to be achieved by removal of a mouth piece which is operably linked to the moisture resistor. Movement from the measuring position to the transitory position would use a mechanism similar to that described in EP 0 539 469, e.g. by depressing the button half way. Movement to the transfer position being achieved by further depressing the button, and then depression completely, moving the metering cone and the moisture resistor to the delivery position.

20

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

25

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

30

35

P:\O\23\4\10888-00\pat-137874

- 11 -

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A medicament delivery device comprising:  
a medicament reservoir;  
5 an inhalation passage; and  
a metering member, provided with at least one dispensing cup, adapted to transfer a measured dose of medicament from the medicament reservoir to the inhalation passage; wherein  
the metering member provides at least one measuring chamber for transferring  
10 medicament from the reservoir to the dispensing cup and the dispensing cup is provided with an air duct.
2. A medicament delivery device according to Claim 1 wherein the device is provided with a moisture proof barrier.
- 15 3. The delivery device according to claim 1 or 2 wherein said metering member comprises a moisture resistant sleeve.
4. The delivery device according to claim 3 wherein at least one aperture in said  
20 sleeve provides said at least one measuring chamber.
5. An inhaler comprising:  
a medicament reservoir;  
an inhalation passage for the delivery of the medicament; and  
25 a metering member, provided with at least one dispensing cup, adapted to transfer a measured dose of medicament from the medicament reservoir; wherein the metering member provides at least one measuring chamber for transferring medicament from the reservoir to said dispensing cup and the dispensing cup is provided with a duct to allow air to be sucked through the metering member upon inhalation by a patient.
- 30 6. An inhaler according to claim 3 wherein the metering member comprises an outer



P:\OFFER\INNOVATA\00 ip.doc.216494

- 12 -

sleeve and a dispensing member.

7. A medicament delivery device, substantially as described with reference to the accompanying drawings.

5

8. An inhaler, substantially as described with reference to the accompanying drawings.



10

Dated this 23rd day of August, 2004

**INNOVATA BIOMED LIMITED**

By DAVIES COLLISON CAVE

Patent Attorneys for the Applicant



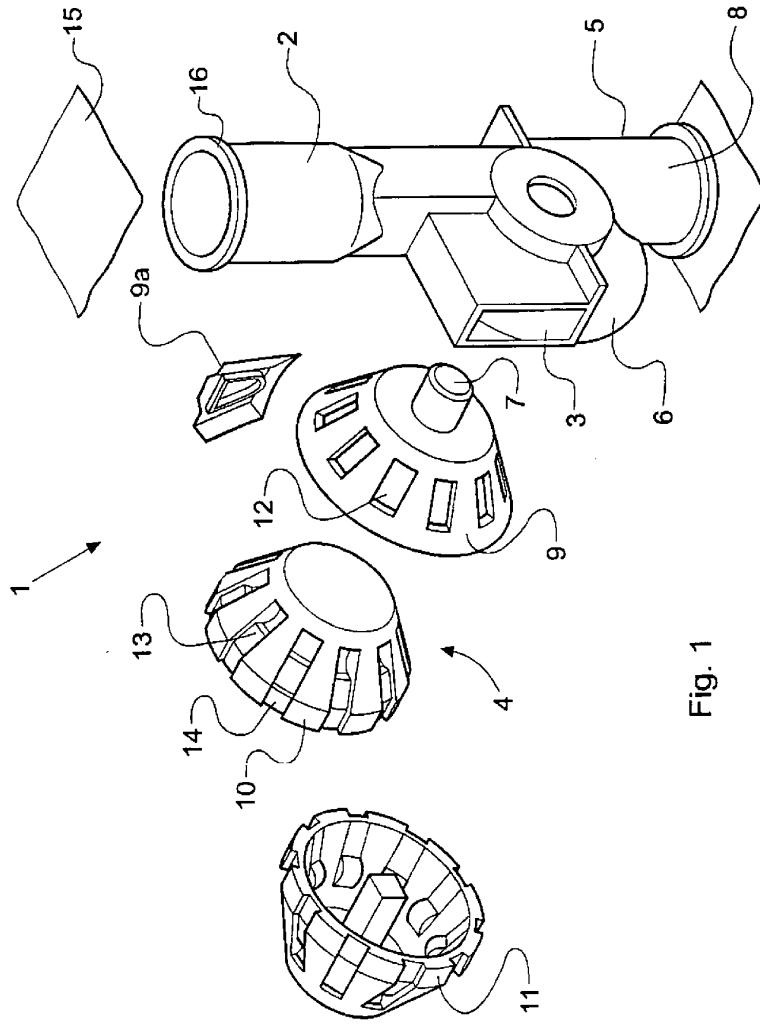


Fig. 1

SUBSTITUTE SHEET (RULE 26)



2/3



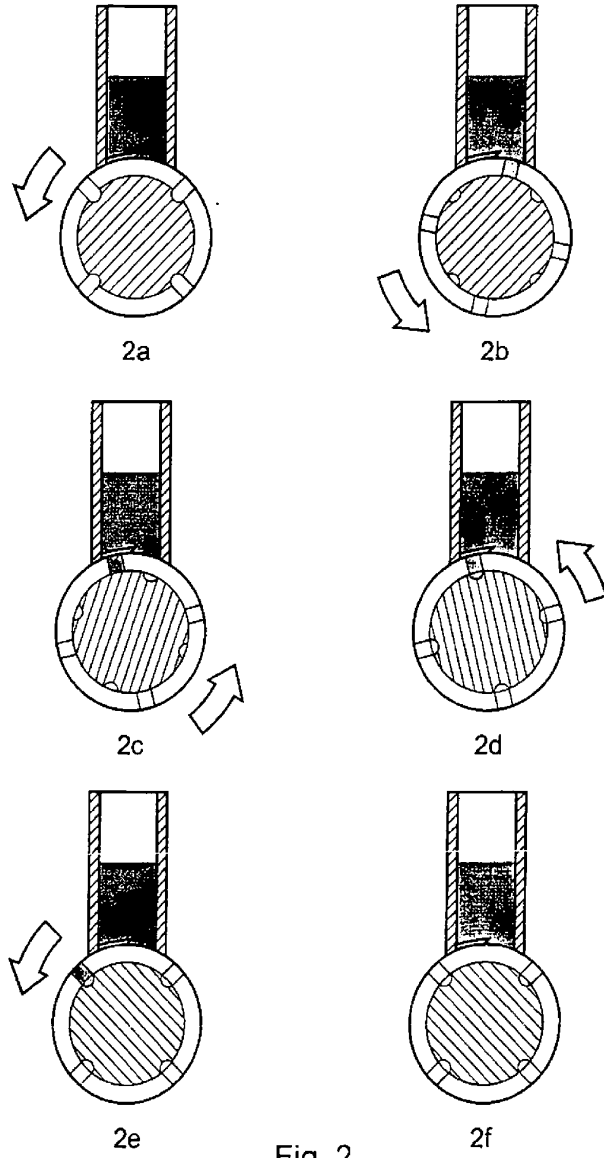


Fig. 2

SUBSTITUTE SHEET (RULE 26)

3/3

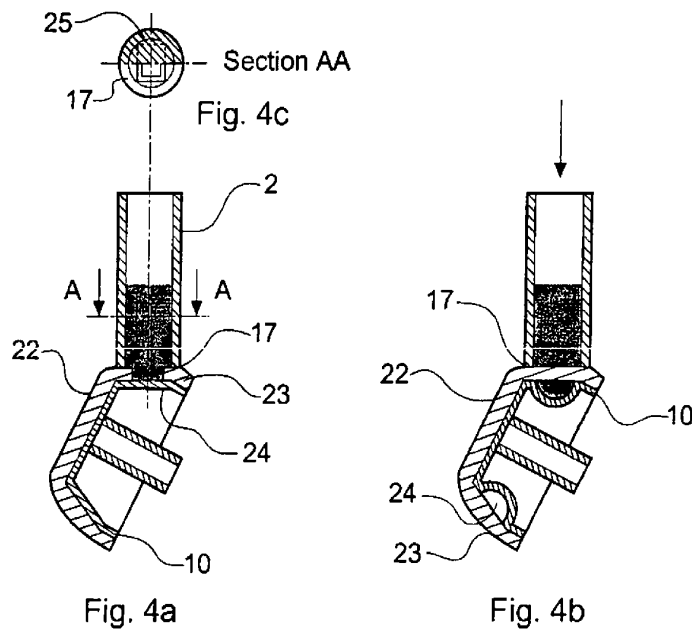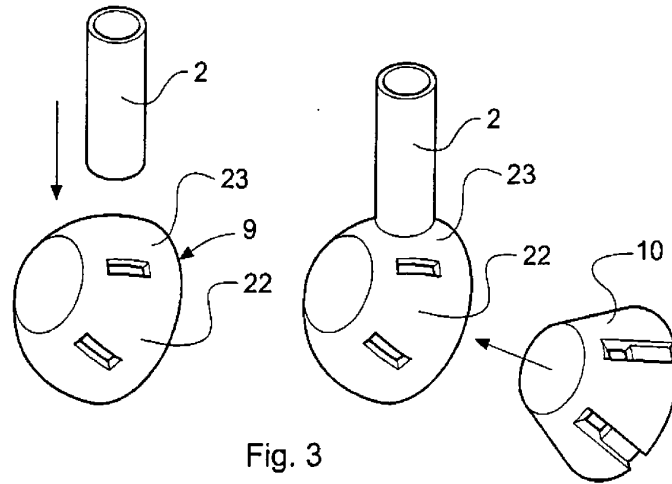

SUBSTITUTE SHEET (RULE 26)