

116

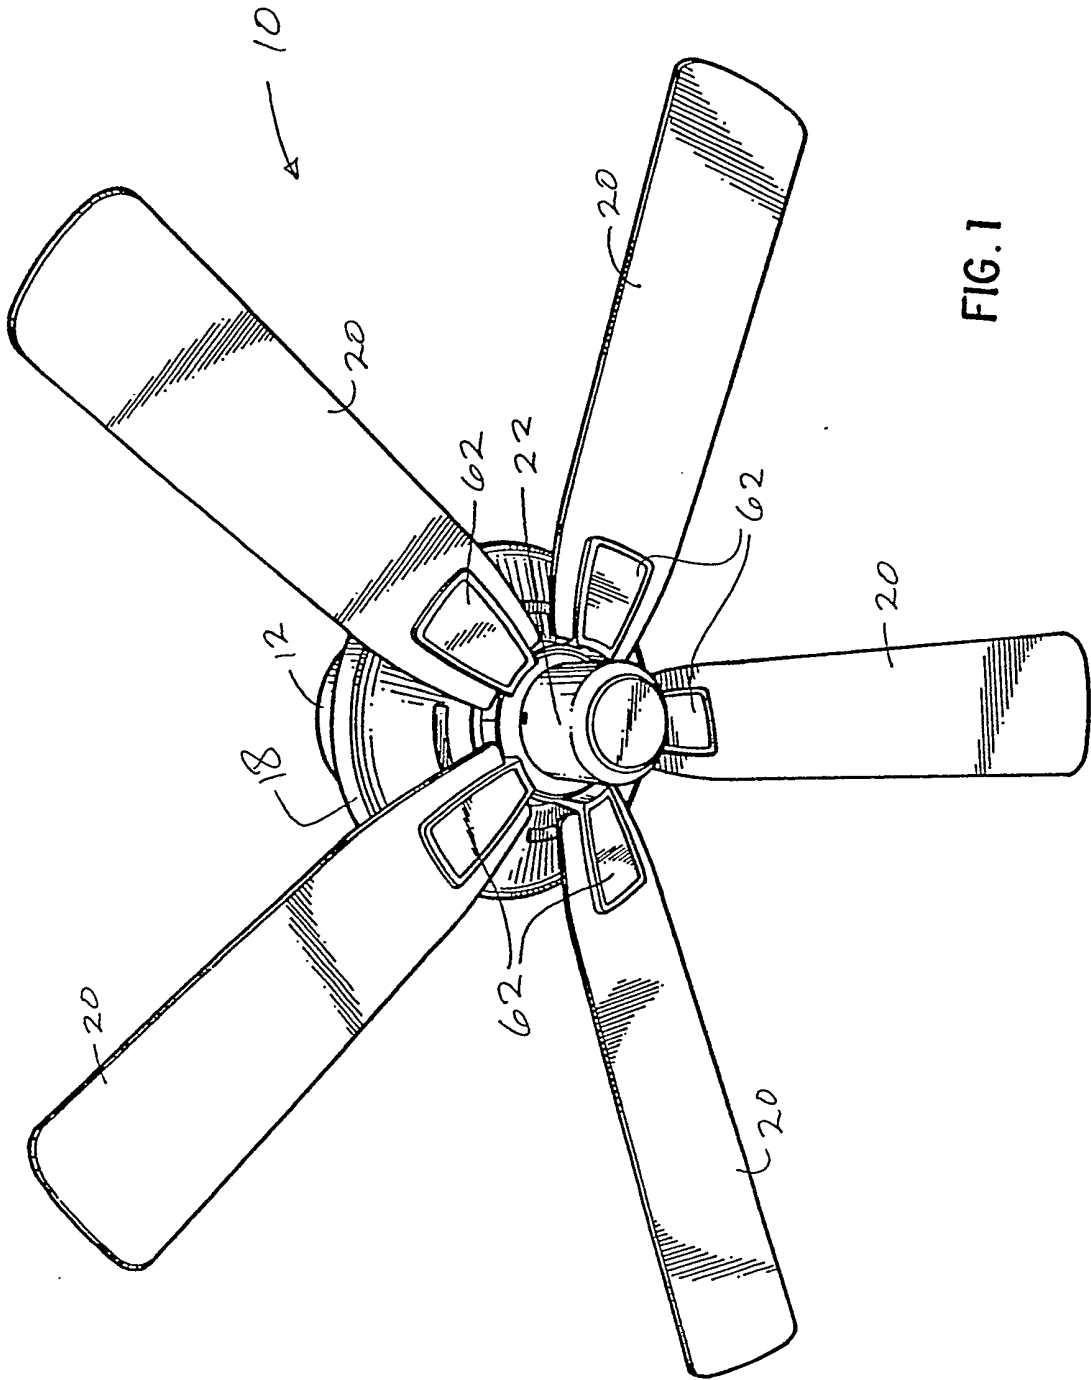


FIG. 1

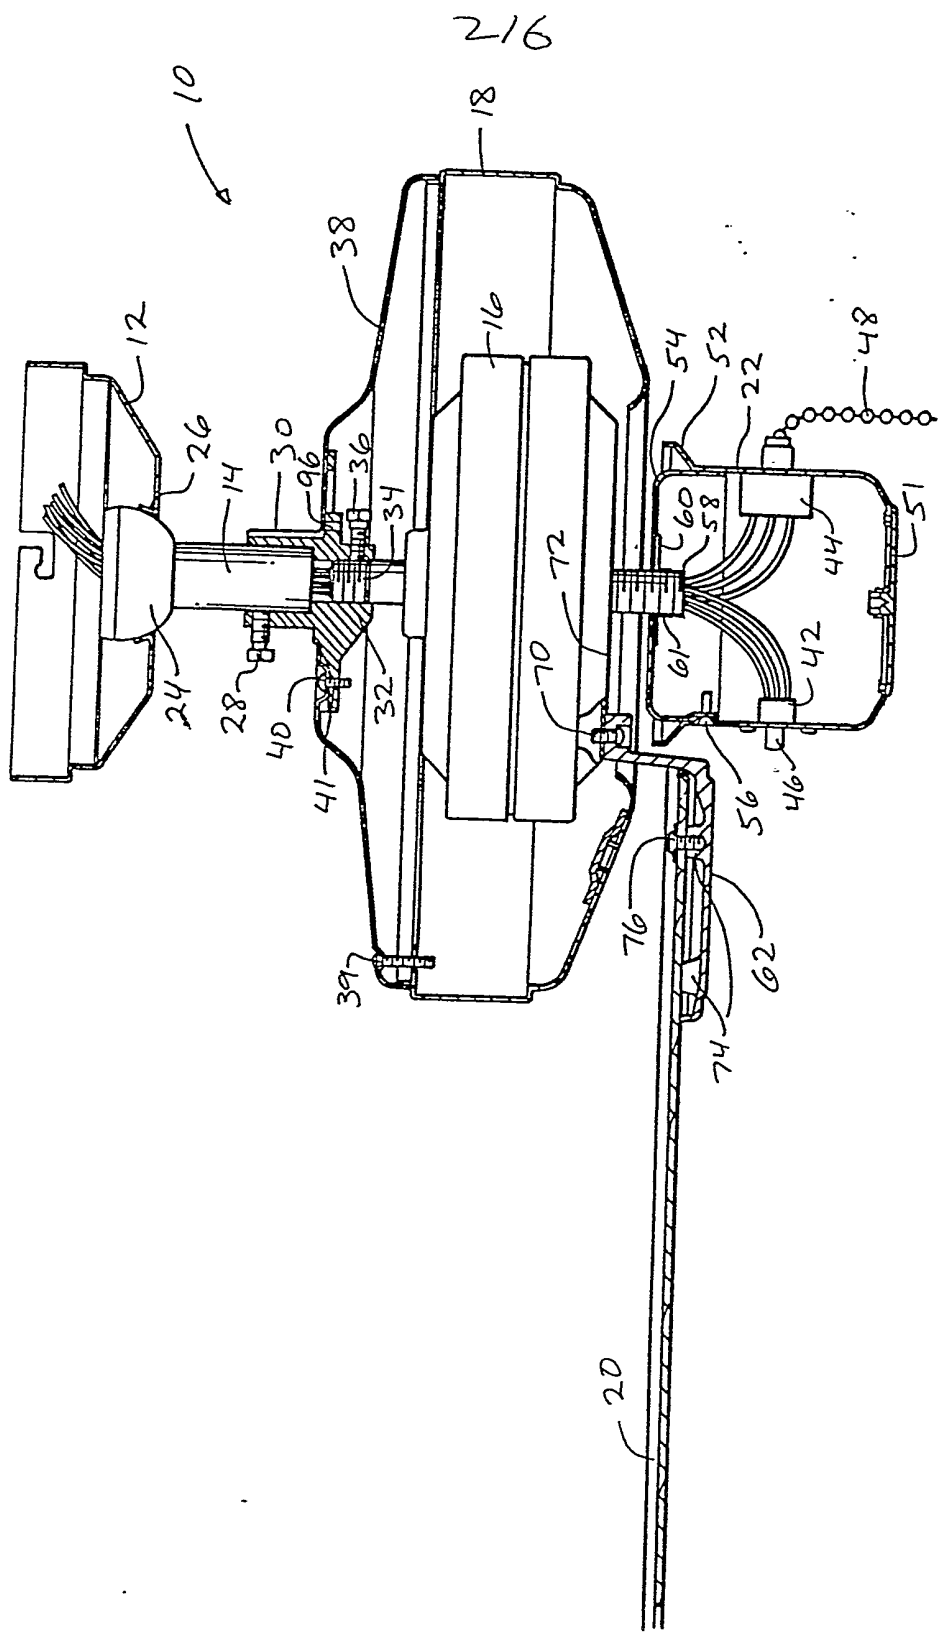


FIG. 2

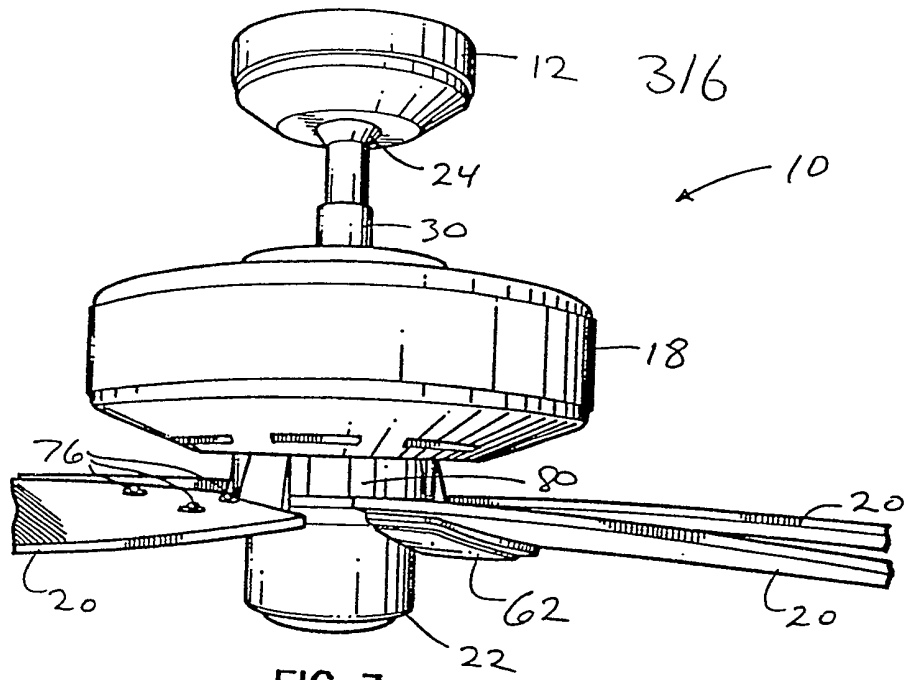


FIG. 3

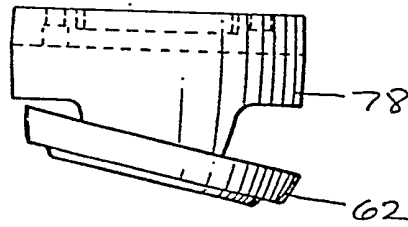


FIG. 4

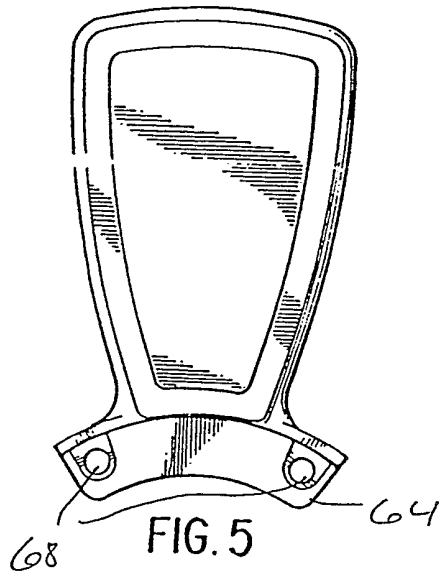


FIG. 5

416

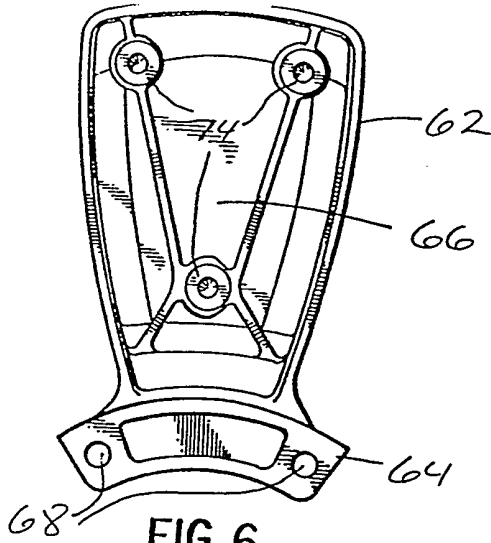


FIG. 6

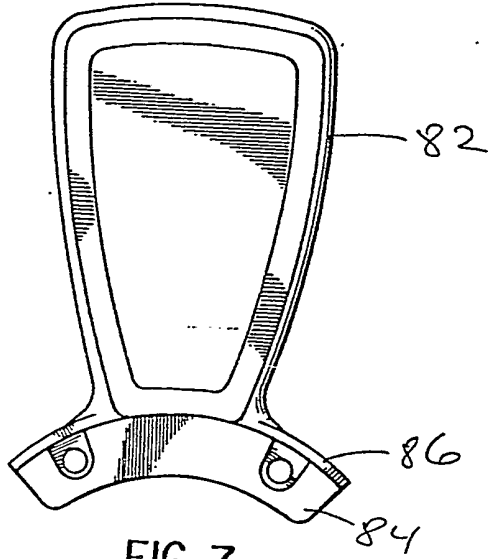


FIG. 7

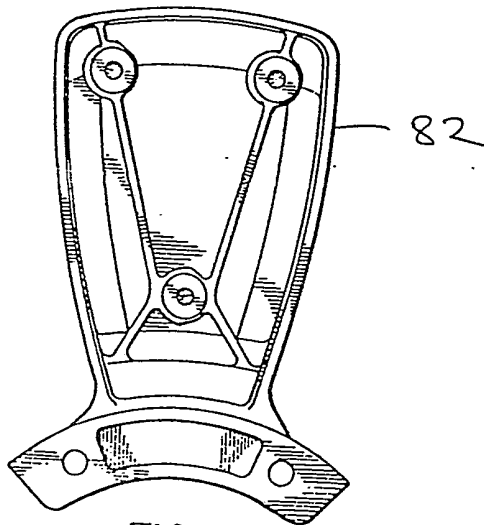


FIG. 8

516

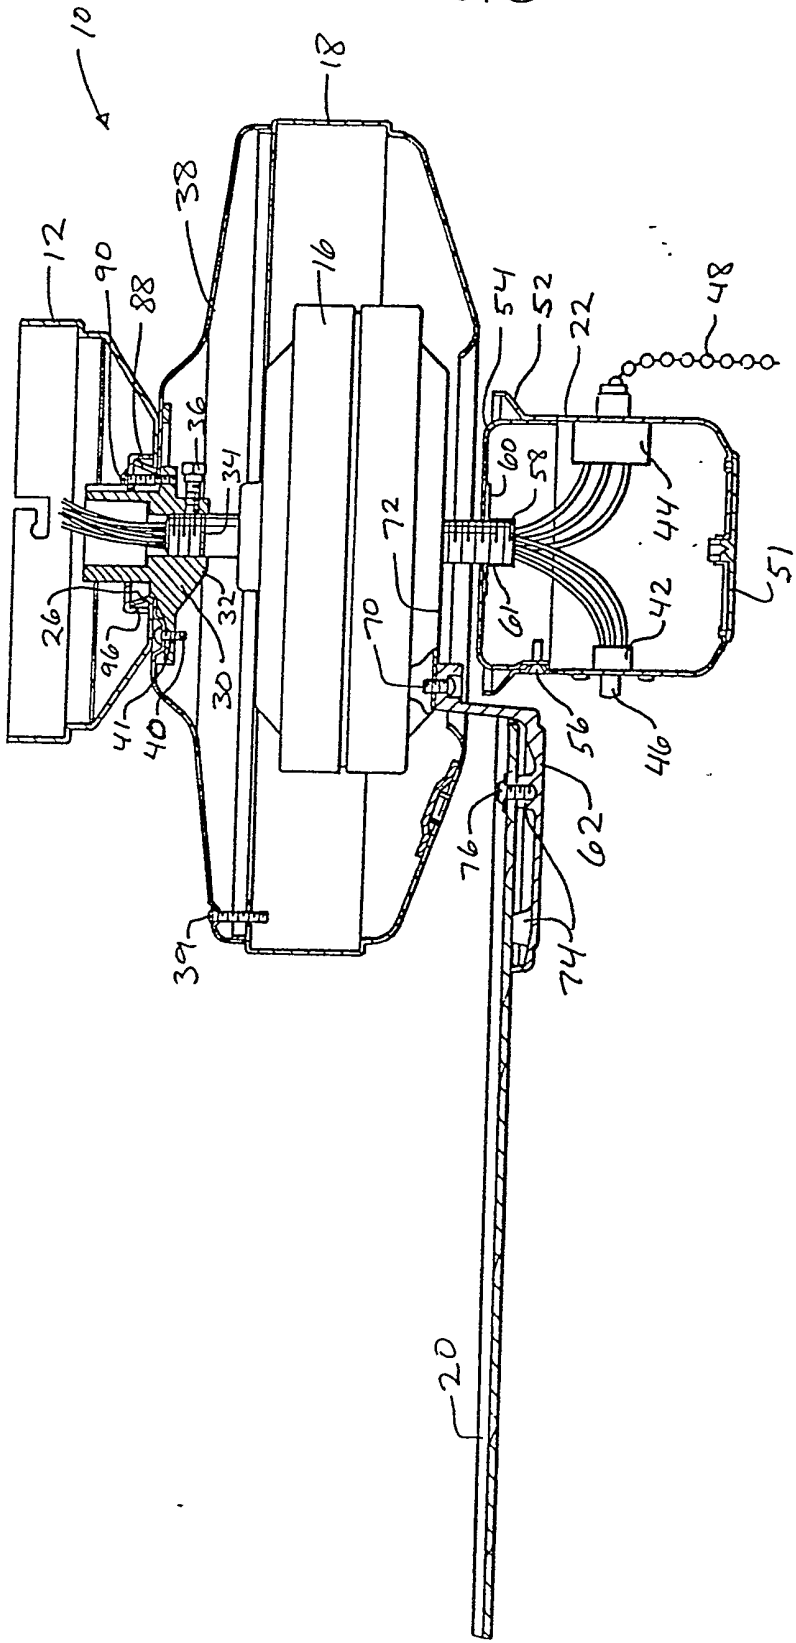


FIG. 9

616 .

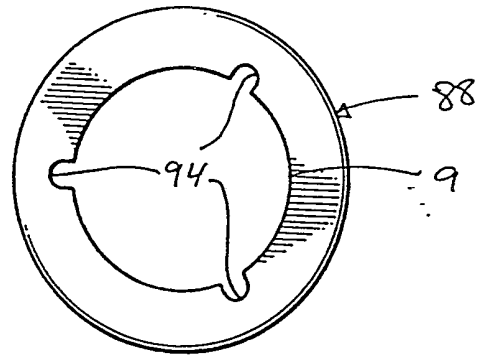


FIG. 10

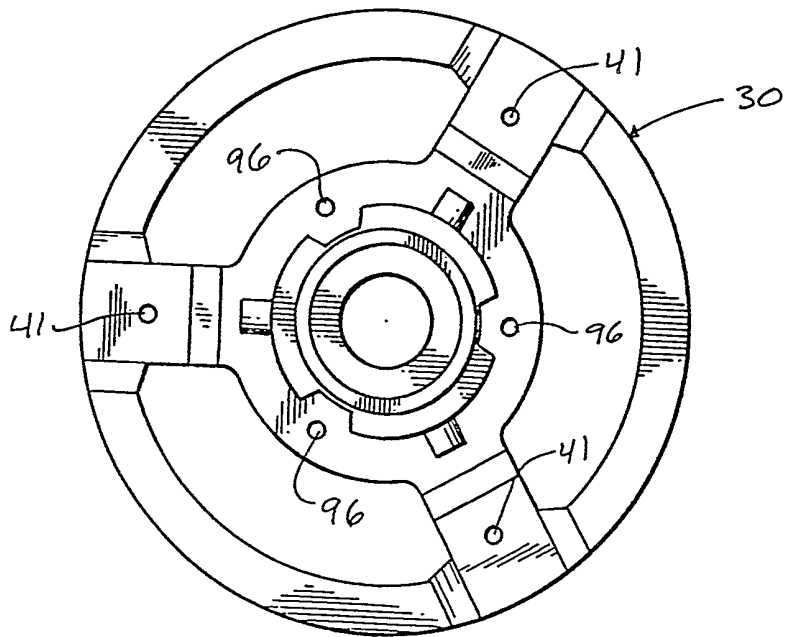


FIG. 11

Background of the InventionField

5 The present invention relates to ceiling fans and, more particularly, to ceiling fans having an improved switch housing/blade iron relationship.

Description of the Prior Art

10 Electric ceiling fans are commonly utilized to assist heating and air conditioning systems by providing an additional degree of air circulation within the confines of a room. Most modern ceiling fans consist of an electric motor suspendable by a shaft from a ceiling, with a plurality of blades mounted to either the top or bottom surface of the motor. Conventional ceiling fans typically incorporate one or
15 more electrical switches for controlling the speed and rotational direction of the motor, said switches being encased within a switch housing disposed beneath the motor.

20 In the case of ceiling fans having blades mounted to the bottom surface of the motor, blade irons to which the blades are secured are typically attached to the motor by means of a plurality of screws. While blade irons can be quite ornate and decorative, the multiplicity of screws utilized to secure blade irons to the blades and the motor are unsightly.

25 U.S. Patent No. 4,884,947 issued December 5, 1989, entitled "CEILING FAN ASSEMBLY" demonstrates one effort to create an aesthetically pleasing ceiling fan, wherein the blade irons and associated screws are hidden from view. The fan disclosed in the '947 patent, however, represents a radical ultra-modern configuration which is suitable for use
30 in a very limited number of environments. Additionally, this fan is composed of an unusually large number of components, thereby increasing the cost and complexity of the assembly for the user.

35 Conventional ceiling fans are typically adapted for mounting the blades and motor in a plurality of spaced-apart

relationships relative to a ceiling, in order to accommodate vaulted and/or unusually high ceilings. Some fans are configured exclusively for mounting close to the ceiling, while others are configured exclusively for being suspended at a distance from the ceiling by a rod or tube. Most, however, are suited for either mounting position, in which case the canopy typically includes unsightly mounting holes for attaching the motor directly to the canopy. Such holes are not visible when the fan is mounted close to the ceiling, but are visible when the fan is suspended at a distance below the ceiling.

There is a need in the art for a ceiling fan having a simplified, yet aesthetically pleasing structure, with an appearance suitable for use in most contemporary applications. There is a further need for a ceiling fan adaptable for mounting either close to, or suspended at a distance from, a ceiling, having an aesthetically improved canopy with no additional mounting holes exposed in either position.

Brief Summary of the Invention

This invention provides a unique ceiling fan assembly having a switch housing specially configured to shield the proximate ends of the blade irons from below. The blade irons are also uniquely adapted to form a substantially continuous ring around the upper portion of the switch housing, thereby shielding the distal ends of the blade irons and corresponding screws from view from the side. The distal ends of the blade irons are adapted to receive screws from above, such screws being employed to secure the blades to the blade irons.

This invention also employs a unique apparatus for converting the fan from a mounting position suspended at a distance from the ceiling to a position close to the ceiling. This apparatus comprises a canopy securable flush against the ceiling, a ring member disposable within the canopy when the fan is to be mounted close to the ceiling, and a special adapter secured to the fan motor adapted to engage either a down rod, when the fan is to be suspended at a distance from

the ceiling, or the ring.

Brief Description of the Drawings

FIGURE 1 is a perspective view of a ceiling fan incorporating principles of the present invention;

5 FIGURE 2 is a side sectional view through the motor housing, switch housing and a representative blade and blade iron of the preferred embodiment of the present invention, showing the ceiling fan suspended at a distance from the ceiling;

10 FIGURE 3 is a side elevational view of the preferred embodiment of the present invention;

 FIGURE 4 is an end elevational view of a blade iron of the preferred embodiment of the invention;

15 FIGURE 5 is a bottom plan view of the blade iron shown in FIGURE 4;

 FIGURE 6 is a top plan view of the blade iron shown in FIGURES 4 and 5;

 FIGURE 7 is a bottom plan view of an alternative embodiment for the blade iron of the present invention;

20 FIGURE 8 is a top plan view of the alternative embodiment shown in FIGURE 7;

 FIGURE 9 is a side sectional view similar to FIG 2, showing the preferred embodiment of the ceiling fan mounted close to the ceiling;

25 FIGURE 10 is a top plan view of the mounting ring employed to mount the ceiling fan close to the ceiling as shown in FIG 9; and

 FIGURE 11 is a top plan view of the adapter employed to secure the fan motor to either the down tube or the mounting ring.

Detailed Description of the Preferred Embodiment

Referring initially to Figures 1 and 2, the preferred embodiment of the present invention is a ceiling fan 10, comprising a canopy 12 securable to a ceiling (not shown),
35 down rod 14 pivotally retained in canopy 12, electric motor 16 encased by motor housing 18, a plurality of blades 20, and switch housing 22. Ball member 24 is secured to the upper end

of down rod 14 and is configured to seat within specially adapted socket 26 which is integrally formed in canopy 12. The lower end of down rod 14 is retained by set screw 28 within adapter 30, the lower portion 32 of which is threadingly engaged to upper stationary threaded member 34 of motor 16 and further secured thereto by set screw 36. Top portion 38 of housing 18 is secured to adaptor 30 by screws 40 engaging threaded holes 41 in adapter 30. A plurality of equally spaced apart screw 39 secure top portion 38 to the lower portion of housing 18.

Ceiling fan 10 preferably includes at least two control switches 42 and 44 for controlling the speed and direction of rotation for motor 16. As shown in Figure 2, switches 42 and 44 are secured within switch housing 22, with switch 42 controlling the direction of rotation for motor 16 by selective operation of button 46, and switch 44 controlling the speed of rotation by selective operation of chain 48. As will be fully understood by those skilled in the art, however, the number and type of switches employed can be varied as desired without departing from the scope of this invention. Switches 42 and 44 are given by way of example only, and should not constitute any limitation on the scope of this invention.

In the preferred embodiment shown, switch housing 22 has a generally cylindrical side wall 50, with a radially outwardly flared upper lip portion 52. Cylindrical side wall 50 is secured to cap member 54 by at least one screw 56. Nut 60, comprising a sheet metal stamping having an internal threaded portion 61, is preferably welded to cap member 54 in a manner allowing for threading engagement of portion 61 with lower stationary threaded member 58, thereby securing switch housing 22 in place. The lower edge of cylindrical side wall 50 forms a generally circular opening having cover 51 removably secured therein. Cover 51 is preferably formed from a suitable plastic or resilient metal material and is snapped

into place, removal thereof providing access to switches 42 and 44 and their associated wiring. Those skilled in the art will appreciate the fact that cover 51 is uniquely securable without the need for any additional fastening means, such as screws, as required with conventional switch housings.

Those skilled in the art will readily recognize that motor 16 of ceiling fan 10 is largely conventional. While the electromagnetic characteristics of motor 16 are irrelevant to the present invention, it may be helpful to note that upper stationary threaded member 34 and lower stationary threaded member 58 are typical components of the stator portion of a conventional electric motor, with the remainder of motor 16 as illustrated comprising a generally conventional rotor.

In the preferred embodiment shown, ceiling fan 10 has five blades 20 and an equal number of blade irons 62. As best shown in Figures 4-6, each blade iron 62 has a proximate end 64 and a distal end 66. Proximate end 64 has a pair of holes 68 formed therethrough for receiving screws 70 which engage suitable threaded holes formed within lower surface 72 of motor 16. Distal end 66 of blade irons 62 has three threaded bosses 74 integrally formed therein, which threadingly engage screws 76 to secure blades 20 to the top surface of blade irons 62.

Blade irons 62 include a downwardly extending flange 78, as best seen in Figure 4. Flanges 78 provided by the plurality of blade irons 62 cooperate to collectively form a substantially continuous ring 80 which generally encircles upper lip portion 52 of switch housing 22. In the five-bladed configuration of the preferred embodiment of ceiling fan 10, each flange 78 must be configured to comprise an arcuate portion of ring 80 subtended by an angle of approximately 72° in order for ring 80 to be substantially unbroken. When so configured, ring 80 and upper lip portion 52 of switch housing 22 cooperate to effectively shield from view proximate ends 64 of blade irons 62 and associated screws 70, thereby creating

an aesthetically attractive and unique configuration for ceiling fan 10.

5 Figures 7 and 8 depict blade irons 82, which represent an alternative embodiment for this invention wherein only four blades are employed, rather than five. The proximate ends 84 of blade irons 82 have flanges 86 formed thereon, wherein flanges 86 of the four blade irons 82 collectively form a substantially continuous ring as described above. The only difference between the alternative embodiment blade irons 82 and the preferred embodiment blade irons 62 is the length of flange 86. With blade irons 82, flanges 86 must be configured to comprise an arcuate portion subtended by an angle of 90°, in order for the four blade irons 82 to form a substantially continuous 360° ring around upper lip portion 52 of switch housing 22.

20 As mentioned above, screws 76 are inserted through blades 20 from the top sides thereof to conventionally engage threaded bosses 74. Since the threaded holes in bosses 74 do not extend through the bottom surface of blade irons 62 (or 82), the view of the blade irons 62 from below is of an essentially smooth surface, undisturbed by any screws or other fastening means. Accordingly, the view of ceiling fan 10 from below is similarly free of any undesirable and unattractive fastening means for securing blades 20 to motor 16.

25 Like many ceiling fans presently available on the market, ceiling fan 10 may be suspended at a distance from a ceiling as shown in Figures 2 and 3, are mounted close to the ceiling as shown in Figure 9. In this configuration, down rod 14, ball member 24, end set screw 28 are omitted, and top portion 30 38 of motor housing 18 directly to canopy 12 by means of ring 88 and a plurality of screws 90. As illustrated in Figures 10 and 11, ring 88 has a generally circular central opening 92 with three indentations 94 formed at equally spaced intervals therein. Indentations 94 operate to receive three screws 90 and engage the head portions thereof, screws 90 being 35

operative to engage threaded holes 96 formed in adaptor 30. Outer angular lip 96 of ring 88 is adapted to completely circumscribe socket 26 so that, upon assembly as shown in Figure 9, top portion 38 of motor housing 18 is substantially rigidly secured to canopy 12.

Those skilled in the art will readily appreciate the fact that ring 88, working in conjunction with screws 90 and adaptor 30, eliminate the need for any additional mounting holes in canopy 12 as required by most conventional ceiling fans. It will also be readily apparent that the precise configuration of ring 88 and adaptor 30, as well as the number of screws 90, may vary considerably without departing from the scope of the present invention.

From the above detailed description of the preferred and alternative embodiments of the present invention, it will be appreciated that a ceiling fan has been described wherein the switch housing operates to conceal from view the fastening means utilized to secure the blades to the motor, and that the blade irons cooperate with the switch housing to provide a uniquely configured ceiling fan suitable for use in most conventional applications. Although specific embodiments have been so described, it is to be understood that various changes, substitutions, and alterations can be made therein without departing from the spirit and the scope of the invention as defined by the appended claims.

Claims

1. A ceiling fan, comprising:

5 a motor, comprising a generally stationary member having a top portion and a bottom portion, and a rotor having a bottom portion, said rotor being rotatable about said stationary member upon operation of said motor;

means for suspending said motor from a ceiling, securable to said top portion of said stationary member of said motor;

10 a motor housing enclosing at least a portion of said motor;

switch means for selectively controlling the operation of said motor;

15 a plurality of blades, removably securable by suitable fastening means to said bottom portion of said rotor and rotatable therewith;

20 a switch housing for containing said switch means, securable to said bottom portion of said stationary member, said switch housing having an upper edge in close proximity to said fastening means and a lower edge spaced vertically apart from said upper edge, wherein

said upper edge of said switch housing is adapted to conceal at least a portion of said fastening means when the ceiling fan is viewed from below.

25 2. A ceiling fan as set forth in claim 1, wherein said fastening means comprise:

30 a plurality of blade irons, equal in number to the number of said blades, each of said blade irons having a distal end adapted for attachment to one of said blades and a proximate end adapted for attachment to said bottom portion of said rotor;

a plurality of screws for attaching said proximate ends of said blade irons to said bottom portion of said rotor, wherein

35 said upper edge of said switch housing is adapted to conceal said screws and said proximate ends of said blade irons.

3. A ceiling fan as set forth in claim 2, wherein;
each of said blade irons further includes a
downwardly projecting flange, disposed intermediate said
distal and proximate ends generally adjacent said proximate
5 end, wherein

the totality of said flanges on said plurality of
blade irons cooperate to conceal said screws and said
proximate ends of said blade irons when said fan is viewed
from the side.

10 4. A ceiling fan as set forth in claim 3, wherein:
said flanges are adapted to collectively form a
substantially continuous ring around said upper edge of said
switch housing.

15 5. A ceiling fan as set forth in claim 1, wherein:
said switch housing comprises a generally
cylindrical side member having top and bottom ends and a
radius; and

said upper edge comprises an annular frusto-conical
member having a narrow portion and a wide portion,

20 said narrow portion being secured around said
cylindrical side member generally adjacent said top end
thereof, said wide portion being spaced upwardly and outwardly
from said narrow portion and having a radius larger than said
radius of said cylindrical side member.

25 6. A ceiling fan as set forth in claim 5, wherein said
wide portion of said frusto-conical member includes an
upwardly projecting annular ring portion integrally formed
therewith and extending therefrom.

30 7. A ceiling fan as set forth in claim 1, wherein the
number of said blades in four.

8. A ceiling fan as set forth in claim 1, wherein the
number of said blades is five.

9. A ceiling fan as set forth in claim 2, wherein:
the proximate end of each of said blade irons has a pair of holes formed therein for receiving a pair of said screws for securing said blade irons to said rotor.

5 10. A ceiling fan as set forth in claim 2, wherein:
the distal end of each of said blade irons has three threaded bosses formed in a top surface thereof for threadingly engaging three screws; and
the proximate end of each of said blades has three
10 holes formed therethrough alignable with said three threaded bosses; wherein
said screws are inserted through said three holes in each of said blades and engaged with said threaded bosses, thereby securing said blades to said blade irons.

15 11. A ceiling fan as set forth in claim 1, wherein said means for suspending said motor from a ceiling comprises:
a canopy removably securable to a ceiling, having a centrally located opening formed therein, said opening defining a socket;
20 a ball member pivotally seated within said socket;
a rod, having an upper end and a lower end, said upper end being secured to said ball member; and
an adapter having top and bottom portions, said
bottom portion being secured to said top stationary portion of
25 said motor and said top portion being secured to said lower end of said rod.

12. A ceiling fan as set forth in claim 1, wherein said means for suspending said motor from a ceiling comprises:
a canopy removably securable to a ceiling, having a
30 centrally located opening formed therein, the perimeter of said opening defining a socket;
an adapter having top and bottom portions, said
bottom portion being secured to said top stationary portion of
said motor and said top portion being received within said
35 opening in said canopy;

a ring member disposed within said canopy, having a central opening for receiving said top portion of said adapter, said ring member being adapted to engage said socket; and

5 means for fastening said ring member to said adapter, thereby securing said motor to said canopy.

13. A ceiling fan as set forth in claim 12, wherein:

said adapter includes an intermediate section having a plurality of threaded holes formed therein;

10 said ring member includes a plurality of screw engaging surfaces; and

said fastening means comprise a plurality of screws passing through said screw engaging surfaces on said ring member and threadingly engaging said threaded holes in said intermediate section of said adapter.

14. A ceiling fan adapted for mounting close to a ceiling, comprising:

a motor, having an upper stationary member;

20 a canopy removably securable to a ceiling, having a centrally located opening formed therein, said canopy also having inner and outer surfaces;

25 an adapter having top and bottom portions, said bottom portion being secured to said upper stationary member of said motor and said top portion being received within said opening in said canopy;

30 a ring member disposed within said canopy, having a central opening for receiving said top portion of said adapter, said ring member being adapted to engage a portion of said inner surface of said canopy adjacent said opening in said canopy; and

means for fastening said ring member to said adapter, thereby securing said motor to said canopy.

15. A ceiling fan as set forth in claim 14, wherein:

35 said adapter includes an intermediate section having a plurality of threaded holes formed therein;

said ring member includes a plurality of screw engaging surfaces; and

5 said fastening means comprise a plurality of screws passing through said screw engaging surfaces on said ring member and threadingly engaging said threaded holes in said intermediate section of said adapter.

16. A ceiling fan adapted for being suspended at a distance from a ceiling, comprising:

10 a motor, having an upper stationary member;
a canopy removably securable to a ceiling, having a centrally located opening formed therein, the perimeter of said opening defining a socket;

15 a ball member pivotally seated within said socket;
a rod, having an upper end and a lower end, said upper end being secured to said ball member; and

an adapter having top and bottom portions, said bottom portion being secured to said upper stationary member of said motor and said top portion being secured to said lower end of said rod.

20 17. A ceiling fan adapted for mounting either close to a ceiling or suspended at a distance from a ceiling, comprising:

25 a motor, having an upper stationary member;
a canopy removably securable to a ceiling, having a centrally located opening formed therein, the perimeter of said opening defining a socket;

a ball member pivotally seatable within said socket;
a rod, having an upper end and a lower end, said upper end being securable to said ball member;

30 an adapter having top and bottom portions, said bottom portion being secured to said upper stationary member of said motor, said top portion being removably securable to said lower end of said rod;

35 a ring member, having a central opening suitable for receiving said top portion of said adapter and an outer dimension larger than said opening in said canopy; and

means for removably fastening said ring member to said adapter; whereby

5 said ceiling fan may be mounted close to the ceiling by placing said ring member inside said canopy, inserting said top portion of said adapter through said opening in said canopy, and fastening said ring member to said adapter, and

10 said ceiling fan may be suspended at a distance from said ceiling by seating said ball member in said socket, securing said upper end of said rod to said ball member, and securing said lower end of said rod to said adapter.

18. A ceiling fan constructed and arranged to operate substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

Amendments to the claims have been filed as follows

1. A ceiling fan, comprising:

a motor, comprising a generally stationary member having a top portion and a bottom portion, and a
5 rotor having a bottom portion, said rotor being rotatable about said stationary member upon operation of said motor;
means for suspending said motor from a ceiling, securable to said top portion of said stationary member of said motor;

10 a motor housing enclosing at least a portion of said motor;

switch means for selectively controlling the operation of said motor;

a plurality of blades, each having a proximate
15 end secured to the distal end of a corresponding blade iron, each said blade iron having a proximate end removably securable by suitable fastening means to said bottom portion of said rotor and rotatable therewith;

a switch housing for containing said switch
20 means, securable to said bottom portion of said stationary member, said switch housing having a side member, an upper edge in close proximity to said fastening means, and a lower edge spaced vertically apart from said upper edge, wherein said fastening means are disposed radially
25 outwardly from said side member, and

said upper edge of said switch housing is flared radially outwardly substantially to conceal said fastening means when the ceiling fan is viewed from below.

2. A ceiling fan as claimed in claim 1, wherein
30 said fastening means comprise:

a plurality of screws for attaching said proximate ends of said blade irons to said bottom portion of said rotor, wherein

said upper edge of said switch housing is adapted to conceal said screws and said proximate ends of said blade irons.

3. A ceiling fan as claimed in claim 2,
5 wherein:

the proximate end of each of said blade irons has a pair of holes formed therein for receiving a pair of said screws for securing said blade irons to said rotor.

4. A ceiling fan as claimed in claim 2,
10 wherein:

the distal end of each of said blade irons has three threaded poses formed in a top surface thereof for threadingly engaging three screws; and

the proximate end of each of said blades has
15 three holes formed therethrough alignable with said three threaded bosses; wherein

said screws are inserted through said three holes in each of said blades and engaged with said threaded bosses, thereby securing said blades to said
20 blade irons.

5. A ceiling fan as claimed in any preceding claim, wherein:

each of said blade irons further includes a downwardly projecting flange, disposed intermediate said
25 distal and proximate ends generally adjacent said proximate end, wherein

the totality of said flanges on said plurality of blade irons cooperating to conceal said screws and said proximate ends of said blade irons when said fan is viewed
30 from the side.

6. A ceiling fan as claimed in claim 5,
wherein:

said flanges are adapted to collectively form a
substantially continuous ring around said upper edge of
5 said switch housing.

7. A ceiling fan as claimed in any preceding
claim, wherein:

said side member is generally cylindrical,
having top and bottom ends and a radius; and

10 said upper edge comprises an annular frusto-
conical member having a narrow portion and a wide portion,
said narrow portion being secured around said
cylindrical side member generally adjacent said top end
thereof, said wide portion being spaced upwardly and
15 outwardly from said narrow portion and having a radius
larger than said radius of said cylindrical side member.

8. A ceiling fan as claimed in any preceding
claim, wherein the number of said blades is four.

9. A ceiling fan as claimed in any one of
20 claims 1 to 7, wherein the number of said blades is five.

10. A ceiling fan as claimed in any preceding
claim, wherein said means for suspending said motor from a
ceiling comprises:

a canopy removably securable to the ceiling,
25 having a centrally located opening formed therein, said
opening defining a socket;

a ball member pivotally seated within said
socket;

a rod, having an upper end and a lower end, said
30 upper end being secured to said ball member; and

an adapter having top and bottom portions, said
bottom portion being secured to said top stationary

portion of said motor and said top portion being secured to said lower end of said rod.

11. A ceiling fan as claimed in any one of claims 1 to 9, wherein said means for suspending said motor from a ceiling comprises:

a canopy removably securable to the ceiling, having a centrally located opening formed therein, the perimeter of said opening defining a socket;

an adapter having top and bottom portions, said bottom portion being secured to said top stationary portion of said motor and said top portion being received within said opening in said canopy;

a ring member disposed within said canopy, having a central opening for receiving said top portion of said adapter, said ring member being adapted to engage said canopy generally adjacent said socket; and

means for fastening said ring member to said adapter, thereby securing said motor to said canopy.

12. A ceiling fan as claimed in claim 11, wherein:

said adapter includes an intermediate section having a plurality of threaded holes formed therein;

said ring member includes a plurality of screw engaging surfaces; and

said means for fastening said ring member to said adapter comprise a plurality of screws passing through said screw engaging surfaces on said ring member and threadingly engaging said threaded holes in said intermediate section of said adapter.

13. A ceiling fan having a housing assembly adapted for mounting close to a ceiling, said assembly comprising:

a motor, having an upper stationary member;
a canopy removably securable to the ceiling,
having a centrally located opening formed therein, said
canopy also having inner and outer surfaces;

5 an adapter having top and bottom portions, said
bottom portion being secured to said upper stationary
member of said motor and said top portion being received
within said opening in said canopy;

a ring member disposed within said canopy,
10 having a central opening for receiving said top portion of
said adapter, said ring member being adapted to engage a
portion of said inner surface of said canopy adjacent said
opening in said canopy; and

means for fastening said ring member to said
15 adapter, thereby securing said motor to said canopy.

14. A ceiling fan as claimed in claim 13,
wherein:

said adapter includes an intermediate section
having a plurality of threaded holes formed therein;

20 said ring member includes a plurality of screw
engaging surfaces; and

said fastening means comprise a plurality of
screws passing through said screw engaging surfaces on
said ring member and threadingly engaging said threaded
25 holes in said intermediate section of said adapter.

15. A hanging assembly adapted for mounting a
ceiling fan either close to a ceiling or, alternatively,
suspended at a distance from a ceiling, comprising:

a motor, having an upper stationary member;
30 a canopy removably securable to the ceiling,
having a centrally located opening formed therein, the
perimeter of said opening defining a socket;

a ball member pivotally seatable within said
socket;

a rod, having an upper end and a lower end, said upper end being securable to said ball member;

an adapter having top and bottom portions, said bottom portion being secured to said upper stationary member of said motor, said top portion being removably securable to said lower end of said rod;

a ring member, having a central opening suitable for receiving said top portion of said adapter and an outer dimension larger than said opening in said canopy; and

means for removably fastening said ring member to said adapter; whereby

said ceiling fan may be mounted close to the ceiling by placing said ring member inside said canopy, inserting said top portion of said adapter through said opening in said canopy, and fastening said ring member to said adapter, and

said ceiling fan may be suspended at a distance from said ceiling by seating said ball member in said socket, securing said upper end of said rod to said ball member, and securing said lower end of said rod to said adapter.

16. A ceiling fan, comprising:

a motor, comprising a generally stationary member having a top portion and a bottom portion, and a rotor having a bottom portion, said rotor being rotatable about said stationary member upon operation of said motor;

means for suspending said motor from a ceiling, securable to said top portion of said stationary member of said motor;

a motor housing enclosing at least a portion of said motor;

switch means for selectively controlling the operation of said motor;

a plurality of blades, removably securable by suitable fastening means to said bottom portion of said rotor and rotatable therewith;

a switch housing for containing said switch
5 means, securable to said bottom portion of said stationary member, said switch housing comprising a generally cylindrical side member having an upper edge in close proximity to said fastening means, and a lower edge spaced vertically apart from said upper edge,
10 said upper edge comprising an annular frusto-conical member having a narrow portion secured around said cylindrical side member generally adjacent said top end thereof, and a wide portion spaced upwardly and outwardly from said narrow portion and having a radius larger than
15 the radius of said cylindrical side member, said wide portion including an upwardly projecting annular ring portion integrally formed therewith and extending therefrom; wherein
said upper edge of said switch housing is
20 adapted to conceal at least a portion of said fastening means when the ceiling fan is viewed from below.

17. A ceiling fan constructed and arranged to operate substantially as hereinbefore described with reference to and as illustrated in the accompanying
25 drawings.

18. A hanging assembly for a ceiling fan, such assembly being constructed and arranged to operate substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

Patents Act 1977
 Examiner's report to the Comptroller under
 Section 17 (The Search Report)

Application number

GB 9215476.4

Relevant Technical fields

- (i) UK CI (Edition K) F1C (CE, CFAA, CFE, CFGB)
- (ii) Int CI (Edition 5) F04D 25/00, 25/02, 25/06,
 25/08; 29/26, 29/40, 29/32,
 29/34, 29/36, 29/60

Search Examiner

M D WALKER

Date of Search

23 SEPTEMBER 1992

Databases (see over)

(i) UK Patent Office

(ii)

Documents considered relevant following a search in respect of claims 1 TO 13

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
Y	GB 2214571 A (CEC) Figure 1	1, 2 at least
Y	GB 2076468 A (ALLWARE..) page 2 line 119 to page 3 line 4	1
Y	GB 1508076 (SANYO) eg Figure 10	1
Y	GB 783431 (GENERAL ELECTRIC) whole document	1 at least
Y	US 4936751 (MARSHALL) Figure 1	4
Y	US 4884947 (REZEK) Figures 1, 2	1,2,7,8, 9,11,12

SJJ - doc99\fil000757

Category	Identity of document and relevant passages	Relevant to claim)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).

Patents Act 1977
E: miner's report to the Comptroller under
Section 17 (The Search Report)

Application number

GB 9215476.4

Relevant Technical fields

(i) UK Cl (Edition L) F1C (CE, CFAA, CFGB)

(ii) Int Cl (Edition 5) F04D 25/00 25/02 25/06
 25/08 29/60 29/62
 29/64

Search Examiner

M D WALKER

Date of Search

18 FEBRUARY 1993

Databases (see over)

(i) UK Patent Office

(ii)

Documents considered relevant following a search in respect of claims 14, 15, 17

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
Y	GB 0478417 (SIEMENS) Figure 1 Note means in ceiling canopy for holding carrier 4 of the fan	14
Y	US 4884947 (REZEK) Figure 1; column 1, line 60 to column 2, line 36	14, 17
Y	US 4878806 (MARKWAROT) Figure 4; column 6, lines 40-54	14, 17
Y	US 4714230 (HUANG) Figure 4A; column 3, line 19 etc	14
Y	US 4592702 (BOGAGE) Figure 2, column 2, page 50 to column 3, line 43	14

Category	Identity of document and relevant passages	Relevant to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).