




- (51) International Patent Classification:  
F42C 15/34 (2006.01)
- (21) International Application Number:  
PCT/IL2018/050020
- (22) International Filing Date:  
07 January 2018 (07.01.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
249976 08 January 2017 (08.01.2017) IL
- (71) Applicant: ISRAEL AEROSPACE INDUSTRIES LTD.  
[IL/IL]; Ben Gurion International Airport, 7010000 Lod (IL).
- (72) Inventors: AMINOV, Gavriel; 14/1 Rashi Street, 4082114 Elad (IL). ZEHAVAL, Eyal; 7 Duhifat Street, 7042507 Gedera (IL).
- (74) Agent: SERUYA, Yehuda; Reinhold Cohn & Partners, P.O.B. 13239, 6113102 Tel-Aviv (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: SAFETY DEVICE

FIG. 10(a)

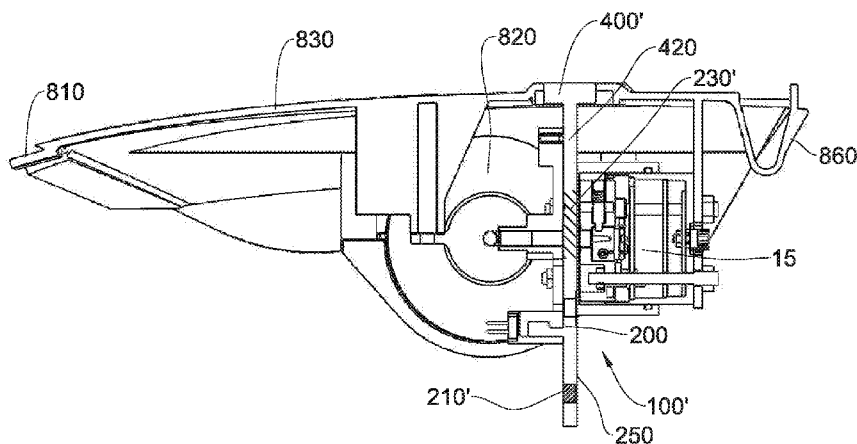

(57) Abstract: Examples of safety devices for use with a munition are provided, the munition including a munition explosive and a safe and arm (S&A) device for activation of the munition explosive. In some examples the safety device includes a switch member and an actuation mechanism. The switch member is configured for being disposed between the munition explosive and the S&A device, the switch member being movable between at least two switch positions. In a first switch position (an arming prevention position (APP)), arming communication between the munition explosive and the S&A device is prevented. In a second switch position (an arming enabling position (AEP)), arming communication between the munition explosive and the S&A device is allowed. The actuation mechanism is configured for selectively moving the switch member at least from the APP to the AEP to thereby enable the S&A device, when armed, to detonate the munition explosive via the switch member.



**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

**Published:**

- *with international search report (Art. 21(3))*

- 1 -

**SAFETY DEVICE****TECHNOLOGICAL FIELD**

The presently disclosed subject matter relates to munitions, in particular to arming systems for explosives.

**5 BACKGROUND ART**

References considered to be relevant as background to the presently disclosed subject matter are listed below:

- US 780,366
- US 4,667,600
- 10 - US 6,295,932
- SAFETY AND ARMING DEVICE DESIGN PRINCIPLES, Steven E Fowler, Naval Air Warfare Center Weapons Division China Lake, CA 93555-6100; May 1999.

Acknowledgement of the above references herein is not to be inferred as  
15 meaning that these are in any way relevant to the patentability of the presently disclosed subject matter.

**BACKGROUND**

Safety and arming (S&A) devices are well known in the art of munitions, in  
20 particular relating to warheads in missiles as well as in bombs and other free-fall weapons.

Conventionally, S&A devices have a number of functions, including at least the following:

- keeping the ordnance (explosive) section of a munition from arming  
25 during shipping, handling or storage;

- 2 -

- arming the ordnance section when a predetermined set of conditions is met (typically via sensors);
- causing high explosives in the ordnance section to detonate when hitting the target or at predetermined distance therefrom.

5           Conventionally, S&A devices are configured as self-contained components, and provide isolation of the relatively insensitive secondary explosives from external stimuli that could otherwise transfer enough energy to initiate the explosives. Such stimuli can include, for example, heat, shock, light, or static electricity. Such isolation can be provided by a mechanical barrier between the detonator and the high explosives when  
10 the S&A device is in the safe mode, and the mechanical barrier and the detonator are an integral part of the S&A device. The mechanical barrier operates to block transmission of any explosive shock from the detonator to the high explosives that may occur in response to any such stimuli. In the armed mode, the mechanical barrier is removed, and is replaced with a transfer lead that allows energy from the detonator to flow to the high  
15 explosive and detonate the same, typically either in response to the target being approached or hit (the desired result) or in response to unwanted stimuli (undesired result).

          Conventionally, S&A devices are configured with an arming delay feature, to provide a delay (usually corresponding to an elapsed time or a distance travelled by the  
20 munition) between deployment of the munition and arming thereof. This serves to provide a safety zone around the point of deployment, or defines an evacuation time period, to minimize risk of the exploding munition becoming a hazard to personal or equipment at the point of deployment.

          There are cases in which a single point failure may occur, in which for example  
25 the S&A device may be caused to arm prematurely, thereby becoming a safety hazard.

          Conventionally, once a munition is deployed and it is subsequently decided to abort (but prior to the signal to arm the S&A device having been sent to the munition), the munition is rarely if ever recovered. This abandonment of the munition is carried out as a safety measure since conventionally it cannot be known for certain that the S&A  
30 device did not become accidentally armed, for example as a result of single point failure, and thus could now be a hazard. On the other hand, this safety measure is costly,

- 3 -

as in the vast majority of cases the S&A device is in fact not armed, and the munition could have been safely recovered for future use and has been discarded instead.

### GENERAL DESCRIPTION

5           According to a first aspect of the presently disclosed subject matter there is disclosed a safety device for use with a munition, the munition including a munition explosive and a safe and arm (S&A) device for activation of the munition explosive, the safety device (being different from the S&A device and). In at least a first example the safety device comprises:

10           a switch member, configured for being disposed between the munition explosive and the S&A device, said switch member being movable between at least two switch positions including:

                  - a first switch position, being an arming prevention position (APP), in which arming communication between the munition explosive and  
15           the S&A device is prevented [i.e., blocked] ; and

                  - a second switch position, being an arming enabling position (AEP), in which arming communication between the munition explosive and the S&A device is allowed (i.e., open communication is provided);

                  an actuation mechanism for selectively moving said switch member at least  
20           from said APP to said AEP to thereby enable the S&A device, when armed, to detonate the munition explosive via the switch member.

                  For example, said switch member comprises a marker element, wherein the marker element is configured for providing an externally observable indication corresponding to the switch member being in at least one of said switch positions

25           Additionally or alternatively, for example, the first example of the safety device can include one or more of the following features.

                  Additionally or alternatively, for example, said switch member comprises a transfer lead portion, configured to be in arming contact with, and thereby providing

- 4 -

arming communication between, the munition explosive and the S&A device when said switch member is at said AEP.

Additionally or alternatively, for example, said switch member comprises a blocking portion, configured to block arming contact with, and thereby prevent arming  
5 communication between, the munition explosive and the S&A device when said switch member is at said APP.

Additionally or alternatively, for example, said switch member is moved from said APP to said AEP in linear motion along an activation axis. Additionally or alternatively, for example, wherein said switch member is in the form of a elongate rod  
10 having a rod longitudinal axis, wherein said transfer lead portion is longitudinally spaced from said blocking portion along said rod longitudinal axis. For example, said rod longitudinal axis is parallel to said activation axis.

Additionally or alternatively, for example, said switch member is moved from said APP to said AEP in pivoting motion about a pivot axis. Additionally or  
15 alternatively, for example, said switch member is in the form of a plate having a plate pivoting axis, wherein said transfer lead portion is circumferentially spaced from said blocking portion with respect to said plate pivoting axis. For example, said plate pivoting axis is coaxial with said pivot axis.

Additionally or alternatively, for example, the safety device is  
20 independent/different from the S&A device.

Additionally or alternatively, for example, the marker element is configured for providing an externally observable indication correspondingly relating to at least one of the following:

- 25 - that said switch member is at said APP concurrent with said switch member being at said APP;
- that said switch member is at said AEP concurrent with said switch member being at said AEP;
- that said switch member is at said APP concurrent with said switch member being at said APP; and that said switch member is at said  
30 AEP concurrent with said switch member being at said AEP.

- 5 -

For example, said marker element comprises a rod member that is deployable from a retracted position, in which the rod member is not externally observable, and a deployed position, in which the rod member is externally observable. For example, said switch member from said APP to said AEP in linear motion along an activation axis, and wherein said rod member is linearly deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in which the rod member projects outside of said housing and is thereby externally observable. Alternatively, for example, said switch member from said APP to said AEP in pivoting motion about a pivot axis, and wherein said rod member is pivotably deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in which the rod member pivots to a position outside of said housing and is thereby externally observable. Alternatively, for example, said switch member from said APP to said AEP in linear motion along an activation axis, and wherein said rod member is linearly deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in which the rod member projects outside of said housing and is thereby externally observable. Alternatively, for example, said switch member from said APP to said AEP in pivoting motion about a pivot axis, and wherein said rod member is pivotably deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in which the rod member pivots to a position outside of said housing and is thereby externally observable.

Additionally or alternatively, for example, said retracted position corresponds to said AEP. Alternatively, for example, said retracted position corresponds to said APP.

25 Additionally or alternatively, for example, said marker element comprises an electromagnetic wave transmitter configured for selectively operating in a transmitting mode or in a non-transmitting mode, wherein in said transmitting mode said electromagnetic wave transmitter selectively transmits electromagnetic waves within a first wavelength range, and wherein in said non-transmitting mode said electromagnetic wave transmitter does not transmit electromagnetic waves within said first wavelength range. For example, said transmitting mode corresponds to said AEP and wherein said non-transmitting mode corresponds to said APP; alternatively, for example, said

- 6 -

transmitting mode corresponds to said APP and wherein said non-transmitting mode corresponds to said AEP. For example, the first wavelength range corresponds to one or more of the ultraviolet wavelength range, or the visible spectrum wavelength range, or to the infra-red wavelength range.

5           Additionally or alternatively, for example, said marker element comprises an electromagnetic wave transmitter configured for selectively operating in a first transmitting mode or in a second transmitting mode, wherein in said first transmitting mode said electromagnetic wave transmitter selectively transmits electromagnetic waves within a first wavelength range, and wherein in said second transmitting mode  
10 said electromagnetic wave transmitter transmits electromagnetic waves within a second first wavelength range different from said first wavelength range. For example, said first transmitting mode corresponds to said AEP and wherein said second transmitting mode corresponds to said APP; alternatively, for example, said first transmitting mode corresponds to said APP and wherein said second transmitting mode corresponds to said  
15 AEP. For example, the first wavelength range corresponds to one or more of the ultraviolet wavelength range, or the visible spectrum wavelength range, or to the infra-red wavelength range. Additionally or alternatively, for example, the second wavelength range corresponds to one or more of the ultraviolet wavelength range, or the visible spectrum wavelength range, or to the infra-red wavelength range. Additionally or  
20 alternatively, for example, the marker element is visually observable.

          Additionally or alternatively, for example, said actuation mechanism is configured for selectively moving said switch member from said APP to said AEP, responsive to an actuation event. For example, said safety device is coupled to a communication module, and wherein said actuation event includes the communication  
25 module receiving an externally transmitted first attack signal. Additionally or alternatively, for example, said safety device is coupled to a timing module, and wherein said actuation event includes the timing module determining that a predetermined time period has elapsed from a start time. Additionally or alternatively, for example, said safety device is coupled to an altitude sensor module, and wherein  
30 said actuation event includes the altitude sensor module determining that a predetermined altitude has been reached. Additionally or alternatively, for example, said safety device is coupled to a navigation module, and wherein said actuation event



- 7 -

includes the navigation module determining that a predetermined geographical position has been reached.

Additionally or alternatively, for example, said actuation mechanism comprises a linear actuator or a rotary actuator.

5           Additionally or alternatively, for example, the safety device comprises or is operatively connected to a Remove Before Operation (RBO) pin having an engaged configuration wherein the RBO pin mechanically prevents arming of the S&A device, and a disengaged configuration wherein the RBO pin cannot mechanically prevent arming of the S&A device. Alternatively, the safety device comprises or is operatively  
10 connected to a Remove Before Operation (RBO) pin having an engaged configuration wherein the RBO pin mechanically prevents arming of the S&A device and concurrently mechanically prevents movement of said switch member from said APP to said AEP, and a disengaged configuration wherein the RBO pin cannot mechanically prevent arming of the S&A device, and cannot mechanically prevent movement of said  
15 switch member from said APP to said AEP.

            Additionally or alternatively, for example, the safety device further comprises a positional sensor system including at least one emitter sensor set configured for sensing at least one said position of the switch member, each said emitter sensor set comprising  
20 an emitter and a sensor aligned therewith along a first axis, wherein movement of the switch member between the APP and AEP either allows or blocks sensing by the sensor of emissions emitted by the emitter.

            In at least a second example according to the first aspect of the presently  
25 disclosed subject matter the safety device comprises:

            a switch member, configured for mounting the S&A device thereto, said switch member being movable between at least two switch positions while carrying the S&A device therewith, said at least two switch positions including:  
            - a first switch position, being an arming prevention position (APP), in  
30           which arming communication between the munition explosive and the S&A device is prevented; and

- 8 -

- a second switch position, being an arming enabling position (AEP), in which arming communication between the munition explosive and the S&A device is allowed;

an actuation mechanism for selectively moving said switch member at least from  
5 said APP to said AEP to thereby enable the S&A device, when armed, to  
detonate the munition explosive via the switch member.

In at least some examples, the safety device further comprises a marker element,  
wherein the marker element is configured for providing an externally observable  
indication corresponding to the switch member being in at least one of said switch  
10 positions.

Additionally or alternatively, the second example of the safety device can  
include one or more of the features disclosed above for the first example, *mutatis  
mutandis*.

According to a second aspect of the presently disclosed subject matter there is  
15 disclosed a munition, in which a first example thereof comprises:

- a munition explosive;
- a safe and arm (S&A) device for activation of munition explosive;
- a safety device as defined herein with respect to the aforesaid first aspect  
of the presently disclosed subject matter.

20 According to the second aspect of the presently disclosed subject matter, a  
second example of the munition comprises:

- a munition explosive;
- a safe and arm (S&A) device for activation of munition explosive;
- a safety mechanism comprising:

25 a switch member, configured for mounting the S&A device thereto, said  
switch member being movable with the S&A device between at least two  
positions including:

- an arming prevention position (APP), in which arming  
communication between the munition explosive and the S&A  
30 device is prevented; and

- 9 -

- an arming enabling position (AEP), in which arming communication between the munition explosive and the S&A device is allowed;

an actuation mechanism for selectively moving said switch member at least from said  
5 APP to said AEP to thereby enable the S&A device, when armed, to detonate the munition explosive.

The first or second examples of the munition according to the second aspect of the presently disclosed subject matter can include one or more of the following features.

For example, said S&A device is a stand-alone component configured for  
10 providing safety and arming functions to the munition explosive also in the absence of said safety device.

Additionally or alternatively, for example, the S&A device comprises a detonator spaced from an output lead by a barrier member having a barrier portion and a transfer lead portion.

15 Additionally or alternatively, for example, the S&A device is different from said safety device.

Additionally or alternatively, for example, the munition explosive comprises at least one grenade.

20 Additionally or alternatively, for example, the munition explosive comprises a plurality of grenades.

Additionally or alternatively, for example, the munition explosive comprises a warhead.

25 According to a third aspect of the presently disclosed subject matter there is disclosed a vehicle, configured for motion, and comprising a munition as defined herein with respect to the aforesaid second aspect of the presently disclosed subject matter.

For example, the vehicle is an air vehicle, configured for motion in the atmosphere.

Additionally or alternatively, for example, the vehicle is any one of an unmanned air vehicle (UAV), a missile, or a free-fall weapon.

30 Additionally or alternatively, for example, the vehicle is any one of a torpedo, a robotic land surface or a water surface vehicle.

- 10 -

Additionally or alternatively, for example, the vehicle is in the form of a quadcopter.

According to a third aspect of the presently disclosed subject matter there is  
5 disclosed a method for operating a munition, comprising:

- (a) deploying the munition, the munition being as defined herein with respect to the aforesaid second aspect of the presently disclosed subject matter;
- (b) selectively moving said switch member from said APP to said AEP;
- (c) arming the S&A device;
- 10 (d) causing the S&A device to detonate the munition explosive via the switch member.

For example, the method comprises disengaging a Remove Before Operation (RBO) pin prior to step (b).

Additionally or alternatively, for example, the method comprises aborting  
15 deployment of the munition after step (a) and before step (b), and recovering the munition with said switch member at said APP.

Additionally or alternatively, for example, the method comprises aborting deployment of the munition after step (b) and before step (c). The method can also include the step of selectively moving said switch member from said AEP to said APP,  
20 and the step of recovering the munition with said switch member at said APP.

Additionally or alternatively, for example, the method comprises aborting deployment of the munition after step (c) and before step (d). The method can also include the step of disarming the S&A device into safe mode, the step of selectively moving said switch member from said AEP to said APP, and the step of recovering the  
25 munition with said switch member at said APP.

According to some aspects of the presently disclosed subject matter, examples of safety devices for use with a munition are provided, the munition including a munition explosive and a safe and arm (S&A) device for activation of the munition explosive. In some such examples the safety device includes a switch member and an actuation  
30 mechanism. The switch member is configured for being disposed between the munition explosive and the S&A device, the switch member being movable between at least two switch positions. In a first switch position (an arming prevention position (APP)),

- 11 -

arming communication between the munition explosive and the S&A device is prevented. In a second switch position (an arming enabling position (AEP)), arming communication between the munition explosive and the S&A device is allowed. The actuation mechanism is configured for selectively moving the switch member at least  
5 from the APP to the AEP to thereby enable the S&A device, when armed, to detonate the munition explosive via the switch member.

A feature of at least one example of the presently disclosed subject matter is that recovery of unused munition can be possible in a safe manner.

Another feature of at least one example of the presently disclosed subject matter  
10 is that recovery of unused munition can be possible in a verifiably safe manner.

Another feature of at least one example of the presently disclosed subject matter is that it provides an independent safety measure to a munition that provides visual confirmation of the munition being in a safe configuration and/or visual confirmation of the munition being in a potentially armed or actually armed configuration.

15 Another feature of at least one example of the presently disclosed subject matter is that it provides an independent safety measure to a munition that allows for visual determination of the safety state of the munition from a safe distance.

Another feature of at least one example of the presently disclosed subject matter is that it provides a visual marker that corresponds to the safety state of the munition  
20 with very high degree of reliability.

Another feature of at least one example of the presently disclosed subject matter is that it provides a visual marker that corresponds to the safety state of the munition with close to absolute degree of reliability.

Another feature of at least one example of the presently disclosed subject matter  
25 is that it provides a delivery vehicle configured for delivering a warhead to a desired target, and at the same time is configured for allowing the recovery of the delivery vehicle in a safe manner in situations where such delivery is aborted.

Another feature of at least one example of the presently disclosed subject matter is that it provides a suicide delivery vehicle configured for delivering a warhead to a

- 12 -

desired target, the delivery vehicle being destroyed or damaged in the process., and at the same time is configured for allowing the recovery of the delivery vehicle in a safe manner in situations where such delivery is aborted.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

In order to better understand the subject matter that is disclosed herein and to exemplify how it can be carried out in practice, embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

10 **Fig. 1** illustrates in side view a munition including a safety device according to a first example of the presently disclosed subject matter, the safety device being in arming prevention mode.

**Fig. 2** illustrates in side view the example of Fig. 1, the safety device being in arming enabling mode.

15 **Fig. 3(a)** illustrates in side view a munition including a safety device according to another example of the presently disclosed subject matter; **Fig. 3(b)** illustrates in side view a munition including a safety device according to another example of the presently disclosed subject matter.

**Fig. 4(a)** illustrates in side view a munition including a safety device according  
20 to another example of the presently disclosed subject matter, the safety device being in arming prevention mode; **Fig. 4(b)** illustrates in side view the example of Fig. 4(a), the safety device being in arming enabling mode.

**Fig. 5(a)** illustrates in side view a switch member of a safety device according to another example of the presently disclosed subject matter, the safety device being in  
25 arming prevention mode; **Fig. 5(b)** illustrates in side view the example of Fig. 5(a), the safety device being in arming enabling mode.

**Fig. 6(a)** illustrates in side view a munition including a safety device according to another example of the presently disclosed subject matter; **Fig. 6(b)** illustrates in side view a munition including a safety device according to another example of the presently  
30 disclosed subject matter.

**Fig. 7(a)** illustrates in side view a switch member of a safety device according to another example of the presently disclosed subject matter, the safety device being in arming prevention mode; **Fig. 7(b)** illustrates in side view the example of Fig. 7(a), the safety device being in arming enabling mode.

5       **Fig. 8** illustrates in isometric view, an air vehicle including warhead module according to an example of the presently disclosed subject matter.

**Fig. 9(a)** illustrates in isometric view the warhead module example of Fig. 8, the safety device thereof being in arming prevention mode; **Fig. 9(b)** illustrates in isometric view the example of Fig. 9(a), the safety device being in arming enabling mode.

10       **Fig. 10(a)** illustrates in cross-sectional side view the warhead module example of Fig. 8, the safety device thereof being in arming prevention mode; **Fig. 10(b)** illustrates in cross-sectional side view the example of Fig. 10(a), the safety device being in arming enabling mode.

**Fig. 11(a)** illustrates in aft view the warhead module example of Fig. 8, the safety device thereof being in arming prevention mode; **Fig. 11(b)** illustrates in aft view the example of Fig. 11(a), the safety device being in arming enabling mode.

**Fig. 12** illustrates in bottom isometric view the warhead module example of Fig. 8.

**Fig. 13** illustrates in bottom cross-sectional view the warhead module example of Fig. 8.

**Fig. 14** illustrates in side view a variation of the example of Fig. 1, including an alternative example of the Remove Before Operation pin, in engagement configuration.

**Fig. 15** illustrates in side view the example of Fig. 14, the safety device being in disengagement configuration with respect to the Remove Before Operation pin.

25       **Figs. 16(a)** and **16(b)** illustrate, in partial isometric view, a positional sensor system for the switch member of the examples of Figs. 1 to 15, in in arming prevention mode and in arming enabling mode respectively.

**Fig. 17(a)** illustrates in side view a munition including a safety device according to a second example of the presently disclosed subject matter, the safety device being in arming prevention mode; **Fig. 17(b)** illustrates in side view the example of Fig. 17(a), the safety device being in arming enabling mode.

30

**DETAILED DESCRIPTION**

Referring to Figs. 1 and 2, a safety device for a munition **10** according to a first example of the presently disclosed subject matter, generally designated **100**, comprises a switch member **200** and an actuation mechanism **300**.

5           The munition **10** includes a safety and arming (S&A) device **15** and a munitions explosive **45**, which includes the main explosive charge of the munition, which in this example is a chemical explosive munition of a warhead. In this example the munition explosive **45** comprises chemical explosives, which when detonated create a destructive heat and pressure wave. In alternative variations of this example, the warhead can include  
10 the munition in the form of any one of chemical weapons, biological weapons, nuclear weapons, hollow charge weapons, and so on.

The S&A device **15** is a stand-alone component, i.e. a self-contained component, and comprises at least a detonator (not shown), an S&A output lead **17**, and an S&A barrier member (not shown) having a S&A transfer lead.

15           Conventionally, such an S&A device **15** can be directly coupled to the munitions explosive **45**, and at least one example of S&A device **15** thereby provides in such an arrangement:

- (a) a safety setting to the munitions explosive **45** when the S&A barrier member blocks the S&A output lead **17** from the munitions explosive **45**; or
- 20           (b) arms the munitions explosive **45** when the S&A barrier member aligns the S&A transfer lead between the detonator and the S&A output lead **17**.

Furthermore, at least one example of the S&A device **15** can have a number of functions, including for example one or more of the following:

- 25           - keeping the munitions explosive **45** from arming during shipping, handling or storage;
- arming the munitions explosive **45** when a predetermined set of conditions is met;
- causing munitions explosive **45** to detonate when hitting the target or at predetermined distance therefrom.



- 15 -

There are numerous examples of such S&A devices known in the art, and thus the S&A device **15** will not be described further herein.

According to the presently disclosed subject matter, the S&A device **15** can retain its conventional structure and functions, but rather than being coupled directly to the munitions explosives **45**, the S&A device **15** and the munitions explosives **45** are separated from one another via the safety device **100**.

The safety device **100** is thus different from, and operates independently of, the S&A device **15**.

In this example, the S&A device **15** is fixedly mounted with respect to the munition **10**, and in particular with respect to the munitions explosives **45**. The switch member **200** is disposed between the S&A device **15** and the munitions explosives **45**. Furthermore, the switch member **200** is movable between at least two switch positions:

- an arming prevention position (APP), for example as illustrated in Fig. 1, corresponding to a safety device arming prevention mode; and
- an arming enabling position (AEP), for example as illustrated in Fig. 2, corresponding to a safety device arming enabling mode.

In the arming prevention position (APP), corresponding to an arming prevention mode for the safety device **100**, arming communication between the munition explosive **45** and the S&A device **15** is blocked or otherwise prevented.

In the arming enabling position (AEP), corresponding to an arming enabling mode for the safety device **100**, arming communication between the munition explosive **45** and the S&A device **15** is allowed, i.e., the munition explosive **45** and the S&A device **15** are in arming communication i.e., in arming contact.

The term "arming communication" as used herein refers to the type of communication or contact between the munition explosive **45** and the S&A device **15** (via the safety device **100**, in particular via the switch member **200**) that is such as to establish a contiguous explosive train between the S&A device **15** and the munition explosive **45** of the warhead. For example, when "arming communication" is established between the S&A device **15** and the munition explosive **45**, this allows a detonation wave to travel from the

- 16 -

S&A device **15** to the munition explosive **45** and thereby cause the munition explosives **45** to explode. Conversely, blocking or otherwise preventing "arming communication" between the munition explosive **45** and the S&A device **15** (via the safety device **100**, in particular via the switch member **200**), refers to interrupting the explosive train between  
5 the S&A device **15** and the munition explosive **45**, and thus, for example, a detonation wave originating from the S&A device **15** is prevented from traveling to the munition explosive **45** and the detonation wave is thereby not able to reach or cause the munition explosives **45** to explode.

Furthermore in this example, the switch member **200** is the form of an elongate rod  
10 **250** (also referred to herein as a slider), having a rod longitudinal axis **RLA**, and comprises a transfer lead portion **210** longitudinally spaced from a blocking portion **230** along the rod longitudinal axis **RLA**. The rod **250** has a first longitudinal end **252** and a second longitudinal end **254**, and at least in this example also has a substantially uniform transverse thickness **t**, at least along a minimum longitudinal length **L** thereof including the  
15 transfer lead portion **210** and the blocking portion **230** wherein said length **L** is disposed between the first longitudinal end **252** and the second longitudinal end **254**.

The transfer lead portion **210** is configured for selectively being in arming contact with, and to thereby provide arming communication between, the munition explosive **45** and the S&A device **15** when the switch member **200** is at the **AEP** (see Fig. 2). The  
20 transfer lead portion **210** thus extends through the transverse thickness **t** of the rod **250**, and has a first face **212** transversely spaced from a second face **214**, the first face **212** generally facing towards the S&A device **15**, and the second face **214** generally facing towards the munition explosive **45**. The transfer lead portion **210** is made from any suitable material that is configured for allowing arming communication between the  
25 munition explosive **45** and the S&A device **15**, transversely through the rod **250**. For example, the transfer lead portion **210** can be made from the same material as the S&A output lead **17** of the S&A device **15**. Examples of such materials for the transfer lead portion **210** can include, for example, PBXN-5, PA508, CH6, and so on, as known in the art.

30 Thus, in the **AEP** the munition explosive **45**, the transfer lead portion **210** and the S&A device **15** are in-line, along axis of arming **AOA**.

- 17 -

The blocking portion **230** is configured to block arming contact with, and to thereby prevent arming communication between, the munition explosive **45** and the S&A device **15** when the switch member **200** is at the **APP** (see Fig. 1). The blocking portion **230** can extend through all of or part of transverse thickness  $t$  of the rod **250**, and extends  
5 longitudinally and/or laterally sufficiently to ensure that at the **APP** the munition explosive **45** is out of line with respect to the S&A device **15** until the transfer lead portion **210** is aligned with the S&A output lead **17** of the S&A device **15**. The blocking portion **230** is made from any suitable material that is configured for blocking arming communication between the munition explosive **45** and the S&A device **15**, transversely through the rod  
10 **250**, at the **APP**. For example, the blocking portion **230** can be made from any suitable barrier material that does not allow propagation of a detonation wave therethrough. Examples of such materials for the blocking portion **230** can include, for example, ceramics, metals (for example steel), and other materials as well known in the art.

The rod **250** can be made from a material different from that of the blocking  
15 portion **230** and from that of the transfer lead portion **210**, and the blocking portion **230** and of the transfer lead portion **210** are embedded in the rod **250**, for example as plugs of the respective materials. Alternatively, the rod **250** can be made from the same material different as the blocking portion **230** and can be made integral therewith; the transfer lead portion **210** can then be embedded in the rod **250**, for example as plug of the respective  
20 material.

In this example, in operation the switch member **200** is movable from the **APP** to the **AEP** in a linear motion along an activation axis **AA**. In particular, the rod **250** is slidably movable from **APP** to the **AEP** in a linear motion along activation axis **AA**, which is parallel or coaxial with the rod longitudinal axis **RLA**. The safety device **100** comprises  
25 suitable slide rails or guides (not shown) or any other suitable arrangement to allow sliding of the rod **250** between the **APP** and the **AEP**.

To enhance the safety feature aspect of the switch member **200**, the transfer lead portion **210** can optionally be designed to be as small as possible with respect to the output lead **17** of the S&A device **15**, so that only when the switch member is in the **AEP** is it  
30 possible for the S&A device **15** to detonate the munition, i.e., when the transfer lead portion **210** and the output lead **17** are coaxially aligned along axis **AOA** (Fig. 2). In such a

- 18 -

case, the safety device **100** is essentially in safe mode even when the switch is moved away from the **APP**, and at virtually all other positions intermediate the **APP** and the **AEP**, except for the actual **AEP** itself.

The actuation mechanism **300** is configured for selectively moving the switch member **200** at least from the **APP** to the **AEP** to thereby enable the S&A device **15**, when armed, to detonate the munition explosive **45** via the switch member **200**. For example, the actuation mechanism **300** comprises an electric motor **260** operatively connected to the switch member **200**, and a suitable power source (e.g. a battery) is operatively connected to the motor. For example, the motor can be operatively connected to the rod **250** via a rack and pinion arrangement, the motor turning the pinion, and the rack being affixed to or integral with the rod **250**. Actuation of the motor rotates the pinion, which in turn moves the rod **250** between the **APP** and the **AEP**. For example the rack can be provided on a side edge of the switch member **200**. Optionally, the rack can include a cut-out portion such that when the switch member **200** is translated via rotation of the pinion gear, when the cut-out portion reaches the position of the pinion gear, the pinion gear becomes disengaged with the rack and thus prevents further displacement of the switch member **200** even if the pinion gear is still rotating. This can help ensure that switch member **200** remains in the **AEP** and that concurrently the marker element **400** (see below) remains visible.

Alternatively, in this example, and in at least some alternative variations of this example and in other examples of the presently disclosed subject matter, actuation mechanism **300** can be based on a linear actuator or a rotary actuator, and can comprise for example any one of:

- a linear actuator, for example a solenoid or other linear motor, operatively connected to a suitable power source (e.g. a battery), and connected directly or indirectly (for example via a lever system) to the rod **250**, such that actuation of the solenoid or other linear motor moves the rod **250** from the **APP** to the **AEP**.

- a rotary actuator, for example a rotary motor, operatively connected to a suitable power source (e.g. a battery), and connected directly or indirectly

- 19 -

- (for example via a rack and pinion gear system) to the rod **250**, such that actuation of the rotary motor moves the rod **250** from the **APP** to the **AEP**.
- 5                   - a linear actuator, for example a pyrotechnic actuator coupled to a piston arrangement (having a piston movable within a housing) and connected to a suitable power source (e.g. a battery); the piston arrangement is connected directly or indirectly (for example via a lever system) to the rod **250**, such that actuation of the pyrotechnic actuator causes the piston to move relative to the housing, thereby moving the rod **250** from the **APP** to the **AEP**.
  - 10                  - a linear actuator, for example a pneumatic actuator or a hydraulic actuator, coupled to a piston arrangement (having a piston movable within a housing) and connected to a suitable compressed gas source or hydraulic liquid source, respectively; the piston arrangement is connected directly or indirectly (for example via a lever system) to the rod **250**, such that  
15                   actuation of the actuator causes the piston to move relative to the housing, thereby moving the rod **250** from the **APP** to the **AEP**.
  - a linear actuator, for example a thermal actuator, having a piston arrangement (the piston movable within a housing of the actuator) and connected to a suitable power source (e.g. a battery); the piston  
20                   arrangement is connected directly or indirectly (for example via a lever system) to the rod **250**, such that actuation of the thermal actuator heats up the thermal material (for example a wax) inside thereof and causes the piston to move relative to the housing, thereby moving the rod **250** from the **APP** to the **AEP**.
  - 25                  - a linear or rotary actuator, for example a compressed spring arrangement having a lock pin that keeps the spring compressed until actuated; the lock pin can be, for example, in the form of an explosive bolt, or is shearable or otherwise removable responsive to said actuation, allowing the spring to expand, thereby moving the rod **250** from the **APP** to the **AEP**.

- 20 -

Optionally, the safety device **100** comprises a lock mechanism for reversibly or irreversibly locking the switch member **200** at the **AEP** after it has moved from the **APP**. For example, such a lock mechanism can comprise a mechanical stop, for example in the form of a wedge **272**, affixed to the rod **250** and moveable therewith, and includes a pawl  
5 **274** provided at a fixed position. As the rod **250** slides from the **APP** to the **AEP**, the pawl is deflected by the wedge **272** and pivots in a counter clockwise direction (as seen in Figs. 1 and 2). However, the pawl is configured to return to its initial position, and can comprise another mechanical stop (not shown) so that it is limited from pivoting in clockwise direction only to its initial position, and thus prevents the rod **250**, via the wedge **272**, from  
10 returning to the **APP**. In alternative variations of this example and in other examples of the presently disclosed subject matter, other configurations can be provided for the lock mechanism, or alternatively, the lock mechanism can be omitted.

Further optionally, the lock mechanism is reversibly lockable, and thus can be manually unlocked (e.g. once the munition **10** is recovered), and thus allow the switch  
15 member **200** to be moved back from the **AEP** to the **APP**, for example manually. In such a case, the lock mechanism can be, for example, in the form of a clutch having a spherical member urged against the switch member **200** via a spring, wherein in the **AEP** the spherical member is engaged in an indentation provided in the switch member **200**, wherein by manually pushing the switch member **200** towards the **APP** causes the  
20 spherical member to become disengaged from the indentation.

According to another aspect of the presently disclosed subject matter, the safety device **100** further comprises a marker element **400** for alerting an external observer **EO** as to the position of the switch mechanism **200**. In other words, the marker element **400** is configured for providing an externally observable indication, i.e. a marker or indication to  
25 an external observer **EO**, that correspondingly relates to the position of the switch mechanism **200**, in particular as relating to the **AEP** and/or to the **APP**.

In general, the marker element **400** can be configured to enable the external observer to be alerted to any one of the following conditions:

(A) that the switch member **200** is at the **APP** concurrent with the switch  
30 member **200** being at the **APP**;

- 21 -

(B) that said switch member **200** is at the **AEP** concurrent with the switch member being at the **AEP**;

(C) that the switch member **200** is at the **APP** concurrent with the switch member **200** being at the **APP**; and, that the switch member **200** is at said  
5 **AEP** concurrent with the switch member **200** being at the **AEP**.

In this example, and in at least some alternative variations of this example and in other examples of the presently disclosed subject matter, the marker element **400** is in the form of a visual marker that is configured for enabling an external observer to be visually alerted as to the position of the switch mechanism **200**.

10 Furthermore, in at least this example, and in at least some alternative variations of this example and in other examples of the presently disclosed subject matter, the marker element **400** is configured for condition (B), i.e., when the switch member **200** is in the **AEP** the marker element **400** is externally observable, i.e. under conditions in which the S&A device **15** can potentially arm the munition explosive **45**.

15 In this example the marker element **400** comprises a rod member **420** that is deployable from a retracted position to an exposed deployed position. In the retracted position the rod member **420** is not externally visible, and corresponds to the **APP**. In the deployed position the rod member **420** is externally visible, and corresponds to the **AEP**.

In this example, in operation the rod member **420** is linearly deployable or movable  
20 from the retracted position to the deployed position in a linear motion along a deployment axis **DA**, and the safety device **100** comprises suitable slide rails or guides (not shown) or any other suitable arrangement to allow the aforesaid linear motion of the rod member **420**. Also in this example, in the retracted position the rod member **420** is enclosed in a housing  
20 **20** and thereby not externally observable, while in the deployed position the rod member  
25 **420** projects outside of the housing **20** via opening **25** and is thereby externally observable.

In this example and in other examples where the munition **10** is deployed as a self-contained unit – for example in the form of a missile, or a free-fall weapon, torpedo, robotic land surface or water surface vehicle, and so on - the housing **20** can be part of an external wall or external casing of the munition **10** itself, such an external wall being  
30 observable by an external observer **EO** from an outside of the munition **10**.

- 22 -

In at least some alternative variations of this example and in other examples of the presently disclosed subject matter, the munition is carried by a carrier vehicle, for example, a UAV, up to and including detonation. In such cases the carrier vehicle is designed to be sacrificed, and is also referred to herein as a "kamikaze" vehicle. In such cases the housing  
5 **20** can be part of an external wall of the carrier vehicle, such an external wall being observable by an external observer **EO** from an outside of the carrier vehicle.

Thus, the retracted position corresponds to the **APP**, while the deployed position corresponds to the **AEP**.

Furthermore, the switch member **200** and the marker element **400** are configured as  
10 a kinematic pair, such that when the switch member **200** moves from the **APP** to the **AEP**, the marker element **400** correspondingly moves from the retracted position to the deployed position.

In this example, the deployment axis **DA** of the marker element **400** is parallel to or coaxial with the activation axis **AA** of the switch member **200**. Furthermore in this  
15 example, the rod member **420** is affixed to, or integrally formed with, the rod **250**, at the first end **252** of the rod **250**, and thus the rod member **420** and the rod **250** move as a single rigid body. Thus as the switch member **200** from the **APP** to the **AEP**, the marker element **400** concurrently moves from the retracted position to the deployed position along the same actuation axis **AA**.

20 Furthermore, in this example, the marker element moves **400** in the same direction as the switch member **200**. However, in alternative variations of this example, and referring to Fig. 3(a), the marker element **400** moves along the deployment axis **DA** in the opposite direction with respect to the switch member **200**, and the deployment axis **DA** is parallel to the actuation axis **AA**. For example, the safety device **100** comprises a double  
25 rack and pinion arrangement, including a first rack gear **201** affixed to the marker element **400**, a second rack gear **202** affixed to the switch member **200**, and a pinion gear **203** rotatable about pinion axis **205**.

In yet other alternative variations of this example, and referring to Fig. 3(b), the marker element moves **400** along the deployment axis **DA** with respect to the switch  
30 member **200**, wherein the deployment axis **DA** is at an angle  $\theta$  to the actuation axis **AA**,



- 23 -

where angle  $\theta$  can be any angle in the range  $0^\circ$  to  $360^\circ$ . For example, and as with the example of Fig. 3(a), the safety device **100** comprises, for example, a double rack and pinion arrangement, including first rack gear **201** affixed to the marker element **400**, second rack gear **202** affixed to the switch member **200**, and pinion gear **203** rotatable  
5 about pinion axis **205**. In some such cases, and depending on the relative sizes of the marker element **400** and the switch member **200**, on the magnitude of the angle  $\theta$ , and the linear travel of the marker element **400** and the switch member **200** between positions **APP** and **AEP**, the marker element **400** is spaced from the switch member **200** in a direction along the pinion axis **205** sufficient to avoid collision between the marker  
10 element **400** and the switch member **200**.

In any case, and to enhance visibility of the marker element **400** in the deployed position, the marker element (e.g. the rod member **420**) can be integrally formed with or can be coated in bright color (e.g. red paint), and/or in fluorescent colors, and/or can comprises a highly reflective coating, for example retro-reflective tape.

15 In alternative variations of this example, the deployment axis **DA** of the marker element **400** is not parallel to the activation axis **AA** of the switch member **200**. Rather, the marker element **400** and the switch member **200** form a kinematic pair via a mechanical connection, for example levers pivotably mounted to the marker element **400** and to the switch member **200**.

20 In yet other alternative variations of this example and in other examples of the presently disclosed subject matter, the marker element **400** is configured for condition (A), i.e., when the switch member **200** is in the **APP** the marker element **400** is externally visible, under conditions in which the S&A device **15** is prevented from arming the munition explosive **45** via the switch member **200**. In such cases, and referring again to  
25 Figs. 1 and 2, the marker element **400** can also comprise a rod member **420'** (for example similar to rod member **420**, *mutatis mutandis*) that is deployable from a retracted position to an exposed deployed position. In the retracted position the rod member is not externally visible, and corresponds to the **AEP**, while in the deployed position the rod member is externally visible, and corresponds to the **APP** – the rod member **420'** is shown at these  
30 positions as dotted lines **420'** in Figs. 1 and 2. Also in this example, in operation the rod member **420'** is linearly deployable or movable from the retracted position to the deployed

- 24 -

position in a linear motion along a deployment axis **DA**, and the safety device **100** comprises suitable slide rails or guides (not shown) or any other suitable arrangement to allow the aforesaid linear motion of the rod member. Also in this example, in the retracted position the rod member is enclosed in housing **20** and thereby not externally observable, while in the deployed position the rod member **420** projects outside of the housing **20** via opening **25** and is thereby externally observable. Furthermore, in this example, the rod member is affixed to, or integrally formed with, the rod **250**, at the second end **254** of the rod **250**. Thus as the switch member **200** from the **APP** to the **AEP**, the marker element **400** concurrently moves from the deployed position to the retracted position along the same actuation axis **AA**. In alternative variations of this example, the deployment axis **DA** of the marker element **400** is not parallel to the activation axis **AA** of the switch member **200**, and/or the marker element **400** and the switch element **200** move in different directions from one another, for example as described above with respect to Figs. 3(a) and 3(b), *mutatis mutandis*.

In yet other alternative variations of this example and in other examples of the presently disclosed subject matter, the marker element **400** is configured for condition (C), i.e.:

- when the switch member **200** is in the **APP** the marker element **400** is externally visible, under conditions in which the S&A device **15** is prevented from arming the munition explosive **45** via the switch member **200**;
- and
- when the switch member **200** is in the **AEP** the marker element **400** is also externally visible, under conditions in which the S&A device **15** can potentially arm the munition explosive **45**.

In such cases, the marker element **400** can also comprise a rod member **420** as well as rod member **420'**, as disclosed above for the corresponding examples relating to condition (B) and condition (A), *mutatis mutandis*. Thus, rod member **420** is deployable from a retracted position to an exposed deployed position, while concurrently rod member **420'** is retractable from an exposed position to a retracted position, while concurrently the

- 25 -

switch member is moved from the **APP** to the **AEP**. Thus, in the **APP** only the rod member **420'** is externally visible, while in the **AEP** only the rod member **420** is externally visible. To differentiate between the **AEP** and the **APP**, the rod member **420** in its corresponding deployed position is visually distinguishable from the rod member **420'** in its corresponding deployed position. For example the rod member **420** can have a red color while the rod member **420'** can have a green color, and/or, the rod member **420** can have a first geometrical shape, while the rod member **420'** can have a second geometrical shape that is visually very different from the first geometrical shape. In this example, the rod member **420** and the rod member **420'** are each kinematically coupled to the switch member **200**, and each one of the rod member **420** and the rod member **420'** can be linearly deployed along the same or different axes with respect to each other or with respect to the switch member **200**.

In these or other alternative variations of this example, in operation the marker element **400** is pivotably deployable or movable from the retracted position to the deployed position in a pivotable motion about a deployment pivot axis, and the safety device **100** comprises suitable journals, bearings or other pivoting structure or any other suitable arrangement to allow the aforesaid pivotable motion of the marker element **400**. The marker element **400** can be in the form of a disc or segment of a disc, or a portion of a spherical surface, for example, in which the center of the corresponding disc or sphere is on the deployment pivot axis.

For example, and alternatively for each of the examples disclosed above regarding conditions (A), (B) and (C), while the switch member **200** is actuated to move linearly from the **APP** to the **AEP** along actuation axis **AA**, and the marker element **400** concurrently moves along deployment axis **DA**, other arrangements are also possible. For example, referring to Figs. 4(a) and 4(b), the safety device **100** can be instead configured such that as the switch member **200** is actuated to move linearly from the **APP** to the **AEP** along actuation axis **AA**, the marker element **400** is pivotably retractable or movable from the deployed position to the retracted position in a pivotable motion about a deployment pivot axis **DPA**. For example, the safety device **100** comprises a rack and pinion arrangement, including a rack gear **231** affixed to the switch member **200**, and a pinion gear **233** rotatable about a pinion gear axis, which in this example is coaxial with the deployment pivot axis **DPA**. In this example the marker element **400** is in the form of a

- 26 -

disc sector **430**, including for example more than 180° of the full disc, and having a perimeter including a circumferential portion **435** and a chord portion **436**. The disc sector **430** also has flat faces **439**, and disc center **438** which is coaxial with the deployment pivot axis **DPA**. The disc sector **430** is affixed to or integral with the pinion gear **233**.

5 Referring still to Figs. 4(a) and 4(b), in condition (B), as the switch member **200** is actuated to move linearly from the **APP** to the **AEP** along actuation axis **AA**, the rack and pinion arrangements causes the pinion gear **233** to rotate, thereby pivoting the disc sector **430** from the retracted position in housing **20** (Fig. 4(a)) to the deployed position outside of the housing **20** (Fig. 4(b)) in a pivotable motion about a deployment pivot axis **DPA**. In the  
10 deployed position, the faces **439** are projecting outside of the housing **20** and are clearly visible to an external observer **OA** outside of the housing **20**, who can now be assured that the switch member **200** is in the **AEP** position.

Alternatively, in condition (A), the disc sector **430** is affixed to the pinion gear **233** in a relative angular orientation (for example displaced by 180° from the orientation shown  
15 in Figs. 4(a) and 4(b)) such that in the **APP**, the disc sector **430** is in the deployed position, and thus the faces **439** are projecting outside of the housing **20** via opening **25** and are clearly visible to an external observer **OA** outside of the housing **20**, who is now assured that the switch member **200** is in the **APP** position. As the switch member **200** is actuated to move linearly from the **APP** to the **AEP** along actuation axis **AA**, the rack and pinion  
20 arrangement causes the pinion gear **233** to rotate, but now pivoting the disc sector **430** from the deployed position outside housing **20** via opening **25** to the retracted position inside of the housing **20** via opening **25** in a pivotable motion about a deployment pivot axis **DPA**. In the retracted position, the faces **439** are no longer projecting outside of the housing **20** and this is clearly observable by an external observer **OA** outside of the  
25 housing **20**, who can now be assured that the switch member **200** is in the **AEP** position.

Alternatively, in condition (C), the disc sector **430** is in the form of a full disc having two half-disc sectors marked therein, a first disc sector and a second disc sector. The full disc is affixed to the pinion gear **233** in a relative angular orientation such that in the **APP**, the first disc sector is in the deployed position while the second disc sector is in  
30 the retracted position, while in the **AEP** the first disc sector is in the retracted position while the second disc sector is in the deployed position. Thus, as the switch member **200** is

- 27 -

actuated to move linearly from the **APP** to the **AEP** along actuation axis **AA**, the rack and pinion arrangement causes the pinion gear **233** to rotate, but now pivoting the full disc by **180°** in which the first disc sector is retracted from the deployed position outside housing **20** to the retracted position inside of the housing **20** in a pivotable motion about a deployment pivot axis **DPA**, while concurrently the second disc sector is deployed from the retracted position in housing **20** to the deployed position projecting outside of the housing **20** via opening **25** in a pivotable motion about a deployment pivot axis **DPA**. In the **APP** position, the corresponding faces of the first disc sector are projecting outside of the housing **20** via opening **25** and this is clearly visible to an external observer **OA** outside of the housing **20**, who is now assured that the switch member **200** is in the **AEP** position. In the **AEP** position, the corresponding faces of the second disc sector are projecting outside of the housing **20** via opening **25** and this is clearly visible to an external observer **OA** outside of the housing **20**, who can now be assured that the switch member **200** is in the **APP** position. To differentiate between the **AEP** and the **APP**, the first disc segment in its corresponding deployed position is visually distinguishable from the second disc segment in its corresponding deployed position. For example the first disc segment and the second disc segment can have different colors – for example the first disc segment can have a red color while the second disc segment can have a green color, and/or, the first disc segment and the second disc segment can have different geometrical shapes – for example the first disc segment can have a first geometrical shape while the second disc segment can have a second geometrical shape that is visually very different from the first geometrical shape. For example the first geometric shape can be a full disc segment with continuous faces, while the second geometric shape can include a disc segment having a plurality of through-holes through the faces thereof. Alternatively for example, first geometric shape can be a full disc segment with continuous semi-circular edge, while the second geometric shape can include a disc segment having a star-shaped edge.

In yet other alternative variations of the above examples, and referring to Figs. 5(a) and 5(b), in operation the switch member **200** is pivotably movable at least from the **APP** to the **AEP** in a pivotable motion (rather than in a linear motion) about an actuation pivot axis **APA**, and the safety device **100** comprises suitable journals, bearings or other pivoting structure or any other suitable arrangement to allow the aforesaid pivotable motion of the switch member **200**. For example, the switch member **200** can be in the form

- 28 -

of a disc or segment of a disc, for example disc element **270** which is a segment of an imaginary disc **D**, and in which actuation pivot axis **APA** passes through the center of the imaginary disc. In this example, the disc element **270** also comprises transfer lead portion **210'** and blocking portion **230'** which are respectively similar to the transfer lead portion **210** and the blocking portion **230** of the examples discussed above, *mutatis mutandis*, with a few differences, as follows. In the example of Figs. 5(a) and 5(b), the transfer lead portion **210'** is circumferentially spaced from a blocking portion **230'** about the actuation pivot axis **APA**.

In this example, in operation the disc element **270** is movable from the **APP** to the **AEP** in a pivotal motion about an activation pivot axis **APA**, so that at the **APP** the blocking portion **230'** blocks arming contact with, and thereby prevents arming communication between, the munition explosive **45** and the S&A device **15**. In the **AEP** the transfer lead portion **210'** is in-line with, and thus in arming contact with the munition explosive **45** and the S&A device **15** along axis **AOA**, to thereby provide arming communication between, the munition explosive **45** and the S&A device **15**.

In the example of Figs. 5(a) and 5(b), the disc element **270** is actuated by actuation mechanism **300** which can be similar to the examples disclosed above with respect to the rod **250**, *mutatis mutandis*, with the main difference being that the actuation mechanism **300** is coupled to the disc element **270** to provide a pivoting motion thereof rather than a linear motion of the rod **250**.

In the example of Figs. 5(a) and 5(b), the disc element **270** is operatively coupled to the marker element **400** such that pivoting the **APP** to the **AEP** about an activation pivot axis **APA** causes the marker element **400** to be deployed and/or retracted to enable the external observer to be alerted to any one of conditions (A), (B) or (C), in a similar manner to the examples disclosed above, *mutatis mutandis*, with some differences as will become clearer below.

For example, referring to Fig. 6(a), in the illustrated example the element **400** is configured according to condition (A), in which the retracted position of the marker element **400** corresponds to the **AEP**, while the deployed position corresponds to the **APP**. Furthermore, the switch member **200** and the are configured as a kinematic pair, such that when the switch member **200** moves from the **APP** to the **AEP**, the marker element **400**

- 29 -

moves from the deployed position to the retracted position. In this example, the deployment axis **DA** of the marker element **400** is orthogonal to the activation pivot axis **APA** of the switch member **200**. Furthermore in this example, the rod member **420** comprises a rack and pinion arrangement, including a rack gear **401'** affixed to the marker element **400**, a first pinion gear **402'** affixed to the switch member **200**, and a second pinion gear **403'** rotatable about pinion axis **405'**. Thus as the switch member **200** pivots, in a clockwise position as seen in Fig. 6(a), from the **APP** to the **AEP**, the marker element **400** concurrently moves from the deployed position to the retracted position along the deployment axis **DA** from the deployed position to the retracted position.

10 Alternatively, the example of Fig. 6(a) can be configured according to condition (B), by configuring the switch member to pivot from the **APP** to the **AEP**, in a counter clockwise position as seen in Fig. 6(a).

In another example, and referring to Fig. 6(b), the element **400** is configured according to condition (B), in which the deployed position of the marker element **400** corresponds to the **AEP**, while the retracted position corresponds to the **APP**. Furthermore, the switch member **200** and the are configured as a kinematic pair, such that when the switch member **200** moves from the **APP** to the **AEP**, the marker element **400** moves from the retracted position to the deployed position. In this example, the deployment axis **DA** of the marker element **400** is orthogonal to the activation pivot axis **APA** of the switch member **200**. Furthermore in this example, the rod member **420** comprises a rack and pinion arrangement, including a rack gear **401'** affixed to the marker element **400**, and a first pinion gear **402'** affixed to the switch member **200**. Thus as the switch member **200** pivots, in a clockwise position as seen in Fig. 6(b), from the **APP** to the **AEP**, the marker element **400** concurrently moves from the retracted position to the deployed position along the deployment axis **DA** from the deployed position to the retracted position.

25 Alternatively, the example of Fig. 6(b) can be configured according to condition (A), by configuring the switch member to pivot from the **APP** to the **AEP**, in a counter clockwise position as seen in Fig. 6(a).

In another example, and referring to Figs. 7(a) and 7(b), the safety device **100** can be configured such that as the switch member **200** is actuated to be movable at least from the **APP** to the **AEP** in a pivotable motion about activation pivot axis **APA** the marker

- 30 -

element **400** is concurrently pivotably deployable or movable from the retracted position to the deployed position in a pivotable motion about a deployment pivot axis **DPA**. For example, the safety device **100** comprises pinion arrangement, for example gear teeth **231'** about the periphery of the switch member **200**, which can be in the form of a disc or part thereof, and a pinion gear **233'** coaxially affixed to or integral with the marker element **400** and thus rotatable therewith about the deployment pivot axis **DPA**. In this example the marker element **400** is in the form of a disc sector **430**, including for example more than 180° of the full disc, and having a perimeter including a circumferential portion **435** and a chord portion **436**. The disc sector **430** also has flat faces **439**, and disc center which is coaxial with the deployment pivot axis **DPA**. The gear teeth **231'** of the switch member **200** are meshed with pinion gear **233'**.

Referring still to Figs. 7(a) and 7(b), in condition (B), as the switch member **200** is actuated to pivotably move from the **APP** to the **AEP** about activation pivot axis **APA** (in a counter clockwise direction as seen in these figures), the meshing between gear teeth **231'** of the switch member **200** and the pinion gear **233'** cause pivoting of the disc sector **430** from the retracted position in housing **20** (Fig. 7(a)) to the deployed position outside of the housing **20** via opening **25** (Fig. 7(b)) in a pivotable motion about a deployment pivot axis **DPA**. In the deployed position, the faces **439** are projecting outside of the housing **20** via opening **25** and are clearly visible to an external observer **OA** outside of the housing **20**, who can now be assured that the switch member **200** is in the **AEP** position, similar to the example of Figs. 4(a) and 4(b), *mutatis mutandis*.

Alternatively, in condition (A), the disc sector **430** is affixed to the pinion gear **233'** in a relative angular orientation (for example displaced by 180° from the orientation shown in Figs. 7(a) and 7(b)) such that in the **APP**, the disc sector **430** is in the deployed position, and thus the faces **439** are projecting outside of the housing **20** via opening **25** and are clearly visible to an external observer **OA** outside of the housing **20**, who can now be assured that the switch member **200** is in the **APP** position.

As the switch member **200** is actuated to pivot from the **APP** to the **AEP** about activation pivot axis **APA** (also in a counter clockwise direction), the meshing between gear teeth **231'** of the switch member **200** and the pinion gear **233'** cause pivoting of the disc sector **430** from the deployed position outside housing **20** via opening **25** to the



- 31 -

retracted position inside of the housing **20** in a pivotable motion about a deployment pivot axis **DPA**. In the retracted position, the faces **439** are clearly not projecting outside of the housing **20** and this is clearly observable by an external observer **OA** outside of the housing **20**, who can now be assured that the switch member **200** is in the **APP** position.

5           Alternatively, in condition (C), the disc sector **430** is in the form of a full disc having two half-disc sectors marked therein, a first disc sector and a second disc sector. The full disc is affixed to the pinion gear **233'** in a relative angular orientation such that in the **APP**, the first disc sector is in the deployed position while the second disc sector is in the retracted position, while in the **AEP** the first disc sector is in the retracted position  
10 while the second disc sector is in the deployed position. Thus, as the switch member **200** is actuated to pivot from the **APP** to the **AEP** about activation pivot axis **APA**, the meshing between gear teeth **231'** of the switch member **200** and the pinion gear **233'** cause pivoting of the full disc by 180° in which the first disc sector is retracted from the deployed position outside housing **20** to the retracted position inside of the housing **20** via opening **25** in a  
15 pivotable motion about a deployment pivot axis **DPA**, while concurrently the second disc sector is deployed from the retracted position in housing **20** to the deployed position projecting outside of the housing **20** via opening **25** in a pivotable motion about a deployment pivot axis **DPA**. In the **APP** position, the corresponding faces of the first disc sector are projecting outside of the housing **20** via opening **25** and this is clearly visible to  
20 an external observer **OA** outside of the housing **20**, who is now assured that the switch member **200** is in the **AEP** position. In the **AEP** position, the corresponding faces of the second disc sector are projecting outside of the housing **20** via opening **25** and this is clearly visible to an external observer **OA** outside of the housing **20**, who can now be assured that the switch member **200** is in the **APP** position. To differentiate between the  
25 **AEP** and the **APP**, the first disc segment in its corresponding deployed position is visually distinguishable from the second disc segment in its corresponding deployed position. For example the first disc segment and the second disc segment can have different colors – for example the first disc segment can have a red color while the second disc segment can have a green color, and/or, the first disc segment and the second disc segment can have  
30 different geometrical shapes – for example the first disc segment can have a first geometrical shape while the second disc segment can have a second geometrical shape that is visually very different from the first geometrical shape. For example the first geometric

- 32 -

shape can be a full disc segment with continuous faces, while the second geometric shape can include a disc segment having a plurality of through-holes through the faces thereof. Alternatively for example, first geometric shape can be a full disc segment with continuous semi-circular edge, while the second geometric shape can include a disc segment having a  
5 star-shaped edge.

In alternative variations of the above examples, and in other examples, the marker element **400**, additionally or alternatively, comprises an electromagnetic wave transmitter configured for selectively operating in a transmitting mode or in a non-transmitting mode. In the transmitting mode the electromagnetic wave transmitter selectively transmits  
10 electromagnetic waves within a first wavelength range, and in the non-transmitting mode said electromagnetic wave transmitter does not transmit electromagnetic waves within said first wavelength range. For example, the transmitting mode corresponds to the **AEP** while the non-transmitting mode corresponds to the **APP**. Alternatively, the transmitting mode corresponds to the **APP** while the non-transmitting mode corresponds to said **AEP**.

15 Alternatively, the marker element **400** comprises an electromagnetic wave transmitter configured for selectively operating in a first transmitting mode or in a second transmitting mode, wherein in the first transmitting mode said electromagnetic wave transmitter selectively transmits electromagnetic waves within a first wavelength range, and wherein in the second transmitting mode said electromagnetic wave  
20 transmitter transmits electromagnetic waves within a second first wavelength range different from said first wavelength range. The first transmitting mode can correspond to the **AEP** while the second transmitting mode corresponds to said **APP**. Alternatively, the first transmitting mode corresponds to the **APP** while the second transmitting mode corresponds to said **AEP**.

25 For example the first wavelength range and/or the second wavelength range can be in the visible spectrum and/or in the IR or UV ranges.

In the above examples, and in alternative variations thereof and in other examples, and referring again for example to Figs. 1 and 2, the respective safety device **100** can optionally further comprise a Remove Before Operation (RBO) pin **600** that is  
30 initially engaged with the switch member **200** and has to be mechanically disengaged therefrom to enable the safety device **100** to be operated and thus to

- 33 -

subsequently allow movement of the switch member **200** from the **AEP** and the **APP**, and to allow the S&A device to become armed.

In this example, the RBO pin **600**, in the engaged position, is inserted into a hole **690** provided in the switch member **200**, mechanically preventing the switch member **200** from moving until the RBO pin **600** is mechanically removed, i.e. disengaged, from the hole **690**.

In an alternative variation of the example of Figs. 1 and 2, and referring to Figs. 14 and 15, the RBO pin, generally designated with the reference numeral **600'**, is configured for providing an engaged configuration and a disengaged configuration. In the engaged configuration illustrated in Fig. 14, the RBO pin **600'** mechanically prevents the switch member **200** from moving from the **APP** to the **AEP**, and also mechanically prevents the S&A device **15'** from becoming armed. In this example, the RBO pin **600'** comprises a shaft **620** having a first engagement end **622** and a second engagement end **610**. The first engagement end **622** is configured for being inserted into a slot **630** provided in the S&A device **15'**, in the engaged configuration of the RBO pin **600'**, and mechanically preventing the S&A device **15'** from arming when thus engaged. Thus the S&A device **15'** in this example is configured in a manner that does not allow itself to become armed when the first engagement end **622** is engaged in the slot **630**, and for enabling the S&A device **15'** to become armed when the first engagement end **622** is disengaged from the slot **630** (for example as a result of the RBO pin **600'** being removed). The second engagement end **610** is in the form of an enlarged head, that overlies the top end **201** of the switch member **200**. In the engaged configuration of the RBO pin **600'**, the enlarged head configuration of the second engagement end **610** abuts and mechanically prevents the top end **201** from moving upwards (as seen in Fig. 14) and thereby prevents the switch member **200** from moving from the **APP** to the **AEP**. In the disengaged configuration of the RBO pin **600'** (illustrated in Fig. 15) the first engagement end **622** is no longer inserted in the slot **630**, allowing the S&A device **15'** to become selectively armed, and concurrently the second engagement end **610** is no longer abutting the top end **201**, allowing the switch member to be selectively moved from the **APP** to the **AEP**.

In at least this example, the RBO pin operates as a Remove Before Fly (RBF) pin, as it is generally removed only prior to flying.

- 34 -

For example, in examples of the presently disclosed subject matter in which the munition is incorporated in a UAV or other carrier vehicle (see example illustrated in Figs. 8 to 13, for example), the RBO pin **600** is configured such that it is required to be removed from the UAV before flying the UAV, as a safety feature. Thus, so long as the RBO pin  
5 **600** is engaged this prevents accidental actuation of the safety device, since disengagement/removal of the RBO pin **600** will eventually allow the munition **10** to become armed.

In other words, the safety device **100** cannot operate or become armed so long as the RBO pin **600** is still engaged.

10 It is to be noted that the safety device **100** is, in operation, operatively connected to a controller that selectively provides an "attack" command (for example in the form of an electrical or electronic signal or data transfer) to the actuation system **300** under certain conditions. Such an "attack" command can also be provided if it is wished to self-destruct the munition **10**, for example. Responsive to receipt of such an "attack"  
15 command the actuation system **300** operates to actuate the switch member **200**, and thus move the switch member **200** from the **APP** to the **AEP**. Such an "attack" command is provided by the controller, when the target is located and the munition **10** is finally committed to neutralize the target, for example. This can occur, for example, at or within the last period of flight to target, or if commanded to self-destruct. Operation of  
20 the controller to provide such an "attack" command can be manual (for example sent to the controller in the form of a radio signal or data transfer), or can be autonomously programmed in the controller; alternatively the controller can be programmed in any other suitable manner to operate the safety device **100**.

Until such an "attack" command is provided, the safety device **100** is in arming  
25 prevention mode, and allows the munition to be recovered safely, in case a mission is aborted, for example, even if the S&A becomes armed inadvertently for example due to a single point failure, since the safety device **100** operates to provide an additional barrier that prevents the S&A feature from detonating the munition. Furthermore, according to some aspects of the presently disclosed subject matter the marker element  
30 can provide a reliable visual indication of the safety state of the safety device **100**, i.e.,

- 35 -

indicating that the safety device **100** is in arming prevention mode and/or that the safety device **100** is in arming enabling mode.

Such an "attack" command can also activate the S&A device **15** to the respective arm mode, or alternatively the S&A device **15** can be armed using a different signal.

5 Referring to Figs. 16(a) and 16(b), the marker element **400** according to any one of the above examples can include, or alternatively be in the form of, a positional sensor system **700** set up with respect to the switch member **200**.

The positional sensor system **700** comprises a first emitter sensor set, comprising a first LED emitter **710** and a first LED sensor **720**, aligned along an axis  
10 **A1**. In operation, the first LED emitter **710** transmits light of a particular wavelength  $\lambda 1$  on a path along axis **A1** towards the first LED sensor **720**, and in the absence of an opaque object blocking this path, the first LED sensor **720** detects the transmitted light and provides a corresponding signal **S1**. This signal **S1** can be, for example, in the form of a light (UV, infrared and/or visible light spectrum) being lit on the outside of the  
15 munition, and/or in the form of an audible sound, and/or in the form of a radio transmission. Conversely, in operation of the first emitter sensor set, if an opaque object blocks this path, the first LED sensor **720** cannot detect the transmitted light from the first LED emitter **710** and does not provide the aforementioned corresponding signal **S1**. In this example, the switch member **200** is made from an opaque material, and includes  
20 a hole **705** through the thickness thereof along an axis **B1**. Axes **A1** and **B1** are generally orthogonal to activation axis **AA**. While in this example axes **A1** and **B1** are parallel, they can instead be inclined with one another at a small angle, depending on the size of hole **705** and the spacing between the first LED emitter **710** and the first LED sensor **720**. The first LED emitter **710** and the first LED sensor **720** are positioned  
25 on either sides of the switch member **200**, such that when the switch member **200** is in the **APP** the axes **A1** and **B1** are aligned and coaxial. This enables the first LED sensor **720** to detect the light transmitted by first LED emitter **710** thereto via the hole **705**. In alternative variations of this example in which axes **A1** and **B1** are not parallel, the first LED emitter **710** and the first LED sensor **720** are positioned on either side of the  
30 switch member **200**, such that when the switch member **200** is in the **APP** the axes **A1** and **B1** intersect within the hole **705** or in close proximity thereto such as to allow the

- 36 -

first LED sensor **720** to detect the light transmitted by first LED emitter **710** thereto via the hole **705**. In any case, as the switch member **200** is moved to the **AEP** along activation axis **AA**, the hole **705** (and axis **B1**) goes out of alignment with axis **A1**, and the opaque material of the switch member **200** thus blocks the first LED sensor **720** from detecting the light transmitted by the first LED emitter **710**. The first emitter sensor set can thus provide a positive indication that the switch member **200** is in the **APP**, via the aforesaid signal **S1**, and the absence of the aforementioned signal **S1** can be taken as an indication that the switch member **200** is not in the **APP**.

In alternative variations of this example, the first emitter sensor set is configured to conversely provide the aforesaid signal **S1** only when first LED sensor **720** cannot detect the transmitted light from the first LED emitter **710**, and not to provide the aforesaid signal **S1** when first LED sensor **720** detects the transmitted light from the first LED emitter **710** via hole **705**. In such a case, first emitter sensor set can thus provide a positive indication that the switch member **200** is not in the **APP**, via the aforesaid signal **S1**, and the absence of the aforementioned signal **S1** can be taken as an indication that the switch member **200** can be in the **APP**.

The positional sensor system **700** further comprises a second emitter sensor set, comprising a second LED emitter **730** and a second LED sensor **740**, aligned along an axis **A2**. In operation, the second LED emitter **730** transmits light of a particular wavelength  $\lambda_2$  on a path along axis **A2** towards the second LED sensor **740**, and in the absence of an opaque object blocking this path, the second LED sensor **740** detects the transmitted light and provides a corresponding signal **S2**. This signal **S2** can be, for example, in the form of a light (UV, infrared and/or visible light spectrum) being lit on the outside of the munition, and/or in the form of an audible sound, and/or in the form of a radio transmission. Conversely, in operation of the second emitter sensor set, if an opaque object blocks this path, the second LED sensor **740** cannot detect the transmitted light from the second LED emitter **730** and does not provide the aforementioned corresponding signal **S2**. In this example, the switch member **200** is made from an opaque material, and includes a hole **715** through the thickness thereof along an axis **B2**. Axes **A2** and **B2** are generally orthogonal to activation axis **AA**. While in this example axes **A2** and **B2** are parallel, they can instead be inclined with one another at a small angle, depending on the size of hole **715** and the spacing between the second LED

- 37 -

emitter **730** and the second LED sensor **740**. The second LED emitter **730** and the second LED sensor **740** are positioned on either sides of the switch member **200**, such that when the switch member **200** is in the **AEP** the axes **A2** and **B2** are aligned and coaxial. This enables the second LED sensor **740** to detect the light transmitted by second LED emitter **730** thereto via the hole **715**. In alternative variations of this example in which axes **A2** and **B2** are not parallel, the second LED emitter **730** and the second LED sensor **740** are positioned on either side of the switch member **200**, such that when the switch member **200** is in the **AEP** the axes **A2** and **B2** intersect within the hole **715** or in close proximity thereto such as to allow the second LED sensor **740** to detect the light transmitted by second LED emitter **730** thereto via the hole **715**. In any case, when the switch member **200** is at the **APP** the axes **A2** and **B2** are not in alignment, and the opaque material of the switch member **200** thus blocks the second LED sensor **740** from detecting the light transmitted by the second LED emitter **730**. As the switch member **200** is moved from the **APP** to the **AEP** along activation axis **AA**, the hole **715** (and axis **B2**) comes into alignment with axis **A2**, allowing the second LED sensor **740** to detect, via hole **715**, the light transmitted by the second LED emitter **730**. The second emitter sensor set can thus provide a positive indication that the switch member **200** is in the **AEP**, via the aforesaid signal **S2**, and the absence of the aforementioned signal **S2** can be taken as an indication that the switch member **200** is not in the **AEP**.

In alternative variations of this example, the second emitter sensor set is configured to conversely provide the aforesaid signal **S2** only when second LED sensor **740** cannot detect the transmitted light from the second LED emitter **730**, and not to provide the aforesaid signal **S2** when second LED sensor **740** detects the transmitted light from the second LED emitter **730** via hole **715**. In such a case, second emitter sensor set can thus provide a positive indication that the switch member **200** is not in the **AEP**, via the aforesaid signal **S2**, and the absence of the aforementioned signal **S2** can be taken as an indication that the switch member **200** can be in the **AEP**.

It is to be noted that holes **705** and **715** are transversely spaced by a spacing **T** (Fig. 16(a)).

While the wavelengths  $\lambda_2$  and  $\lambda_1$  can be the same or different from one another.

- 38 -

The signals **S1** and **S2** can be in the same form, in similar forms, or in different forms from one another. For example, signals **S1** and **S2** can be observed as lights of different colors, or lights of the same color but blinking at significantly different frequencies, or one of the signals **S1** and **S2** can be in the form of a light while the other  
5 is in the form of an audible sound, and so on.

In alternative variations of this example, the safety device **100** can omit the positional sensor system **700** entirely, or the safety device can include the first emitter sensor set but omit the second emitter sensor set, or the safety device can include the second emitter sensor set but omit the first emitter sensor set.

10 In these or other alternative variations of this example the positional sensor system can be set up with respect to the marker element rather than with respect to the switch member.

In these or other alternative variations of this example the positional sensor system can be based on other technologies rather than light transmission/detection, in  
15 particular LED transmission/detection.

According to another aspect of the presently disclosed subject matter, and referring to Figs. 8 to 13, an example of implementation of a safety device in a munition is illustrated, in which the munition is in the form of a warhead module **800** accommodated in a carrier vehicle.

20 In this example, and referring in particular to Fig. 8, the carrier vehicle is an air vehicle, and in particular a UAV, generally designated with the numeral **900**. Furthermore while in this example, the UAV is in the form of a quadcopter, in alternative variations of this example the carrier vehicle can instead be a terrain vehicle, or a seaborne (sea surface and/or submersible) vehicle, or an amphibious vehicle, or a  
25 hybrid vehicle, or the carrier vehicle can be a fixed wing air vehicle or a different type of rotor wing air vehicle, or the carrier vehicle can be configured as a rocket, or as a missile, or as a bomb or as other free-fall weapons.

Referring again to Fig. 8, the UAV **900** comprises an arrangement of four rotors **950** that provide the UAV with maneuverability in six degrees of freedom, as well as  
30 hover capability. The UAV **900** further comprises a fuselage **920**, which accommodates



- 39 -

a controller, electric power source (for example batteries), a communication module and/or a navigation module, and a payload portion **960**. The payload portion is configured for enabling the warhead module **800** to be accommodated in the UAV **900**.

In this example, and referring also to Figs. 9(a) to 13, the warhead module **800** comprises a munition in the form of a warhead comprising two hand grenades **820** immovably affixed to a casing portion **830** via retaining rings **825** (Figs. 11(a), 11(b), 12). In alternative variations of this example, munition in the form of a warhead can include only one grenade, or more than two grenades, or indeed another type of explosive or other ordinance.

The casing portion **830** corresponds to housing **20** or part thereof of the above examples relating to Figs. 1 to 7(b), *mutatis mutandis*, and in this example the casing portion **830** forms part of the fuselage **920** when the warhead module **800** is operatively engaged to the UAV **900**, for example via lip **810** and latch arrangement **860**. The casing portion **830** has an externally exposed surface **835** that is externally visible by an external observer **EO** when the warhead module **800** is operatively engaged to the UAV **900** as in Fig. 8. The casing portion **830** comprises a through-opening **839** through the casing thickness, and corresponds to opening **25** of the above examples relating to Figs. 1 to 7(b), *mutatis mutandis*.

Referring in particular to Fig. 13, the two grenades **820** are in mutual arming communication via common lead **821**, which is arming communication with input lead **827**, such that common lead **821** and input lead **827** are in a "T" configuration.

The warhead module **800** comprises S&A device **15** (as disclosed herein relating to the above examples relating to Figs. 1 to 7(b), *mutatis mutandis*), and further comprises a safety device **100'**, which corresponds to safety device **100** of the above examples relating to Figs. 1 to 7(b), *mutatis mutandis*.

Thus, safety device **100'** comprises switch member **200'**, marker element **400'**, actuation mechanism **300'**, corresponding to switch member **200**, marker element **400**, actuation mechanism **300**, respectively of the above examples relating to Figs. 1 to 7(b), *mutatis mutandis*.

- 40 -

In this example, the safety device **100'** is configured for providing condition (B), i.e., when the switch member **200'** is in the **AEP** the marker element **400'** is externally observable, i.e. under conditions in which the S&A device **15** can potentially arm the munition explosives, which in this example comprise the two grenades **820**. Thus, in the 5 illustrated example, the safety device **100'** corresponds to the safety device **100** of the example illustrated in Figs. 1 and 2, *mutatis mutandis*, though it is clear that the safety device **100'** can instead correspond to the safety device **100** of any of the other examples illustrated in Figs. 3(a) to 7(b), *mutatis mutandis*.

In this example the switch member **200'** is the form of an elongate rod **250'** (also 10 referred to herein as a slider), and comprises a transfer lead portion **210'** longitudinally spaced from a blocking portion **230'** along the rod longitudinal axis, corresponding to transfer lead portion **210** and the blocking portion **230**, respectively of the above examples relating to Figs. 1 and 2, *mutatis mutandis*. The rod **250'** has a substantially uniform transverse thickness and is contiguous with marker element **400'**, also in the 15 form of a rod member **420'** (corresponding to rod member **420** of the above examples relating to Figs. 1 and 2, *mutatis mutandis*) and is affixed thereto or formed integrally therewith. To enhance visibility, rod member **420** is colored in red, but can instead be colored in a different color and/or exhibit other optical properties, such as for example fluorescence and/or reflectivity and/or can include a light source (for example in the UV 20 wavelength range and/or the visible spectrum and/or the IR wavelength range) that is lit when in the **AEP** or in the **APP**.

In the **APP**, the marker element **400'**, in the form of a rod member **420'**, is completely retracted within the fuselage **920**, as best seen in Figs. 8, 9(a), 10(a), 11(a), and the blocking portion **230'** blocks arming contact with, and thereby prevent arming 25 communication between, the munition explosive (in the form of the two grenades **820**) and the S&A device **15**.

Thus if an external observer **EO** observes that the rod member **420'** is not projecting outside the fuselage, this is an indication that the safety device **100'** is in arming prevention mode, and thus the UAV **900** can be approached. Such an indication 30 can be, at least in some examples of the presently disclosed subject matter, to have a

- 41 -

very high degree of reliability, for example such as to be considered in practical terms to be an absolute indication that the safety device **100'** is in arming prevention mode.

In the **AEP**, the marker element **400'**, in the form of a rod member **420'**, is deployed with respect to the fuselage **920**, as best seen in Figs. 9(b), 10(b), 11(b), and the  
5 rod member **420'** visibly projects outside of the fuselage, and in particular outside of the casing portion **830**. In at least one example, the rod member **420'** visibly projects about 32mm or 40mm outside of the fuselage, in particular the rod member **420'** visibly projects about 32mm or 40mm outside of the casing portion **830**. In the **AEP**, the transfer lead portion **210'** enables arming contact with, and thereby allows arming communication  
10 between, the munition explosive (in the form of the two grenades **820**) and the S&A device **15**. In the **AEP**, the input lead **827**, the transfer lead portion **210'** and the S&A device **15** are in-line, along axis of arming **AOA**, as best seen in Figs. 10(b) and 13. Thus, should the S&A device **15** arm, this would result in the grenades **820** detonating.

Thus if an external observer **EO** observes that the rod member **420'** is actually  
15 projecting outside the fuselage, this is an indication that the safety device **100'** is in arming enabling mode, and thus the UAV should not be approached, except perhaps, for example, by trained personnel, as it can present a safety hazard.

Thus, the safety device **100'** provides a visual indication to an external observer **EO** of whether the safety device **100'** is in armed mode or arming prevention mode, and  
20 thus allows safe recovery of the UAV after the mission starts, but before the "attack" command is issued. The safety device **100'** thus allows an external observer to determine with a high degree of certainty that the UAV is safe to return home and be handled in case a mission is aborted. Such a high degree of certainty can be, at least in some examples of the presently disclosed subject matter, a very high degree of  
25 certainty, for example such as to be considered in practical terms to be an absolute high degree of certainty, for example nominally 100% degree of certainty or close thereto.

In other words, the safety device **100'** provides an additional barrier that prevents the S&A device from detonating the munition, even if the S&A device becomes armed inadvertently for example due to a single point failure.

- 42 -

In operation, the UAV **900** is made ready for a mission by engaging the warhead module **800** thereto, and the corresponding RBO pin (not shown in these figures) is removed just prior to initiation of flight of the UAV.

The UAV **900** is flown to target. This can be done autonomously, for example  
5 the on-board computer (i.e., the controller) navigating to a geographical location using the navigation module, and/or the UAV **900** can home on to the target using seeker devices, or indeed other devices for navigation and/or target homing (for example including GPS devices for navigation and/or optical recognition devices for identifying and locking onto a target) installed in the UAV **900**. Alternatively, the UAV is flown by  
10 ground personnel (remote pilot) to the target, providing flight commands via communications link and/or data link, and such commands are received by the communications module and processed by the on-board computer (i.e., the controller).

Once the target is located (for example at or within the last period of flight to target) the "attack" command is communicated to the controller, which then activates  
15 the actuator **300'** to slide the rod **250'** and rod member **420'** concurrently to the **AEP** from the **APP**, and can also activate the S&A device **15** to arm mode.

At this point the input lead **827**, the transfer lead portion **210'** and the output lead **17** of S&A device **15** are in-line, along axis of arming **AOA**. The warhead, in this example in the form of the two grenades **820**, can then be detonated according to  
20 predetermined criteria, for example when hitting the target or at predetermined distance therefrom or via operator command, and the detonator in the S&A device **15** provides a detonation wave that travels to the input lead **827**, via the transfer lead portion **210'**, and then to the two grenades **820** via common lead **821**.

On the other hand, if the mission is aborted for example prior to the attack  
25 command having been communicated to the UAV **900**, the UAV can be returned home, and at that point ground personal can easily observe from a distance whether or not the rod member **420'** is actually projecting outside the fuselage. If it does not project, this provides in this example an indication that the safety device **100'** was not armed, and thus that it is safe to approach the UAV, even if the S&A device **15** became armed; on the other hand if  
30 rod member **420'** is observed as actually projecting outside the fuselage, this provides an indication that the safety device **100** is armed, and thus the UAV presents a potentially

- 43 -

hazardous threat and should not be approached as a safety measure. Whether or not the UAV is an actual threat will of course depend on whether or not the S&A device **15** is also armed.

It is also to be noted that the safety device **100'** is also useful in recovering a UAV  
5 in other scenarios, for example where it is not known whether or not the attack signal was communicated to the UAV. Such a scenario can occur, for example, where such an attack signal is to be provided by ground forces remote from the UAV pilot.

Operation of a UAV fitted with the safety device according to the other examples thereof disclosed herein is similar to the operation disclosed above, with the appropriate  
10 differences corresponding to whether the safety device is configured for providing condition (A), or (C), *mutatis mutandis*. Thus for example if the safety device is configured for providing condition (A), then the corresponding marker element **400** would be visible to an external observer only when the safety device is in arming prevention mode.

Referring to Figs. 17(a) and 17(b), a safety device for a munition **10** according to a  
15 second example of the presently disclosed subject matter, generally designated **100A**, comprises a switch member **200A**, an actuation mechanism **300A**, a S&A device **15A**, respectively similar to the safety device **100**, switch member **200** actuation mechanism **300** and S&A device **15**, as disclosed above regarding the first example and alternative  
20 variations thereof, *mutatis mutandis*, with some differences as will become clearer herein. In the second example, the S&A device **15A** is not fixedly mounted with respect to the munition **10**, and in particular with respect to the munitions explosives **45**. Rather, the S&A device **15A** is movably mounted with respect to the munition **10**. In particular, the switch member **200A**, while also movable between at least two positions including the  
25 **APP** and the **AEP**, is configured for enabling the S&A device **15A** thereto, thereby carrying and concurrently moving the S&A device **15A** between the **APP** and **AEP**. As such, the switch member **200A** is not required to be positioned between the S&A device **15A** and the explosives **45A**, nor does the switch member **200A** require the blocking portion **230** or the transfer lead portion **210** as in the first example.

Thus, referring to Fig. 17(a), when the switch member **200A** is in the **APP**, the  
30 S&A output lead **17A** (corresponding to the aforesaid S&A output lead **17**) is out of

- 44 -

alignment with the munition explosive **45A**, thereby effectively blocking arming communication between the munition explosive **45A** and the S&A device **15A**. Thus detonation of the explosives **45A** is not permitted, even if the S&A device **15A** is armed.

Referring to Fig. 17(b), as the switch member **200A** is moved to the AEP, the S&A  
5 output lead **17A** comes into alignment with the munition explosive **45A**, thereby allowing direct arming communication between the munition explosive **45A** and the S&A device **15A**. Thus detonation of the explosives **45A** is now possible, if the S&A device **15A** is armed.

In this example, the safety device **100A** also includes a marker element **400A**,  
10 similar to the marker element **400** as disclosed herein with respect to the first example and alternative variations thereof, *mutatis mutandis*. As with the first example, *mutatis mutandis*, in general, the marker element **400** can be configured to enable the external observer to be alerted to any one of conditions (A), (B) or (C) as discussed above regarding the first example, *mutatis mutandis*. Thus, for example, in the **APP** the marker element  
15 **400A** does not project from the munition **10**, while in the **AEP** the marker element does project away from the munition **10**, thereby alerting an external observer that the safety device is in the **AEP**.

In this example, the switch member **200A** moves the S&A device **15A** linearly between the **APP** and the **AEP**. However, in alternative variations of the second example,  
20 the switch member **200A** can instead move the S&A device **15A** in a rotary manner between the **APP** and the **AEP**

In the method claims that follow, alphanumeric characters and Roman numerals used to designate claim steps are provided for convenience only and do not imply any particular order of performing the steps.

25 Finally, it should be noted that the word “comprising” as used throughout the appended claims is to be interpreted to mean “including but not limited to”.

While there has been shown and disclosed examples in accordance with the presently disclosed subject matter, it will be appreciated that many changes can be made therein without departing from the spirit of the presently disclosed subject matter.

**CLAIMS:**

1. A safety device for use with a munition, the munition including a munition explosive and a safe and arm (S&A) device for activation of the munition explosive, the safety device comprising:
  - 5 a switch member, configured for being disposed between the munition explosive and the S&A device, said switch member being movable between at least two switch positions including:
    - a first switch position, being an arming prevention position (APP), in which arming communication between the munition explosive and the S&A device is prevented; and
    - 10 - a second switch position, being an arming enabling position (AEP), in which arming communication between the munition explosive and the S&A device is allowed;
  - an actuation mechanism for selectively moving said switch member at least from  
15 said APP to said AEP to thereby enable the S&A device, when armed, to detonate the munition explosive via the switch member.
2. The safety device according to claim 1, said switch member comprising a marker element, wherein the marker element is configured for providing an externally observable indication corresponding to the switch member being in at least one of said  
20 switch positions.
3. The safety device according to claim 1 or claim 2, wherein said switch member comprises a transfer lead portion, configured to be in arming contact with, and thereby providing arming communication between, the munition explosive and the S&A device when said switch member is at said AEP.
- 25 4. The safety device according to any one of claims 1 to 3, wherein said switch member comprises a blocking portion, configured to block arming contact with, and thereby prevent arming communication between, the munition explosive and the S&A device when said switch member is at said APP.
5. The safety device according to any one of claims 1 to 4, wherein said switch  
30 member is moved from said APP to said AEP in linear motion along an activation axis.
6. The safety device according to any one of claims 4 to 5, wherein said switch member is in the form of a elongate rod having a rod longitudinal axis, wherein said

- 46 -

transfer lead portion is longitudinally spaced from said blocking portion along said rod longitudinal axis.

7. The safety device according to claim 6, wherein said rod longitudinal axis is parallel to said activation axis.

5 8. The safety device according to any one of claims 1 to 4, wherein said switch member is moved from said APP to said AEP in pivoting motion about a pivot axis.

9. The safety device according to any one of claims 4 to 5, wherein said switch member is in the form of a plate having a plate pivoting axis, wherein said transfer lead portion is circumferentially spaced from said blocking portion with respect to said plate  
10 pivoting axis.

10. The safety device according to claim 9, wherein said plate pivoting axis is coaxial with said pivot axis.

11. The safety device according to any one of claims 1 to 10, wherein the safety device is independent/different from the S&A device.

15 12. The safety device according to any one of claims 1 to 10, wherein the marker element is configured for providing said externally observable indication correspondingly relating to at least one of the following:

- that said switch member is at said APP concurrent with said switch member being at said APP;
- 20 - that said switch member is at said AEP concurrent with said switch member being at said AEP;
- that said switch member is at said APP concurrent with said switch member being at said APP; and that said switch member is at said AEP concurrent with said switch member being at said AEP.

25 13. The safety device according to claim 12, wherein said marker element comprises a rod member that is deployable from a retracted position, in which the rod member is not externally observable, and a deployed position, in which the rod member is externally observable.

14. The safety device according to claim 13, wherein said switch member from said  
30 APP to said AEP in linear motion along an activation axis, and wherein said rod member is linearly deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in



which the rod member projects outside of said housing and is thereby externally observable.

15 **15.** The safety device according to claim 13, wherein said switch member from said APP to said AEP in pivoting motion about a pivot axis, and wherein said rod member is pivotably deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in which the rod member pivots to a position outside of said housing and is thereby externally observable.

10 **16.** The safety device according to claim 13, wherein said switch member from said APP to said AEP in linear motion along an activation axis, and wherein said rod member is linearly deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in which the rod member projects outside of said housing and is thereby externally observable.

15 **17.** The safety device according to claim 13, wherein said switch member from said APP to said AEP in pivoting motion about a pivot axis, and wherein said rod member is pivotably deployable from said retracted position, in which the rod member is enclosed in a housing and thereby not externally observable, and a deployed position, in which the rod member pivots to a position outside of said housing and is thereby externally observable.

20 **18.** The safety device according to any one of claims 12 to 17, wherein said retracted position corresponds to said AEP, or wherein said retracted position corresponds to said APP.

25 **19.** The safety device according to claim 12, wherein said marker element comprises an electromagnetic wave transmitter configured for selectively operating in a transmitting mode or in a non-transmitting mode, wherein in said transmitting mode said electromagnetic wave transmitter selectively transmits electromagnetic waves within a first wavelength range, and wherein in said non-transmitting mode said electromagnetic wave transmitter does not transmit electromagnetic waves within said first wavelength range.

30 **20.** The safety device according to claim 19, wherein:

- said transmitting mode corresponds to said AEP and wherein said non-transmitting mode corresponds to said APP, or

- 48 -

- said transmitting mode corresponds to said APP and wherein said non-transmitting mode corresponds to said AEP.

**21.** The safety device according to any one of claims 19 to 20, wherein said first wavelength range includes at least one of the ultraviolet (UV) wavelength range, the visible spectrum wavelengths and the infra-red (IR) wavelength range.

**22.** The safety device according to claim 12, wherein said marker element comprises an electromagnetic wave transmitter configured for selectively operating in a first transmitting mode or in a second transmitting mode, wherein in said first transmitting mode said electromagnetic wave transmitter selectively transmits electromagnetic waves within a first wavelength range, and wherein in said second transmitting mode said electromagnetic wave transmitter transmits electromagnetic waves within a second first wavelength range different from said first wavelength range.

**23.** The safety device according to claim 22, wherein:

- said first transmitting mode corresponds to said AEP and wherein said second transmitting mode corresponds to said APP; or
- said first transmitting mode corresponds to said APP and wherein said second transmitting mode corresponds to said AEP.

**24.** The safety device according to any one of claims 22 to 23, wherein each one of said first wavelength range and said second wavelength range includes at least one of the ultraviolet (UV) wavelength range, the visible spectrum wavelengths and the infra-red (IR) wavelength range.

**25.** The safety device according to any one of claims 1 to 24, wherein said actuation mechanism is configured for selectively moving said switch member from said APP to said AEP, responsive to an actuation event.

**26.** The safety device according to claim 25, wherein said safety device is coupled to a communication module, and wherein said actuation event includes the communication module receiving an externally transmitted first attack signal.

**27.** The safety device according to claim 25 or claim 26, wherein said safety device is coupled to a timing module, and wherein said actuation event includes the timing module determining that a predetermined time period has elapsed from a start time.

**28.** The safety device according to any one of claims 25 to 27, wherein said safety device is coupled to an altitude sensor module, and wherein said actuation event

- 49 -

includes the altitude sensor module determining that a predetermined altitude has been reached.

**29.** The safety device according to any one of claims 25 to 28, wherein said safety device is coupled to a navigation module, and wherein said actuation event includes the  
5 navigation module determining that a predetermined geographical position has been reached.

**30.** The safety device according to any one of claims 1 to 29, wherein said actuation mechanism comprises a linear actuator or a rotary actuator.

**31.** The safety device according to any one of claims 1 to 30, wherein the safety  
10 device is operatively connected to a Remove Before Operation (RBO) pin having an engaged configuration wherein the RBO pin mechanically prevents arming of the S&A device, and a disengaged configuration wherein the RBO pin cannot mechanically prevent arming of the S&A device.

**32.** The safety device according to any one of claims 1 to 30, wherein the safety  
15 device is operatively connected to a Remove Before Operation (RBO) pin having an engaged configuration wherein the RBO pin mechanically prevents arming of the S&A device and concurrently mechanically prevents movement of said switch member from said APP to said AEP, and a disengaged configuration wherein the RBO pin cannot mechanically prevent arming of the S&A device, and cannot mechanically prevent  
20 movement of said switch member from said APP to said AEP.

**33.** The safety device according to any one of claims 1 to 32, further comprising a positional sensor system including at least one emitter sensor set configured for sensing at least one said position of the switch member, each said emitter sensor set comprising an emitter and a sensor aligned therewith along a first axis, wherein movement of the  
25 switch member between the APP and AEP either allows or blocks sensing by the sensor of emissions emitted by the emitter.

**34.** A munition, comprising:  
a munition explosive;  
a safe and arm (S&A) device for activation of munition explosive;  
30 a safety device as defined in any one of claims 1 to 33.

**35.** The munition according to claim 34, wherein said S&A device is a stand-alone component configured for providing safety and arming functions to the munition explosive also in the absence of said safety device.

- 50 -

**36.** The munition according to any one of claims 34 to 35, wherein the S&A device comprises a detonator spaced from an output lead by a barrier member having a barrier portion and a transfer lead portion.

**37.** The munition according to any one of claims 34 to 36, wherein the S&A device  
5 is different from said safety device.

**38.** A safety device for use with a munition, the munition including a munition explosive and a safe and arm (S&A) device for activation of the munition explosive, the safety device comprising:

a switch member, configured for mounting the S&A device thereto, said switch  
10 member being movable between at least two switch positions while carrying the S&A device therewith, said at least two switch positions including:

- a first switch position, being an arming prevention position (APP), in which arming communication between the munition explosive and the S&A device is prevented; and
- 15 - a second switch position, being an arming enabling position (AEP), in which arming communication between the munition explosive and the S&A device is allowed;

an actuation mechanism for selectively moving said switch member at least from  
20 said APP to said AEP to thereby enable the S&A device, when armed, to detonate the munition explosive via the switch member.

**39.** The safety device according to claim 38, further comprising a marker element, wherein the marker element is configured for providing an externally observable indication corresponding to the switch member being in at least one of said switch positions.

25 **40.** A munition, comprising:

a munition explosive;  
a safe and arm (S&A) device for activation of munition explosive;  
a safety mechanism comprising:

a switch member, configured for mounting the S&A device thereto, said  
30 switch member being movable with the S&A device between at least two positions including:

- 51 -

- an arming prevention position (APP), in which arming communication between the munition explosive and the S&A device is prevented; and
- an arming enabling position (AEP), in which arming communication between the munition explosive and the S&A device is allowed;

an actuation mechanism for selectively moving said switch member at least from said APP to said AEP to thereby enable the S&A device, when armed, to detonate the munition explosive.

10 **41.** The munition according to any one of claims 34 to 37 or 40, wherein the munition explosive comprises at least one grenade.

**42.** The munition according to any one of claims 34 to 37, 40 to 41, wherein the munition explosive comprises a plurality of grenades.

15 **43.** The munition according to any one of claims 34 to 37, 40 to 42, wherein the munition explosive comprises a warhead.

**44.** A vehicle, configured for motion, and comprising a munition as defined in any one of claims 34 to 37, 40 to 43.

**45.** The vehicle according to claim 44, wherein the vehicle is an air vehicle, configured for motion in the atmosphere.

20 **46.** The vehicle according to claim 44 or claim 45, wherein the vehicle is any one of an unmanned air vehicle (UAV), a missile, or a free-fall weapon.

**47.** The vehicle according to claim 44 or claim 45, wherein the vehicle is any one of a torpedo, a robotic land surface or a water surface vehicle.

25 **48.** The vehicle according to claim 44 or claim 45, wherein the vehicle is in the form of a quadcopter.

**49.** A method for operating a munition, comprising:

- (a) deploying the munition, the munition being as defined in any one of claims 34 to 37, 40;
- (b) selectively moving said switch member from said APP to said AEP;
- (c) arming the S&A device;
- (d) causing the S&A device to detonate the munition explosive via the switch member.

30 **50.** The method according to claim 49, comprising disengaging a Remove Before Operation (RBO) pin prior to step (b).

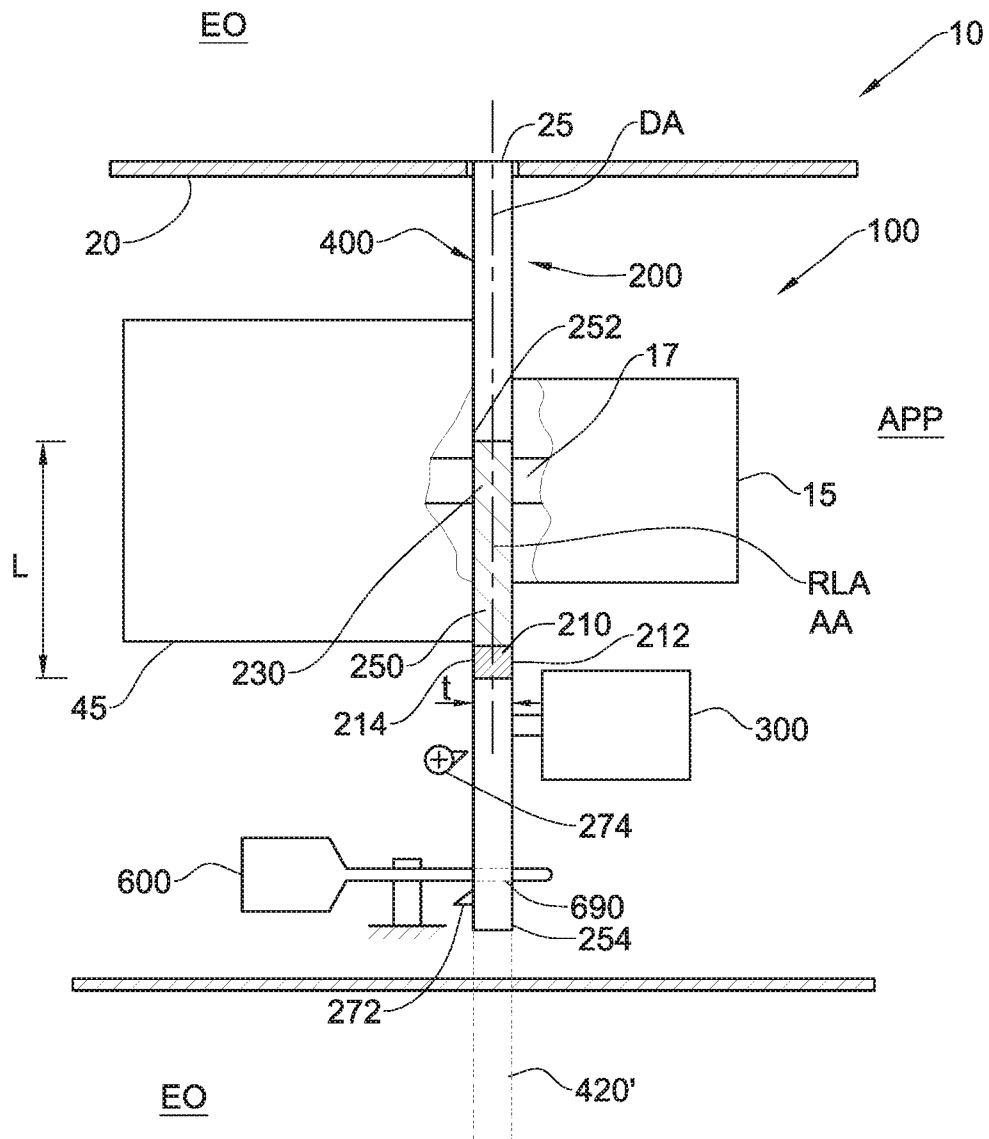


FIG. 1

2/17

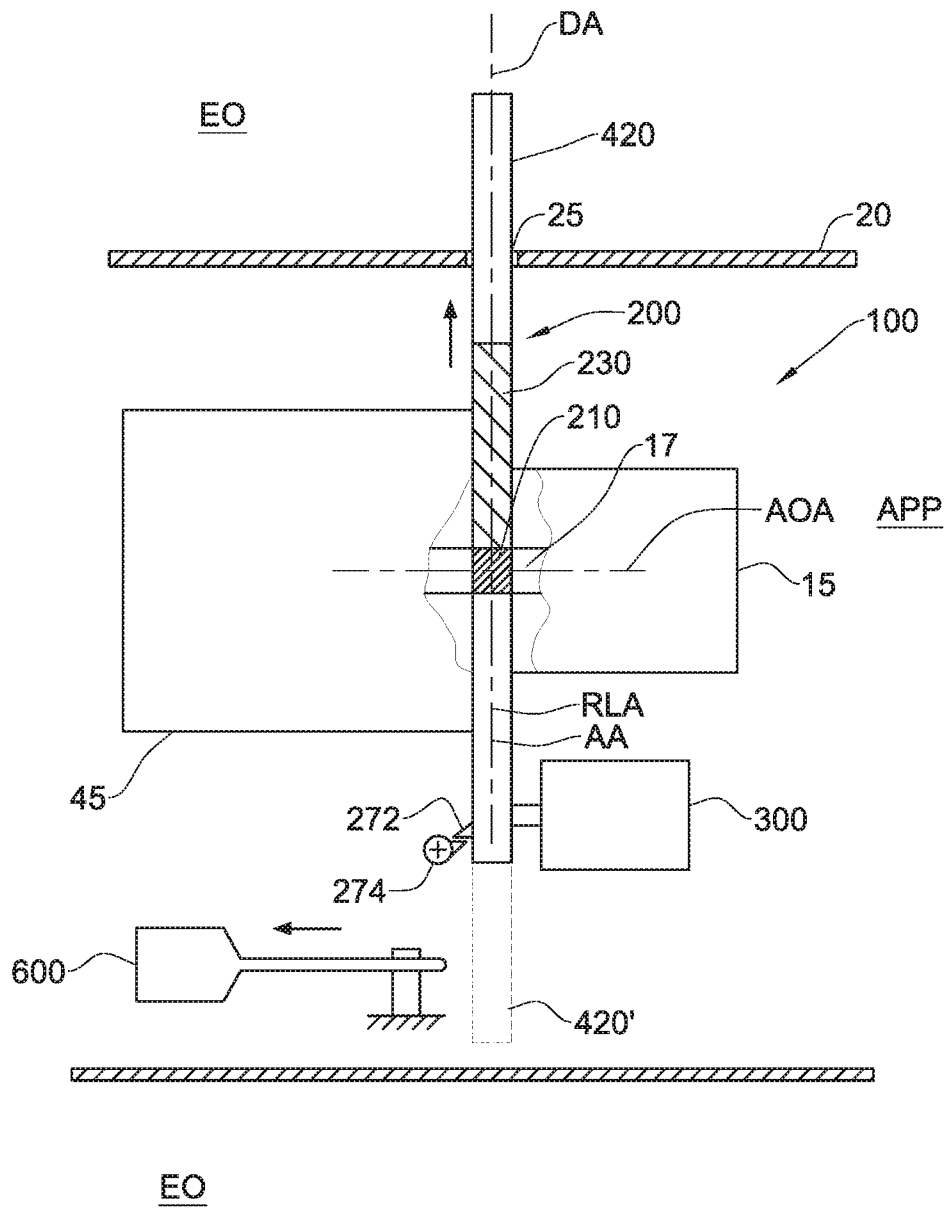


FIG. 2

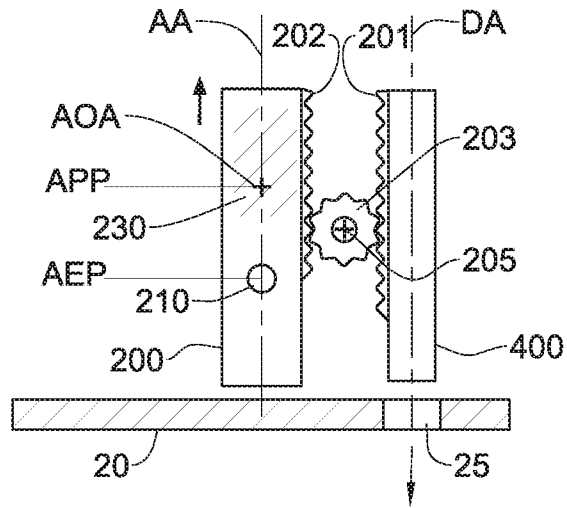


FIG. 3(a)

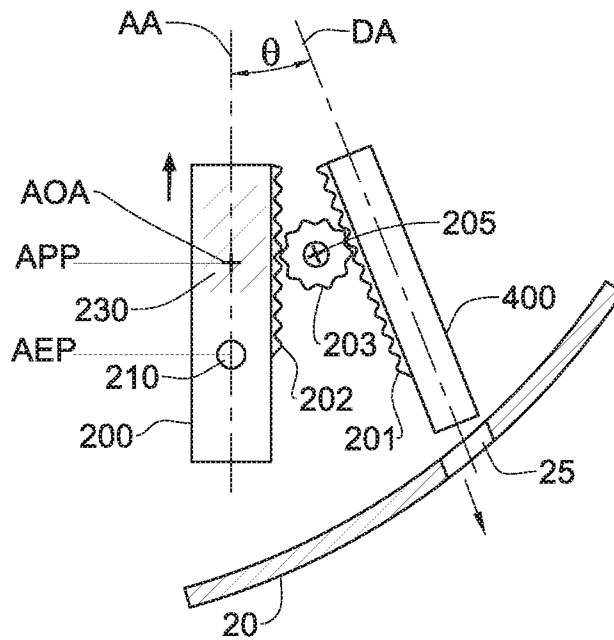


FIG. 3(b)



4/17

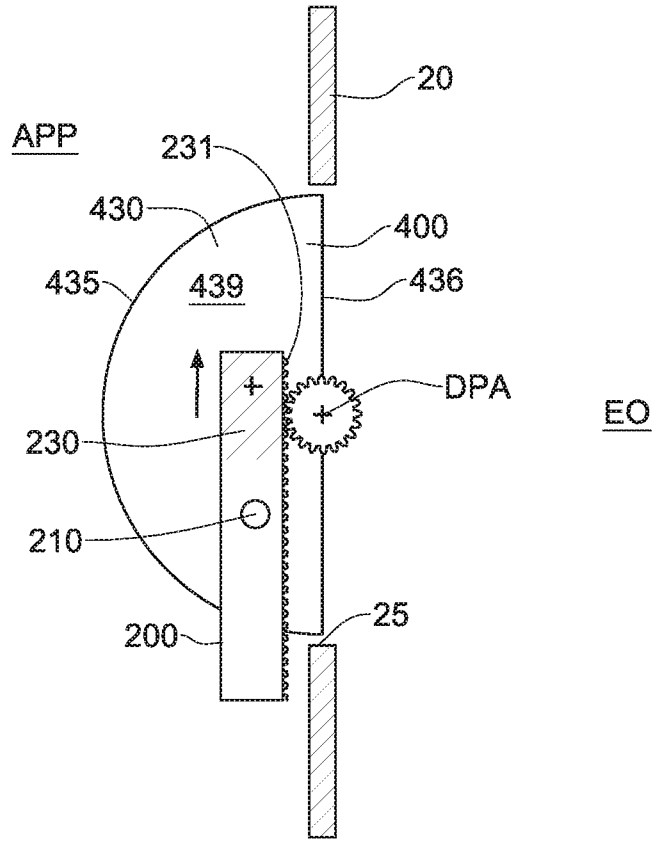


FIG. 4(a)

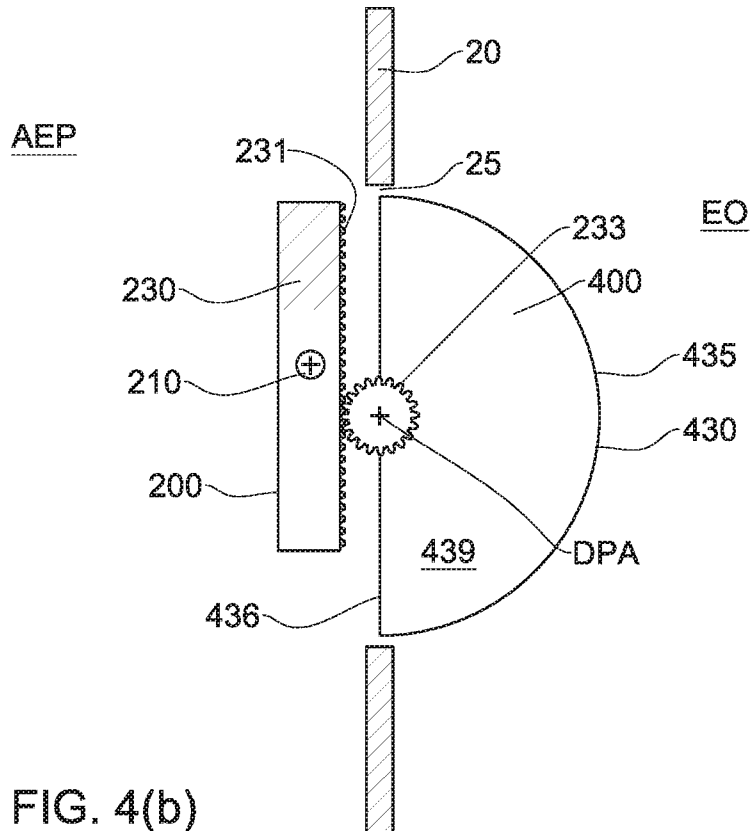


FIG. 4(b)

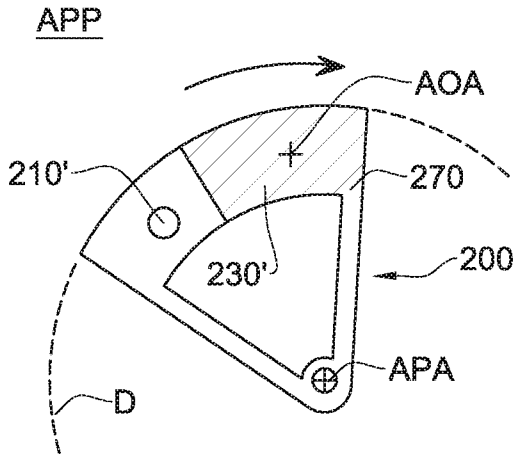


Fig. 5(a)

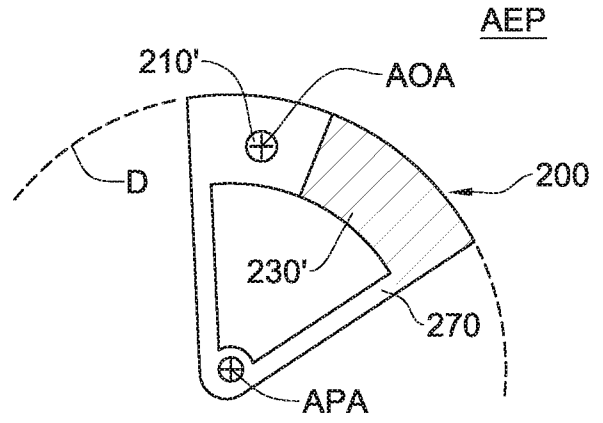


Fig. 5(b)

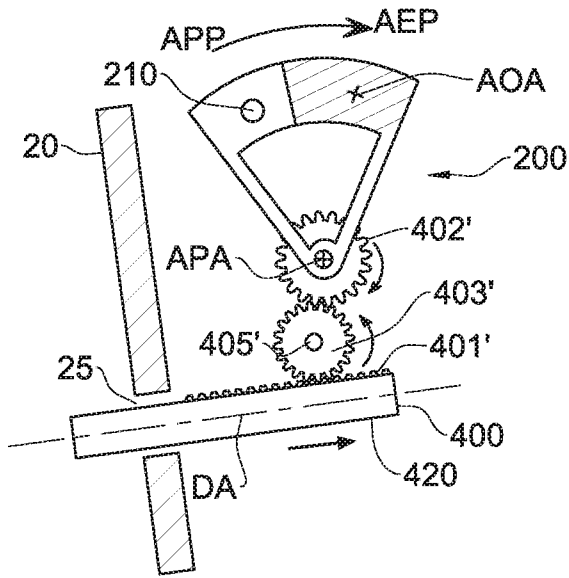


Fig. 6(a)

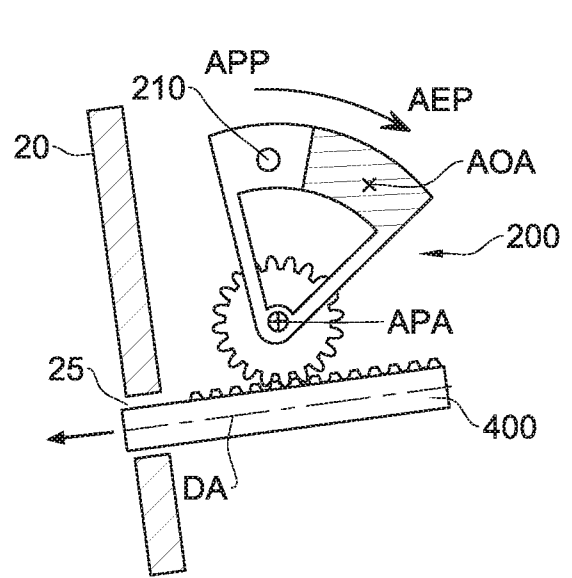


Fig. 6(b)



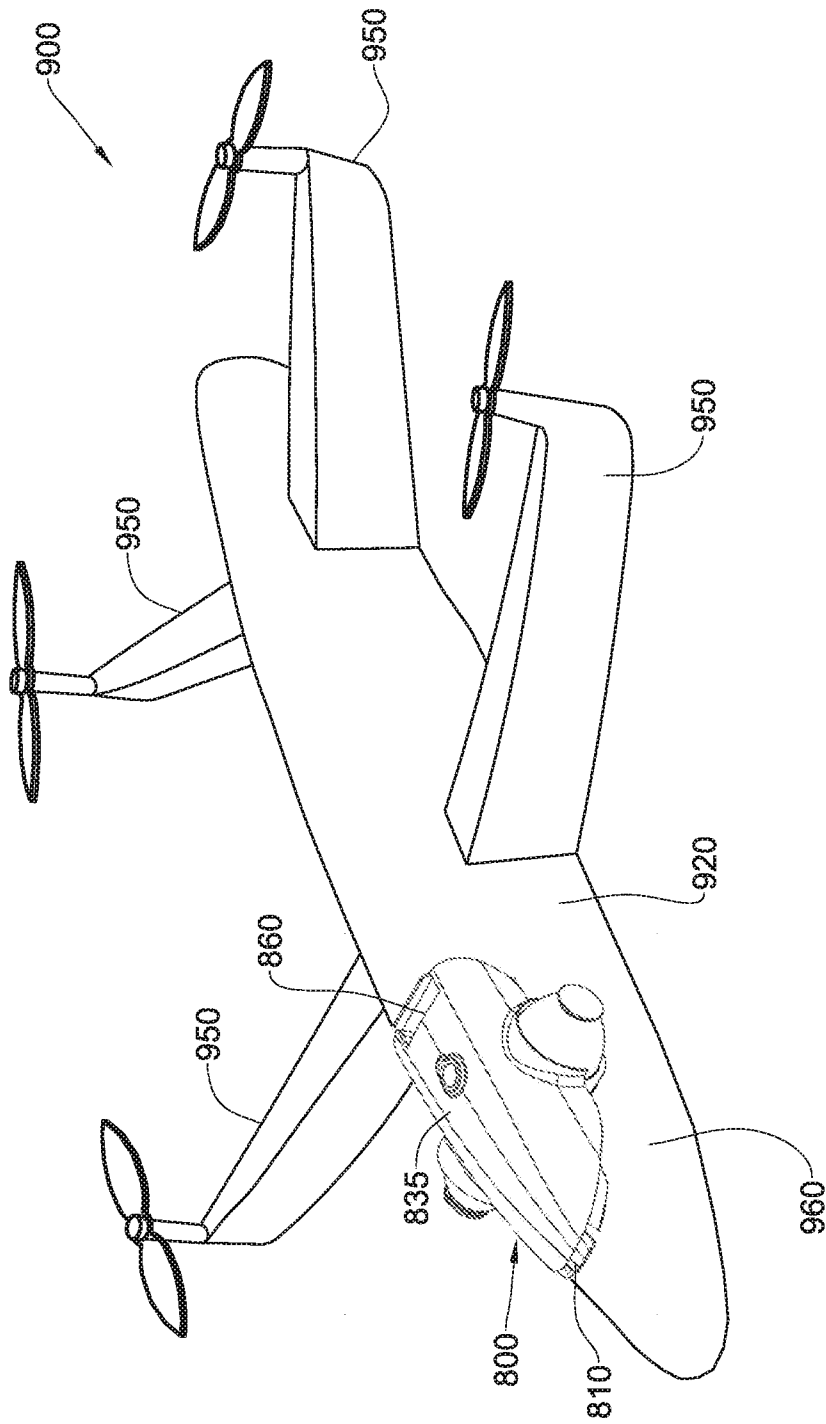


FIG. 8

8/17

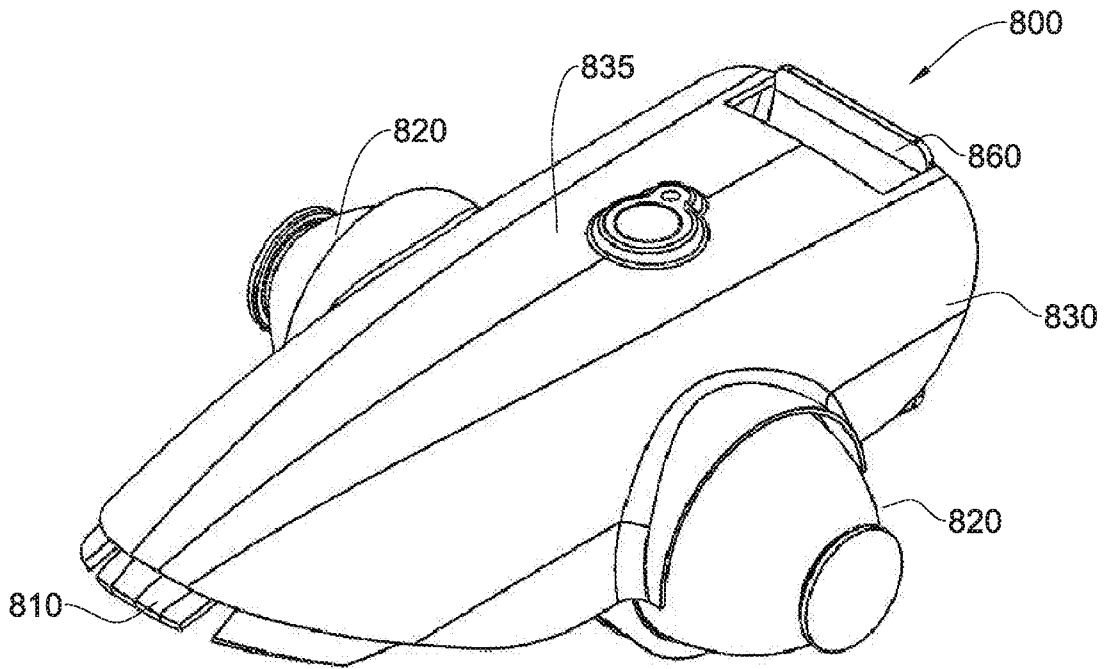


FIG. 9(a)

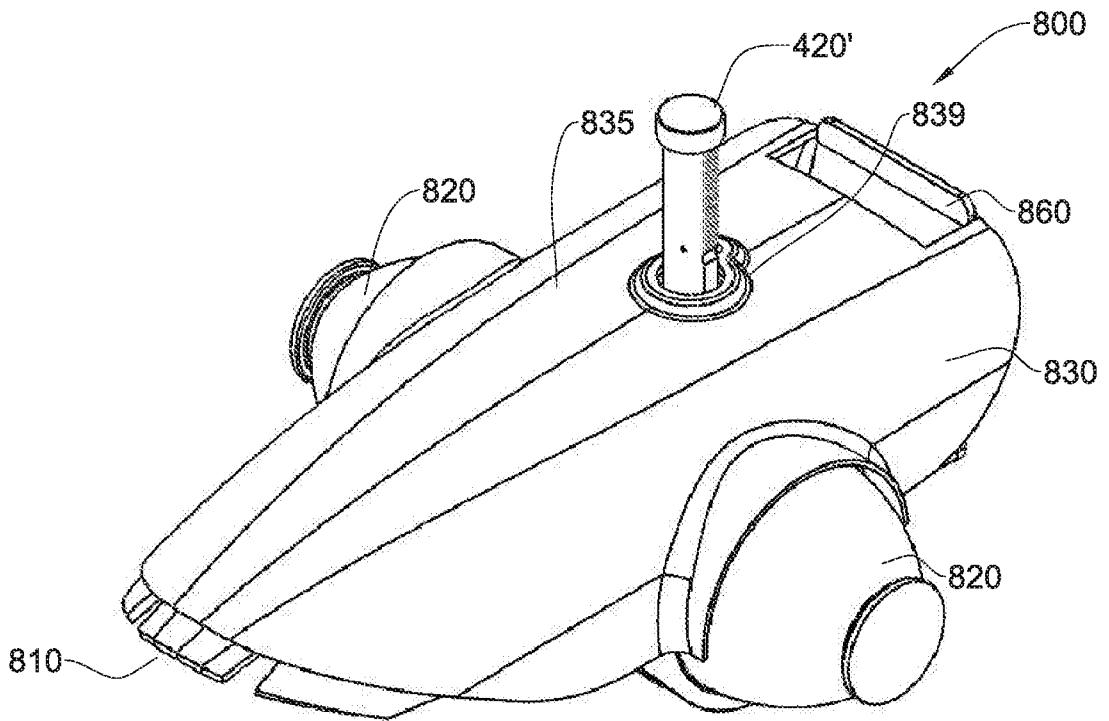


FIG. 9(b)

9/17

FIG. 10(a)

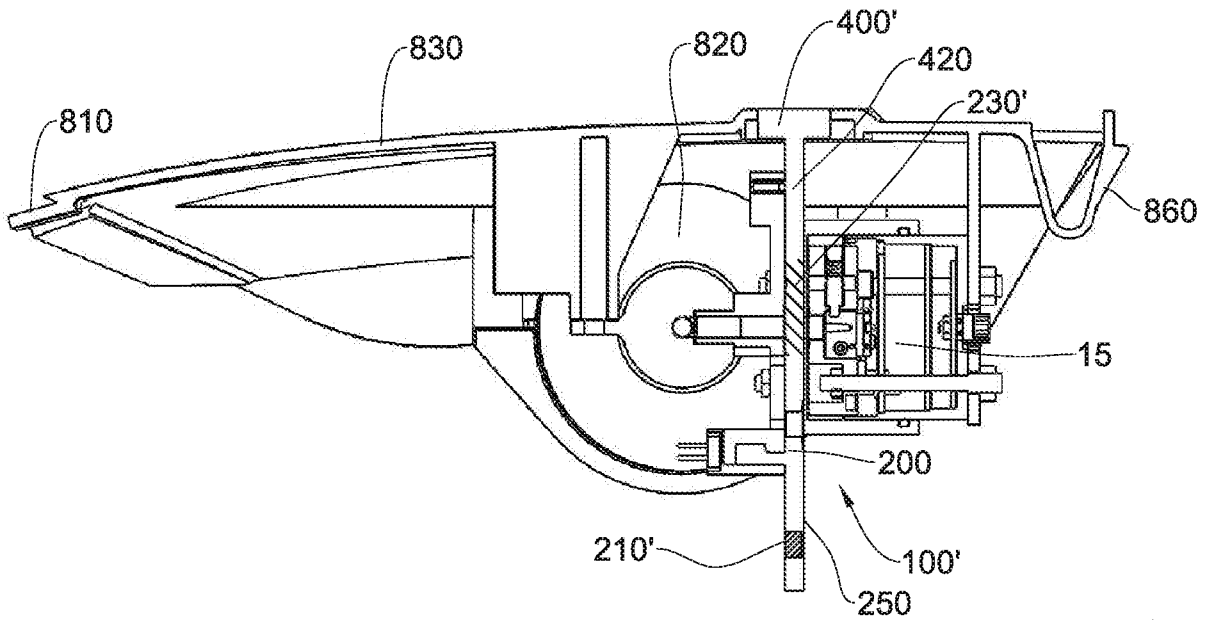


FIG. 10(b)

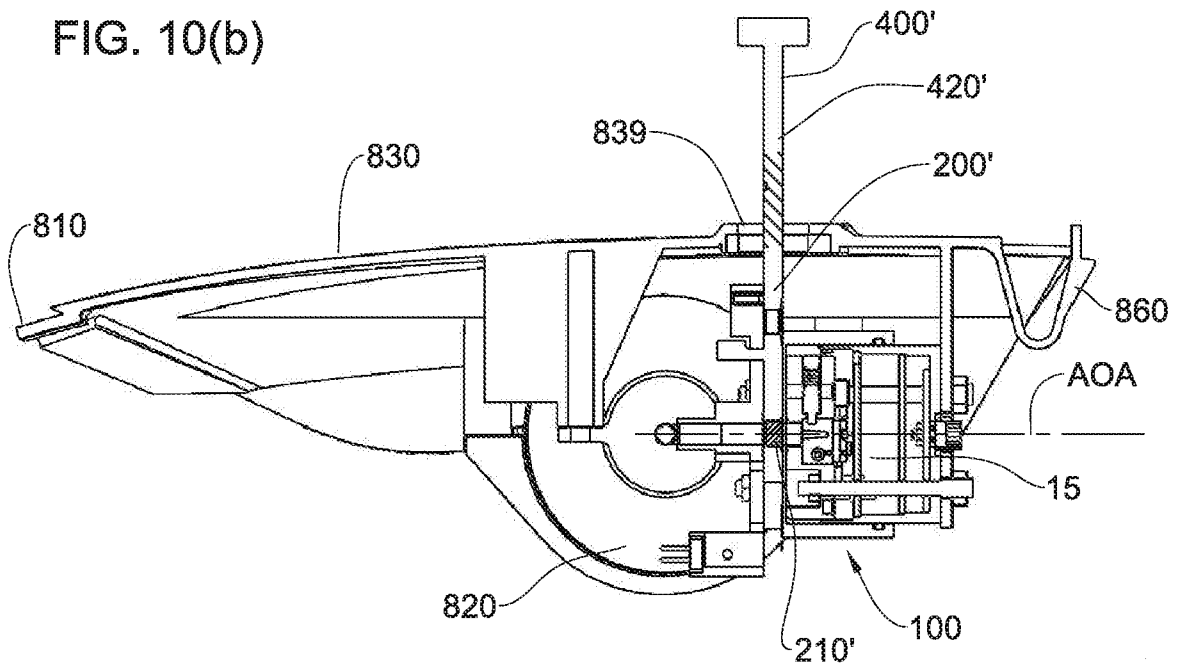


FIG. 11(a)

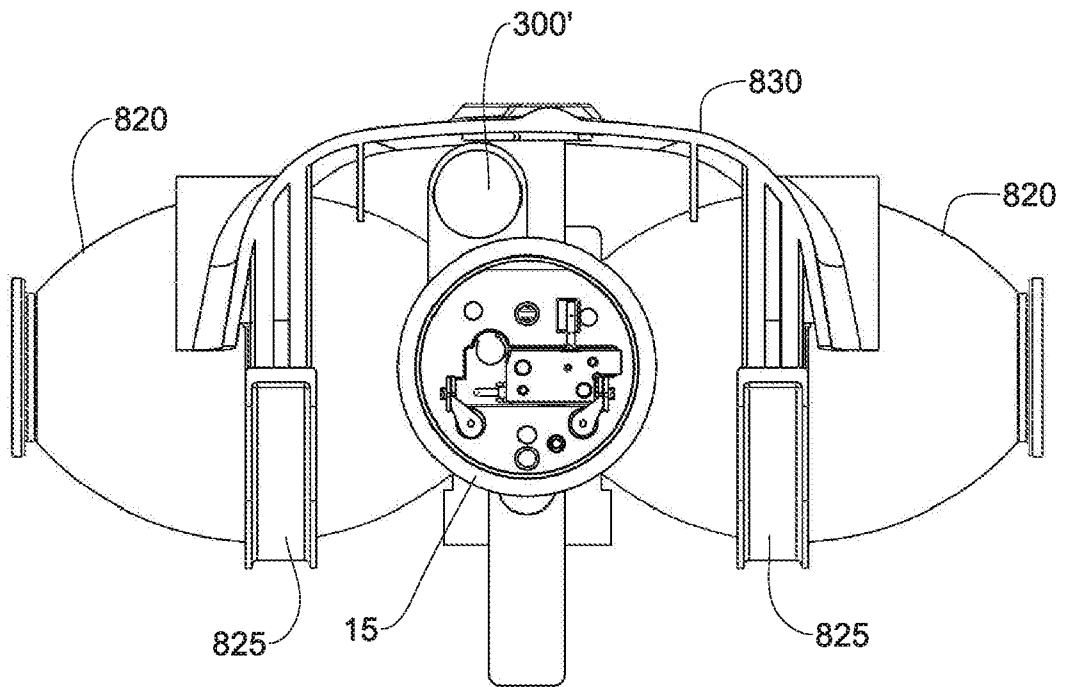
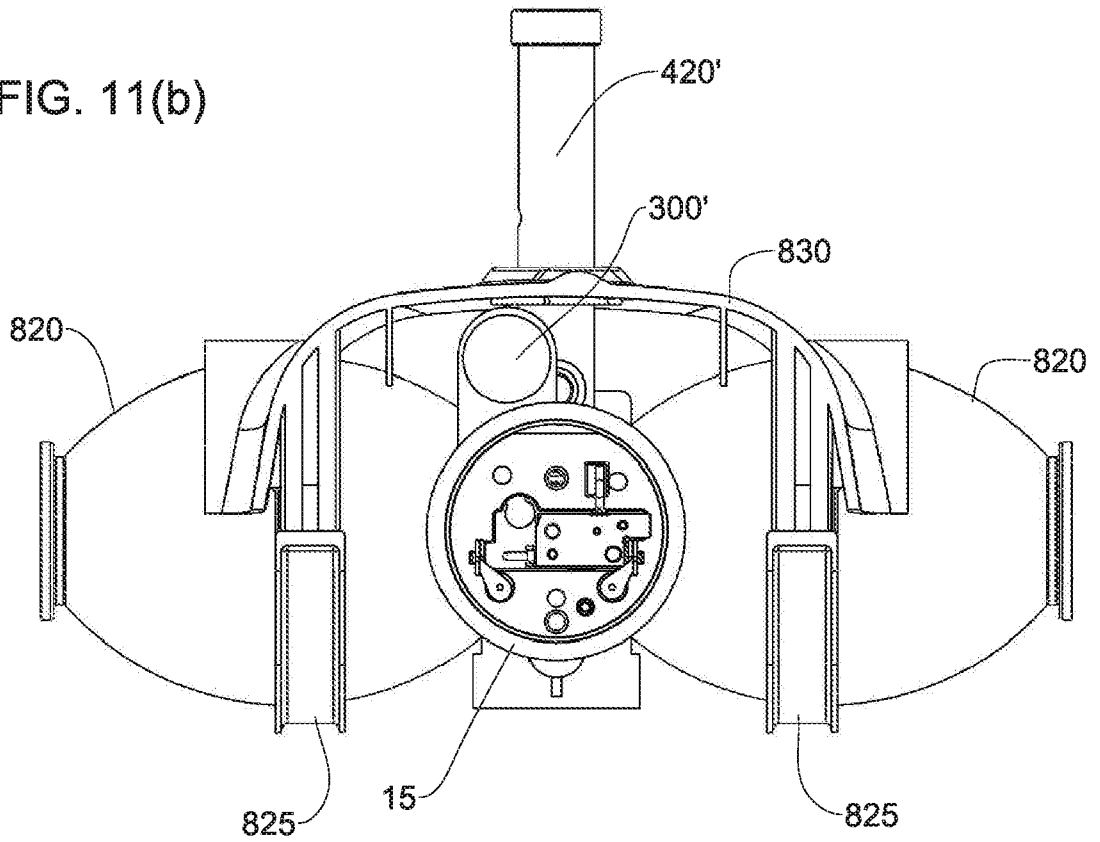


FIG. 11(b)



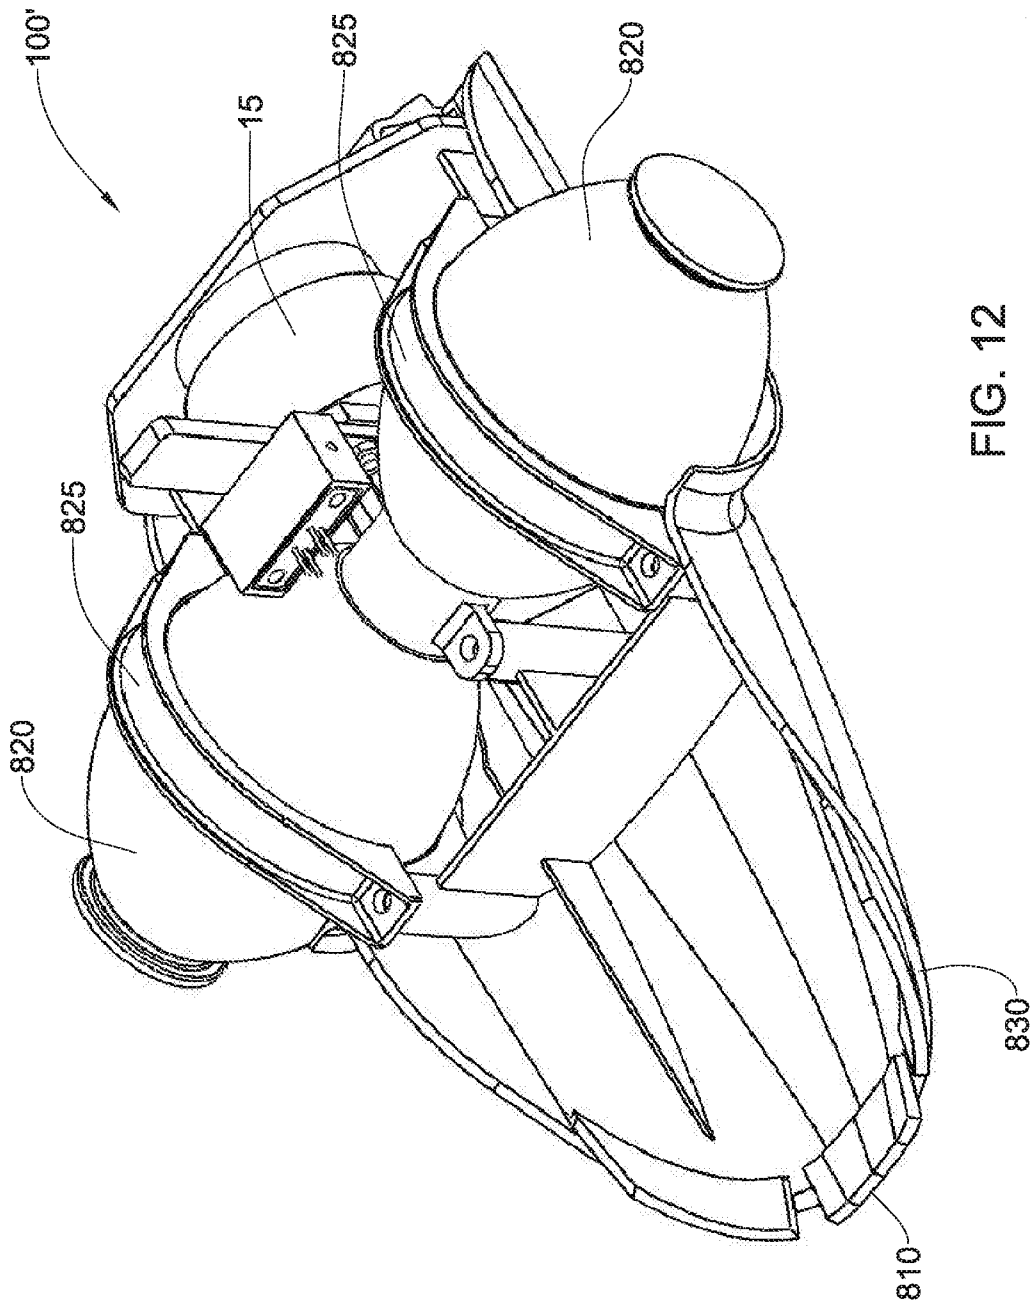


FIG. 12



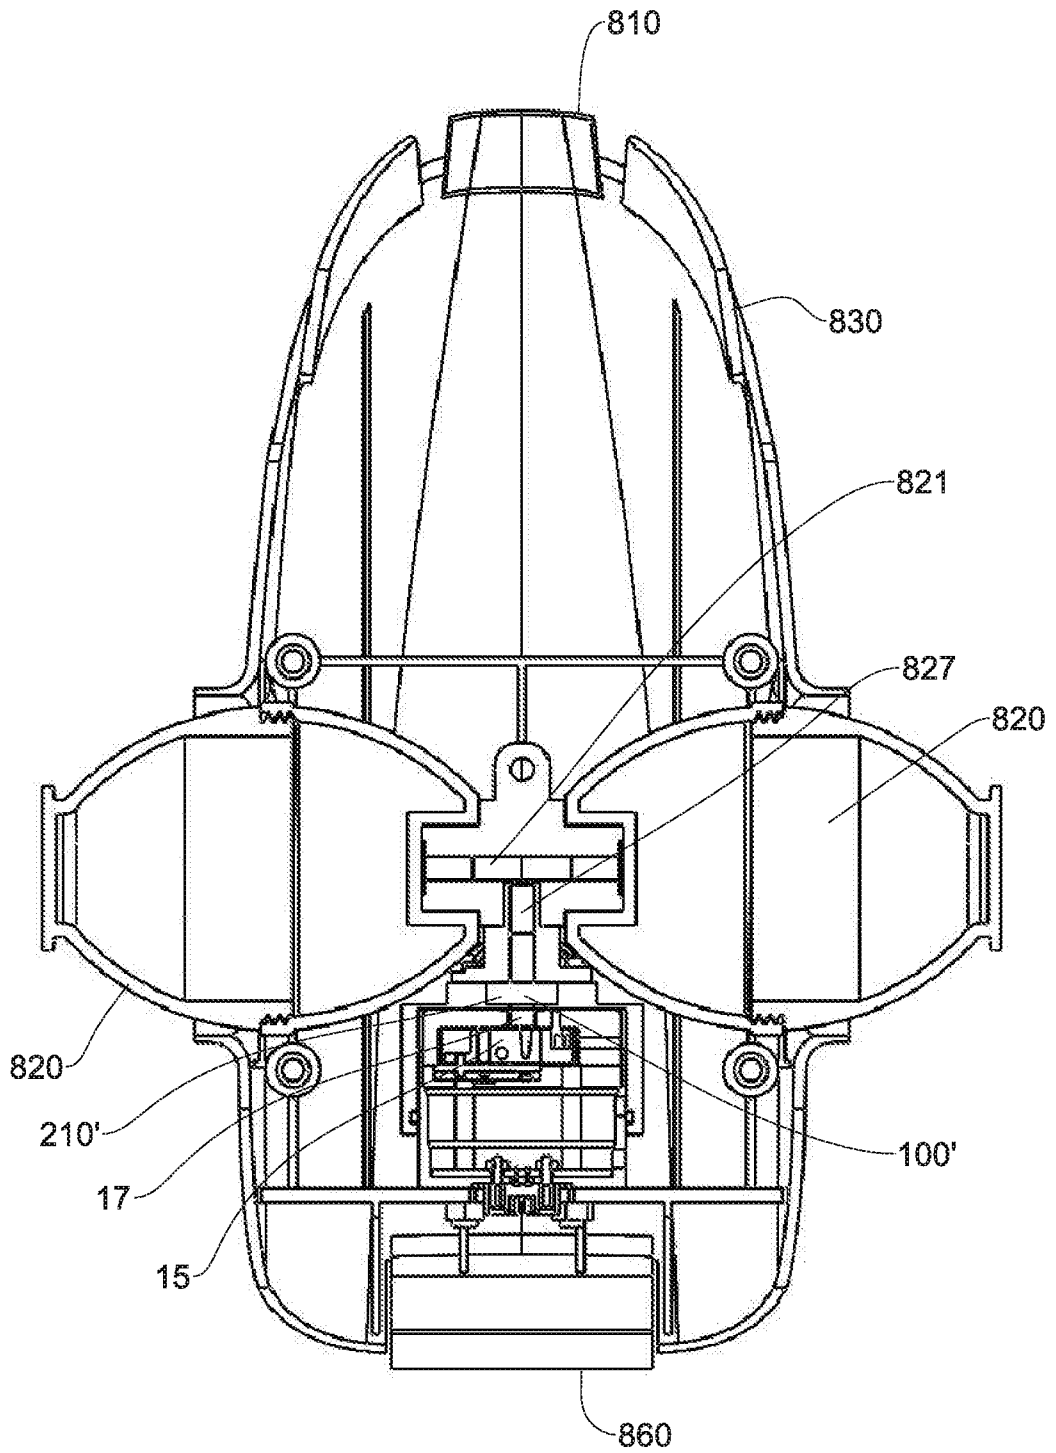


FIG. 13

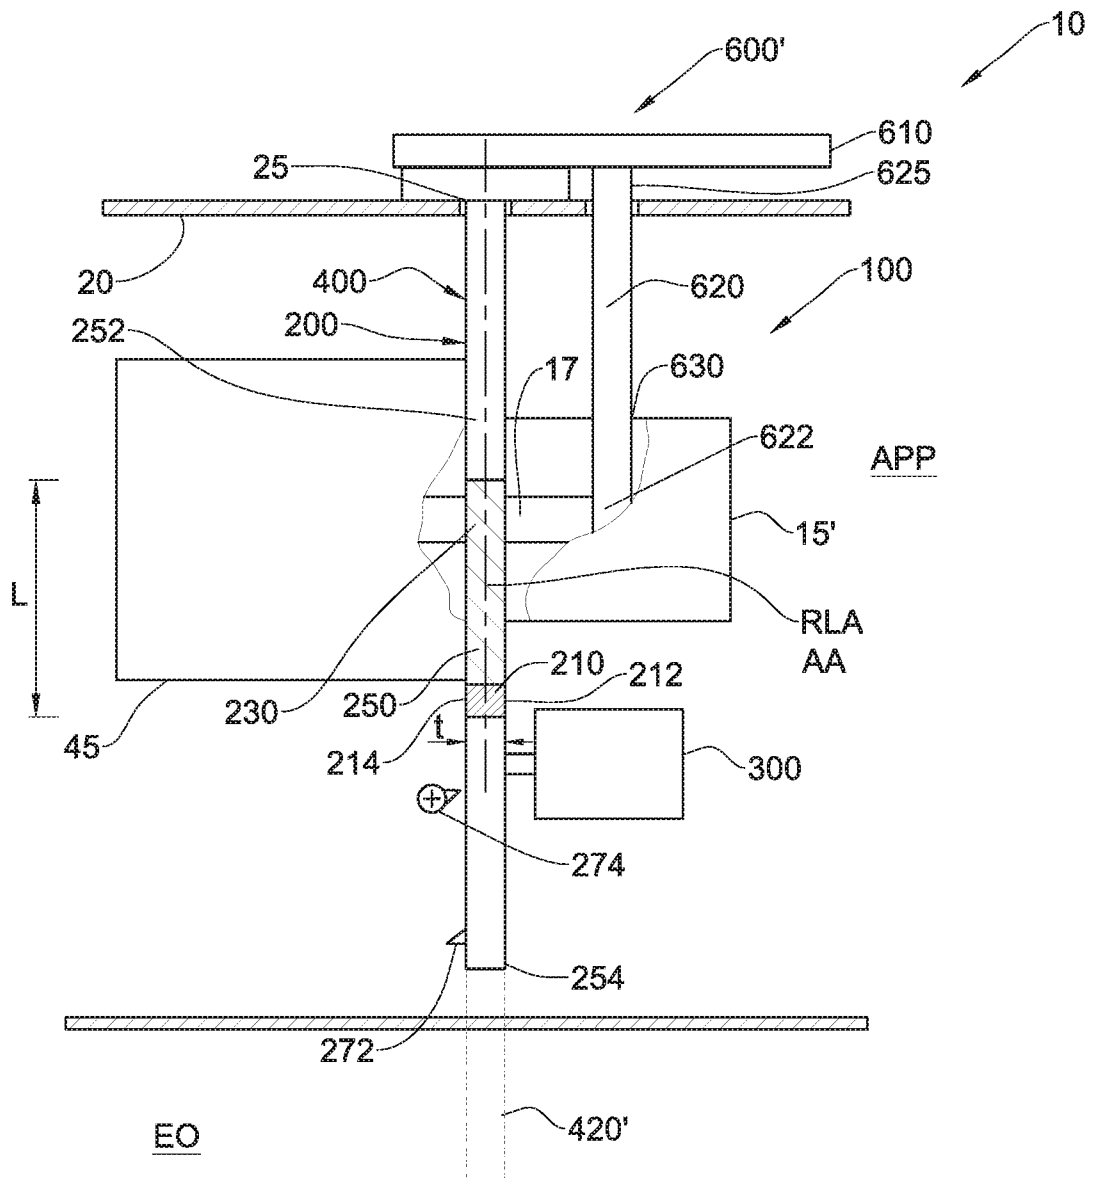


FIG. 14

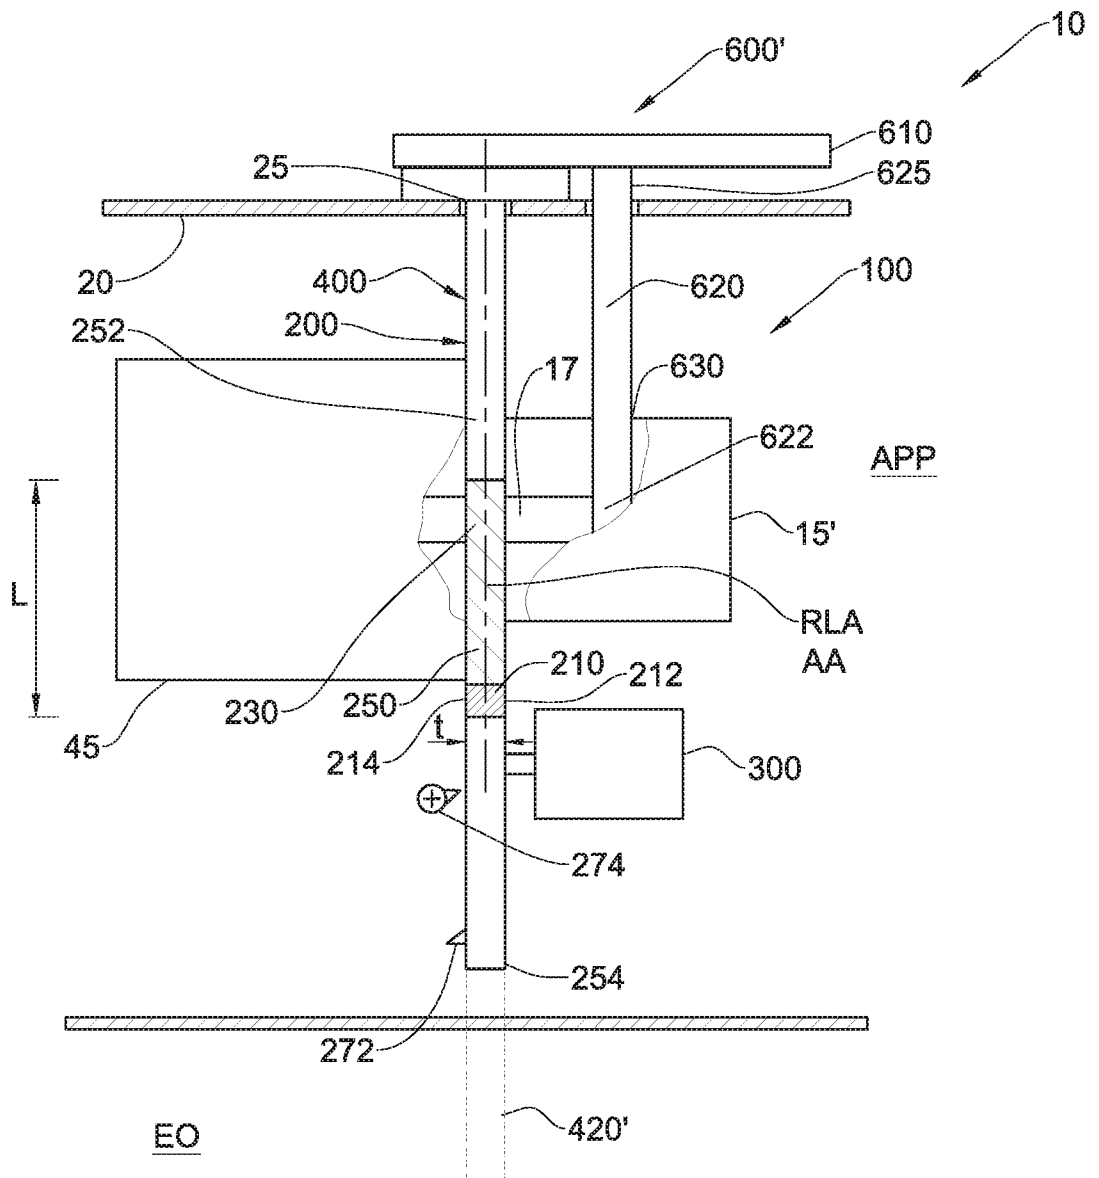


FIG. 14

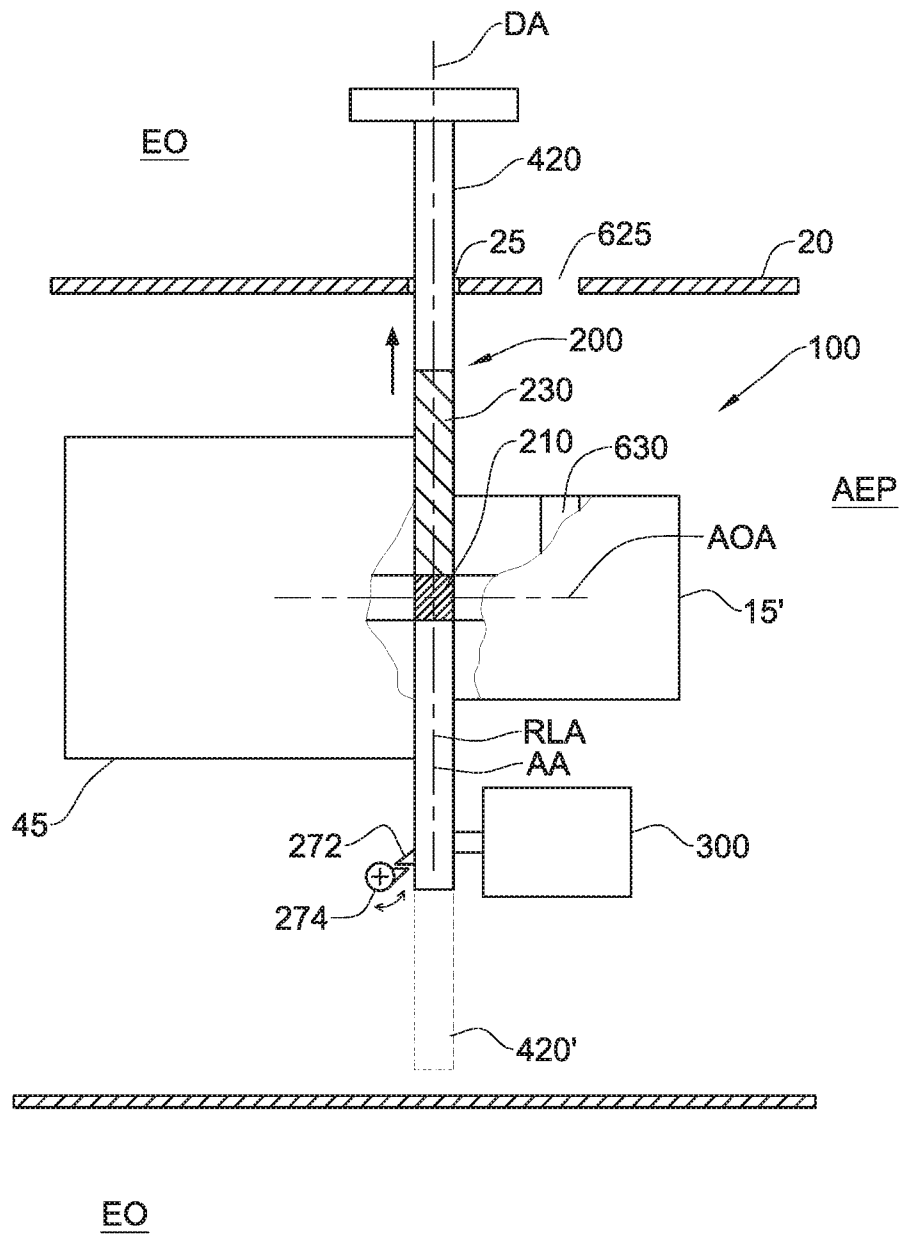


FIG. 15

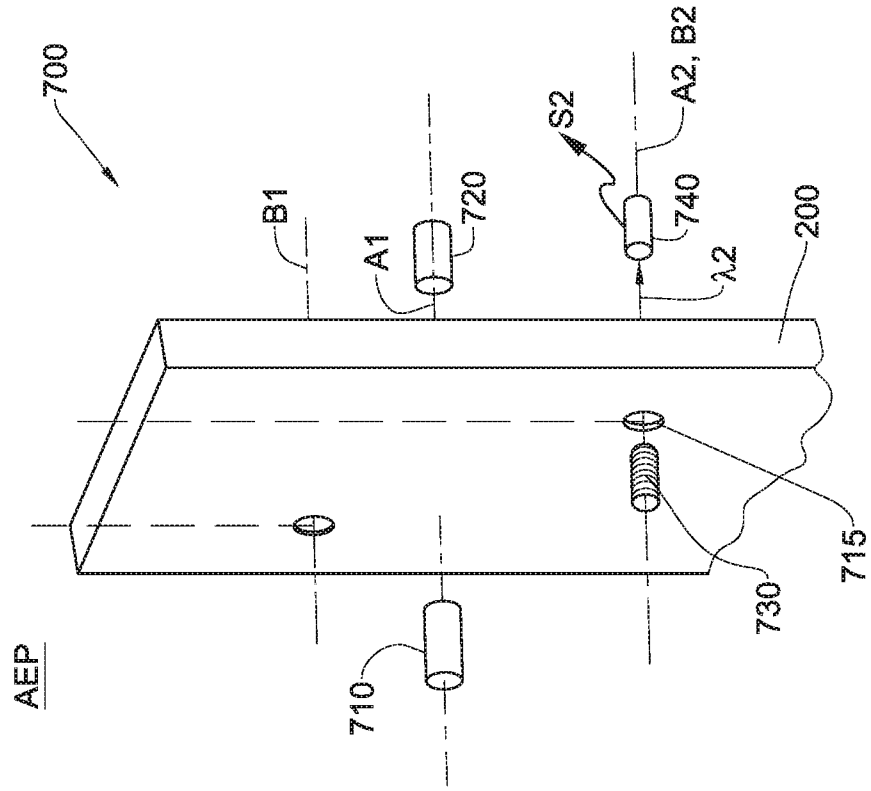


FIG. 16(a)

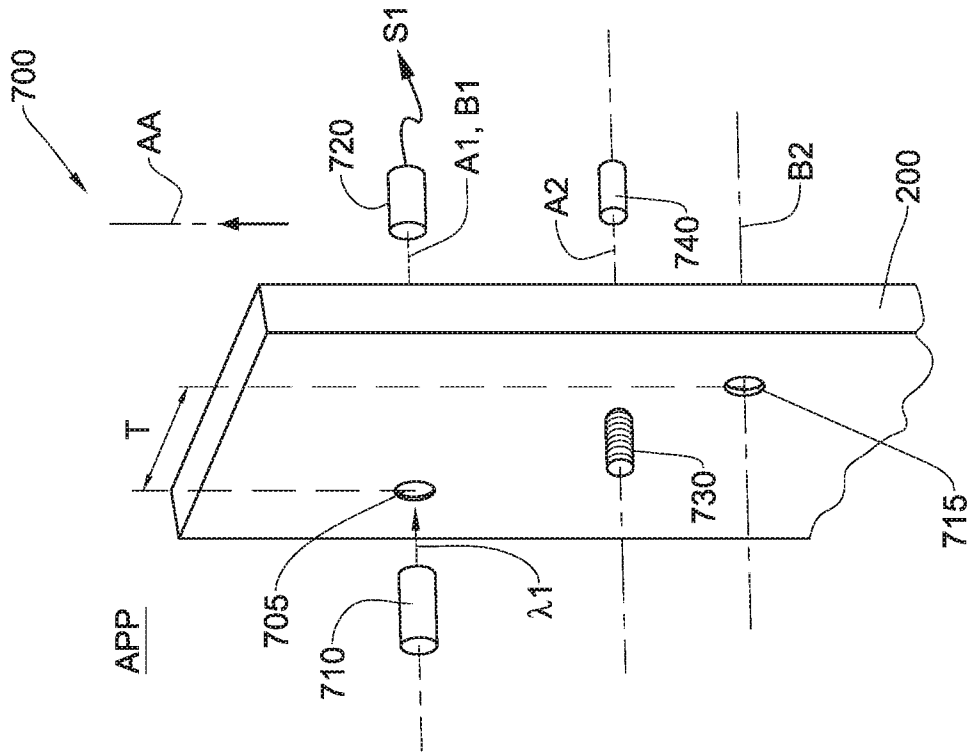


FIG. 16(b)

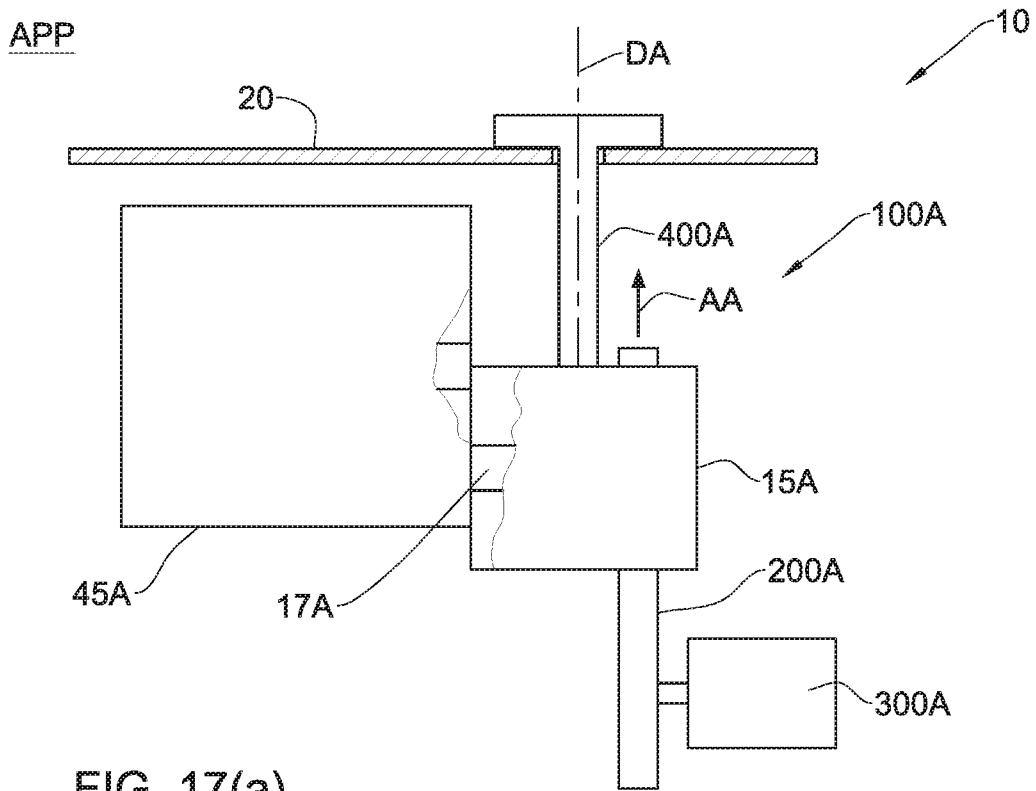


FIG. 17(a)

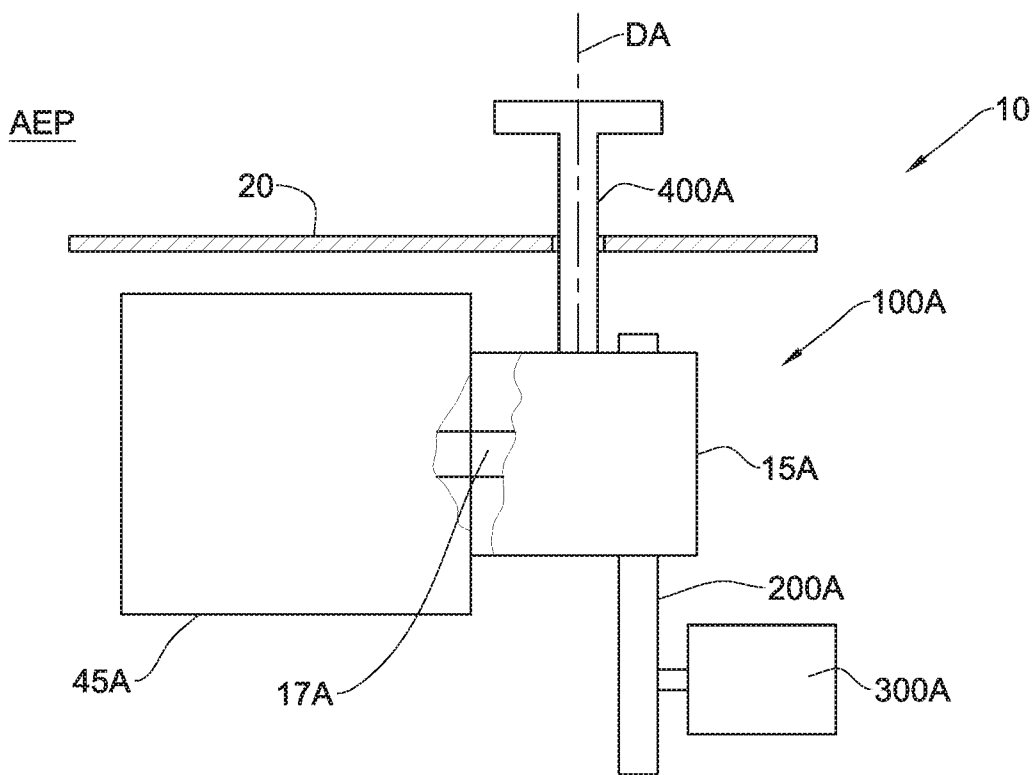


FIG. 17(b)

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2018/050020

A. CLASSIFICATION OF SUBJECT MATTER IPC (2018.01) F42C 15/34		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC (2018.01) F42C 15/34, F42B 12/20, G01P 15/08, F42B 23/24, F42C 9/04, F42C 15/24, F42C 15/00		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: Derwent Innovation, Orbit Search terms used: explosive, detonation, barrier, munition, switch, actuator, sensor, arming, safety, plate, coaxial, transverse, prevent		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012145029 A1 VEKSLER ISAR [IL]; ISRAEL MILITARY IND [IL] 14 Jun 2012 (2012/06/14) Entire Document	1-18,30-32,34-50
A	Entire Document	19-29,33
A	US 4090450 A BOFORS AB 23 May 1978 (1978/05/23) Entire Document	1-50
A	US 5074217 A HERSTAL SA [BE] 24 Dec 1991 (1991/12/24) Entire Document	1-50
A	US 3851531 A WESTINGHOUSE ELECTRIC CORP 03 Dec 1974 (1974/12/03) Entire Document	1-50
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>“A” document defining the general state of the art which is not considered to be of particular relevance</p> <p>“E” earlier application or patent but published on or after the international filing date</p> <p>“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>“O” document referring to an oral disclosure, use, exhibition or other means</p> <p>“P” document published prior to the international filing date but later than the priority date claimed</p> <p>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>“&amp;” document member of the same patent family</p>		
Date of the actual completion of the international search 28 Mar 2018		Date of mailing of the international search report 08 Apr 2018
Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Facsimile No. 972-2-5651616		Authorized officer CHOVER Nimrod Israel  Telephone No. 972-5651692

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2018/050020

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4712478 A HONEYWELL INC [US] 15 Dec 1987 (1987/12/15) Entire Document	1-50
A	US 6272995 B1 KDI PREC PRODUCTS INC [US] 14 Aug 2001 (2001/08/14) Entire Document	1-50
A	US 2008072781 A1 CHANG INDUSTRY INC 27 Mar 2008 (2008/03/27) Entire Document	1-50
A	US 2004144279 A1 GLATTHAAR KARL, ; GIESLER GERD, ; MOOSMANN HORST, ; SCHILLINGER WOLFGANG, ; KIENZLER FRANK, ; JUNGHANS FEINWERKTECHNIK GMBH & CO. KG 29 Jul 2004 (2004/07/29) Entire Document	1-50



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No. PCT/IL2018/050020
--

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
US 2012145029 A1	14 Jun 2012	US 2012145029 A1	14 Jun 2012
		US 8661979 B2	04 Mar 2014
		AU 2010365632 A1	27 Jun 2013
		AU 2010365632 B2	21 Apr 2016
		CA 2819964 A1	21 Jun 2012
		CA 2819964 C	07 Apr 2015
		DK 2649404 T3	24 Aug 2015
		EP 2649404 A1	16 Oct 2013
		EP 2649404 B1	03 Jun 2015
		ES 2542628 T3	07 Aug 2015
		IL 221914 A	29 Oct 2015
		KR 20140018211 A	12 Feb 2014
		KR 101543615 B1	11 Aug 2015
		SG 182061 A1	30 Jul 2012
		WO 2012080998 A1	21 Jun 2012
<hr/>			
US 4090450 A	23 May 1978	US 4090450 A	23 May 1978
		CH 606980 A5	30 Nov 1978
		DE 2648267 A1	12 May 1977
		DE 2648267 C2	10 Mar 1988
		FR 2330993 A1	03 Jun 1977
		FR 2330993 B1	31 Dec 1982
		IT 1075783 B	22 Apr 1985
		SE 407286 B	19 Mar 1979
<hr/>			
US 5074217 A	24 Dec 1991	US 5074217 A	24 Dec 1991
		BE 1003635 A3	12 May 1992
		CN 1052941 A	10 Jul 1991
		EP 0431704 A1	12 Jun 1991
		ES 2026832 T1	16 May 1992
		GR 910300146 T1	30 Jun 1992

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No. PCT/IL2018/050020
--

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		IL 96591 D0	16 Sep 1991
US 3851531 A	03 Dec 1974	US 3851531 A DE 2210277 A1 GB 1388953 A US 3750583 A	03 Dec 1974 21 Sep 1972 03 Apr 1975 07 Aug 1973
US 4712478 A	15 Dec 1987	US 4712478 A	15 Dec 1987
US 6272995 B1	14 Aug 2001	US 6272995 B1	14 Aug 2001
US 2008072781 A1	27 Mar 2008	US 2008072781 A1	27 Mar 2008
US 2004144279 A1	29 Jul 2004	US 2004144279 A1 US 7055436 B2 CH 696892 A5 DE 10302967 A1 DE 10302967 B4 FR 2850455 A1 FR 2850455 B1 ZA 200400517 B	29 Jul 2004 06 Jun 2006 15 Jan 2008 05 Aug 2004 06 Apr 2006 30 Jul 2004 13 Apr 2007 23 Aug 2004