



(43) International Publication Date  
22 May 2014 (22.05.2014)

- (51) International Patent Classification:  
A61M 16/06 (2006.01) A62B 18/02 (2006.01)
- (21) International Application Number:  
PCT/NZ2013/000211
- (22) International Filing Date:  
15 November 2013 (15.11.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/727,322 16 November 2012 (16.11.2012) US
- (71) Applicant: FISHER & PAYKEL HEALTHCARE LIMITED [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).
- (72) Inventors; and
- (71) Applicants : SIEW, Silas Sao Jin [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). GALGALL, Amit [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). GRAHAM, Ryan Anthony [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). THOMPSON, Mark Andrew

[NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **ALLAN, Olivia Marie** [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **SINTIVE, Bruno** [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).

- (74) Agents: **DEVINE, Matthew D** et al.; A J Park, PO Box 949, Wellington, 6140 (NZ).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

(54) Title: NASAL SEAL AND RESPIRATORY INTERFACE

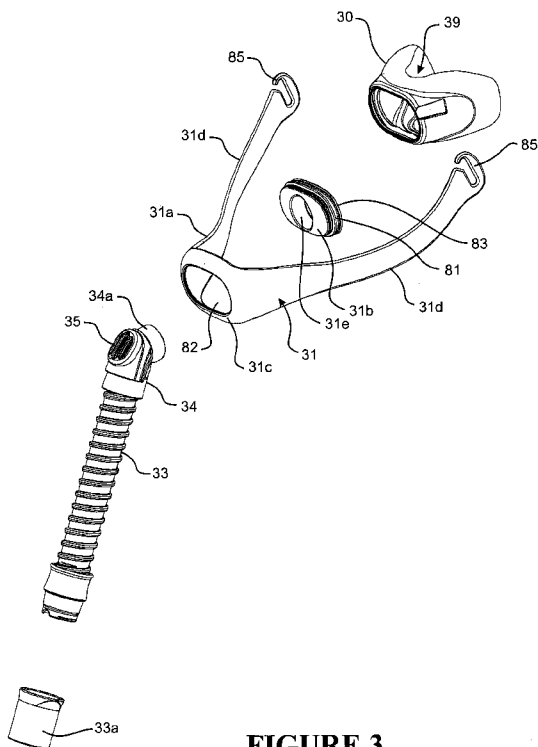


FIGURE 3

(57) Abstract: A nasal seal for a respiratory interface comprises a supple lower-nose-receiving center part having a concave shape preformed to receive and sealingly contact the tip, lower sides, and base of the nose and sealingly contact the upper lip, and position an aperture for gas flow beneath the nares of wearer. The seal may have resilience or memory towards this preformed shape.

WO 2014/077708 A1



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

## NASAL SEAL AND RESPIRATORY INTERFACE

### FIELD OF THE INVENTION

The invention generally relates to a nasal seal for a respiratory interface, and to an  
5 an interface including the nasal seal, comprising either a mask or a mask and headgear.

### BACKGROUND OF THE INVENTION

Respiratory interfaces are used to provide respiratory gas or gases, such as air in  
10 CPAP therapy, to a user under positive pressure. A nasal interface delivers gas to the nose.

The seal of an indirect nasal interface contacts the upper lip, the face on either side  
of the nose, and the bridge of the nose, and substantially encloses the nose. An indirect  
nasal interface may be relatively large on the face, may put pressure on the bridge of the  
nose, and the frame of the interface may include a T-piece connecting to headgear at the  
15 wearer's forehead which typically obstructs also wearing spectacles for example.

A direct nasal interface is typically smaller on the face, and does not comprise a T-  
piece, and is thus less obstructive. However a direct nasal interface typically comprises  
nasal pillows or similar which enter into the nares of the wearer to ensure an effective seal.  
20

### SUMMARY OF THE INVENTION

An object of the invention is to provide a nasal seal and/or interface which is  
improved in at least one or more respects or at least provides the public or the medical  
profession with a useful choice.  
25

In broad terms in one aspect the invention comprises a nasal seal for a mask  
interface, or a mask interface comprising a nasal seal, the seal comprising a face  
contacting or wearer side comprising a supple lower nose-receiving center part having a  
concave shape pre-formed to receive and sealingly contact the tip, lower sides, and base  
30 of the nose and sealingly contact the upper lip, and position an aperture for gas flow  
beneath the nares of wearer, the supple center part comprises left and right side wall  
portions on left and right sides of the aperture to contact the left and right lower sides of  
the nose of the wearer, wherein the left and right side wall portions or at least upper  
sections of the left and right side wall portions have an outwardly projecting or convex  
35 shape (away from an interior of the seal) on opposite sides of the seal, and wherein the  
seal comprises an outward side of the seal opposite the wearer side, which outward side of  
the seal comprises left and right stabilising outer parts which terminate in left and right  
outer tips adapted to contact the face adjacent the lower flanks of the nose on the left and

right sides of the nose when worn, said left and right outer parts of the seal being less flexible or stiff relative to at least the center part of the wearer side of the seal.

5 The left and right side wall portions of the supple center part of the seal extend from the aperture away from one another. In at least some embodiments the outwardly projecting or convex shape of the left and right side wall portion or the upper sections of the left and right side wall portions are arranged to seal against the crease or recess at the junction between the bottom of the sides of the nose and the face. These outwardly projecting or convex upper sections on opposite sides of the seal are typically above the  
10 aperture in a height of the seal.

In at least some embodiments the outward side of the seal connects to upper, lower, and outer tip peripheral parts of the wearer side of the seal with a wall thickness which reduces from that of the external side of the seal to the wearer side of the seal. In at least  
15 some embodiments left and right peripheral parts of the seal at left and right outer tips of the seal which contact the face when worn include an approximately straight part bridging upper and lower peripheral parts of the seal.

Typically a lower edge of the aperture is spaced rearwardly in a depth of the seal  
20 relative to an upper edge of the aperture.

In at least some embodiments the seal has a hollow interior which is filled with air under positive pressure in use, at least on an internal side of the supple lower-nose-receiving concave center part of the wearer side of the seal.  
25

Typically the supple lower-nose-receiving concave center part has resilience or memory towards said pre-formed shape.

30 In at least some embodiments the center part comprises an upper wall portion above the aperture to contact the tip of the nose of the wearer, and a lower wall portion below the aperture and rearward of the upper wall portion to contact the upper lip below the nose of the wearer.

35 In at least some embodiments the upper wall portion, the lower wall portion, and the left and right side wall portions may have complex curved shapes (and to the extent each has an approximate major plane these are not coplanar).

The supple upper wall, lower wall, and side wall portions of the center of the wearer side of the seal have a shape pre-formed to receive and sealingly contact the tip, lower sides, and underside of the nose of the wearer. The supple center part of the wearer side of the seal may have this pre-formed shape when not under positive air pressure from within the seal. While supple and thus flexibly conformable, in at least preferred 5 embodiments it also has resilience or memory towards this pre-formed shape. In other words the seal has 'structure' because it maintains this pre-formed shape. Thus for many wearers the seal will naturally fit, or conform with only a relatively small amount of shape alteration or deformation, to the shape of these parts of the nose of the wearer, even 10 before internal gas flow through the seal creates a positive pressure within the seal. Internal gas flow pressure within the seal will press the seal against these parts of the nose of the wearer. For other wearers internal gas flow pressure within the seal will also cause the seal to alter shape to a greater extent to conform against the shape of the nose of the wearer.

15 The seal does not seal against the bridge of the nose. The seal preferably does not extend, at least to any significant extent such as more than about 1 cm for example, over any flat part of ridge cartilage of the nose between the tip and the bridge.

20 In at least some embodiments the upper wall portion of the supple center part of the wearer side of the seal includes an upper concave section (within the greater general concavity of the supple central part of the wearer side of the seal) to receive specifically the tip of the nose, which is concave in both a height and a width of the seal. This upper concave section may have an intermediate wall thickness greater than the balance of the 25 center part of the wearer side of the seal but less than left and right outer stabilising parts of the wearer side of the seal or less than an outward side of the seal. It may extend from an upper edge of the seal outlet aperture to at or towards an upper periphery of the seal.

30 In at least some embodiments the wearer side of the seal also comprises left and right outer stabilising parts outward of the left and right side wall portions of the supple center part, to contact the wearer's face adjacent the lower flanks of the nose on the left and right sides of the nose, and which are flexible or supple but relatively less so (or are relatively stiffer) than the more supple lower-nose-receiving center part of the wearer side of the seal. For example these left and right outer stabilising parts may have a thicker wall 35 section than a wall section of the lower-nose-receiving center part.

The seal may be proportioned so that a junction or change in wall thickness on either side of the seal between an inner edge of these left and right outer stabilising parts and

the supple center part of the seal sits at or adjacent the junction between the lower sides of the nose and the face adjacent the nose.

5 The left and right outer parts of the outward side of the seal may be relatively less flexible than both the lower-nose-receiving center part and the left and right outer stabilising parts of the wearer side of the seal. For example the left and right outer parts of the external side of the seal may have a greater wall thickness than both the center part and the left and right stabilising parts of the wearer side of the seal. The hollow interior of the seal may extend to between the left and right outer or side parts of the outward and  
10 wearer sides of the seal.

An interface of which the seal may comprise a part may include a frame to which the seal is attached. In at least some embodiments the seal and the frame together form an enclosure having a gas flow inlet opening to the respiratory system and an aperture  
15 through the seal to the wearer

In a preferred embodiment the frame comprises side arms which extend outwardly (away from each other) and rearwardly past left and right extremities of the seal, to extend upwardly at a shallow angle and along the left and right cheeks and in particular  
20 cheekbones of a wearer, to connect to headgear for holding the seal on the face of a wearer. Such side arms may be longer than they are deep or thick and may be resiliently flexibly connected to a central part of the frame and/or resiliently flexible along their length, and may extend to a location between the ears and eyes of the wearer and/or to approximately the temple of the wearer, where the side arms connect to headgear. The  
25 shape of the frame side arms and/or angle between the frame side arms is such that the side arms rest on the left and right cheeks and in particular cheekbones of a wearer to assist in stabilising the interface against rotation about a horizontal axis when worn.

At their outer ends the side arms comprise connector parts for detachably connecting  
30 the frame to headgear. In a preferred form the end of each frame side arm comprises a hook and in particular an upwardly open hook part, for entering into a loop of the headgear.

In preferred embodiments the interface does not comprise a T-piece from the frame  
35 upwardly (when worn) to connect to headgear at the wearer's forehead.

In one embodiment headgear suitable for use with an interface assembly of the invention comprises a rear strap to extend around a rear part of the head of a wearer and a top strap to extend over the top of a head of a wearer. The rear strap may extend around a lower rear part of the head of the wearer and in particular over a lower part of the occipital bone. The top strap may be a crown strap or a forehead strap.

The seal of the invention comprises less flexible left and right stabilising outer parts adapted to contact the face adjacent the lower flanks of the nose on the left and right sides of the nose when worn. The seal has enhanced stability against rotation on the face due for example to tube drag forces, which can break the seal and cause leakage, as do preferred embodiments of interfaces comprising the seal and with side arms as described, even though the seal does not seal against the sensitive bridge of the nose or extend, at least to any significant extent such as more than about 1 cm for example, over any flat part of ridge cartilage of the nose between the tip and the bridge. The seal also enables a nasal interface to be smaller than an indirect nasal interface which substantially encloses the nose and may be relatively large on the face, and also does not require the pillows or similar of a conventional direct nasal interface which protrude into the nares of the wearer. The center of the wearer side of the seal has a shape pre-formed to receive and sealingly contact the tip, lower sides, and underside of the nose of the wearer, and sealingly contact the upper lip of the wearer below the nose. At the same time this center part of the seal is supple so that internal gas pressure will press the seal against these parts of the nose to enhance the seal, and so that the seal will further conform to the shape of these parts of the nose (for many wearers with only a relatively small amount of shape alteration or deformation). Despite being supple the seal also has resilience or memory towards, so as to hold, this preformed shape. Also, because the seal has this preformed shape to receive and contact the lower parts of the nose of the wearer and the upper lip the seal may be effective at relatively low gas flow rates through the mask which create only a relatively low internal gas pressure within the seal against the nose, such as flow rates below about 4 cm H<sub>2</sub>O for example. The left and right side wall portions, or at least upper sections of the left and right side wall portions of the supple center of the wearer side, have an outwardly projecting or convex shape (away from an interior of the seal) on opposite sides of the seal. These outwardly projecting or convex upper sections on opposite sides of the seal contact the crease or recess at the junction between the bottom of the sides of the nose and the face, and assist in avoiding upward leakage of air pressure, towards the eyes, in this area. Under gas pressure within the seal they deform (push) outwardly against the face in this area to enhance this seal.

Also, because the seal in at least preferred embodiments maintains its shape or structure even when not worn or under internal gas pressure, it is relatively visually apparent to a user how to place or position the mask on the face when a user first begins use of a mask comprising the seal of the invention. It is relatively apparent from its shape how to position an indirect nasal mask on the face, and also for a direct nasal interface which comprises nasal pillows or similar which enter into the nares of the wearer, but it may not be immediately apparent at least to some new users, for a mask with a seal which engages only the lower part of the nose but without covering the nose and without parts that enter the nose, and the pre-formed shape of the seal of the invention makes how the seal and thus mask should be positioned on the face more apparent for a mask of this type. Thus the mask may be more intuitive to use.

### Other

The seals may be useful in respiratory interfaces particularly for CPAP therapy, at air pressures in the range about 0.5 to about 30 cm H<sub>2</sub>O for example.

### Definitions

In this specification the terms "wearer" or "user" means persons of or in a range of average adult size(s).

In this specification the terms "height", "width", and "depth" in relation to the interface, mask, or seal mean approximately vertical, transversely horizontal, and front to back horizontal through or in relation to the interface, mask, or seal when worn by a user standing upright.

In this specification the term "concave" means a recess (or recessed) of any shape and not solely mathematically convex, and "convex" has a similar meaning.

In this specification the term "comprising" means "consisting at least in part of".

When interpreting a statement in this specification and claims that includes "comprising", features other than that or those prefaced by the term may also be present. Related terms such as "comprise" and "comprises" are to be interpreted similarly.

Reference to any prior art in this specification is not, and should not be taken as, an acknowledgement or any form of suggestion that that prior art forms part of the common general knowledge in the field of endeavour in any country in the world.



**BRIEF DESCRIPTION OF THE DRAWINGS**

Embodiments of the invention are described with reference to the accompanying drawings, by way of example and without intending to be limiting, in which:

- Figure 1 is a schematic diagram of a system for providing a heated humidified gases stream to a user, such as a continuous positive airway pressure system,
- 5 Figure 2 is a perspective view of a person wearing a patient interface of an embodiment of the invention,
- Figure 3 is an exploded view illustrating the components making up the interface of Figure 2,
- 10 Figure 4A is a vertical cross-section view, Figure 4B is a horizontal cross-section view along line I-I of Figure 4A, and Figure 4C is a vertical cross-section view along line II-II of Figure 4B, and of the interface of Figures 2 and 3 worn by a patient and with a positive pressure airflow through the interface,
- Figure 5 is a perspective view of an embodiment of a seal,
- 15 Figure 6 is a side view of the seal,
- Figure 7 is a top view of the seal,
- Figure 8 is an underside view of the seal,
- Figure 9 is a view of the wearer side of the seal,
- Figure 10 is a view of the external side of the seal,
- 20 Figure 11 is a vertical cross-section view of the seal,
- Figure 12 is a horizontal cross-section view of the seal,
- Figure 13 is a side view of the interface,
- Figure 14 is a top view of the interface,
- Figure 15 is a vertical cross-section view through the interface,
- 25 Figure 16 is a horizontal cross-section view through the interface,
- Figure 17 shows the interface with an embodiment of headgear,
- Figure 18A is an enlarged edge-on view of a loop or buckle end of a strap and Figure 18B is an enlarged side view of the loop or buckle strap end, of the headgear of Figure 17,
- Figure 19 is a view of the rear of the headgear of Figure 17 showing two buckles of Figures
- 30 18A & B each with a tongue strap end passing through the buckle,
- Figure 20 is a view similar to Figure 17 including a headgear embodiment similar to that of Figures 17 to 19 but with in this embodiment an alternate top strap construction,
- Figure 21 is a perspective view of an interface (excluding headgear) of an embodiment of the invention in which the seal comprises side hinges,
- 35 Figure 22 is horizontal cross-section view of the interface of Figure 21,
- Figure 23 is a perspective view of an interface (excluding headgear) of another embodiment of the invention in which the seal comprises side hinges,
- Figure 24 is horizontal cross-section view of the interface of Figure 23,

Figures 25 to 29A and B illustrate headgear embodiments that cover the ears of the user and can include at least two sections having different material characteristics,

Figures 30 to 35 illustrate stretch headgear embodiments that use the chin and parietal region of the head as anchoring points,

5 Figure 36 illustrates an attachment structure for connecting a mask frame to stretch straps of any one of the embodiments of figures 30 to 35,

Figures 37 to 47A illustrate headgear embodiments comprising preferably a single elastic strap which loops around the top of the head and has a rigid or flexible plastic strap that is attached to the elastic strap above the ear and goes around the lower portion of the back  
10 of the head,

Figure 47B is a cross-section of the plastic strap of figure 47A,

Figures 48 to 62 illustrate nasal seal embodiments which have stabilising flaps to transfer the load of the sealing surface on to the cheeks instead of the lip and bridge of the nose,

15 Figure 63 illustrates a flexible mask frame embodiments for OSA masks with arms that cause the frame to pinch inwards against the seal when the headgear is tightened, and

Figures 64 to 82 illustrate inflating nasal seal embodiments that sit under the nose and comprises wings which extend around the sides of the nose, preferably below the eyes and avoiding the bridge of the nose.

## 20 **DETAILED DESCRIPTION OF EMBODIMENTS**

### **Overview**

Figure 1 is a schematic diagram of a continuous positive airway pressure (CPAP) system 10 for providing a heated and humidified air stream to a user U through an interface 11 worn by the user, and which is connected to CPAP system 10 by a conduit or  
25 tube 12.

A humidification chamber 14 has a heat conductive base in contact with a heater plate 16 of humidifier 17 to humidify the air stream. Conduit 12 is connected to an outlet 13 of humidification chamber 14 to convey humidified air to the user interface 11. The  
30 humidifier 17 comprises a controller 18, such as a microprocessor-based controller that executes computer software commands stored in an associated memory, for example but without limitation. The controller 18 receives input commands from multiple sources, including a user input interface 19 such as a dial or touch screen, which enables the setting of a predetermined value of humidity, temperature, or other characteristic of the  
35 humidified air supplied to the user U. The controller 18 also may receive input from one or more other sources, such as for example temperature and/or flow velocity sensors 20 and 21, which are connected through a connector 22 to communicate with controller 18, and/or a heater plate temperature sensor 23. In response to the user set humidity or temperature

value the controller 19 determines when and/or to what level the heater plate 16 should be energized to suitably heat the water contained in the humidification chamber 14.

As the volume of water in the chamber is heated, water vapour begins to fill the  
5 volume of the chamber above a surface of the water. The water vapour passes out of the  
outlet 13 of the humidification chamber with a flow of air that is provided from a supply 25  
such as a blower 27, which enters the humidification chamber 30 through an inlet 26. The  
blower 27 can be variable in speed fan, or can include a variable pressure regulator. The  
blower 27 draws air through an inlet 28. The blower can be controlled by controller 29 or  
10 controller 18 for example. The controller may control blower speed, regulated pressure, or  
the like according to any suitable criteria. For example, the controller may respond to  
inputs from controller 18 and a user set value (e.g., a preset value) of pressure and/or fan  
speed, which can be set with a user interface 30 (e.g., a dial).

15 The conduit 12 may comprise a heater such as a heater wire for example, to heat the  
walls of the conduit to reduce condensation of humidified gases within the conduit.

The seal and interfaces of the invention can be used in such a CPAP system as  
described whether humidified or not, or alternatively in other forms of respiratory systems,  
20 such as for example VPAP (Variable Positive Airway Pressure) systems, BiPAP (Bi level  
Positive Airway Pressure) systems, or with a ventilator, and are described herein generally  
with reference to CPAP therapy by way of example only.

Figure 2 is a perspective view of user U wearing an interface 11 of an embodiment  
25 of the invention, and Figure 3 is an exploded view illustrating the components of the  
interface. The interface comprises a mask including a seal 30 and a frame 31. The  
interface also includes headgear 32 for securing the mask to the wearer. Typically the  
interface also comprises a short flexible supply conduit or tube 33 from the mask such as  
from a central connection at the front of the mask, which connects to the supply conduit  
30 12 of the CPAP or other respiratory system. The conduit 33 may connect to the mask via a  
hollow elbow 34, which may swivel relative to the frame so that the path of the conduit  
relative to the positioning of the mask on the face of the patient can adapt to the sleeping  
position of the patient.

35 The mask may include a limited flow outlet (or bias flow outlet) 35 for providing gas  
washout from the interface. The outlet 35 may be in the form of a collection of small  
apertures. The outlet may be provided in the elbow 34 as shown, in the frame, or  
elsewhere on the interface.

**Seal**

Figures 5 to 12 show an embodiment of a seal. As stated a face contacting or wearer side of the seal comprises a supple lower-nose-receiving concave center part 39 (see particularly Figure 5) pre-formed in shape to form a seal on the face of the wearer by receiving and sealingly contacting the tip, lower sides, and base of the nose and sealingly contacting the upper lip, and position an aperture 40 for gas flow beneath the nares of wearer. The lower-nose-receiving supple center part comprises an upper wall portion 41 to contact the tip of the nose of the wearer, an inwardly spaced lower wall portion 42 to contact the upper lip below the nose of the wearer, and left and right side wall portions 43 and 44 to contact the left and right lower sides of the nose of the wearer.

The upper and lower wall portions 41 and 42 are each symmetrical about separate axes A and B (see Figure 6) in a height h of the seal (see Figure 5). These axes A and B spaced from each other in a depth d of the seal by for example between about 1 to about 3 cm or about 1.5 to about 2.5 cm. Alternatively stated the lower wall portion 42 below the outlet aperture is closer to the left and right rearward-most extremities of the seal than is the upper wall portion 41. The left and right side wall portions 43 and 44 extend from the aperture 40 away from one another. An angle between the left and right side wall portions 43 and 44 may be between about 20 and about 60 degrees or about 30 and about 50 degrees for example.

A lower edge 40a of the aperture 40 is spaced rearwardly in the depth of the seal relative to an upper edge 40b of the aperture.

In at least preferred embodiments the seal has a hollow interior which is filled with air under positive pressure in use.

The supple lower-nose-receiving concave center part even has a thin wall thickness such as a wall thickness in the range about 0.1 to about 0.5mm, or about 0.1 to about 0.3mm, or about 0.2 to about 0.3mm, for example. At the same time and while supple and flexibly conformable, in at least preferred embodiments it also has resilience or memory towards this shape so that it has or maintains this pre-formed shape even when not under positive air pressure from within the seal.

The material from which at least the thin-walled supple center portion of the seal is formed may be a soft stretchable material such as a silicone material, or alternatively a TPE (thermoplastic elastomer) for example. In preferred forms the seal is a one piece

component all of the described parts and portions of which are integrally formed, for example from such a material, by injection moulding for example. In an alternative embodiment however only a wearer side of the seal may be formed of such a material, and may be bonded to a more rigid shell which couples to or is integrally formed with a frame of the interface. Alternatively the seal may be a foam or gel-filled seal.

Typically the seal is wider in a width of the seal than it is higher in a height of the seal. In at least some embodiments the seal may have an overall width of between about 5 and about 10cm, or about 6cm and about 8 cm. In at least some embodiments the seal may have an overall height of less than about 5cm, or less than about 4.5cm.

The aperture 40 may be elongate in a width of the seal. The aperture 40 may be approximately trapezium-shaped in plan view (viewed from above). In at least some embodiments at least a part of a periphery of the aperture comprises a rim thickened on the interior of the seal.

Figure 4A is a vertical cross-section view, Figure 4B is a horizontal cross-section view along line I-I of Figure 4A, and Figure 4C is a vertical cross-section view along line II-II of Figure 4B, of an interface (the interface of Figures 2 and 3) comprising the seal thus described, worn by a user and with a positive pressure airflow through the interface. The pre-formed shape defined between supple upper wall, lower wall, and side wall portions 41-44 of the center of the wearer side of the seal receives and sealingly contacts the tip, lower sides, and underside of the nose of the wearer (see particularly Figures 4A & B). For many wearers the seal will naturally fit or conform with only a relatively small amount of shape alteration or deformation to the shape of these parts of the nose of the wearer, without or before internal gas flow positive pressure. Internal gas flow pressure within the seal will press the seal against these parts of the nose of the wearer. For other wearers internal gas flow pressure within the seal will cause the seal to alter shape to a greater extent to conform against the shape of the nose of the wearer.

As can be seen, the seal does not seal against the bridge of the nose or any flat part of ridge cartilage of the nose between the tip and the bridge.

In at least the embodiment shown the upper wall portion 41 above the aperture 40 includes an upper concave section 41a (see especially Figure 9) within the greater general concavity of the supple center part of the wearer side of the seal, to receive specifically the tip of the nose, which is concave in both a height and a width of the seal. This upper concave section 41a may have an intermediate wall thickness greater than the balance of

the center part of the wearer side of the seal but less than left and right outer stabilising parts of the wearer side of the seal as are described subsequently, or less than an external side of the seal. It may have a wall thickness in the range about 0.4 or 0.5mm to about 1 or 2mm for example. Upper concave section 41a may extend from upper edge 40b of the seal outlet aperture to at or towards an upper periphery of the seal. It may have symmetry about the height axis of the seal. Above this slightly thicker wall thickness section 41a the thickness of the upper wall section 41 at 41b preferably reduces, for example with a tapering wall section, for example to return to the same thinner wall thickness as the lower wall and side wall portions 42-44 of the center of the wearer side of the seal.

Thus the wearer side wall of the preferred embodiment seal thus described has a pre-formed (before being worn) approximate S-shape in central vertical cross-section – see Figure 11. That is, the upper wall portion 41 is concave, especially at 41a, to receive the tip of the nose of the wearer, and the lower wall portion 42 is convex, to cushion-contact the upper lip below the nose of the wearer, and these upper and lower portions are joined by the aperture. In the preferred embodiment the S-shape may be considered top truncated in that the upper wall portion 41 is less convex than is the lower wall portion (concave). Also the seal has an approximate U-shape when considered in horizontal cross-section – see Figure 7.

In at least the embodiment shown the left and right side wall portions 43 and 44, or at least upper sections 43a and 44a of the left and right side wall portions 43 and 44, have an outwardly projecting or convex shape or bump (away from an interior of the seal) on opposite sides of the seal. These outwardly projecting or convex upper sections 43a and 44a on opposite sides of the seal are typically above the aperture in the height of the seal as shown. They may contact the corners of the nose or the crease or recess at the junction between the bottom of the sides of the nose and the face, and assist in avoiding upward leakage of air pressure, towards the eyes, in this area. Under gas pressure within the seal they may deform (push) outwardly and/or inflate against the corners of the nose to enhance this seal. The outwardly projecting or convex sections 43a and 44a may locate between the left and right outer stabilising parts 53 and 54 (described in further detail below) and the upper concave section 41a of the supple center part of the wearer side of the seal. The seal may be preformed with the outwardly projecting or convex sections 43a and 44a on the wearer side. The convex sections 43a and 44a are preferably convex in both a height and a width of the seal. This convex section 43a and 44a may have a wall similar to the balance of the center part of the wearer side of the seal but less than left and right outer stabilising parts of the wearer side of the seal as are described subsequently, or less than an external side of the seal. It may have a wall thickness in the

range about 0.1 to about 0.5mm, or about 0.1 to about 0.3mm, or about 0.2 to about 0.3mm, for example.

5 In an alternative embodiment the single aperture 40 may be replaced by two smaller apertures (separated by a bridge between them which may be slightly thickened for example) the rim around the edge of each of which is upturned to seat against the entry to the nares of the wearer ie slightly enter the nares, by for example about 0.1 to about 3mm.

10 In at least some embodiments the wearer side of the seal comprises left and right outer stabilising parts 53 and 54 beyond or connecting to the left and right side wall portions 42 and 44 of the supple center part, to contact the wearer's face adjacent the lower flanks of the nose on the left and right sides of the nose (see in particular Figure 4C). These outer stabilising parts 53 and 54 are flexible or supple but relatively less so (or  
15 are relatively stiffer) than the more supple lower-nose-receiving center part of the seal. For example these left and right outer stabilising parts 53 and 54 may have a thicker wall section than a wall section of the lower-nose-receiving center part (see Figure 12). Their wall thickness may be in the range about 0.5mm to about 1 or 2mm for example. An angle between these left and right outer stabilising parts may be between about 30 and  
20 about 180 degrees or about 70 and about 150 degrees for example. The left and right outer stabilising parts 53 and 54 assist in stabilising or positioning the seal on the face of the wearer and in particular may assist in stabilising the seal or interface against rotation about a horizontal axis when worn.

25 The seal may be proportioned so that a junction or change in wall thickness on either side of the seal between an inner edge 53a and 53b (see Figure 12) of these left and right outer stabilising parts 53 and 54 and the more supple walls 43 and 44 center part of the seal is sits at or adjacent the junction between the lower sides of the nose and the face adjacent the nose when the interface is worn.

30 The seal comprises an outward side opposite the wearer side which is less flexible or is stiff relative to at least the center part of the wearer side of the seal, and may be less flexible or stiffer than both the center part and the left and right outer stabilising parts of the wearer side of the seal. For example the left and right outer parts of the external side  
35 of the seal may have a greater wall thickness than the central part or both the central part and the left and right stabilising parts of the patient contacting side of the seal.

The outward side of the seal comprises less flexible left and right stabilising parts 63 and 64 adapted to contact the face adjacent the lower flanks of the nose on the left and right sides of the nose when worn. The hollow interior of the seal may extend to between these left and right side parts 63 and 64 of the outward side of the seal and the left and right parts 53 and 54 of the wearer side of the seal. An angle between the left and right parts 63 and 64 of the outward side of the seal may be between greater than about 20 to about 90 degrees or about 30 to about 60 degrees for example. These left and right parts may be formed of the same material as the wearer side of the seal such as a silicone material may have a wall thickness of about 3mm to about 5mm for example. These integral left and right stabilising parts 63 and 64 provide the seal with enhanced stability against rotation on the face due for example to tube drag forces.

In some embodiments the outward side of the seal connects to upper, lower, and outer tip peripheral parts 65-68 of the wearer side of the seal with a wall thickness which reduces, for example with a tapering wall section, from that of the outward side of the seal to the wearer side of the seal. In particular, in the embodiment shown bridging portion 65a (see Figures 5 & 7) between the outward side of the seal and the top of the upper wall section 41 has a thin wall section so that it is also flexible or accommodating in a depth of the seal to assist in accommodating different nose depths (face to tip) . It may have a wall thickness similar to that of supple lower wall and side wall portions 42-44 of the center of the wearer side of the seal for example.

In at least some embodiments left and right peripheral parts 67 and 68 of the seal at left and right outer tips of the seal which contact the face when worn include an approximately straight part bridging upper and lower peripheral parts 65 and 66 of the seal.

In the embodiment shown the outward side of the seal includes an opening 70 to pass gas flow to and from the hollow interior of the seal. Typically, the rim and seal wall 71 around the opening 70 is substantially thicker and relatively stiffer than the supple sealing portions of the seal.

### **Frame**

Figures 13 to 16 show an interface of an embodiment of the invention. The interface comprises the seal of Figures 5 to 12. The frame (and the elbow) may be formed to be stiffer than the seal.



In the embodiment shown the seal 30 attaches to the frame 31 by the resiliently flexible and stretchable rim 71 around aperture 70 in the outward side of the seal engaging over a complementary formation such as a rim on the wearer side of the frame 31, around a passage through the frame from the interior of elbow 34. Thus the seal 30 and the frame  
5 31 together form an enclosure having a gas flow inlet from the CPAP system and aperture 40 through the seal to the wearer.

In the embodiment shown the seal 30 attaches to a subsidiary frame part or boss 31b having a rim 81 which engages, for example in a snap fit, into a matching aperture 82  
10 in a center part 31c of primary frame part 31 as shown. On the seal side the boss 31b has a peripheral flange 83 of slightly larger diameter. Also the depth of the rim 81 of the boss is greater than that of its receiving aperture 82 in center frame part 31c such that when the boss 31b is home in the frame part 31a an annular space is defined between the inside  
15 or wearer side of the center part 31c of primary frame part 31a and the boss flange 83 around the boss, into which the rim 71 of the seal is fitted to attach the seal to the frame, by stretching the seal rim 71 over the flange (see Figures 3, 15, and 16). The inside surface of the rim 71 of the seal may include features such as lips and/or channels to engage with features such as channels and/or lips on the frame to detachably secure the seal to the frame. Alternatively the seal may attach to the frame by clip parts, or over-  
20 moulding to a rim which in turn attaches to the frame, for example. In the embodiment shown the plane of the rim 71 of the seal is approximately vertical when the mask is worn by a user standing upright, but in another embodiment the seal may be formed so that the plane of the seal rim is at an acute angle to the horizontal, such as an angle in the range 45 to 90 degrees for example, while the body of the seal is still oriented relative to the  
25 frame including side arms, and the users face when worn, as shown in Figures 13 to 17.

The frame 31 may comprise side arms 31d which extend outwardly (away from each other) and rearwardly and upwardly at a shallow angle, past left and right extremities of the seal and along the left and right cheeks and in particular cheekbones of a wearer, as  
30 shown in Figure 2, to connect to headgear for holding the seal on the face of a wearer. Such side arms 31d may be longer than they are deep or thick and may be resiliently flexibly connected to the frame and/or resiliently flexible along their length (widthwise but not heightwise), and may extend to a location between the ears and eyes of the wearer and/or to approximately the temple of the wearer, where the side arms connect to  
35 headgear. In a preferred embodiment the length of the side arms is between about 100mm and about 150mm. The shape of the side arms 31d and/or angle between them is such that the side arms rest on the left and right cheeks and in particular cheekbones of a wearer to assist in stabilising the interface against rotation about a horizontal axis when

worn. The side arms 31d may be integrally formed with the frame by injection moulding from a plastics material for example. The side arms may be resiliently flexible towards and away from the face of a wearer in an approximately horizontal plane (when worn), to accommodate different face sizes, but are relatively inflexible in an approximately vertical plane. As shown in Figure 13 (only) the side arms may comprise an aperture or cut-out extending lengthwise of the side arms, preferably lengthwise of a major part of the length of the side arms, to increase this resilient flexibility of the side arms towards and away from the face of a wearer, but to retain relative inflexibility in an approximately vertical plane (when worn).

Preferably the side arms 31d comprise a softer material at least on wearer facing surfaces of the side arms, or fully around the side arms, for softening contact of the side arms with the face of a wearer, which may be removable for cleaning.

At their outer ends the side arms 31d comprise connector parts for detachably connecting the side arms to headgear. In a preferred form the end of each side arm comprises a hook 85 and in particular an upwardly open hook part, for entering into a loop 95 of the headgear.

In preferred embodiments the interface does not comprise a T-piece from the frame upwardly (when worn) to connect to headgear at the wearer's forehead.

Instead of the side arms as shown (or with shorter side arms) the ends of headgear straps may attach to the mask frame (or shorter side arms) on either (left and right) sides via stiffer strap ends, which terminate at the mask by an attachment mechanism which allows movement in an approximately horizontal plane but not in an approximately vertical plane, such as a hook which engages into a vertical upright slot on the mask frame.

As stated the frame may comprise elbow 34 connected to the opening through the frame. The elbow may be a swivelling elbow. In preferred forms the connection of the elbow to the frame provides for both rotation and pivoting of the elbow relative to the frame. For example the connection may comprise a ball joint connection to the frame so that the elbow can pivot about axes parallel to and perpendicular to its connection with the mask. The elbow may include a part ball end 34a (see Figure 3) which snap fits in a socket opening 31e in frame part 31b.

Elbow 34 is connected to the end of a length of flexible tubing 33. The other end of flexible tubing 33 is terminates with a connector 33a. The elbow 34 preferably defines an

angle between flow in the conduit 33, and flow through the connection to the mask of between 0° and about 90°, or about 30° and about 60°.

As stated the elbow may include a gas washout vent 35 which may comprise a plurality of holes through the elbow from interior to exterior. The vent apertures are preferably located on the outside of the bend of the elbow, substantially in the line of the flow path of gases leaving the mask. Alternatively gas washout vent(s) may be provided on the frame for example.

## 10 **Headgear**

Figure 17 shows the interface with an embodiment of headgear suitable for use with an interface mask of the invention. The headgear comprises a rear strap 91 to extend around a rear part of the head of a wearer and a top strap 92 to extend over the top of a head of a wearer. The rear strap 91 may extend around a lower rear part of the head of the wearer and in particular over a lower part of the occipital bone. The top strap 92 may be a crown strap or a forehead strap.

The headgear may be formed at least in part from a soft flexible material such as a cloth covered foam material such a BREATH-O-PRENE material for example. The headgear may be formed by cutting out the headgear to shape from the sheet material by blade cutting or radio frequency cutting for example. In one embodiment the edges of the headgear are thermoformed ie compressing under heat, to form rounded edges. That is, heat and pressure are applied along the headgear edges to compress the opposite outer surfaces of the headgear material towards one another at the edges and heat bond them together. This may be done simultaneously with cutting the headgear to shape for example, by cutting an outline of the headgear shape in the sheet material and theremoforming to define the rounded headgear edges in one operation, or instead by first cutting the headgear to shape and then rounding the edges in a second operation. The rounded edges or any joints in the headgear may alternatively be formed by ultrasonic or radio frequency welding, for example.

In at least some embodiments the length of the rear strap 91 and/or the top strap 92 is adjustable. For example the top strap may be formed in two parts one of which terminates in a loop 96 and the other of which terminates in a tongue 97 which can pass through the loop and be secured back upon the strap part to fix the length of the top strap, by a hook or loop fastener panel on or tab from the end of the tongue and a loop or hook panel on the strap or to a cloth covering of the tab (loop and tongue adjustment). The rear strap may have a buckle 96 and tongue 97 on left and right sides as shown for length

adjustment as shown in Figure 19, or alternatively on one side or centrally. In preferred forms the buckles 96 are formed separately from a different and relatively more rigid material, such as a plastics material for example by injection moulding for example, and are attached to the end of a soft strap by welding such as ultrasonic welding for example, or other suitable means. Figure 18A is an enlarged edge-on view and Figure 18B is an enlarged side view of a buckle 96 end of a headgear part or strap. Each buckle (or fastener part) comprises a first portion 96a attached to the soft flexible material of the headgear and a free second portion 96b which comprises an open loop for receiving therethrough the tongue end of a strap.

In a preferred form the headgear comprises a loop 95 on each of the left side and a right side of the headgear as referred to previously, at a location positioned between the eyes and ears when the headgear is worn, for receiving a hook end 85 of side arms of the interface as described above. The hook end of the side arms attaches directly to the headband comprised of the rear and top straps, without a side strap from the headband towards the mask. In this or other embodiments the side arms may alternatively attach to the headgear by releasable clips or hooks or hook and loop attachment, for example.

Figure 20 is a view similar to Figure 17 including a headgear embodiment similar to that of Figures 17 to 19 but with in this embodiment an alternate top strap construction. In this embodiment the top strap is not formed of the same material as the balance of the headgear such as soft flexible material such as a cloth covered foam material, but is formed of a non-foam plastics material such as plastic strap which may be relatively inextensible lengthwise (but is flexible otherwise, for accommodating the headshape). Again the top strap may be formed in two parts, one of which terminates in a tongue with apertures 97a and the other of which terminates in a buckle with buttons 96a into which the tongue 97a can adjustably pass and over which buttons the tongue apertures may be fitted, with a snap fit, to fix the adjustment and thus the length of the top strap. Optionally a soft material may be provided on the user side of the top strap or part thereof for user comfort.

In embodiments in which frame side arms attach directly to the headgear, such as to a headband as shown comprised of the rear and top straps, without a side strap from the headband towards the frame, as shown, and the edges of the headgear are thermoformed ie compressing under heat to form rounded edges as described above which tends to reduce the 'floppiness' of the soft headgear and cause it to tend to maintain its headband shape, the headgear can be donned ('like a cap') by holding the frame at the seal or near the seal (as one would hold a cap at its peak when lifting or flipping it onto the head). The

headgear may be removed or doffed in a reverse similar action. Other aspects of the headgear and frame which help to reduce the 'floppiness' of the soft headgear and cause it to tend to maintain its headband shape include, the relatively high density of the foam used to form the headgear, the relatively long side arms of the frame that extend  
5 substantially towards or adjacent the wearer's cheeks when worn, and/or the stiffness of the connections (the tight tolerances or tight connections of the headgear about the connectors) between the side arms and the headband (tight loops 59 about the hooks 85) and/or the connections of the top and rear straps of the headgear (tight loops about buckles 96). Such aspects of the headgear enable the headgear to be donned ('like a cap')  
10 by holding the frame at the seal or near the seal (as one would hold a cap at its peak when lifting or flipping it onto the head). The headgear may be removed or doffed in a reverse similar action.

Seals and masks of the invention may be used with headgear in other forms such as  
15 headgear with two straps which attach to the mask on either side ie headgear which comprises left and right side upper and lower straps. The frame of such an interface embodiment may or may not comprise side arms as described above. Left and right upper straps may pass downwardly (when the headgear is worn) between the eyes and ears of the wearer and left and right lower straps may extend from the lower rear of the head and  
20 beneath the ears to the mask (and attach to the mask each side below the upper straps). Alternatively upper and lower straps may join for example in a stiffer yoke before attaching to the mask frame, or which is integral with the mask frame. Such a headgear may have buckle and tongue, loop and tongue (as described above) or other adjustment in the upper or lower straps or both sides, part way along their length(s) or at the connection of the  
25 straps to the mask. In less preferred embodiments the upper straps may attach to the top of a T-piece extending upwardly from the frame to the wearer's forehead. In another embodiment again the headgear may comprise a single strap which passes or loops from the mask on one side around the rear of the head and back to the mask on the other side. Such a headgear strap may be elastic or resiliently stretchable and/or may have a length  
30 adjustment device (eg buckle and tongue, loop and tongue, etc) in the rear or at the sides or at the connection of the headgear to the mask on one or both sides. Variant of such headgear may also comprise a crown strap.

### **Side hinges in seal**

35 Figures 21 and 22 and 23 and 24 show two embodiments of masks of the invention in which the the left and right outer parts of the outward side of the seal each comprise a higher flexibility portion intermediate of their length. These higher flexibility portions enable transverse movement of the balance of the seal relative to the part of the seal

including the rim 71 which connects to a frame of an interface. Thus they may enable some movement of the frame of the mask, due to side force on the mask when a wearer is sleeping on their side with their one side of their face against a pillow for example, which may tend to push the frame sideways, with less tendency to also move the seal itself  
5 sideways, particularly the face contacting or wearer side of the seal, which may break the seal to face contact and lead to air leakage.

In the embodiments shown the higher flexibility portions comprise folds 101/102 in a side wall of the outward side of the seal, inward directed into the interior of the seal. The  
10 folds have a thinner wall section than the outward side of the seal on either side of the folds. In the embodiment of Figures 21 and 22 inward directed folds 101a and 101b extend partially across a width of a hollow interior of the seal. In the embodiment of Figures 23 and 24 inward directed folds 102 a and 102b extend partially in a depth of a hollow interior of the seal. The embodiments of Figures 21 to 24 are otherwise the same as the  
15 embodiment of Figures 2 to 17.

### Summary

The seal of the invention comprises less flexible left and right stabilising outer parts adapted to contact the face adjacent the lower flanks of the nose on the left and right sides  
20 of the nose when worn. The seal has enhanced stability against rotation on the face, and in particular about a width axis of the seal, due for example to tube drag forces, which can break the seal and cause leakage, as do preferred embodiments of interfaces comprising the seal and with side arms as described, even though the seal does not seal against the sensitive bridge of the nose or extend, at least to any significant extent such as more than  
25 about 1 cm for example, over any flat part of ridge cartilage of the nose between the tip and the bridge. The left and right side wall portions, or at least upper sections of the left and right side wall portions of the supple center of the wearer side, have an outwardly projecting or convex shape (away from an interior of the seal) on opposite sides of the seal. These outwardly projecting or convex upper sections on opposite sides of the seal  
30 contact the crease or recess at the junction between the bottom of the sides of the nose and the face, and assist in avoiding upward leakage of air pressure, towards the eyes, in this area. Under gas pressure within the seal they deform (push) outwardly against the face in this area to enhance this seal. The pre-formed or structured but still supple conformable shape of the seal of the invention provides a seal which for many wearers will  
35 naturally fit or conform with only a relatively small amount of shape alteration or deformation, and internal gas flow positive pressure may enhance the seal. An effective seal with minimum or no leakage in a small size or low profile mask may be achieved for many wearers, without also requiring that the mask comprise pillows or similar of a

conventional direct nasal interface which protrude into the nares of the wearer. An effective seal may be achieved at relatively low gas flow rates through the mask creating a relatively low internal gas pressure within the seal against the nose. Also, because the seal in at least preferred embodiments maintains its shape or structure even when not worn or under internal gas pressure, it may be more intuitive to a user how to place or position the mask on the face.

### **Other headgears**

Figures 25 to 29 illustrate headgear arrangements that provide an advantageous force vector for a patient interface or respiratory mask, such as an obstructive sleep apnea (OSA) mask, by sitting on the back of the head and partially or completely covering the ears. See, for example, figure 25.

The headgear 200 can comprise a lightweight stretch fabric, such as Lycra or a similar material, with a more substantial fabric providing support. See, for example, figure 28.

In some configurations, the section 210 which covers the ears can be made of very fine, lightweight, stretch fabric to maximise comfort for the wearer. In some such configurations, the more substantial fabric 220 (which can be heavier weight and/or less stretchable) is used to construct a portion or all of the remainder of the headgear. See, for example, figure 26.

Layering of fabrics 211 and 212 having different properties or characteristics (e.g., different levels of stretch) in some regions can provide more structure for stability and ease of fitting. See, for example, figure 26.

In one or more embodiments, there are wider attachment points 230 (e.g., wider than comparable conventional masks/headgear) at the front to keep the mask seal stable and inhibit or prevent rocking on the face. The attachment points 230 can be as wide as a significant or substantial portion of the height of the mask seal 280. See, for example, figure 25.

There can be a generally circular or halo cut out 240 in some embodiments to encircle the parietal region for stability and reduced bulk. See, for example, figure 26.

In some configurations, the more substantial fabric can extend beyond the front of the ear to provide more structure to the headgear and prevent it from bunching over the ear. See, for example, figure 26.

5 In some configurations, the headgear 200 (or a main body of the headgear) can be comprised only of lightweight stretch fabric that widens at a region 250 towards the back of the head. See, for example, figure 27.

10 In some configurations, the headgear 200 can be comprised of lightweight stretch fabric that widens towards the back of the head and includes sections of more substantial material around the back 250 to provide structure. See, for example, figure 27.

15 In some configurations, the headgear could be adjustable at the top 260 of the halo. See, for example, figure 28.

In some configurations, the headgear 200 could have a thermoformed section that holds the ear covering 270 out from the ear a desirable distance, which can be a relatively small distance in some embodiments. See, for example, figure 29.

20 In some such configurations, the headgear 200 could have a curved plastic piece 270 that sits out from the ear a desirable distance allowing the headgear to be slipped on over the ears more easily. See, for example, figure 29.

25 Figures 30 to 36 illustrate stretch headgear arrangements 300 that use the chin and parietal region of the head as anchoring points.

30 In some configurations, the main structure 300 is comprised of elastic straps, preferably circular knitted, which widen around the chin 310 and back of the head 320. The wider sections can be comprised of stretch fabrics such as Lycra or a similar fabric. See, for example, figures 30 and 31.

In some configurations, there can be adjustment points 330 which sit above the ears. See, for example, figures 30 and 31.

35 Some benefits of such an arrangement are that the headgear 300 is lightweight, doesn't go under the ears, which aids fitting, and is less bulky than conventional headgear.



In some configurations, additional straps 340 connect the mask 380 to the headgear 300. These could also be adjustable to provide improved customization of the fit. See, for example, figures 30 and 31.

5           There could be a single or multiple mask attachment straps 340 on each side. Figure 32 illustrates a single strap option.

10           In some configurations, the headgear 300 could be tightened so that it acts as a chinstrap, which would aid people who breathe through their mouth. See, for example, figure 32.

15           The headgear 300 is secure around the head and preferably doesn't rely on the mask seal 381 as an anchoring point. That is, the headgear 300 can stay on without a seal 381 attached. Advantageously, such an arrangement isolates the force of the seal from the force that keeps the headgear 300 on. This arrangement represents an advantageous difference relative to conventional headgear.

20           Such configurations could work well in combination with a full face mask 380 (figure 33) or a nasal mask 380 (see figures 30, 32, 35 and 37). See, for example, figure 33.

          In at least one embodiment, the strap 320 at the back could be split. In some such arrangements, the split portion of the strap 320 could comprise a rigid component 350. See, for example, figure 34.

25           In some configurations, the mask attachment straps 340 can comprise a loop 341 that sits over one or more hooks 342 or other retention structures on each side of the mask frame 382. See, for example, figures 35 & 36.

30           Figures 37 to 47 illustrate headgear arrangements 400 comprising preferably a single elastic strap 410 which loops around the top of the head and has a rigid or flexible plastic strap 420 that is attached to the elastic strap above the ear and goes around the lower portion of the back of the head.

35           In some configurations, the rigid or flexible plastic strap 420 terminates at the attachment point 430 to the elastic strap above the ears. See, for example, figures 37 and 46.

The rigid or flexible plastic strap 420 may be permanently attached by sewing, welding, rivets, crimping, or clipping, etc or a combination of these methods. In one preferred configuration, the rigid or flexible plastic strap 420 is attached by sewing. See, for example, figures 44 – 41 and figure 46.

5

The elastic strap 410 may also be made up of a number of straps connected at the termination point 430 of the rigid or flexible strap 440 above the ears.

10

In at least one embodiment, a single elastic strap 410 may be attached or fed through a number of loop holes 431 to direct the strap to the desired angle, so that the strap sits on the top of the head and is redirected towards the hole 431 to provide the optimal position for attachment to the mask 480.

15

The strap 410 may be left unattached through the loop holes 431-433 in the attachment point to allow adjustability. See, for example, figures 42 & 43.

The rigid or flexible plastic strap 420 may be covered by fabric or foam 440 etc. See, for example, figures 45 & 47.

20

The plastic component 420 may be die cut or injection moulded etc. In one preferred embodiment, the plastic component or strap 420 is injection moulded.

The plastic component 420 may be textured to be pleasant/soft to the touch.

25

In one configuration, the elastic strap 410, which preferably is circular knitted, may be all the same width or diameter or wider in portions 411 for comfort. See, for example, figure 41.

30

In some configurations, the elastic strap 410 can have stretch 412 and non-stretch 413 areas. See, for example, figure 40.

### **Other seals**

35

Figures 48 to 62 illustrate nasal seals 500 which have stabilising flaps 510 to transfer the load of the sealing surface on to the cheeks instead of the lip and bridge of the nose. This allows the seal 500 to be thin (for example, 0.1mm -0.5mm) and, in some configurations, inflatable to conform around the nose and create a leak free and comfortable seal. There can be supporting sections 530 in the silicone seal 500 which are

thicker (e.g., portions of a greater wall thickness or other structures to provide increased stiffness relative to other portions of the seal 520).

5 The stabilising flaps 510 can be more rigid and structured than the seal, but still flexible enough to conform to the facial features without causing pressure sores. See, for example, figure 51.

The flaps 510 can be sized and shaped to sit on the side of the nose and preferably within the cheek area. See, for example, figure 48.

10

Preferably, the stabilising flaps 510 disperse the loading force of the seal evenly or more evenly on the face relative to existing nasal masks, so that there is not a single point or small area of pressure or loading.

15

Preferably, the flaps 510 are wide enough to minimise upwards movement of the seal into the eyes as well as providing lateral stability on the nose. See, for example, figure 49.

20

In some configurations, the internal seal 520 can sit like a conventional nasal seal over the bridge of the nose and around the sides of the nose and over the top lip. See, for example, figure 48.

25

The flaps 510 can be integrated with the sealing surface 520 in at least one embodiment, and be made of the same material. In such an embodiment, each of the flaps 510 has one or more thicker sections 530 to provide stiffness as well as thin sections 540 for flexibility for a desired or optimum balance between stability and weight.

30

In some configurations, the sealing surface 520 can avoid contact with the bridge of the nose. This could be in combination with integral stabilising flaps 510, or with separate stabilising flaps 510. See, for example, figure 62.

In some configurations, the flaps 510 can be split to fit better on the face or fit better on certain facial geometries. See, for example, figure 61.

35

In some configurations, the flaps 510 can be hollow to conform better to a variety of facial geometries. See, for example, figures 57-59.

In at least one embodiment, the seal 500 can be overmoulded onto a plastic component 550 which has arms 551 that add stiffness to the flaps, instead of or in addition to using thick wall sections of soft elastomeric material. In such an arrangement, the plastic component 550 can be a stiffening member. See, for example, figure 61.

5

In some configurations, the flaps 510 can be separate from the sealing portion 520. The flaps 510 may be different materials, such as breathoprene, thermoformed breathoprene or foam, or foamed silicone, etc.

10

The seals of Figures 48-62 work well in combination with any 2 point headgear, for example, the headgear arrangements 200 and 400 described herein with respect to figures 25 to 29 and figures 37 to 47 respectively.

15

Figure 63 illustrates a flexible mask frame 600 for OSA masks with arms 610 that cause the frame 600 to pinch inwards against the seal 620 when the headgear 630 is tightened. For example, the arms 610 could extend outwardly (away from the face of a user) to an attachment portion 611. Such an arrangement causes end portions 611 of a generally or substantially U-shaped central portion 612 of the mask frame 600 to flex inwardly to pinch the seal 620. Such an arrangement helps to hold the seal 620 more snugly against the nose, thereby improving the seal and/or stability.

20

### **Other seals**

25

Figures 64 to 82 illustrate inflating nasal seals 700 that sit under the nose and comprises wings 710 which extend around the sides of the nose, preferably below the eyes and avoiding the bridge of the nose. See, for example, figure 79.

30

In some configurations, the wings 710 are shaped to sit in the transition between the nose and the cheeks on both sides for stability, to prevent leaks and tolerate movement of the seal 700.

In some configurations, the seal 700 is small enough that the tip of the nose is exposed to accommodate different sized noses. See, for example, figure 82.

35

In some configurations, the sealing portion 720 is relatively thin (such as about 0.1mm – 0.5mm) but may be thicker in certain areas 721 to provide structure (e.g., greater stiffness). See, for example, figure 68.

In some configurations, downward pressure on the lower sealing surface 720 pulls the wings 710 inwards in a pinching motion, creating a better seal and a more secure fit. See, for example, figure 73.

5 In some configurations, the outside wall of one or more portions of the seal (e.g., the wings 710) is substantially thicker than the inside wall 720 to direct the inflation inwards and to push the inflating portion 720 against the face. See, for example, figure 68.

10 In some configurations, there is a single opening 730 for airflow to the nostrils. However, in other configurations, there could be two or more openings 730 for airflow to the nostrils.

15 In some configurations, the seal 700 may include the tip of the nose being contacted or partially or completely covered by the inflating portion to provide a better seal. See, for example, figure 71.

20 The nasal seal 700 may be used in combination with a mask frame 740 which is flexible enough to pinch the seal in towards the nose to provide a closer fit and a better seal. See, for example, figure 75.

As described above, in some configurations, the nasal seal 700 may have separate openings 731 and 732 for each nostril. See, for example, figure 76.

25 In at least one configuration, the inflating nasal seal 700 does not have wings, just a pad 750 under the nose. See, for example, figure 77.

30 In some configurations, the nasal seal 700 may have small angled projections 760 at the top and/or bottom corners of the seal 700 which can aid stability of the seal. See, for example, figures 79-80.

35 One or more configurations of the nasal seal 700 of Figures 64-82 can be configured to work well with the Headgear 400 described herein with respect to figures 37 to 47.

The foregoing describes the invention including preferred forms thereof and alterations and modifications as will be obvious to one skilled in the art are intended to be incorporated in the scope hereof.

**CLAIMS**

1. A nasal seal for a mask interface, the seal comprising a face contacting or wearer side comprising a supple lower-nose-receiving center part having a concave shape pre-  
5 formed to receive and sealingly contact the tip, lower sides, and base of the nose of a wearer and sealingly contact the upper lip, and position an aperture for gas flow beneath the nares of wearer, the supple center part comprises left and right side wall portions on left and right sides of the aperture to contact the left and right lower sides of the nose of the wearer, wherein the left and right side wall portions or at least upper sections of the  
10 left and right side wall portions have an outwardly projecting or convex shape (away from an interior of the seal) on opposite sides of the seal, and wherein the seal comprises an outward side of the seal opposite the wearer side, which outward side of the seal comprises left and right stabilising outer parts which terminate in left and right outer tips which contact the face adjacent the lower flanks of the nose on the left and right sides of  
15 the nose when worn, said left and right outer parts of the seal being less flexible or stiff relative to at least the center part of the wearer side of the seal.
2. A nasal seal according to claim 1 wherein the outwardly projecting or convex shape of the left and right side wall portion or the upper sections of the left and right side wall  
20 portions are arranged to seal against the crease or recess at the junction between the bottom of the sides of the nose and the face.
3. A nasal seal according to claim 2 wherein the outwardly projecting or convex shape of the left and right side wall portion or the upper sections of the left and right side wall  
25 portions are above the aperture in a height of the seal.
4. A nasal seal according to claim 1 to claim 3 wherein the left and right outer parts of the outward side of the seal are less flexible or stiff relative to both the lower-nose-receiving center part and left and right outer stabilising parts of the wearer side of the  
30 seal.
5. A nasal seal according to claim 4 wherein the left and right outer parts of the outward side of the seal have a greater wall thickness than both the center part and left and right stabilising parts of the wearer side of the seal.  
35
6. A nasal seal according to claim 5 wherein a hollow interior of the seal extends to between the left and right side parts of the outward and wearer sides of the seal.

7. A nasal seal according to any one of claims 1 to 6 wherein the outward side of the seal connects to upper, lower, and outer tip peripheral parts of the wearer side of the seal with a wall thickness which reduces from that of the outward side of the seal to the wearer side of the seal.
- 5
8. A nasal seal according to any one of claims 1 to 7 wherein a bridging portion between the outward side of the seal and the upper wall section of the wearer side of the seal is flexible or accommodating in a depth of the seal.
- 10
9. A nasal seal according to any one of claims 1 to 8 wherein left and right peripheral parts of the seal at left and right outer tips of the seal which contact the face when worn include an approximately straight part bridging upper and lower peripheral parts of the seal.
- 15
10. A nasal seal according to any one of claims 1 to 9 wherein the outward side of the seal comprises an aperture for gas flow into and from a hollow interior of the seal, and the seal connects or attaches to a body or frame by a rim around said aperture in the outward side of the seal.
- 20
11. A nasal seal according to any one of claims 1 to 10 wherein a lower edge of the aperture is spaced rearwardly in a depth of the seal relative to an upper edge of the aperture.
- 25
12. A nasal seal according to any one of claims 1 to 11 wherein the seal has a hollow interior filled with gas under positive pressure in use, at least on an internal side of the supple lower-nose-receiving concave center part of the wearer side of the seal.
- 30
13. A nasal seal according to wherein any one of claims 1 to 12 wherein the supple lower-nose-receiving concave center part has said pre-formed shape when not under positive internal gas pressure from within the seal.
- 35
14. A nasal seal according to any one of claims 1 to 13 wherein the supple lower-nose-receiving concave center part has resilience or memory towards said pre-formed shape.
15. A nasal seal according to any one of claims 1 to 14 wherein the seal is wider in a width of the seal than it is higher in a height of the seal.

16. A nasal seal according to any one of claims 1 to 15 wherein the lower-nose-receiving supple center part comprises an upper wall portion above the aperture to contact the tip of the nose of the wearer, a lower wall portion below the aperture and rearward of the upper wall portion to contact the upper lip below the nose of the wearer.

5

17. A nasal seal according to claim 16 wherein the lower wall part portion below the aperture is closer to left and right rearward-most extremities of the seal than is the upper wall portion.

10

18. A nasal seal according to either claim 16 or claim 17 wherein the upper wall portion, lower wall portion, and left and right side wall portions have discrete and complex curved shapes.

15

19. A nasal seal according to any one of claims 16 to 18 wherein the upper wall portion and lower wall portion are each symmetrical about separate axes in a height of the seal spaced from each other in a depth of the seal.

20

20. A nasal seal according to claim 19 wherein said axes are spaced from each other in a depth of the seal by between about 1 and about 3 cm.

25

21. A nasal seal according to any one of claims 16 to 20 wherein the upper wall portion includes an upper concave section within a greater general concavity of the supple center part of the wearer side of the seal, to receive specifically the tip of the nose, which upper concave section is concave in both a height and a width of the seal.

30

22. A nasal seal according to claim 21 wherein said upper concave section extends from an upper edge of the aperture.

23. A nasal seal according to either claim 21 or claim 22 wherein said upper concave section has a wall thickness greater than the balance of the center part of the wearer side of the seal.

35

24. A nasal seal according to any one of claims 21 to 23 wherein said upper concave section has an intermediate wall thickness greater than the balance of the center part of the wearer side of the seal but less than left and right outer stabilising parts of the wearer side of the seal, or less than an external side of the seal.



25. A nasal seal according to any one of claims 16 to 24 wherein the lower wall portion below the outlet aperture is convex in a height of the seal and concave in a width of the seal.

5 26. A nasal seal according to any one of claims 16 to 25 wherein the left and right side wall portions extend away from one another from either side of the aperture.

27. A nasal seal according to any one of claims 1 to 26 wherein the aperture is elongate in a width of the seal.

10 28. A nasal seal according to any one of claims 1 to 27 wherein at least a part of a periphery of the aperture comprises a thickened rim.

15 29. A nasal seal according to any one of claims 1 to 28 wherein the wearer side of the seal comprises left and right outer stabilising parts outward of left and right side wall portions of the supple center part, to contact the wearer's face adjacent sides of left and right sides of the nose, and which are flexible but less so than the lower-nose-receiving center part of the wearer side of the seal.

20 30. A nasal seal according to claim 29 wherein the left and right outer stabilising parts have a thicker wall section than a wall section of the center part.

25 31. A nasal seal according to claim 30 wherein a junction or change in wall thickness on either side of the seal between an inner edge of the left and right outer stabilising parts and the supple center part is positioned to sit at or adjacent the junction between the lower sides of the nose and the face adjacent the nose.

30 32. A nasal seal according to any one of claims 1 to 31 wherein the left and right outer parts of the outward side of the seal each comprise a higher flexibility portion intermediate of their length enabling transverse movement of at least the face contacting or wearer side of the seal relative to a part of the seal which adapted to connect to a frame of an interface.

35 33. A nasal seal according to claim 32 wherein the higher flexibility portions comprise inward directed folds in a side wall of the outward side of the seal.

34. A nasal seal according to claim 33 wherein the inward directed folds extend partially across a width of a hollow interior of the seal.

35. A nasal seal according to claim 33 wherein the inward directed folds extend partially in a depth of a hollow interior of the seal.
- 5 36. A nasal seal according to any one of claims 1 to 35 wherein at least the supple center portion of the seal is formed from a silicone material.
37. A nasal seal according to any one of claims 1 to 35 wherein substantially all of the seal is formed from a silicone material.
- 10 38. A nasal seal according to any one of claims 1 to 37 wherein all of the parts of the seal are integrally formed so that the seal is a one piece component.
39. An interface comprising a seal according to any one of claims 1 to 38 and which includes a frame including left and right side arms which extend outwardly (away from each other) and rearwardly past the left and right extremities of the seal, to extend upwardly at a shallow angle and along the left and right cheeks and in particular cheekbones of a wearer, to connect to headgear for holding the interface on the face of a wearer.
- 15 20 40. An interface according to claim 39 wherein the frame side arms have a length to extend to a location between the ears and eyes and/or to approximately the temple of a wearer.
- 25 41. An interface according to either claim 39 or claim 40 wherein the frame side arms have an angle between them to rest on the left and right cheeks and in particular cheekbones of a wearer to assist in stabilising the interface against rotation about a width axis of the interface.
- 30 42. An interface according to any one of claims 39 to 41 wherein the frame side arms comprise a soft material at least on wearer facing surfaces.
- 35 43. An interface according to any one of claims 39 to 41 wherein the interface does not comprise a T-piece from the frame upwardly to connect to headgear at the wearer's forehead.

44. An interface according to any one of claims 39 to 43 wherein at their outer ends the frame side arms comprise connector parts for detachably connecting the frame to headgear.
- 5 45. An interface according to any one of claims 39 to 44 comprising a swivelling elbow connected to an inlet opening.
46. An interface according to any one of claims 39 to 45 also comprising headgear comprising a rear strap to extend around a rear part of the head of a wearer and a top  
10 strap to extend over the head of a wearer.
47. An interface according to claim 46 wherein the rear strap extends around a lower rear part of the head of the wearer.
- 15 48. An interface according to either claim 46 or claim 47 wherein the top strap is a crown strap or a forehead strap.
49. An interface according to any one of claims 46 to 48 wherein the left and right side arms of the frame extend to attach directly to a headband comprised of the rear strap  
20 and/or top strap.
50. An interface according to any one of claims 46 to 49 wherein a length of the rear strap and/or of the top strap is adjustable.
- 25 51. An interface according to any one of claims 46 to 50 wherein the headgear is formed at least in part from a cloth-covered foam material.
52. A nasal seal for a mask interface, the seal having a hollow interior adapted to be  
30 filled with gas under positive pressure in use, the seal comprising a wearer side comprising a supple lower-nose-receiving center part pre-formed in shape to receive and sealingly contact the tip, lower sides, and base of the nose of a wearer and sealingly contact the upper lip, and position an outlet aperture for gas flow beneath the nares of wearer, the wearer side of the seal also comprising integral left and right outer stabilising parts  
35 outward of the supple center part and rearwardly directed to contact the wearer's face adjacent the lower flanks of the nose on the left and right sides of the nose, and which are flexible but less so than the center part of the seal.

53. A nasal seal for a mask interface, the seal having a hollow interior adapted to be filled with gas under positive pressure in use, the seal comprising a wearer side comprising a supple lower-nose-receiving center part shaped to receive and sealingly contact the lower part of the nose and the upper lip and position an aperture for gas flow beneath the nares of wearer, comprising an upper wall portion above the aperture which is concave in both a height and a width of the seal to contact the tip of the nose of the wearer, a lower wall portion below the aperture and rearwardly of the upper wall portion and which is convex in a height of the seal and concave in a width of the seal to contact the upper lip below the nose of the wearer, and left and right side wall portions to contact the left and right lower sides of the nose of the wearer.

54. A nasal seal for a mask interface, comprising a face contacting or wearer side which is supple and conformable when worn but is pre-formed to comprise in shape before being worn:

- an approximate U-shape when considered in horizontal cross-section, to receive the tip of the nose and lower sides adjacent the tip of the nose of a wearer, and
- an approximate S-shape when considered in central vertical cross-section, comprising an upper concave portion to receive the tip of the nose of a wearer, a lower convex wall portion to cushion-contact the upper lip of the wearer, and an aperture for gas flow to align with the nares of wearer.

55. An interface comprising:

- a seal comprising a wearer side comprising a supple lower-nose-receiving center part pre-formed in shape to receive and sealingly contact the tip, lower sides, and base of the nose of a wearer and sealingly contact the upper lip, and position an outlet aperture for gas flow beneath the nares of wearer, the wearer side of the seal also comprising integral left and right outer stabilising parts outward of the center part and rearwardly directed to contact the wearer's face adjacent the lower flanks of the nose on the left and right sides of the nose, and which are flexible but less so than the lower-nose-receiving center part of the seal,
- a frame including side arms which extend outwardly (away from each other) and rearwardly past left and right extremities of the seal, to extend upwardly at a shallow angle and along the left and right cheeks of a wearer, to connect to headgear for holding the seal on the face of a wearer, and
- headgear comprising a rear strap to extend around a rear part of the head of a wearer and a top strap to extend over the top of the head of a wearer.

56. An interface comprising:

- a seal comprising a wearer side comprising a supple lower-nose-receiving center part pre-formed in shape to receive and sealingly contact the tip, lower sides, and base of the nose of a wearer and sealingly contact the upper lip, and position an outlet aperture for gas flow beneath the nares of wearer,
- a frame including side arms which extend outwardly (away from each other) and rearwardly past left and right extremities of the seal, to connect to headgear for holding the seal on the face of a wearer, the headgear comprising at least a rear strap to extend around a rear part of the head of a wearer and optionally also at least a top strap to extend over the top of the head of a wearer, without a headgear side strap from the rear (or top) strap towards the frame, and
- headgear comprising said at least a rear strap and optionally also at least a top strap, which headgear is non-floppy and tends to maintain its as-worn shape when not worn.

57. An interface according to claim 56 wherein edges of the headgear are thermoformed.

58. Headgear for a respiratory interface, formed of a soft flexible material and comprising at least one fastener component formed of a different and relatively more rigid material fixed to the soft flexible material.

59. Headgear according to claim 58 wherein the at least one fastener component is formed of a plastics material.

60. Headgear according to claim 59 wherein the at least one fastener component is injection molded from a plastics material.

61. Headgear according to any one of claims 58 to 60 wherein the at least one fastener component is attached to or towards an end of a strap portion of the headgear.

62. Headgear according to any one of claims 58 to 61 wherein the at least one fastener component comprises a first portion attached to the soft flexible material of the headgear and a free second portion which comprises an open loop for receiving therethrough a tongue end of a strap.

63. Headgear according to any one of claims 57 to 61 wherein the at least one fastener component is attached to the soft flexible material of the headgear by welding.

64. Headgear according to any one of claims 59 to 63 wherein the at least one fastener component is attached to the soft flexible material of the headgear by ultrasonic welding.

5 65. Headgear according to any one of claims 58 to 62 wherein the soft flexible material is a cloth-covered foam material.

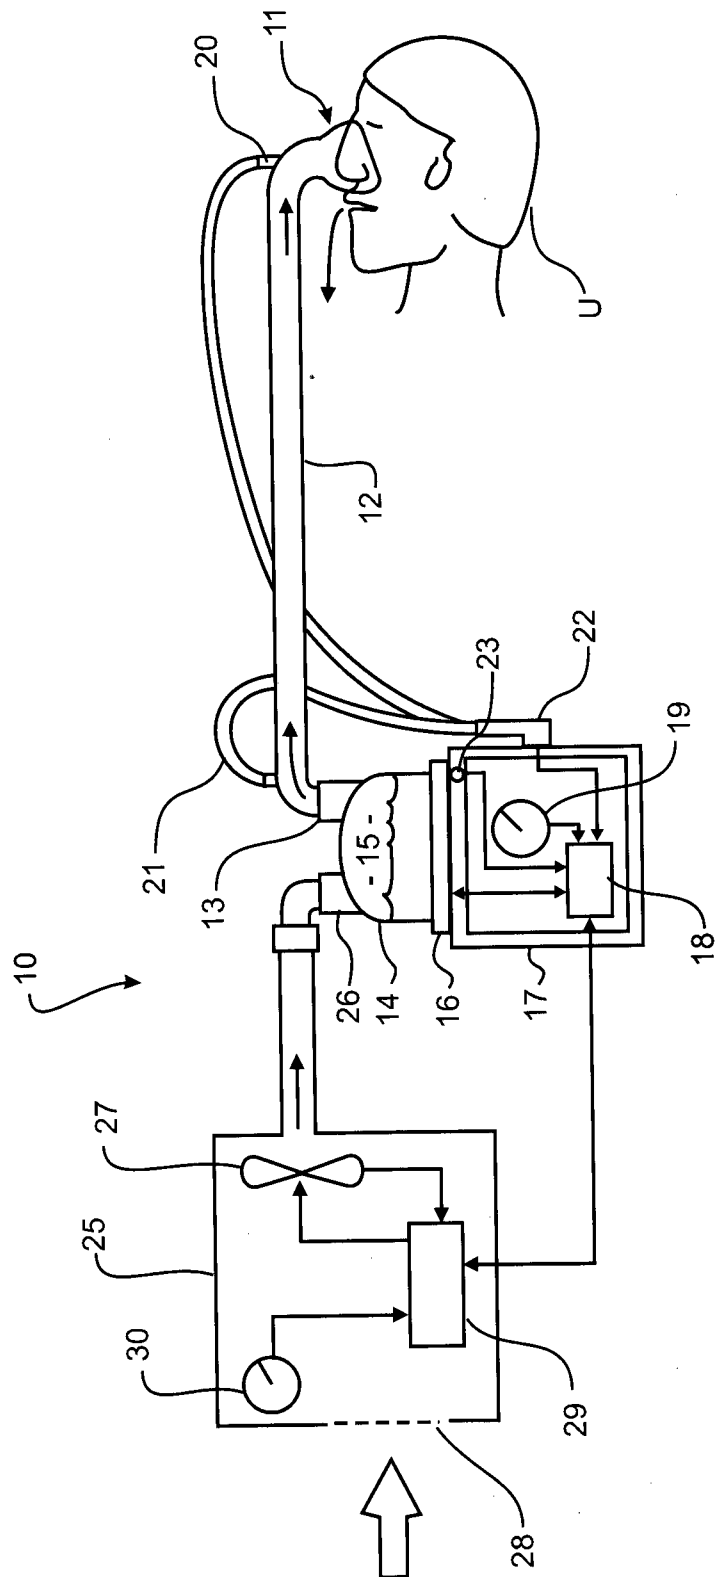


FIGURE 1

2/47

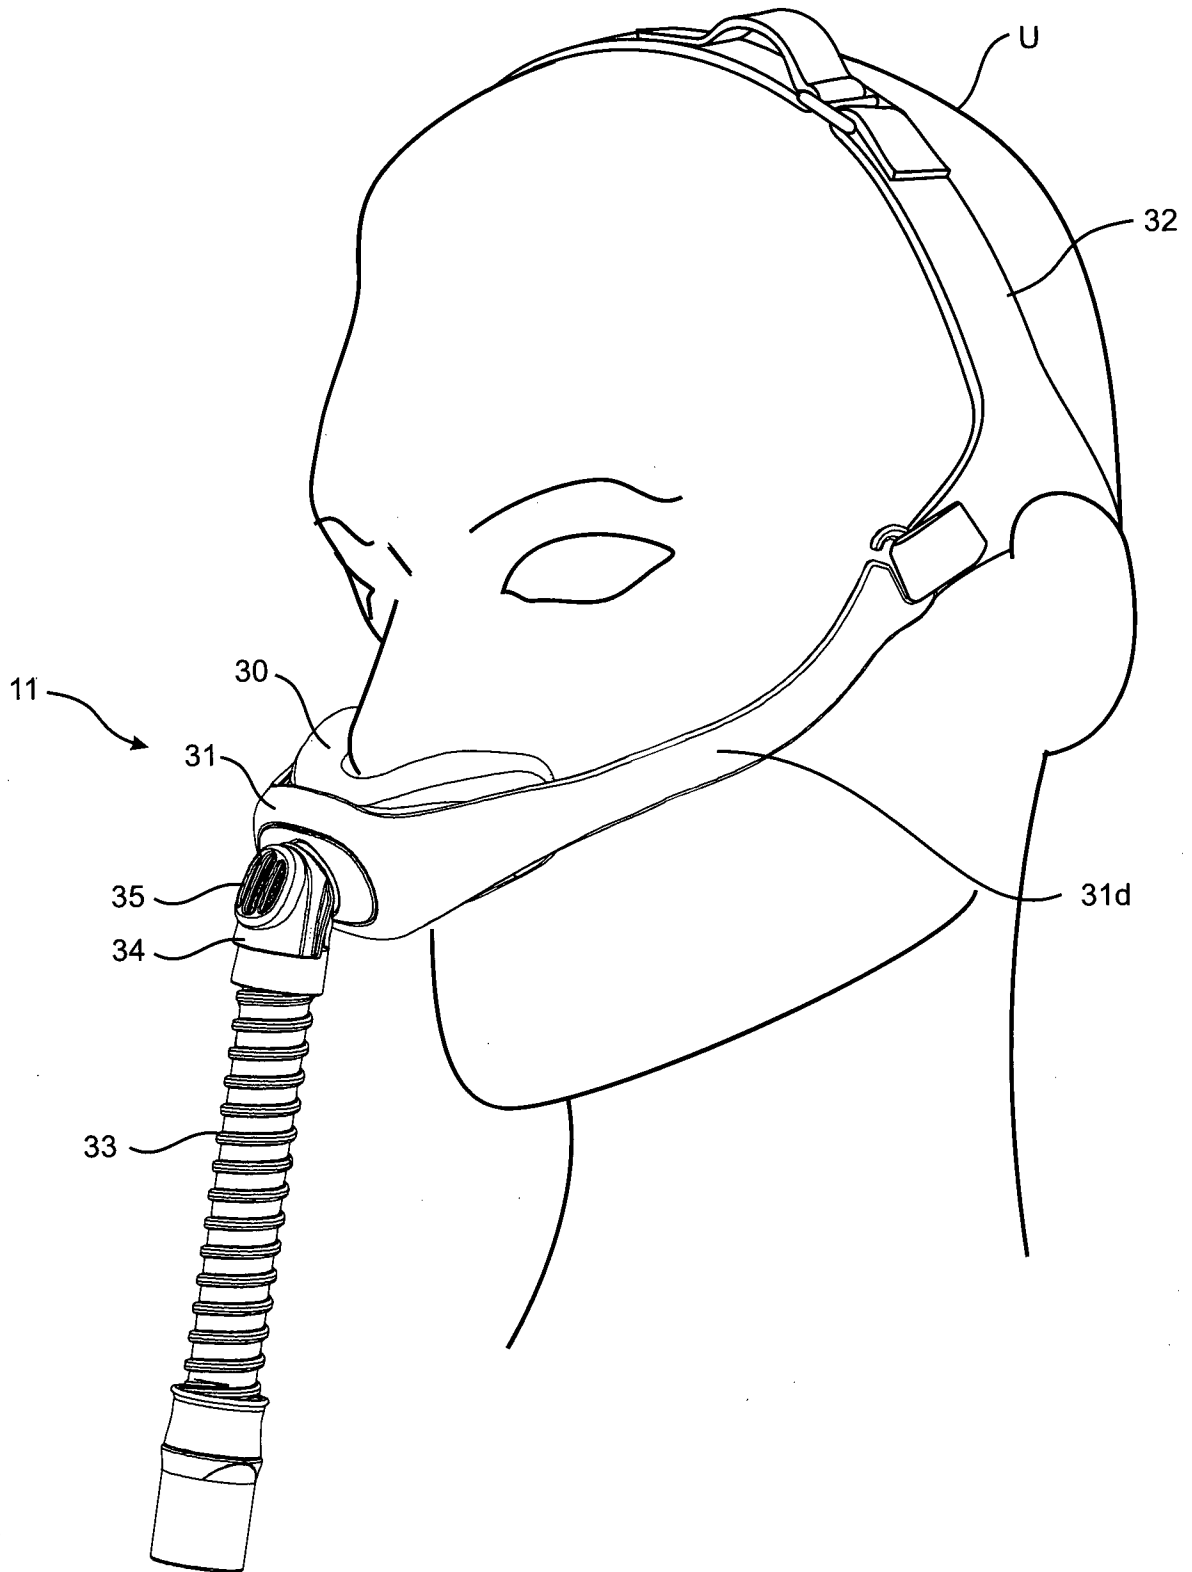


FIGURE 2



3/47

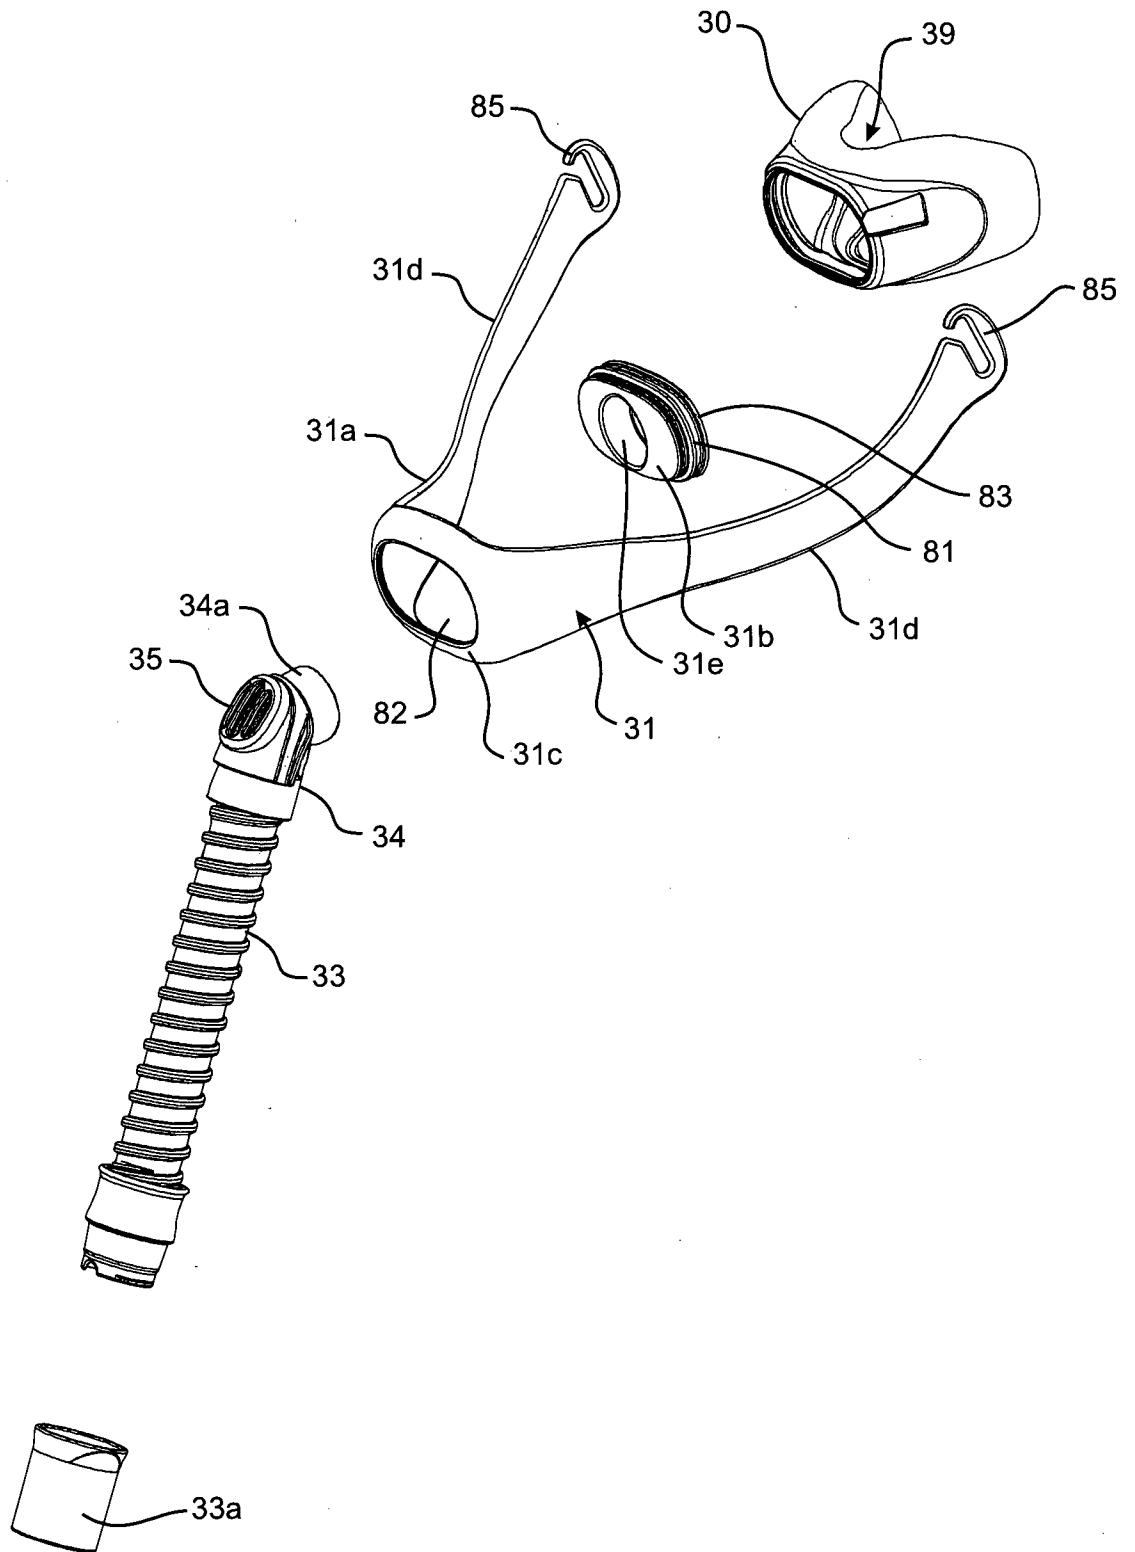


FIGURE 3

4/47

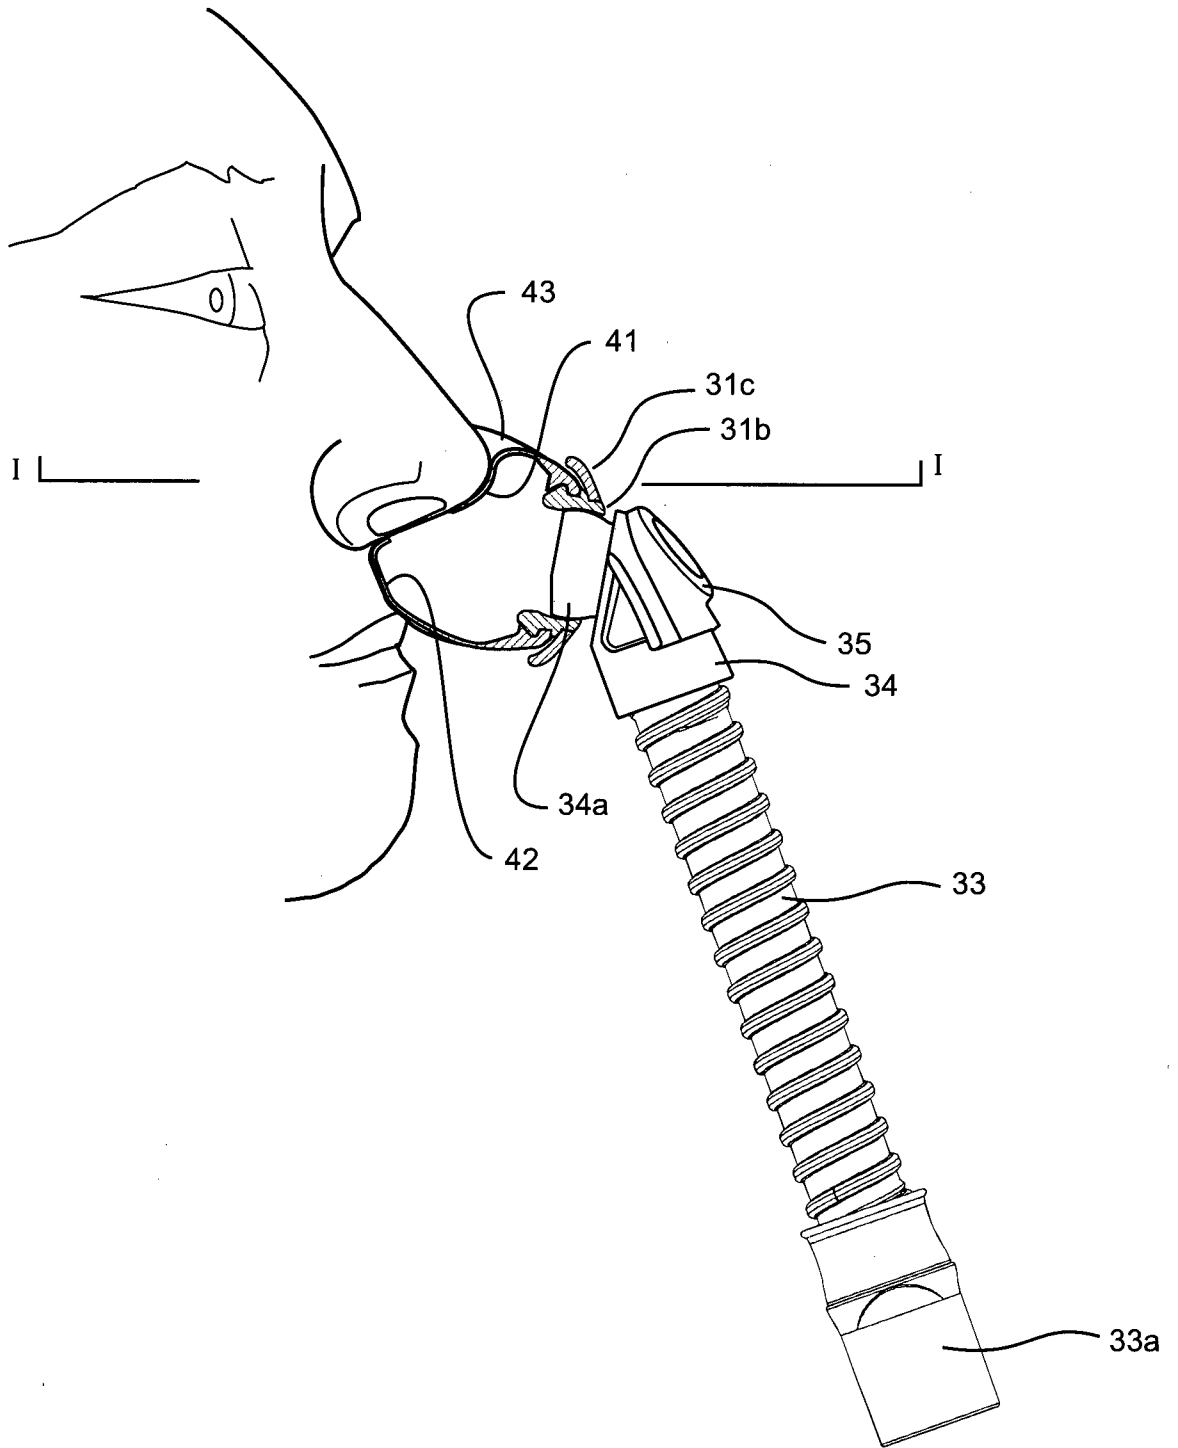


FIGURE 4A

5/47

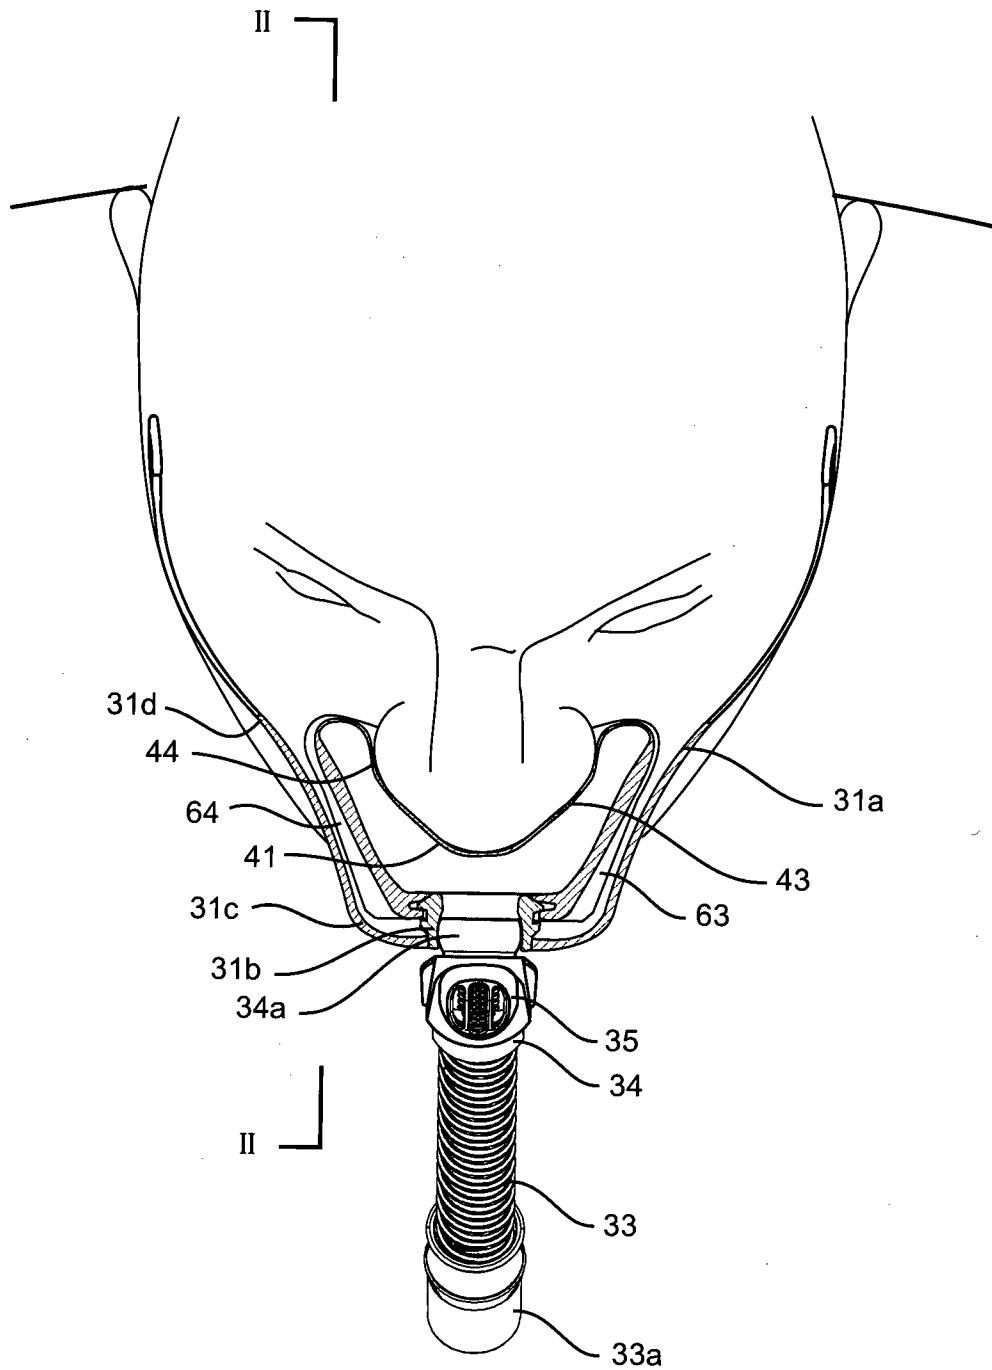


FIGURE 4B

6/47

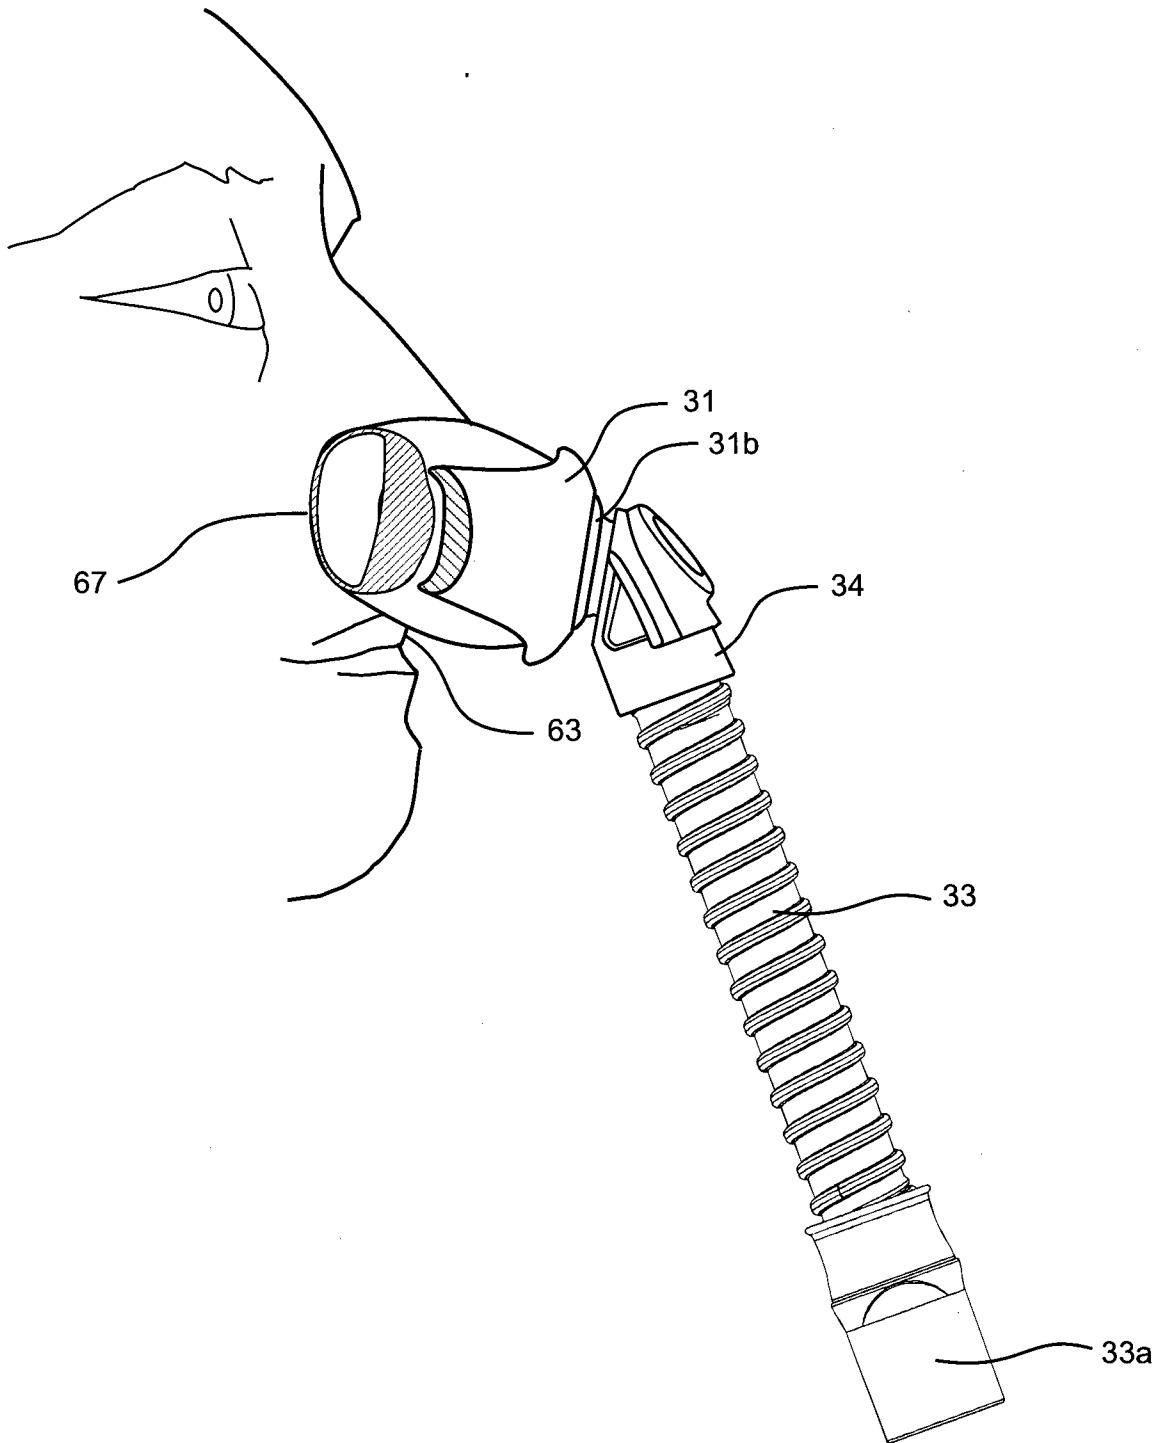


FIGURE 4C

7/47

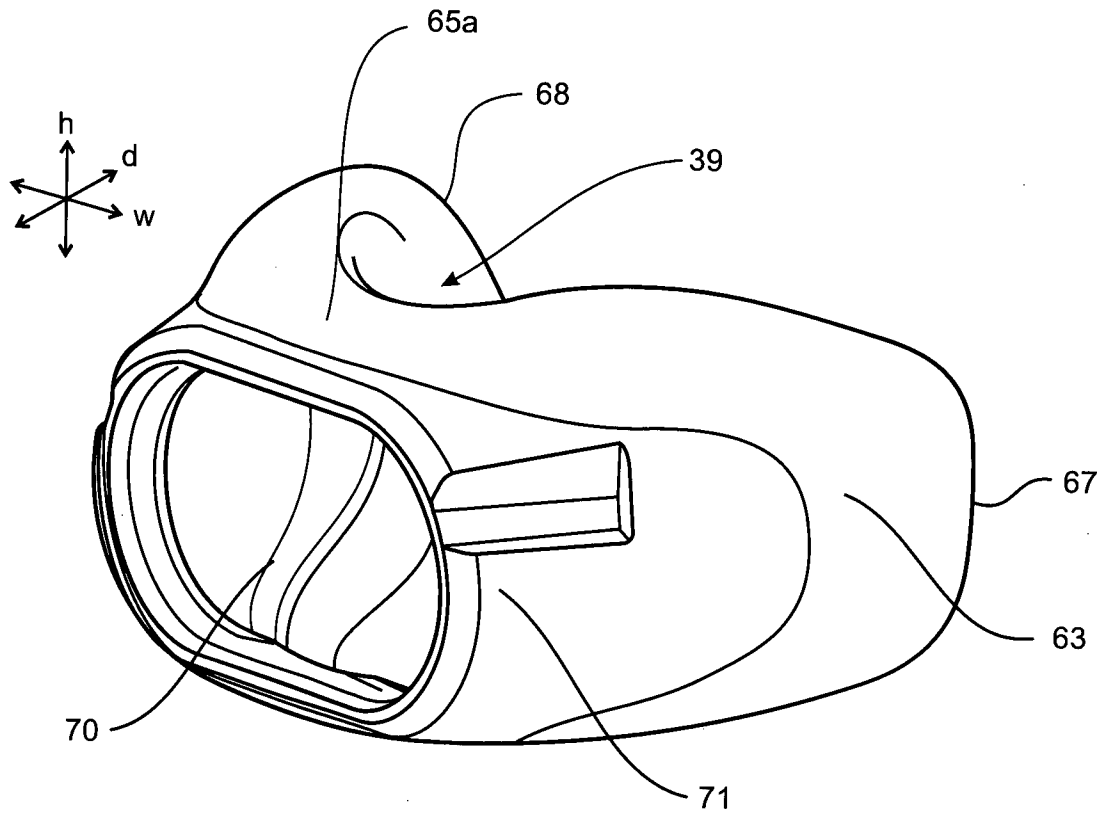


FIGURE 5

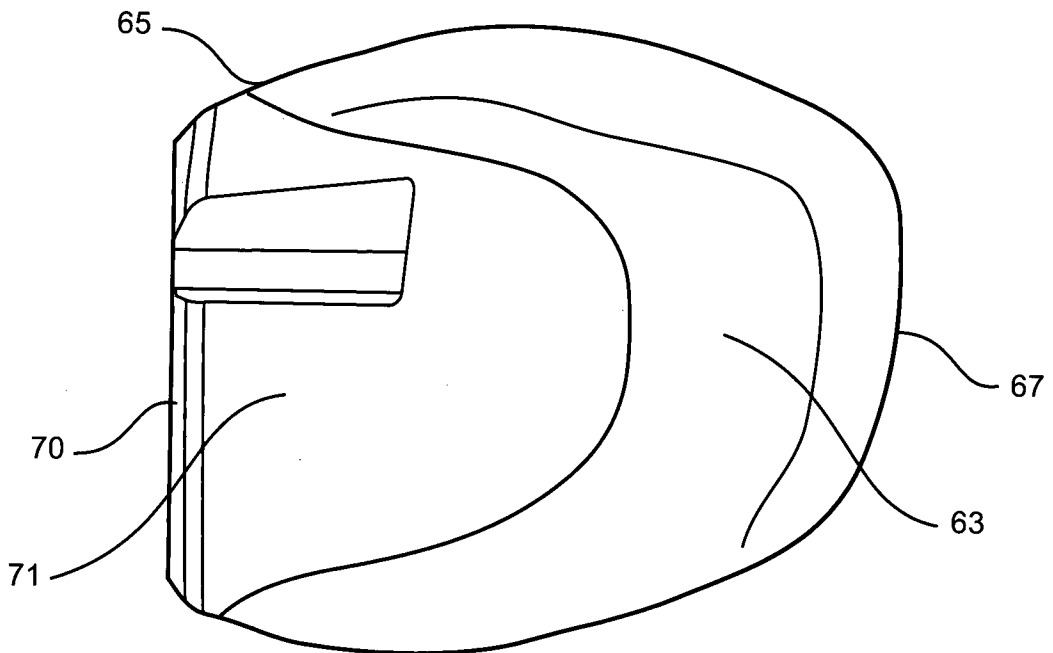


FIGURE 6

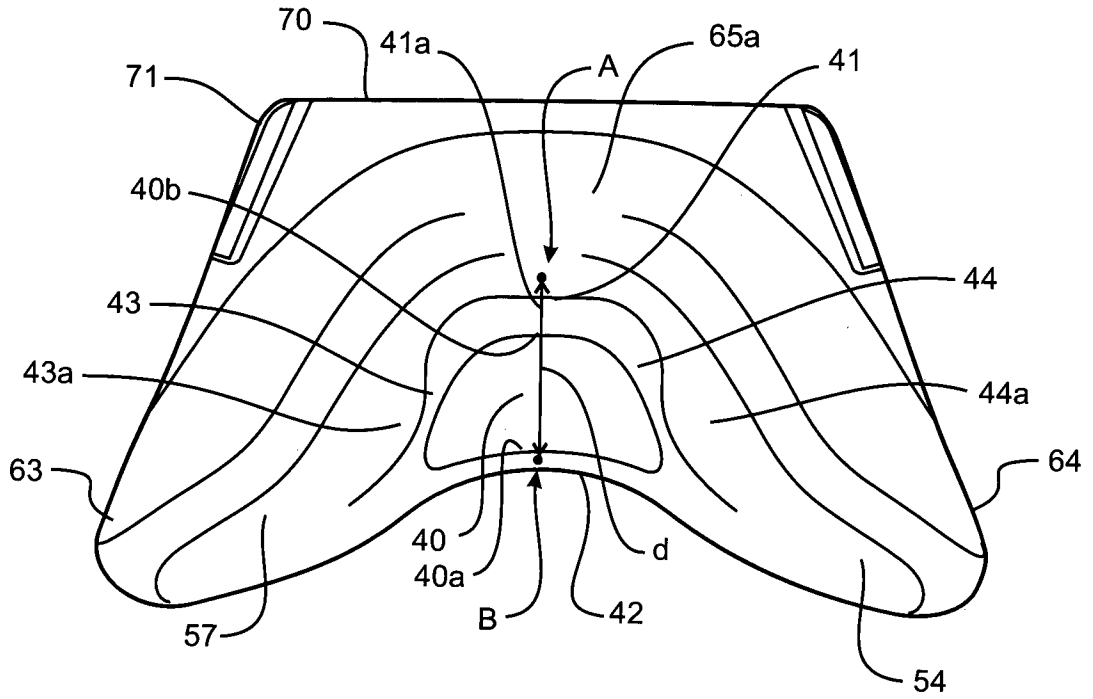


FIGURE 7

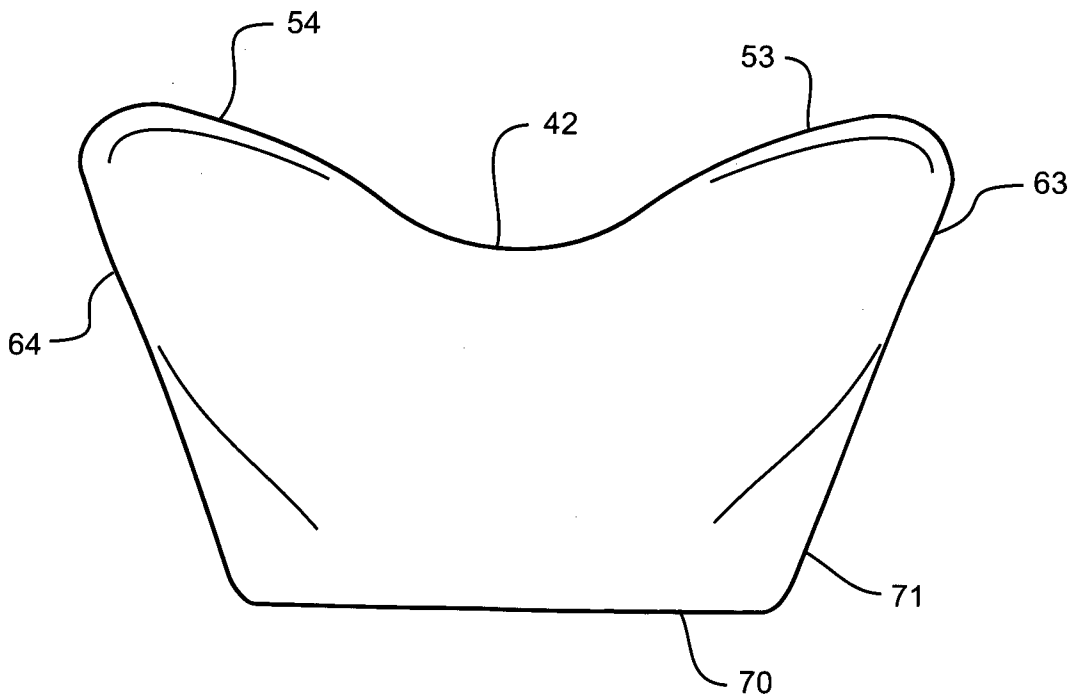


FIGURE 8

9/47

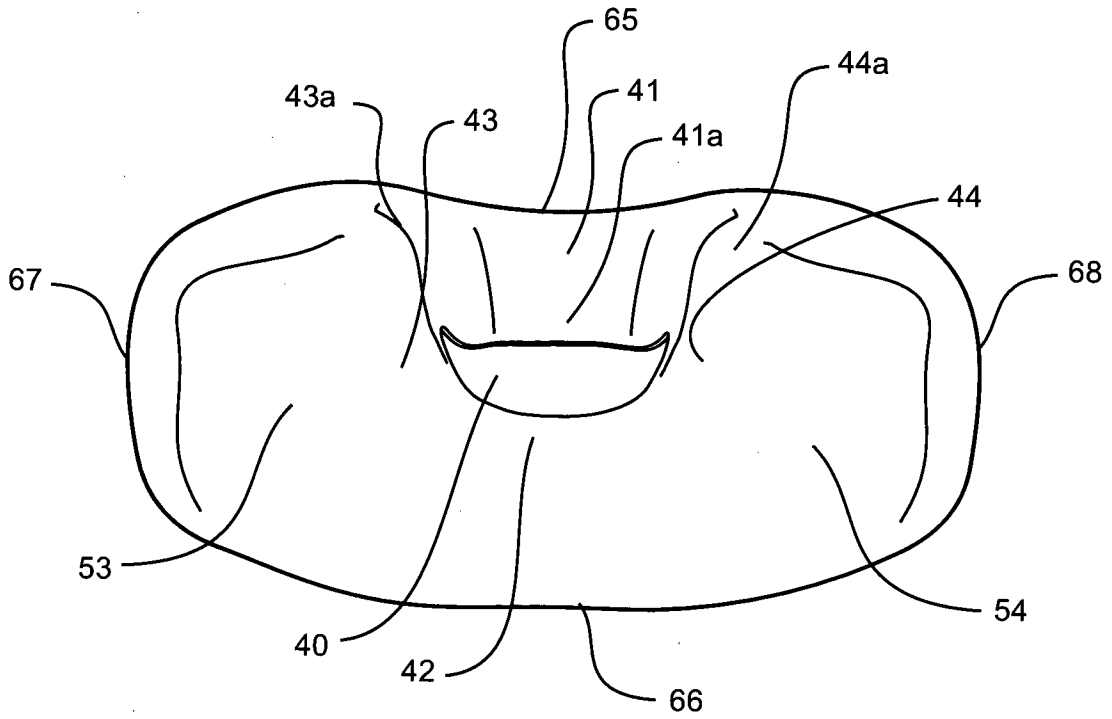


FIGURE 9

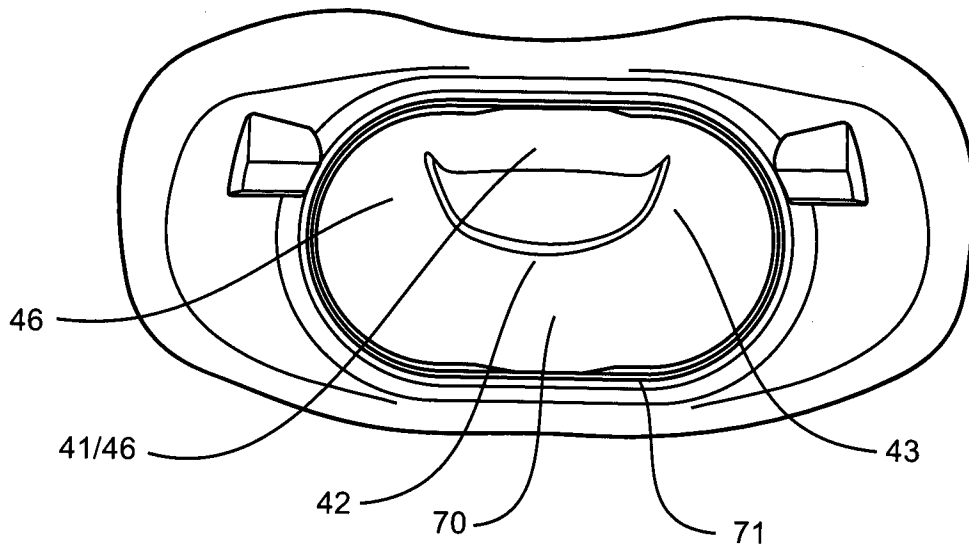


FIGURE 10

10/47

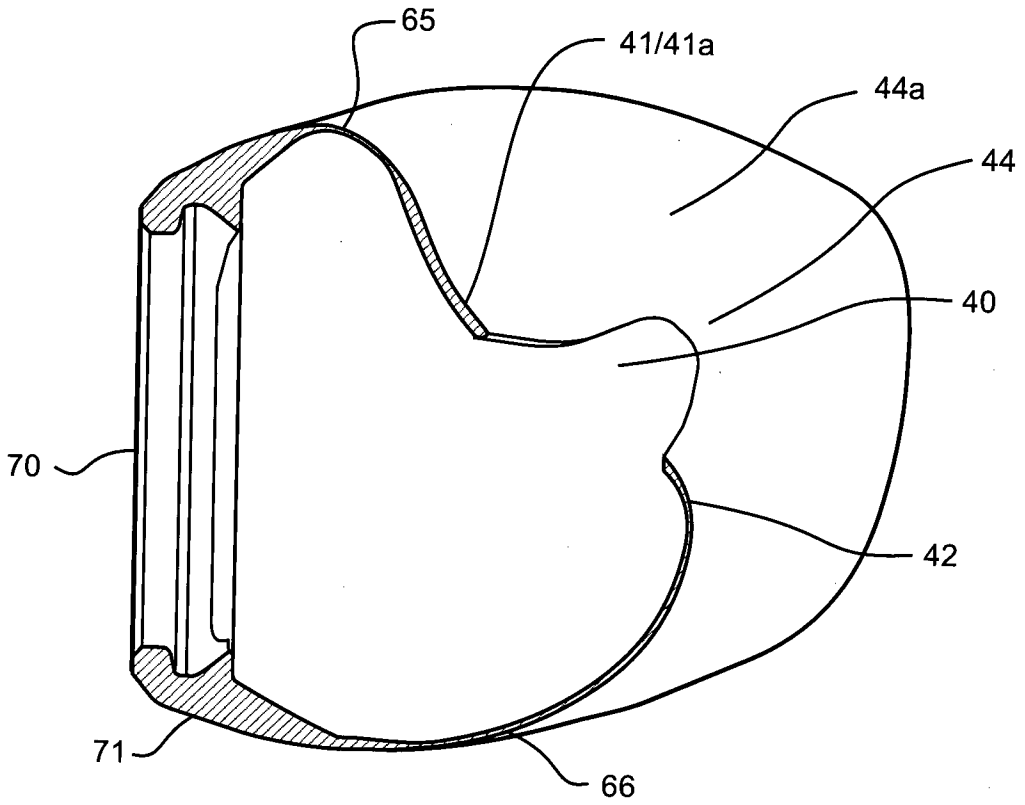


FIGURE 11

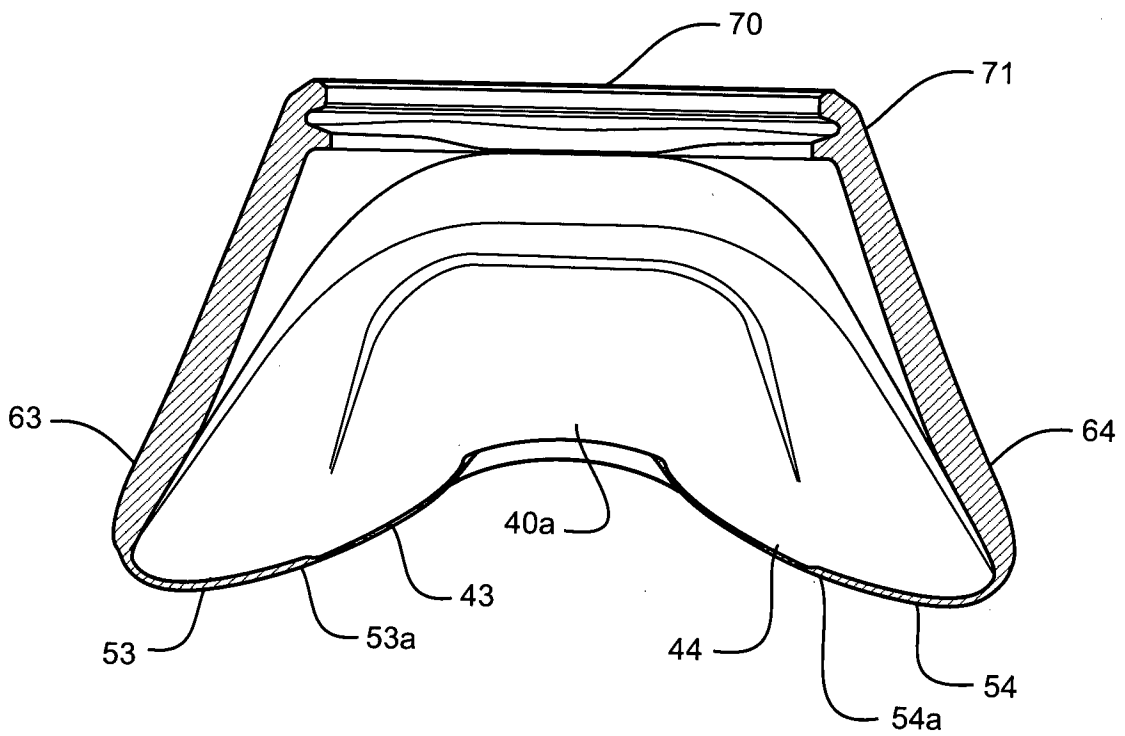


FIGURE 12



11/47

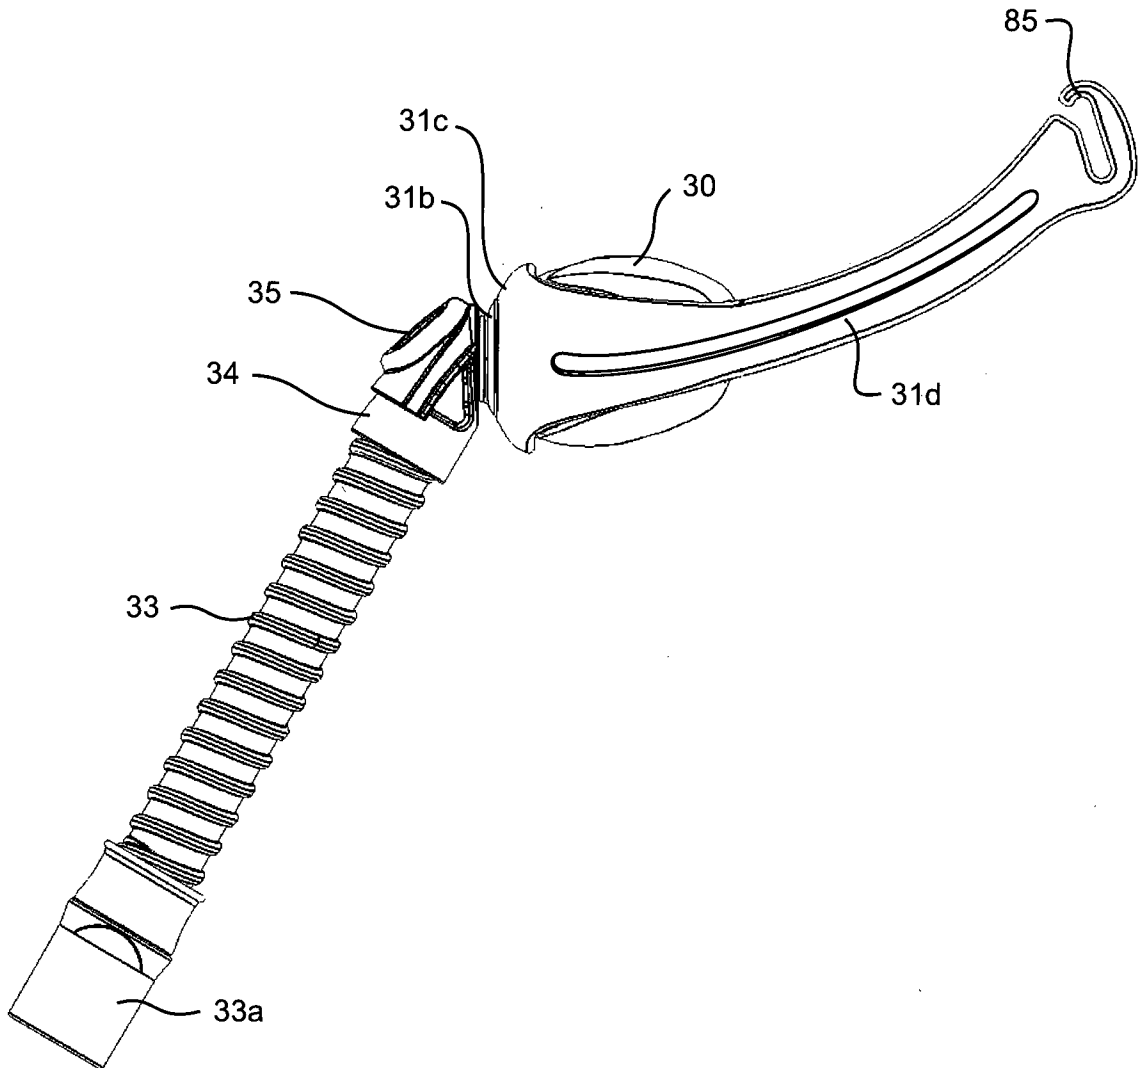


FIGURE 13

12/47

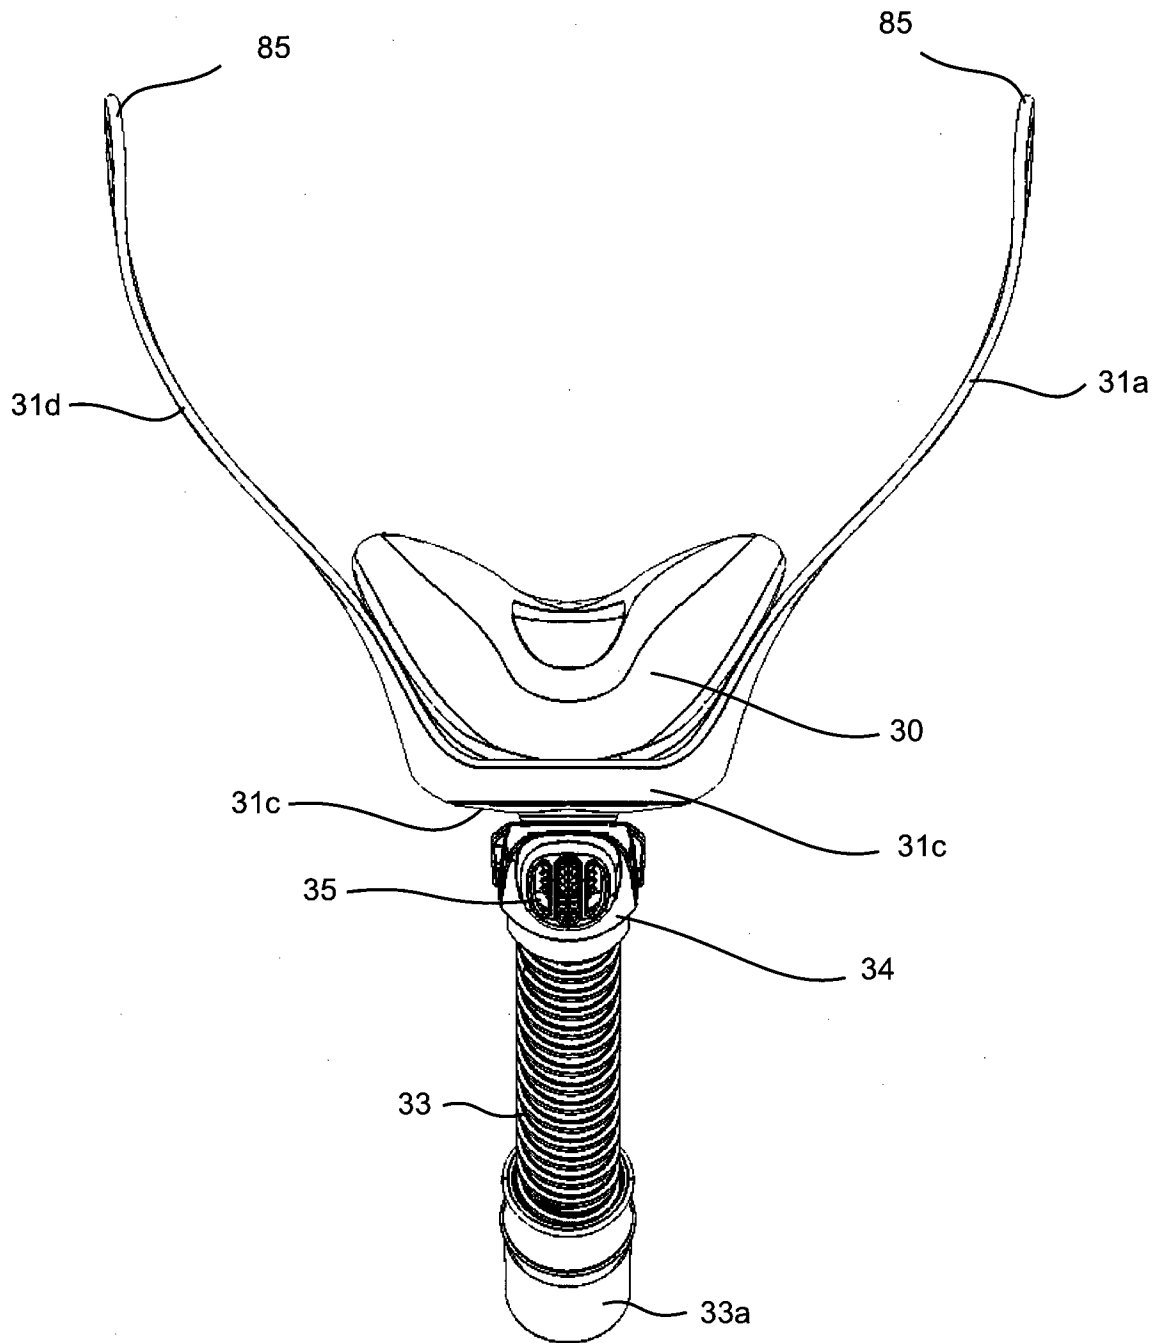


FIGURE 14

13/47

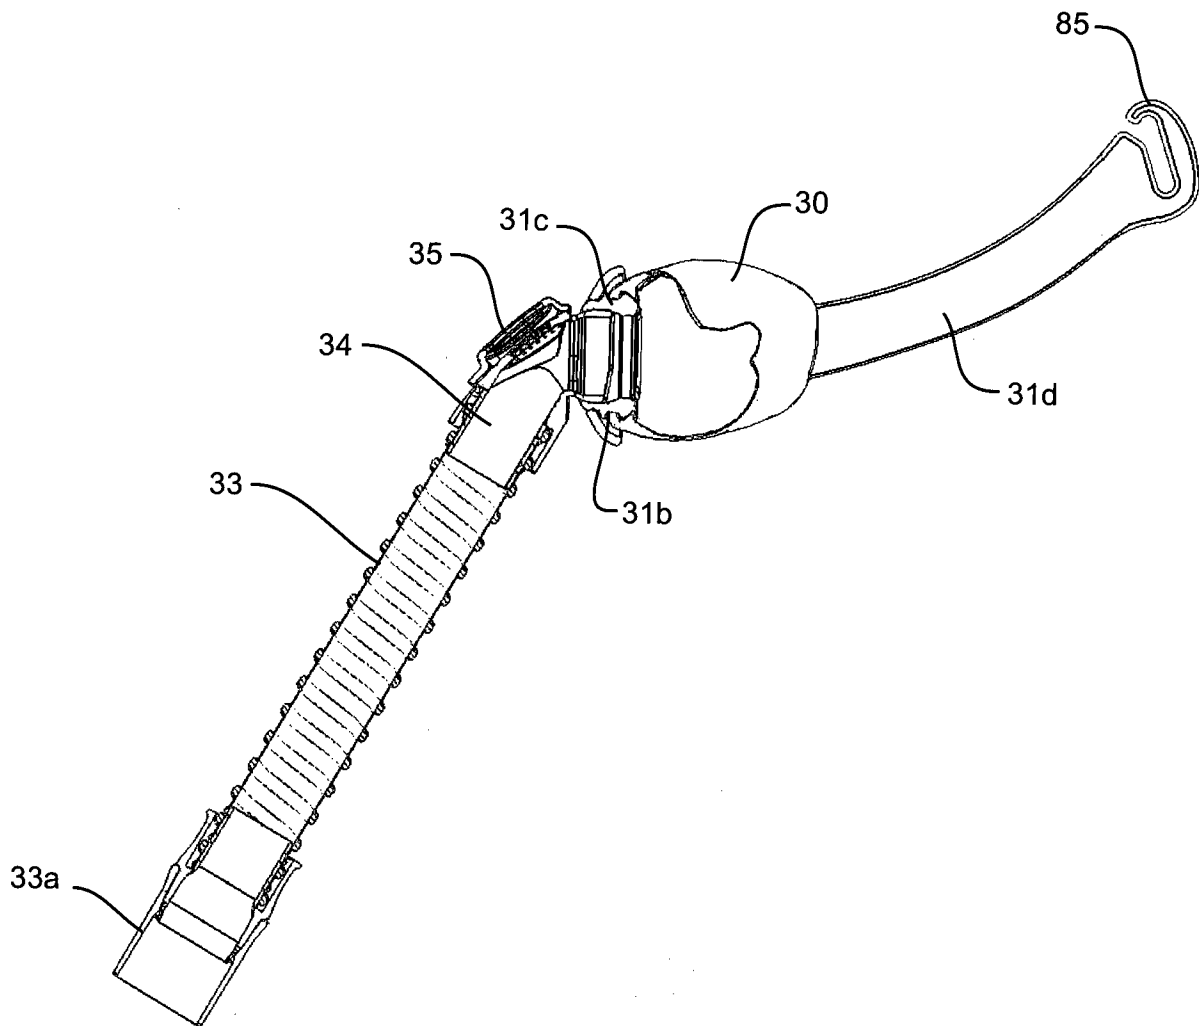


FIGURE 15

14/47

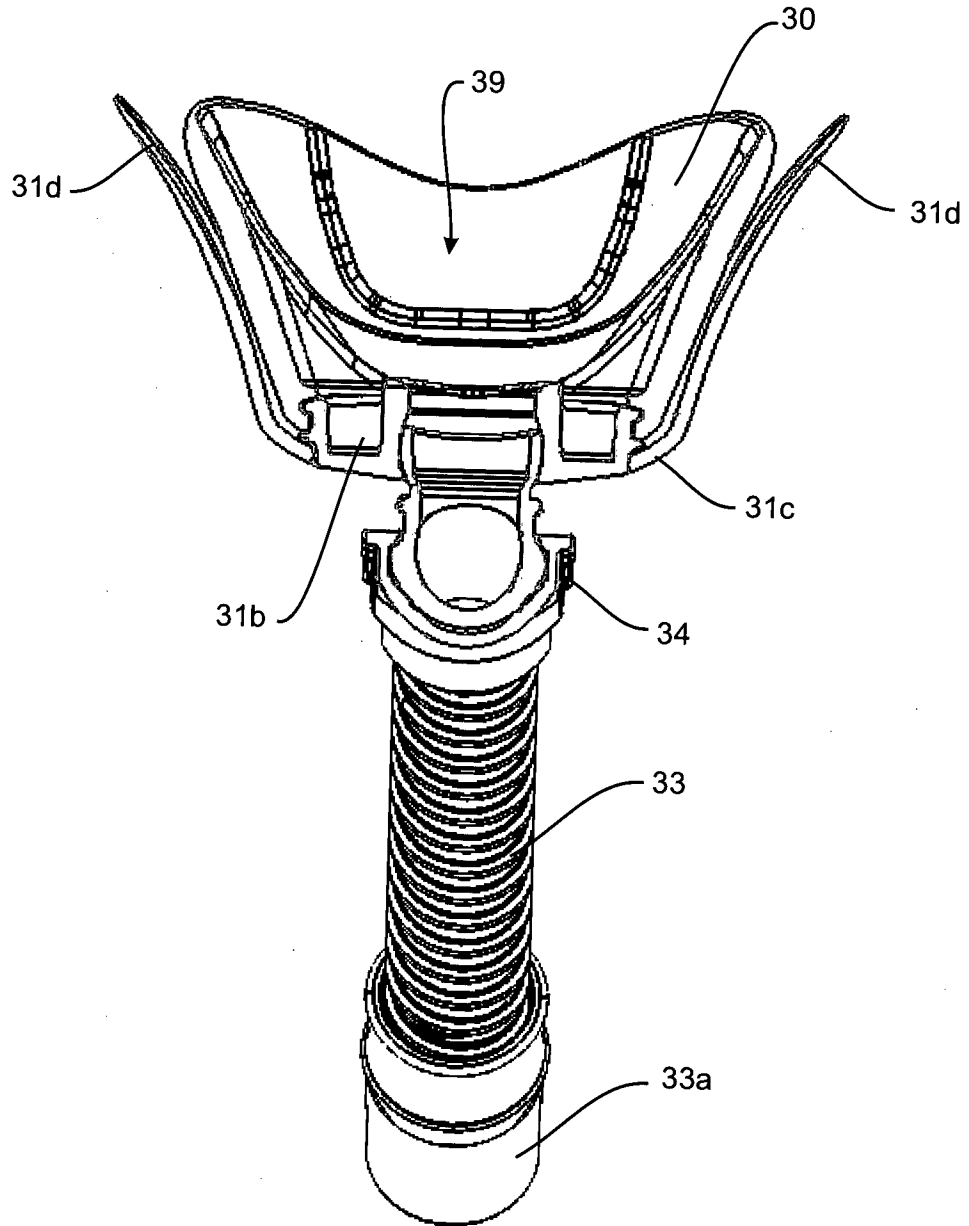


FIGURE 16

15/47

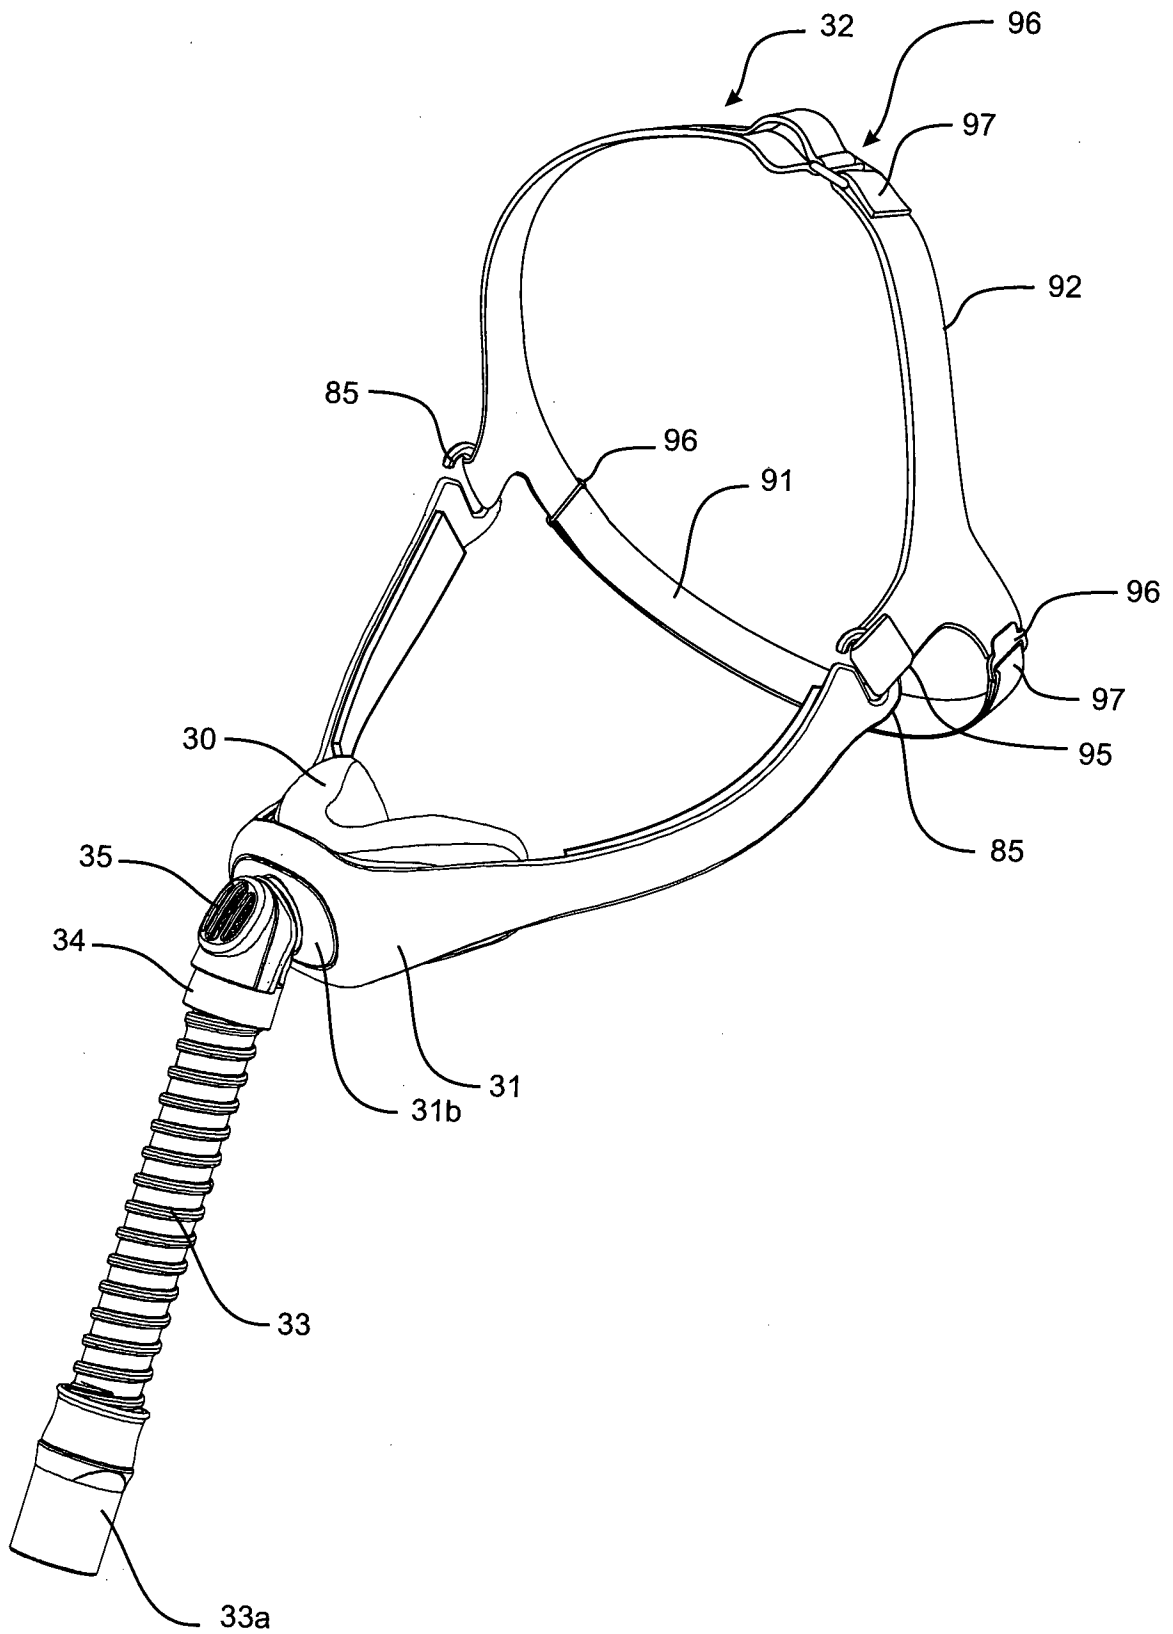


FIGURE 17

16/47

FIGURE 18A

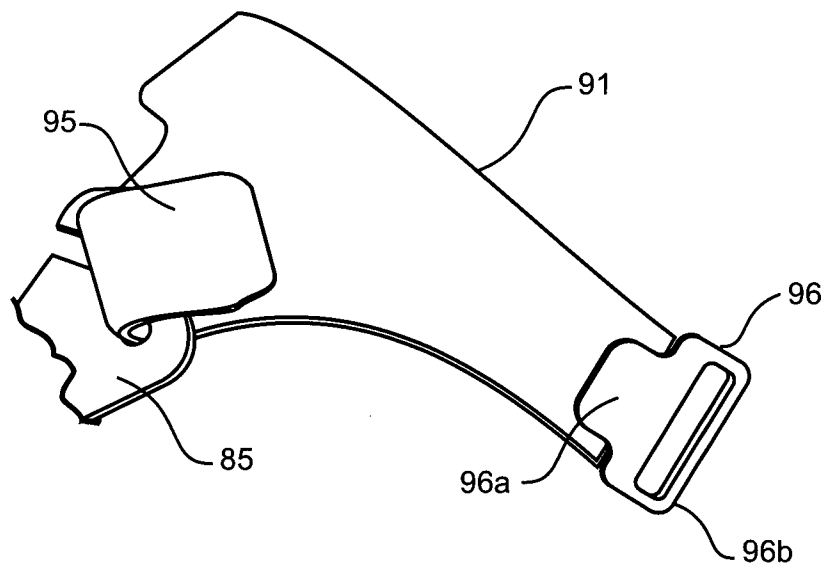
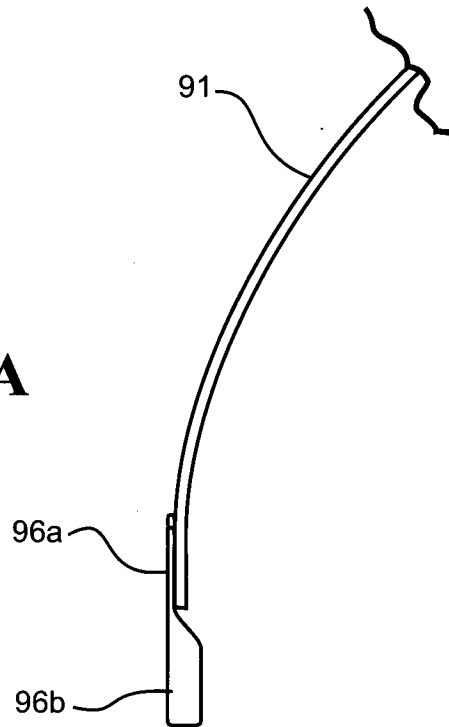


FIGURE 18B

17/47

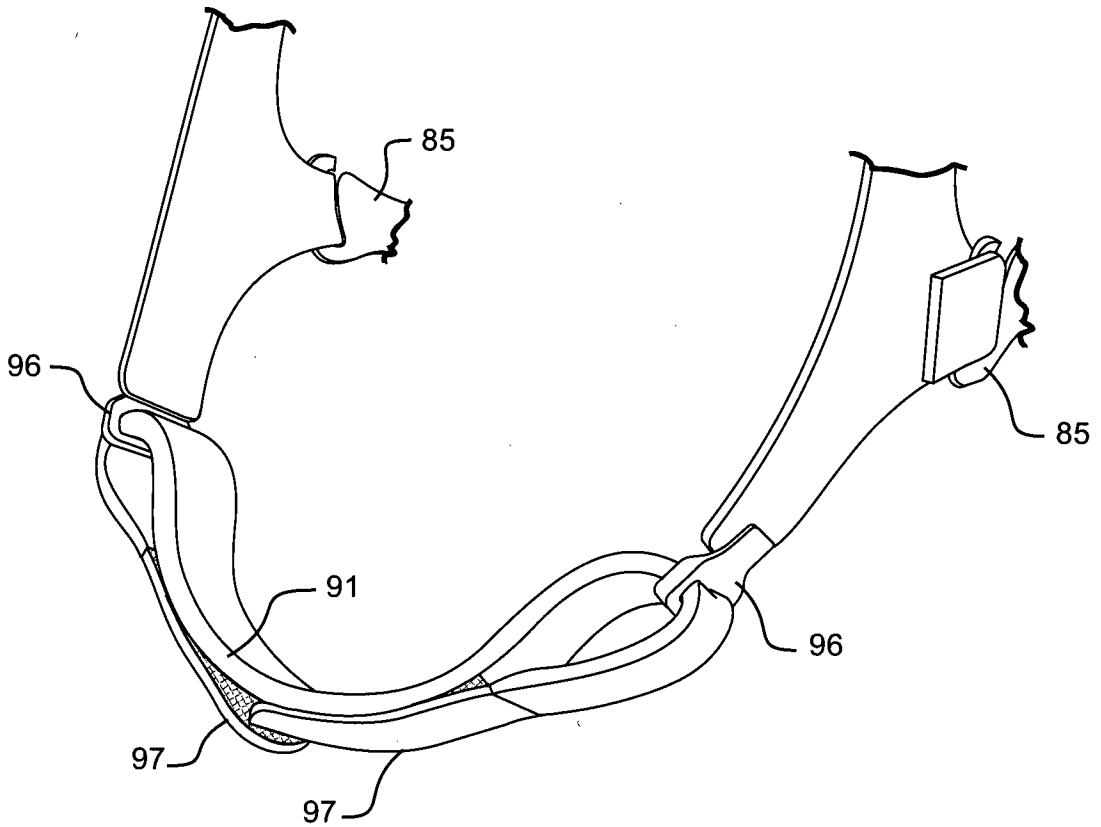


FIGURE 19

18/47

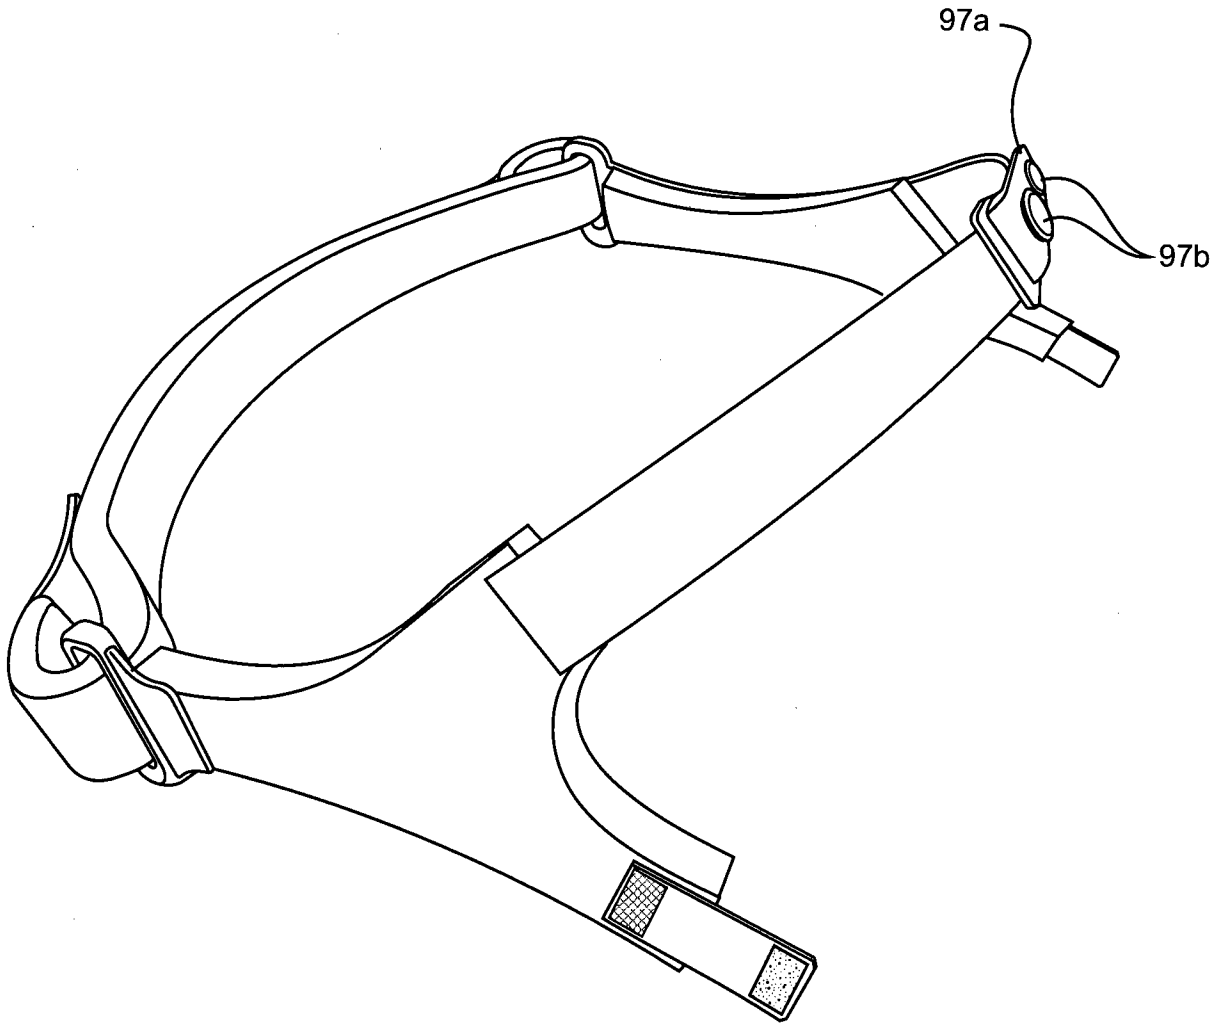


FIGURE 20



19/47

FIGURE 21


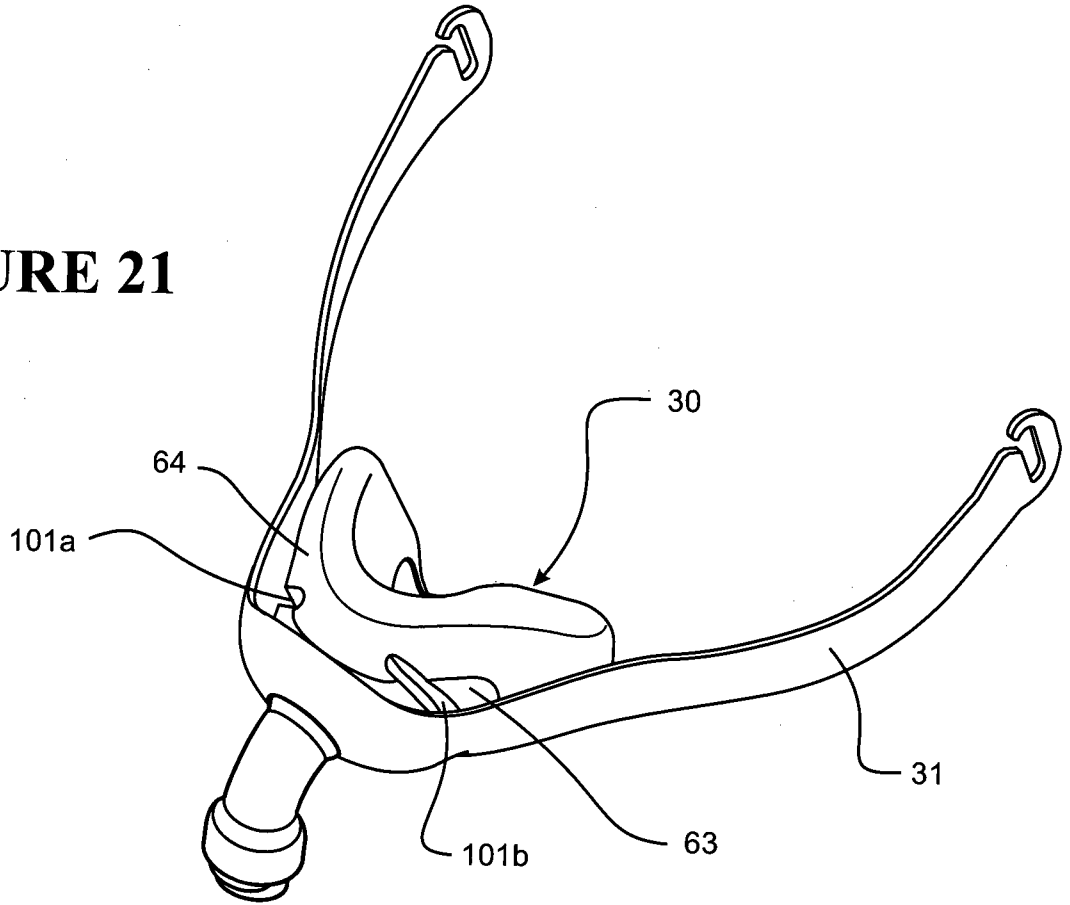


FIGURE 22

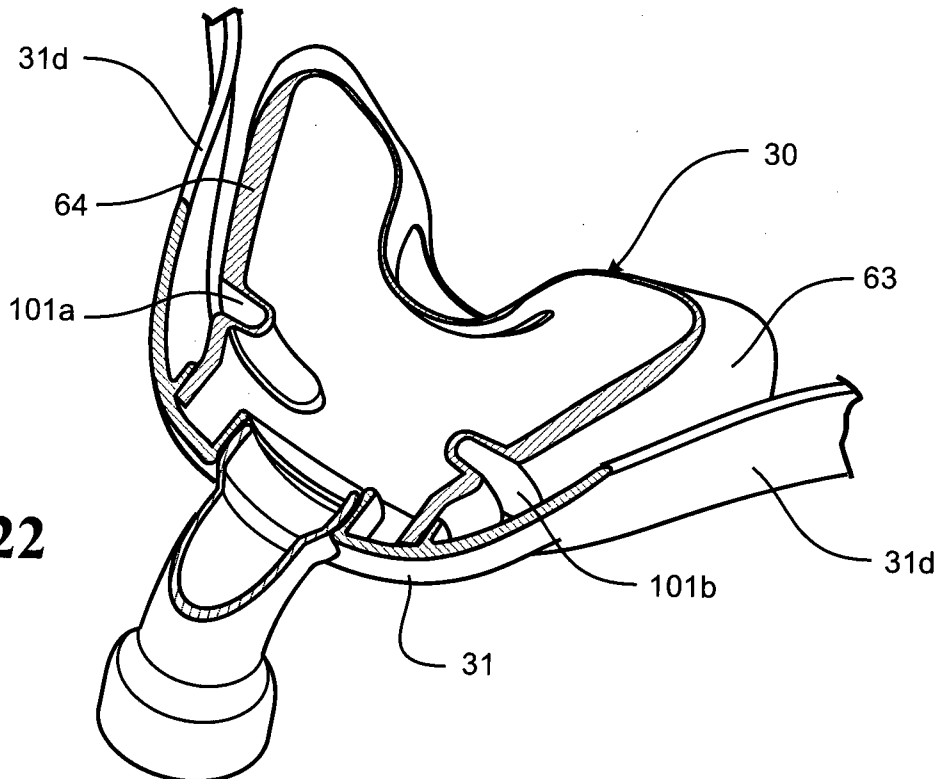

20/47

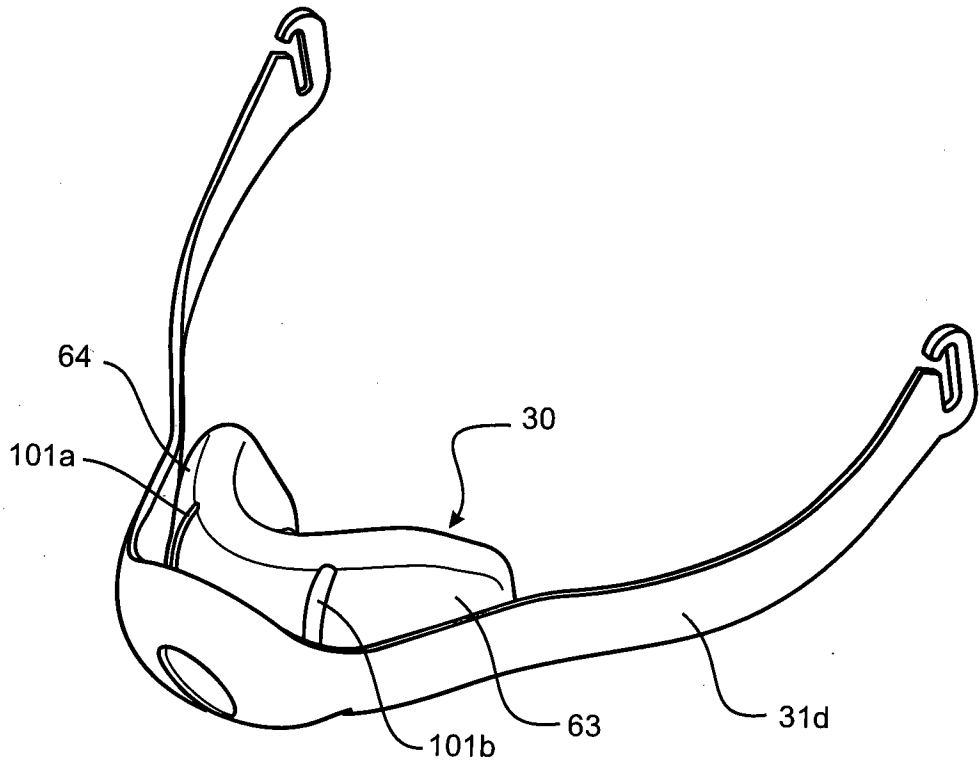


FIGURE 23

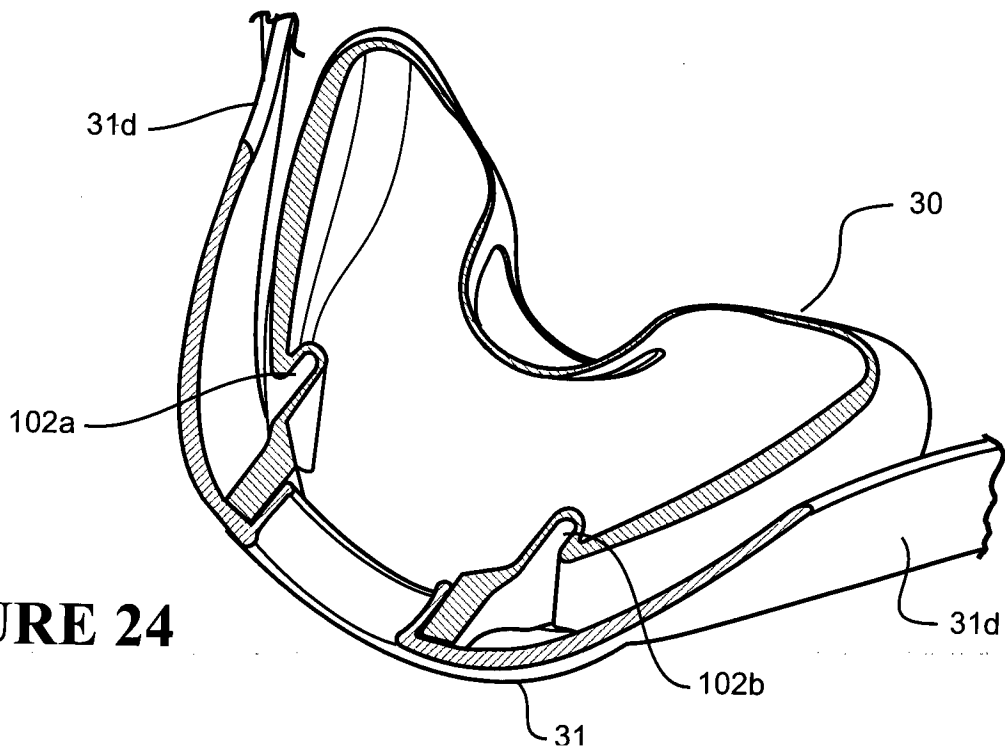


FIGURE 24

21/47

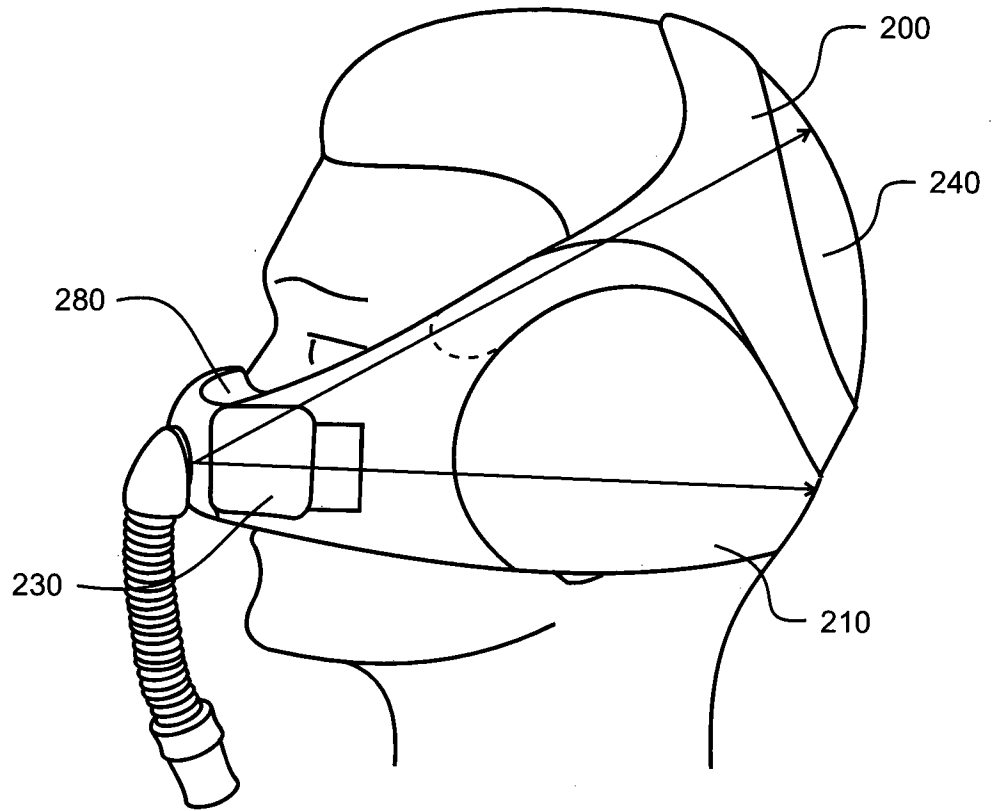


FIGURE 25

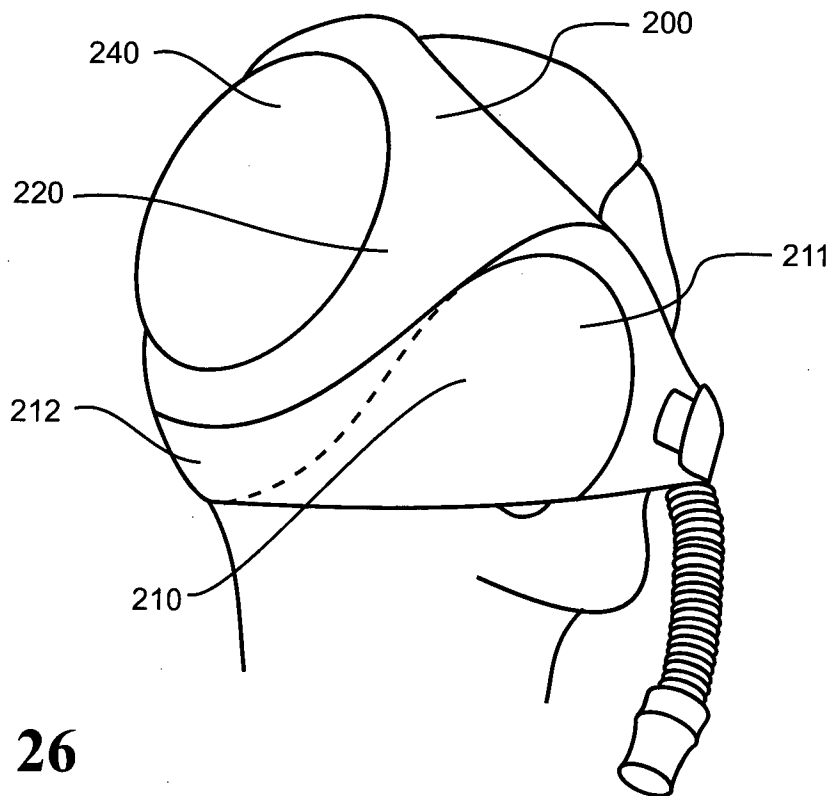


FIGURE 26

22/47

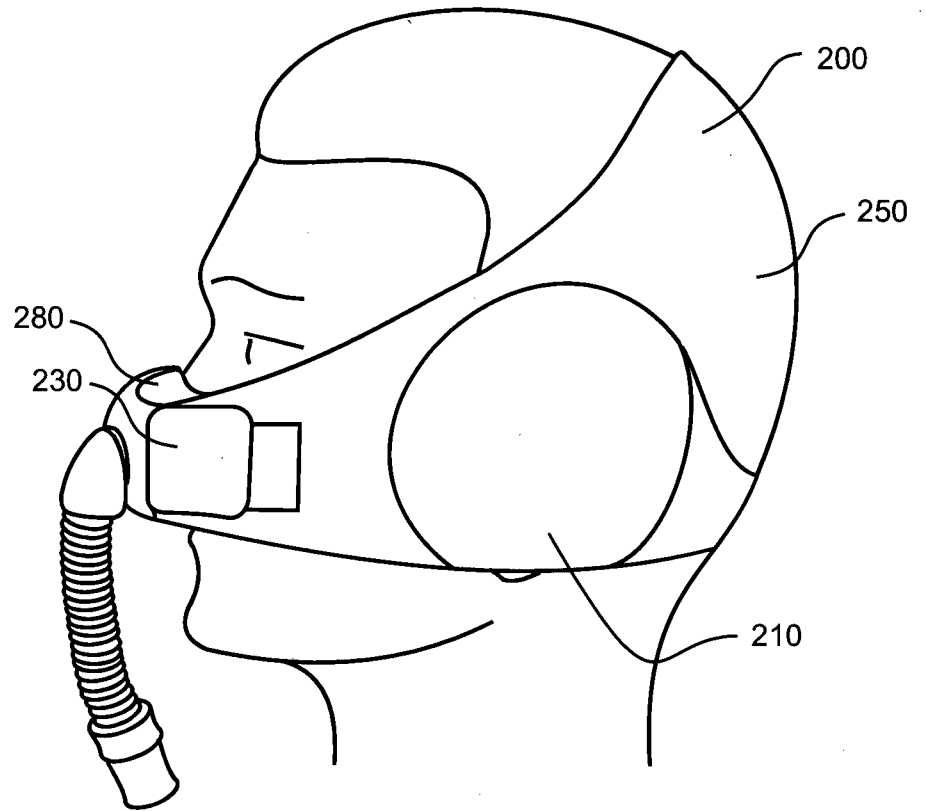


FIGURE 27

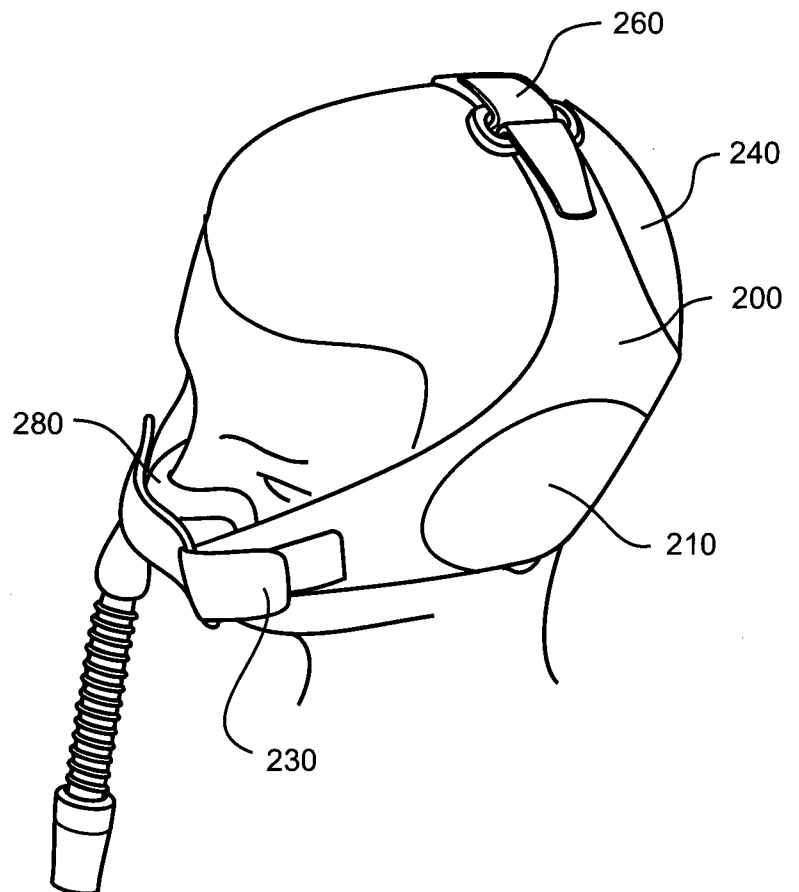


FIGURE 28

23/47

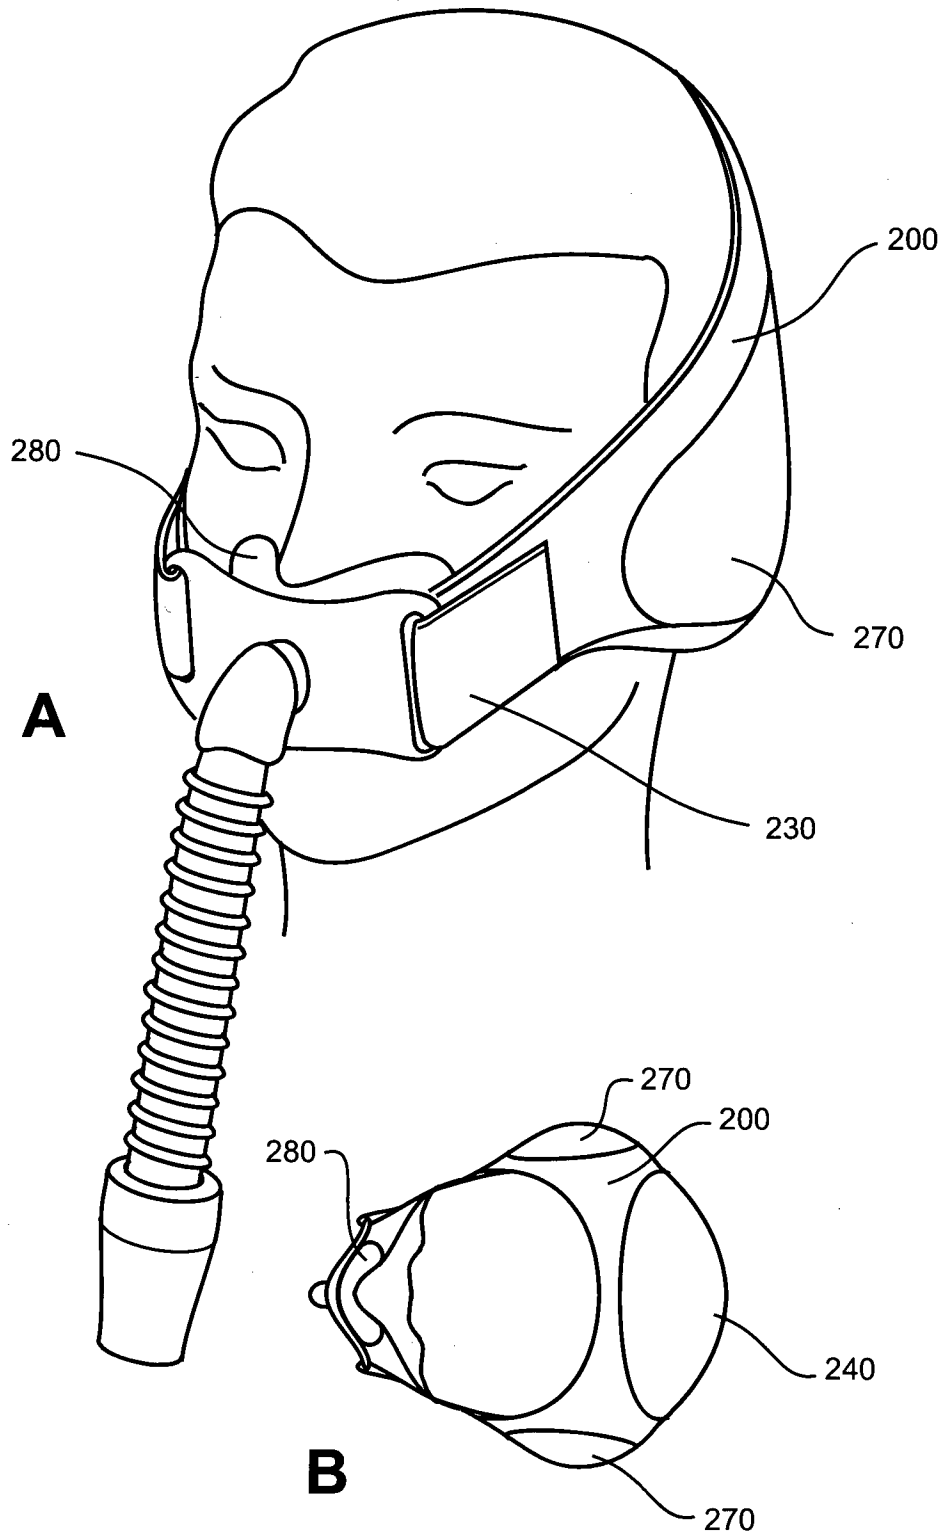


FIGURE 29

24/47

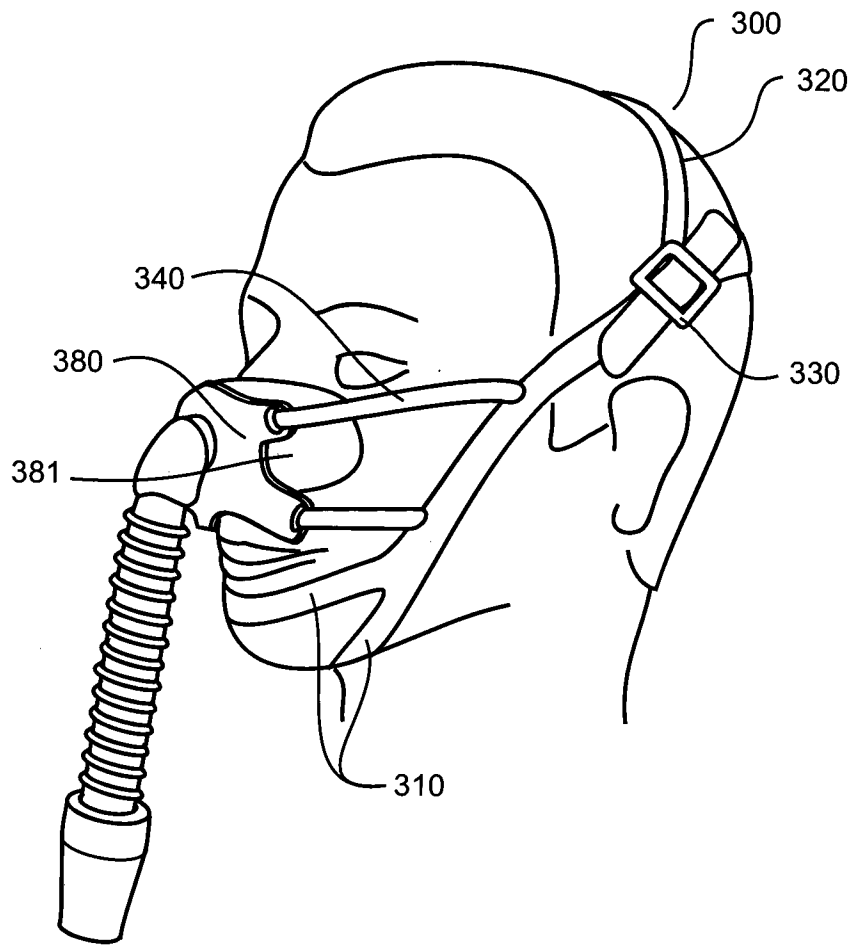


FIGURE 30

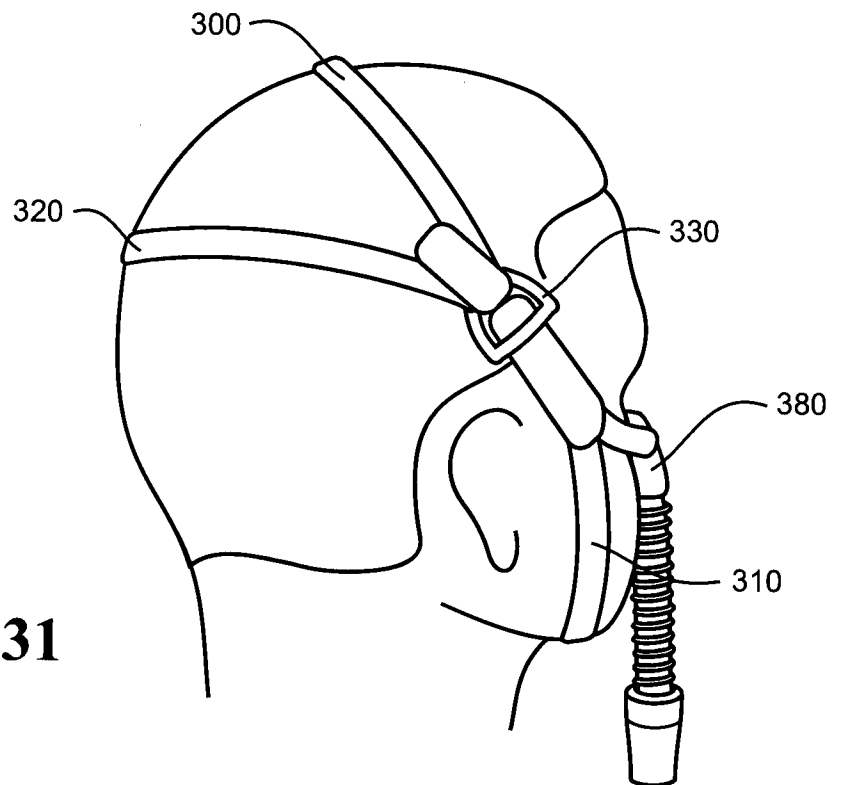


FIGURE 31

25/47

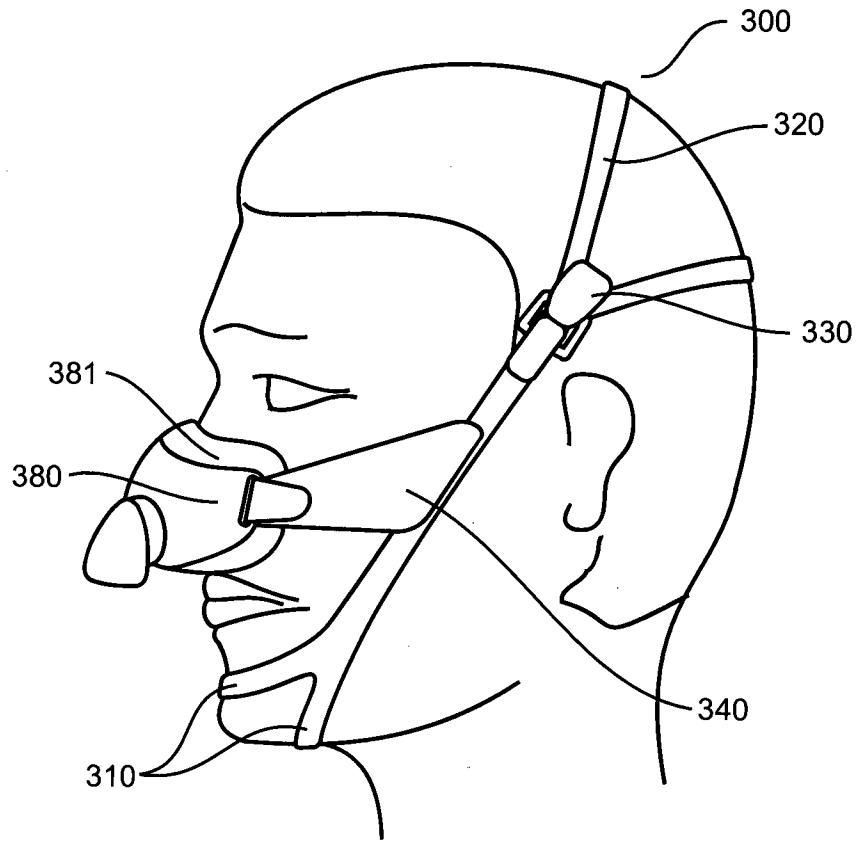


FIGURE 32

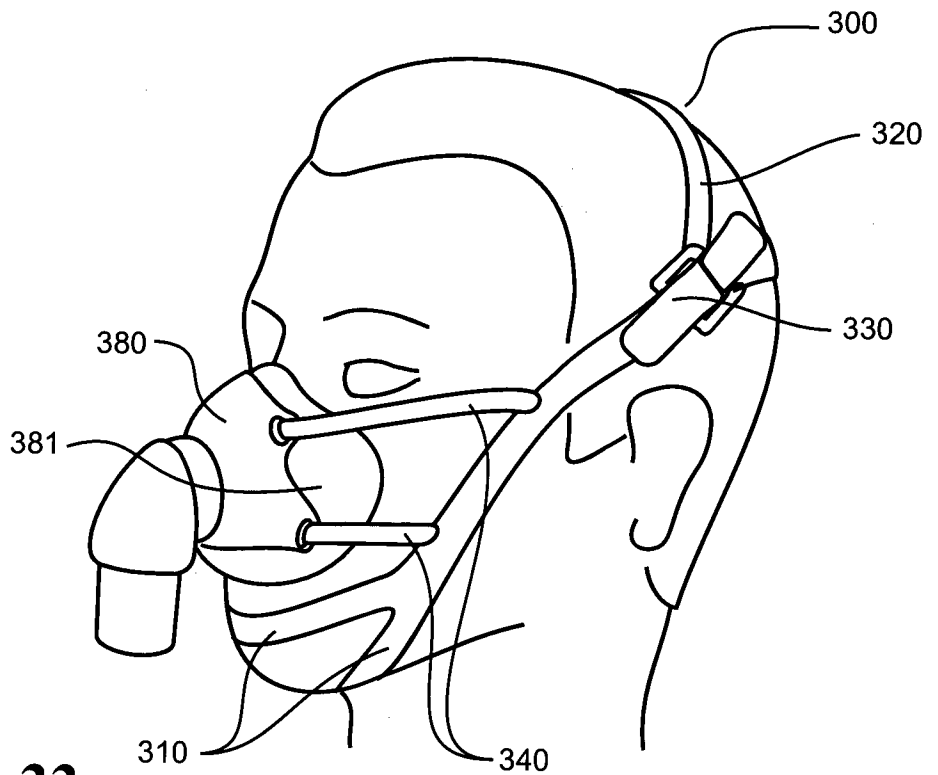


FIGURE 33

26/47

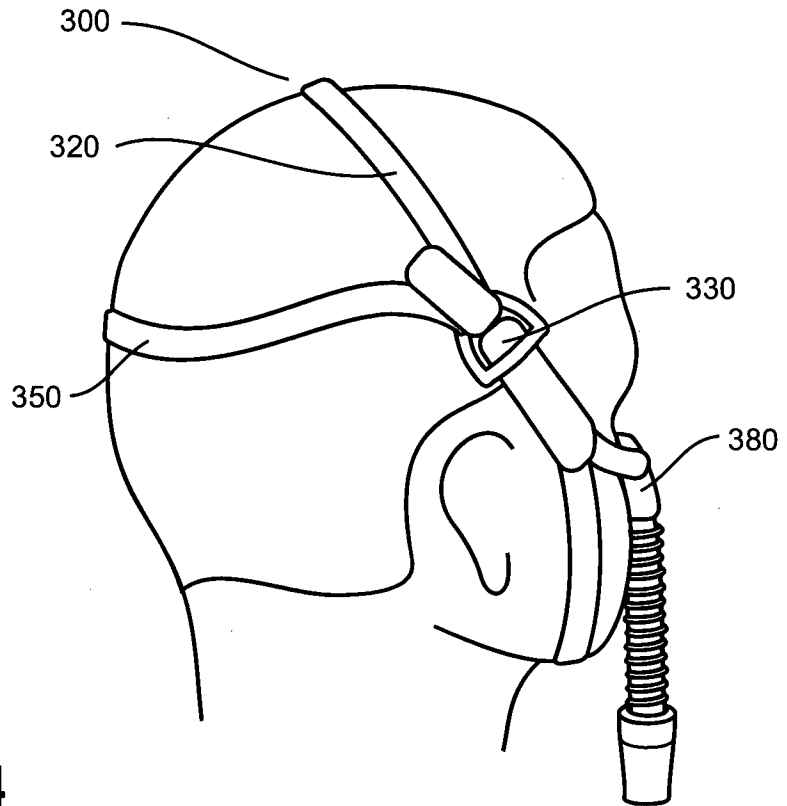


FIGURE 34

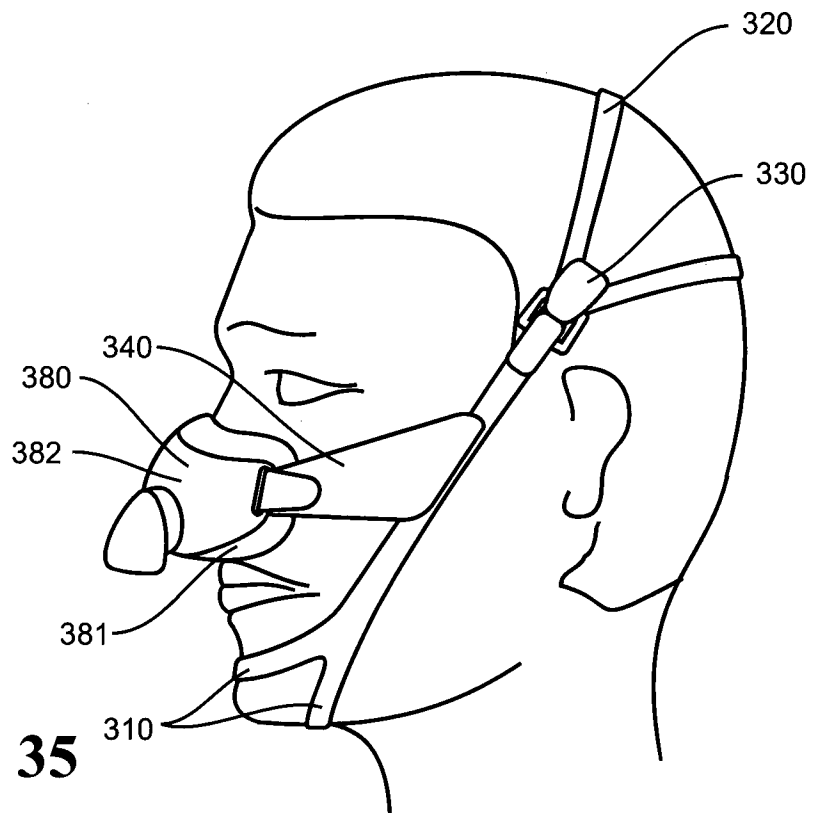


FIGURE 35



27/47

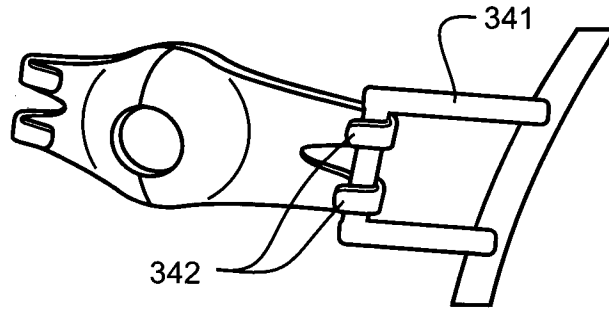


FIGURE 36

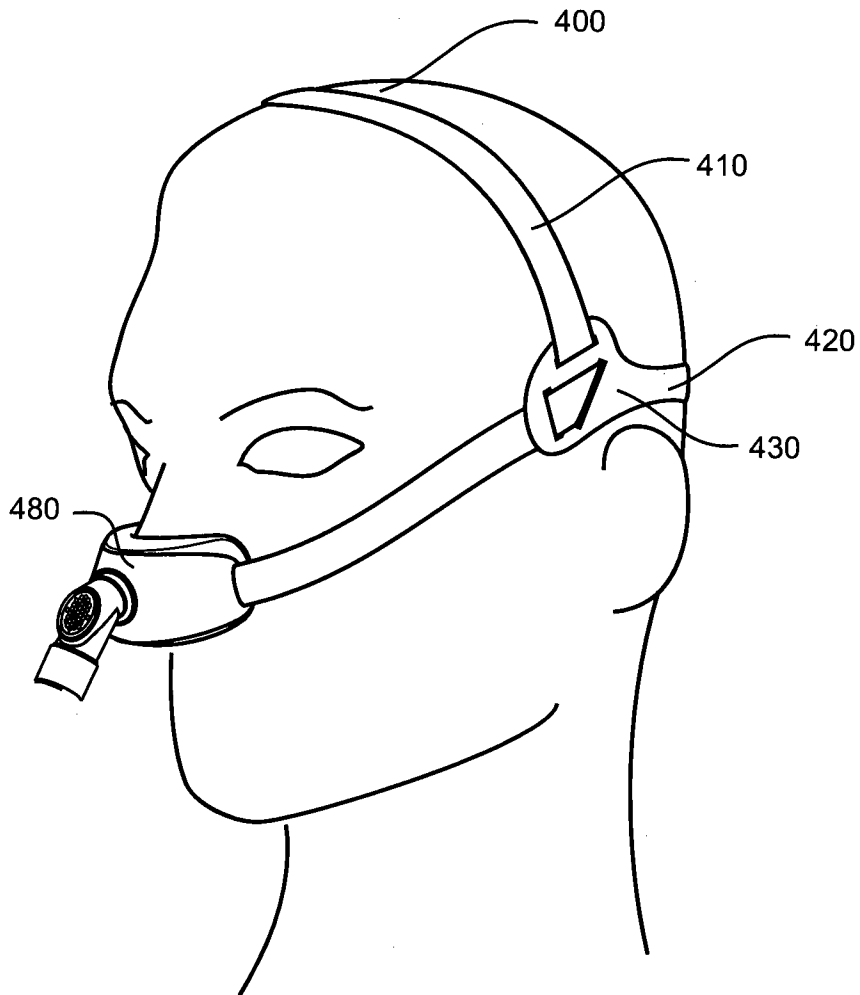


FIGURE 37

28/47

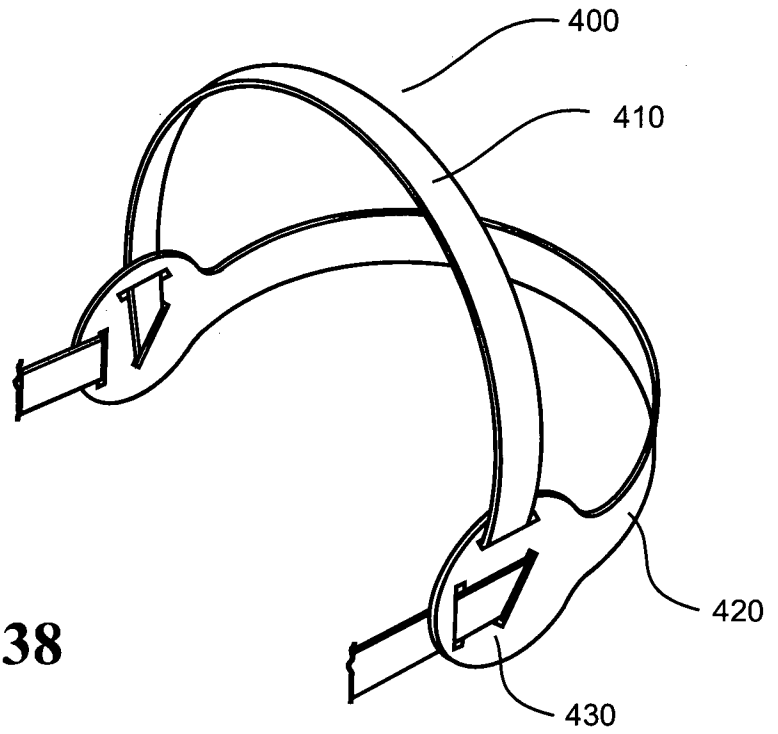


FIGURE 38

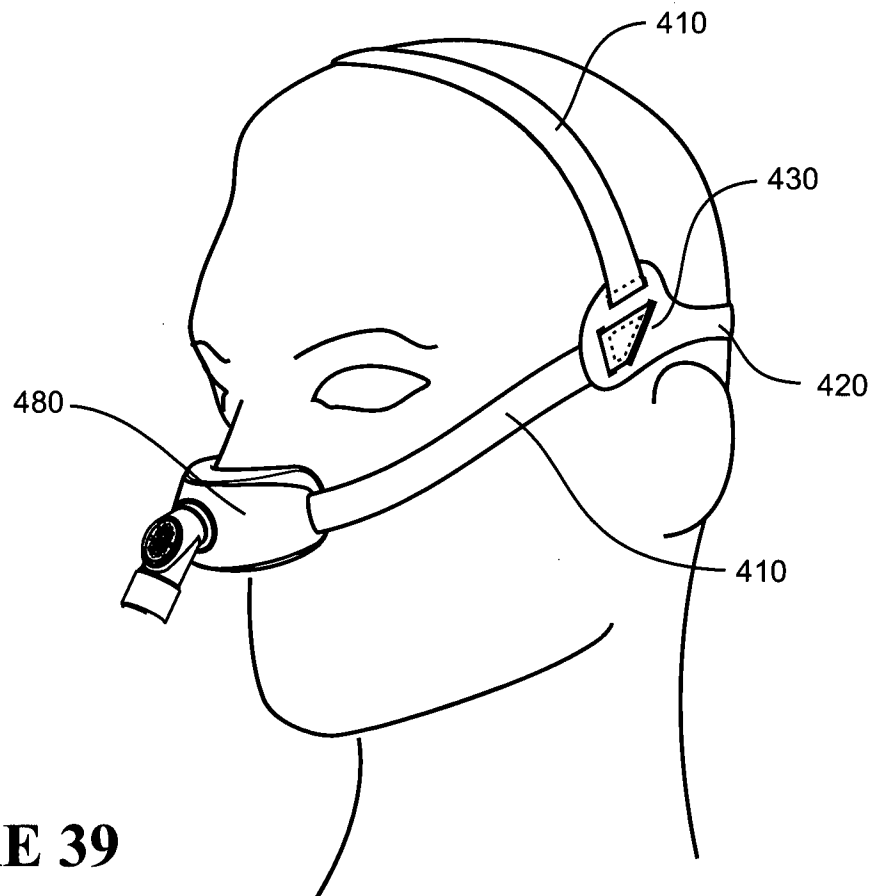


FIGURE 39

29/47

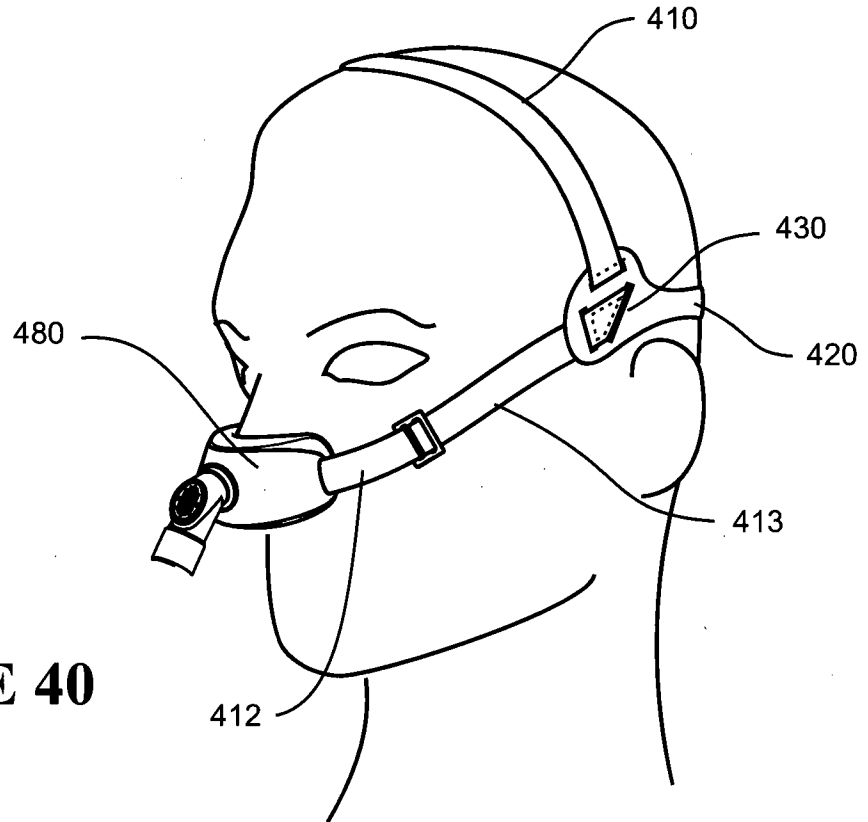


FIGURE 40

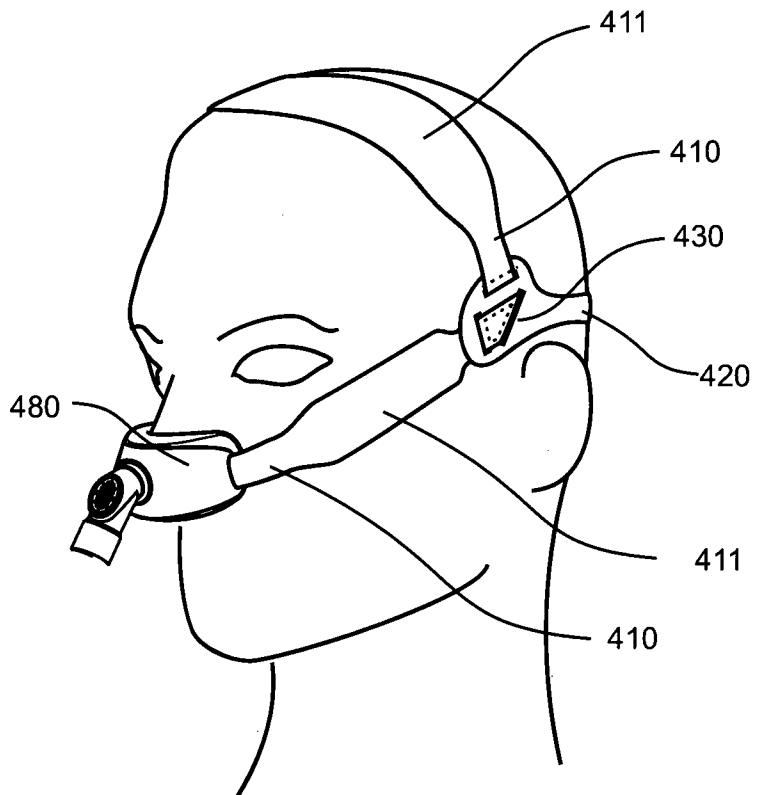


FIGURE 41

30/47

FIGURE 42

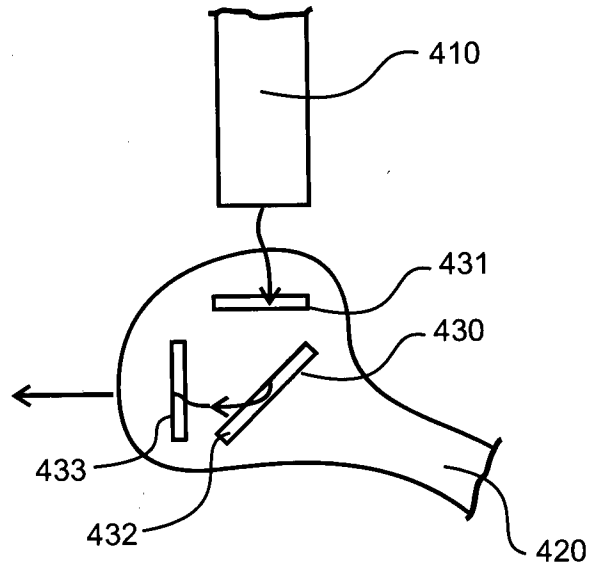


FIGURE 43



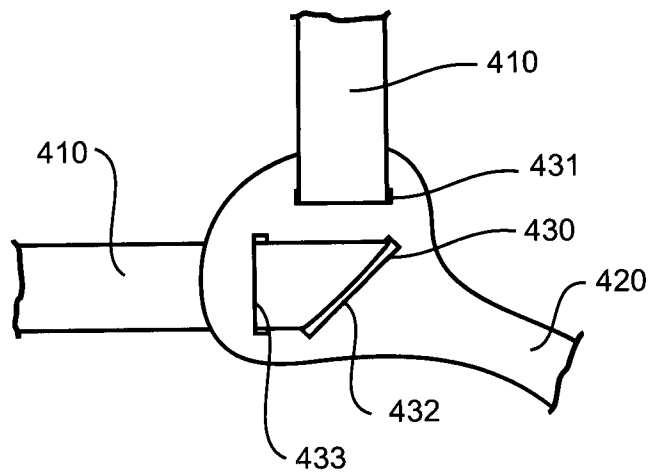



FIGURE 44

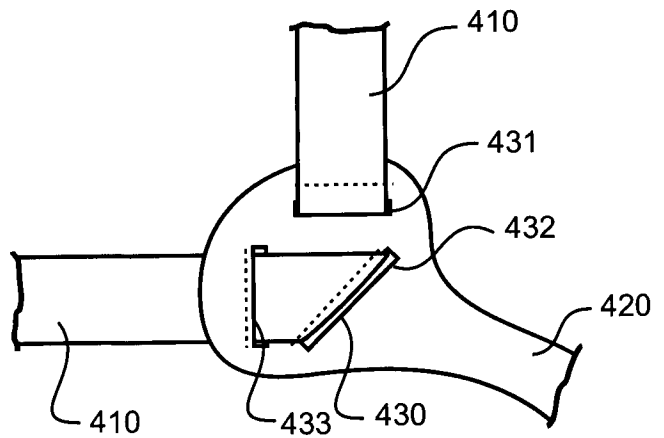


**31/47**

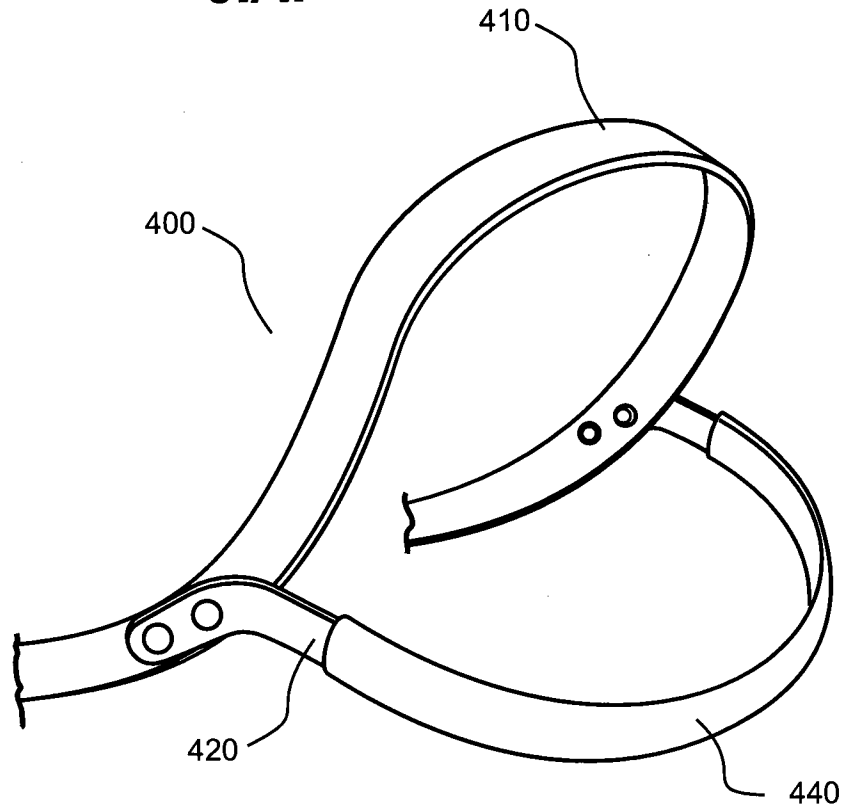

**FIGURE 45**

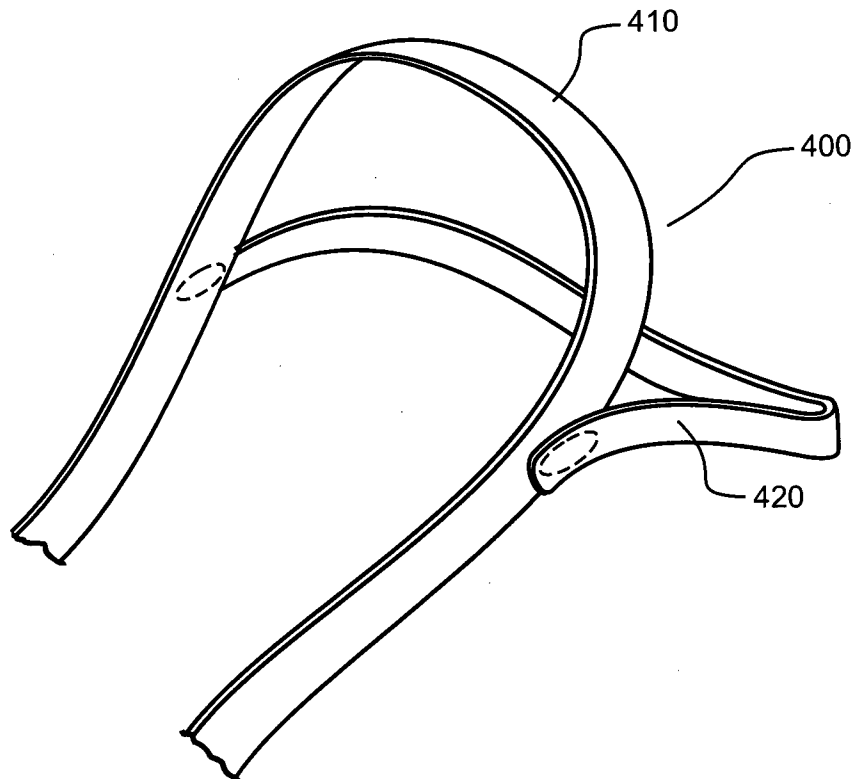


**FIGURE 46**

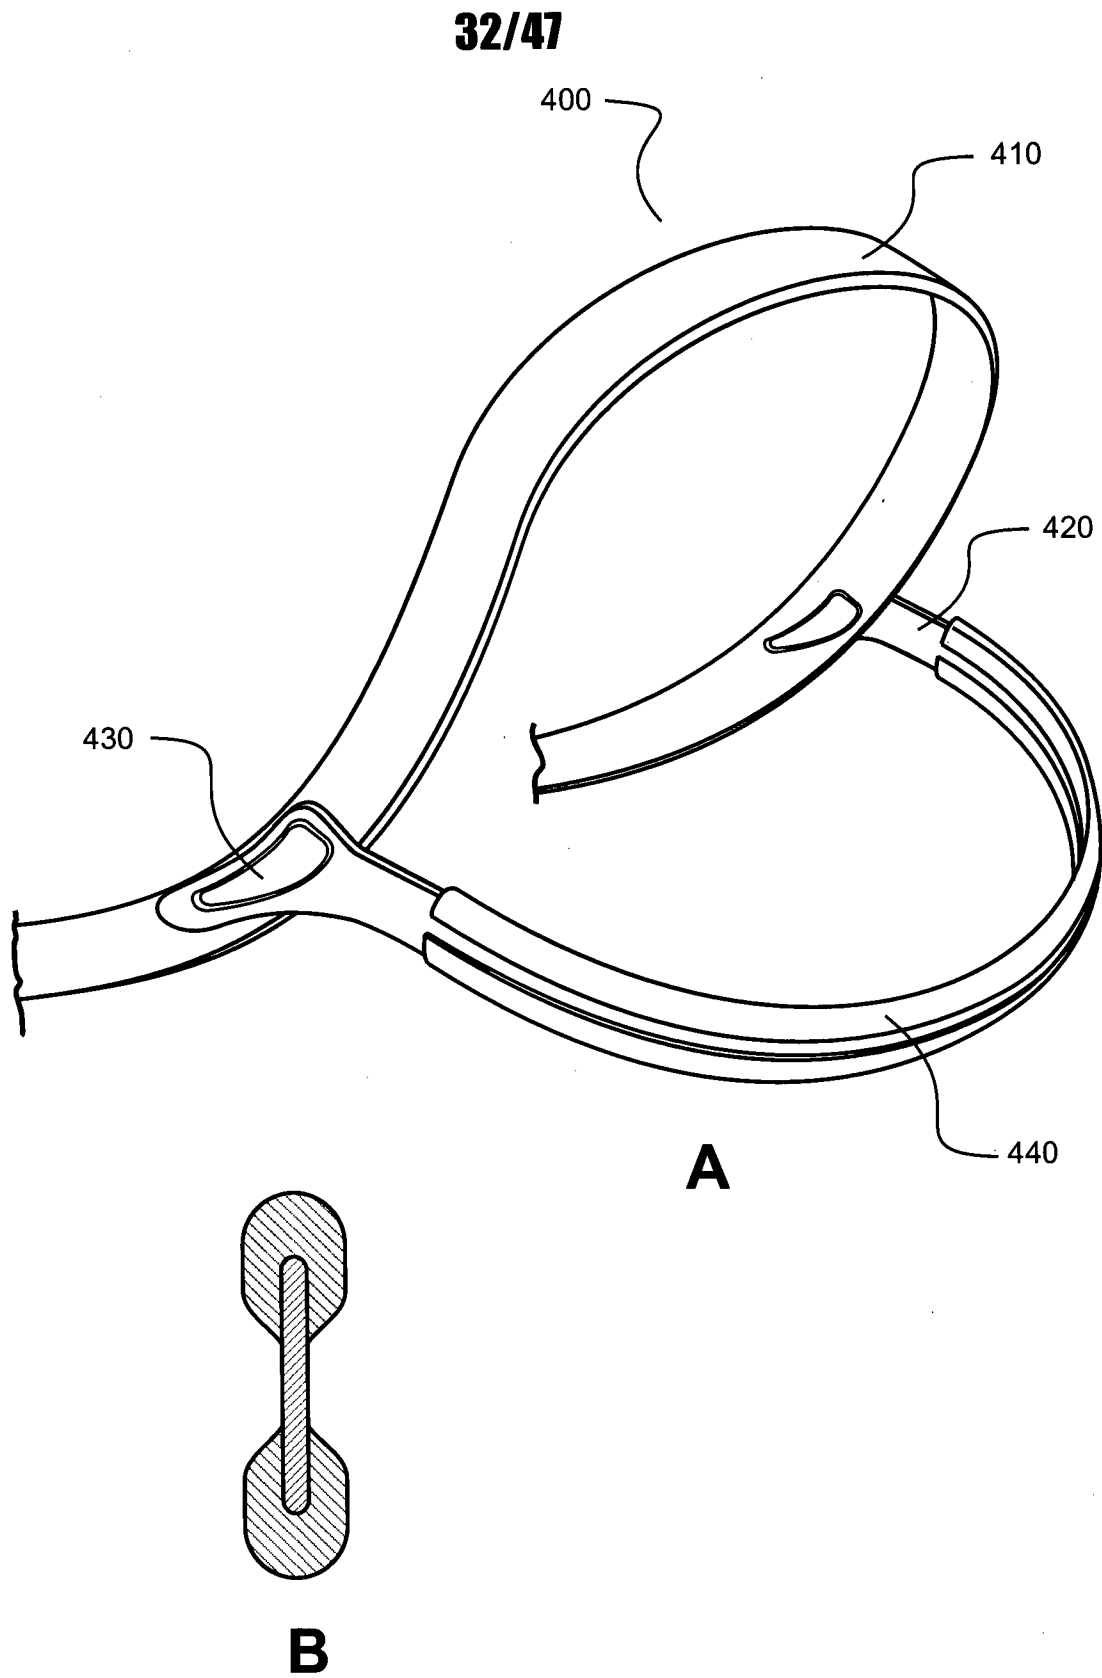


**FIGURE 47**

**33/47**

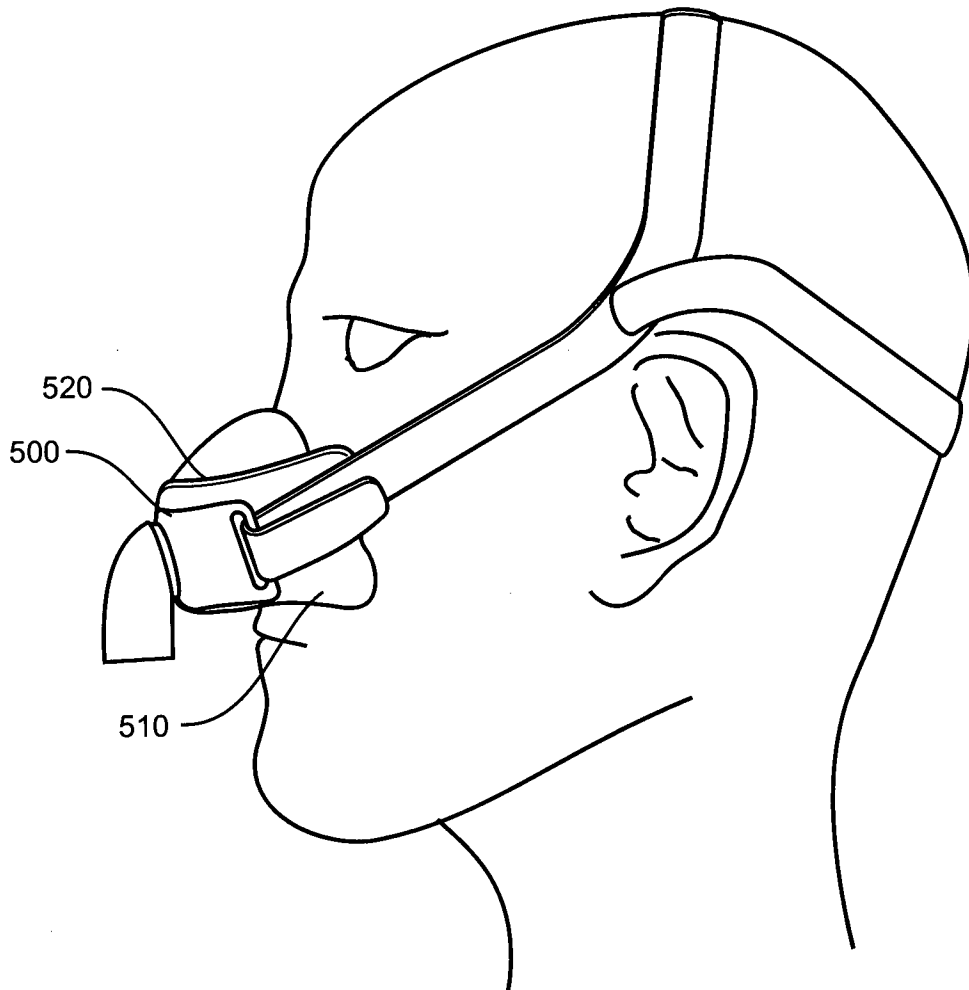


**FIGURE 48**

**34/47**

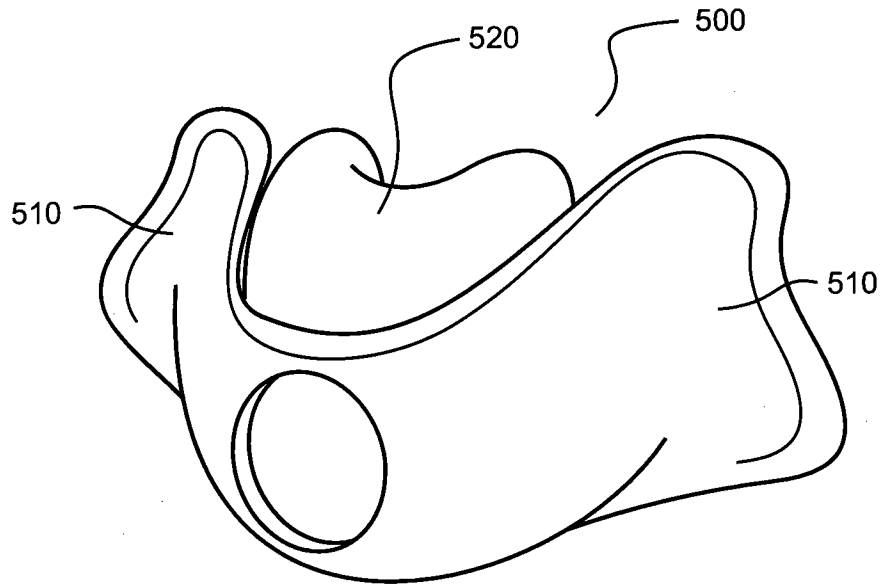


**FIGURE 49**

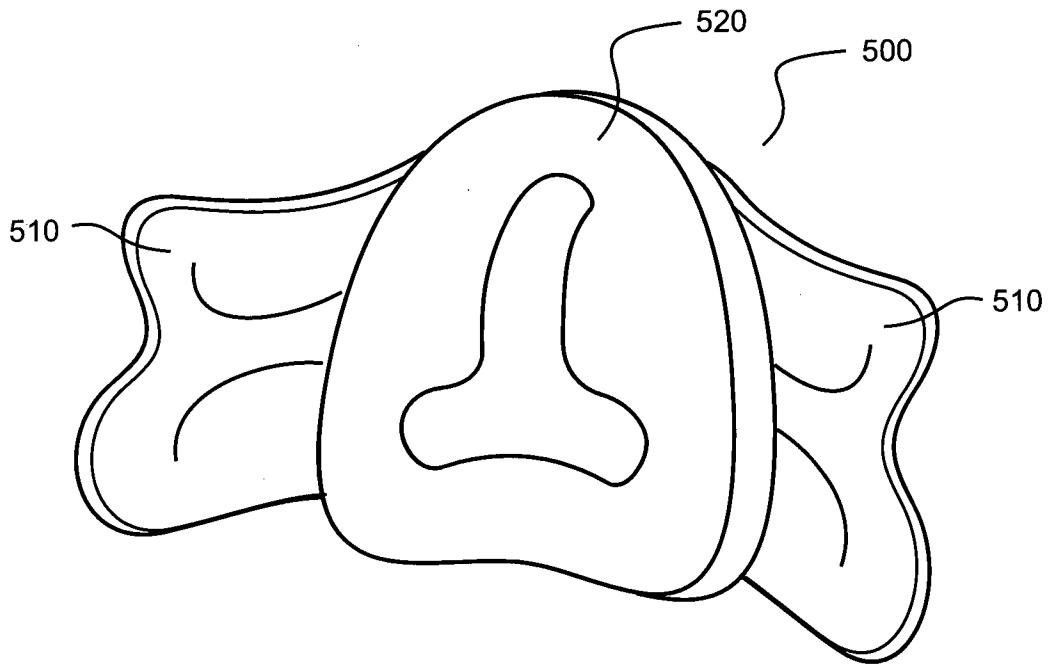


**FIGURE 50**




**35/47**

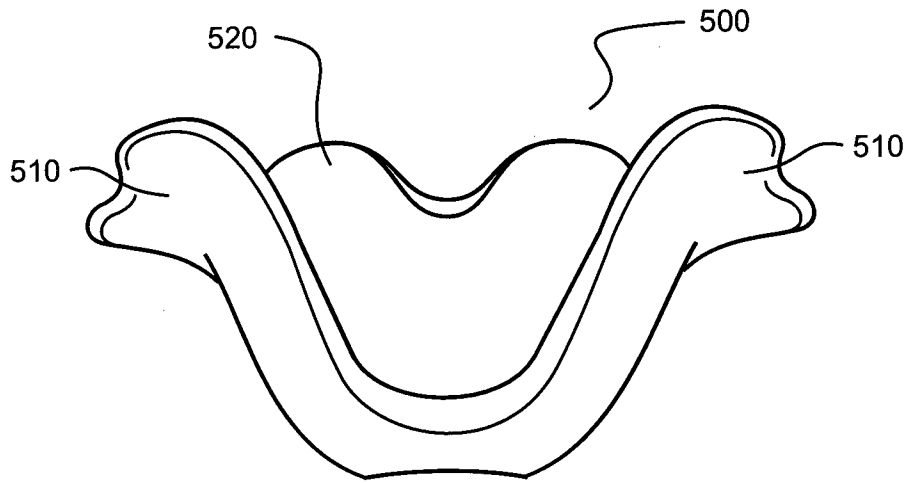

**FIGURE 51**

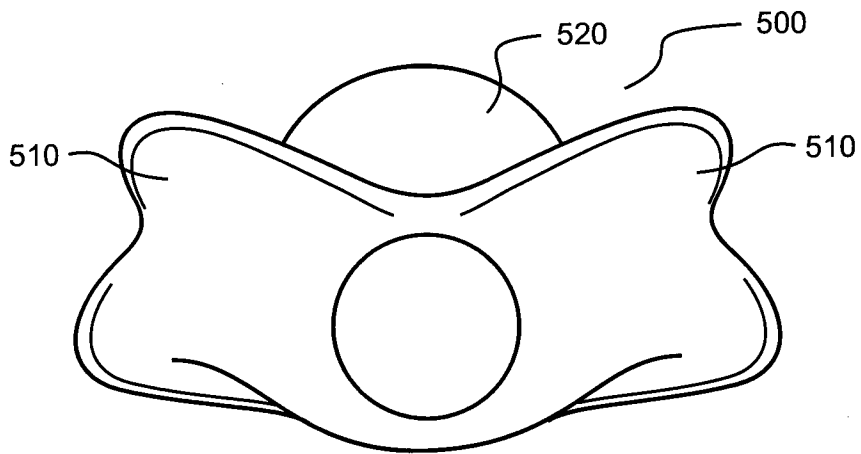


**FIGURE 52**

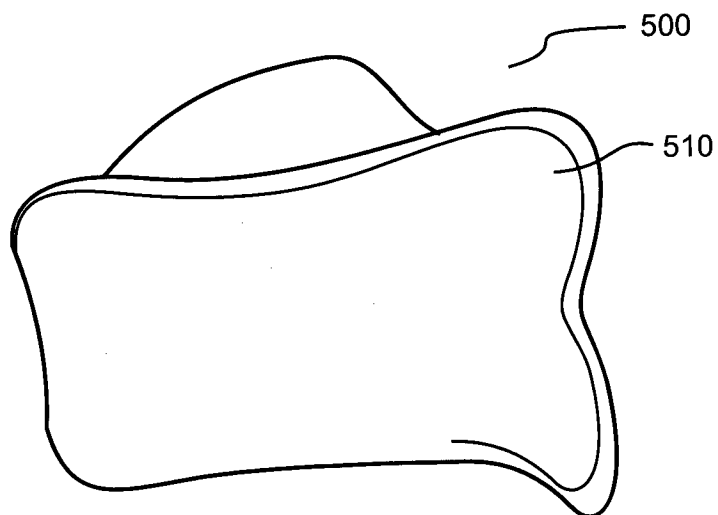


**FIGURE 53**


**36/47**

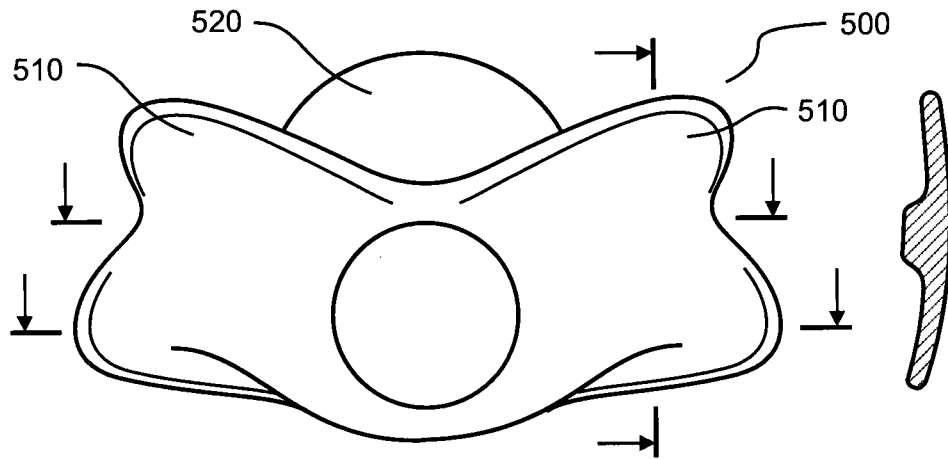

**FIGURE 54**

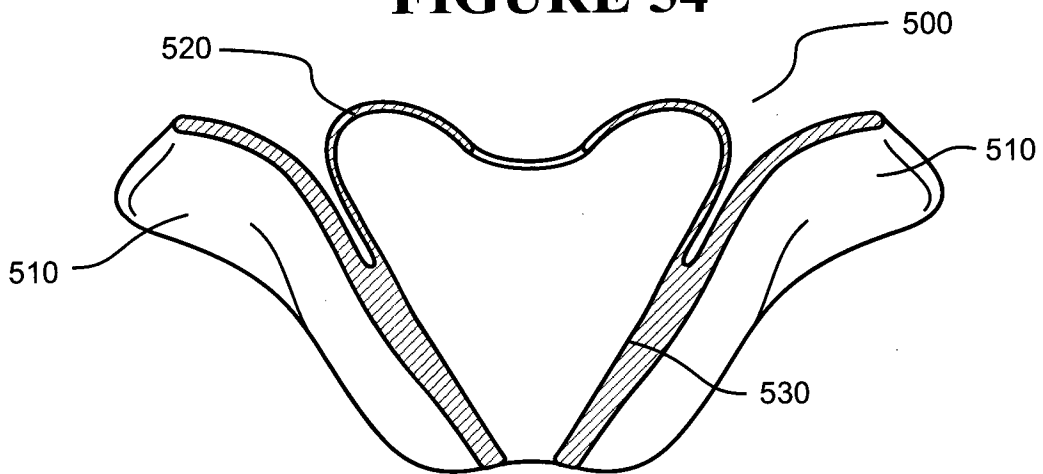


**FIGURE 55**

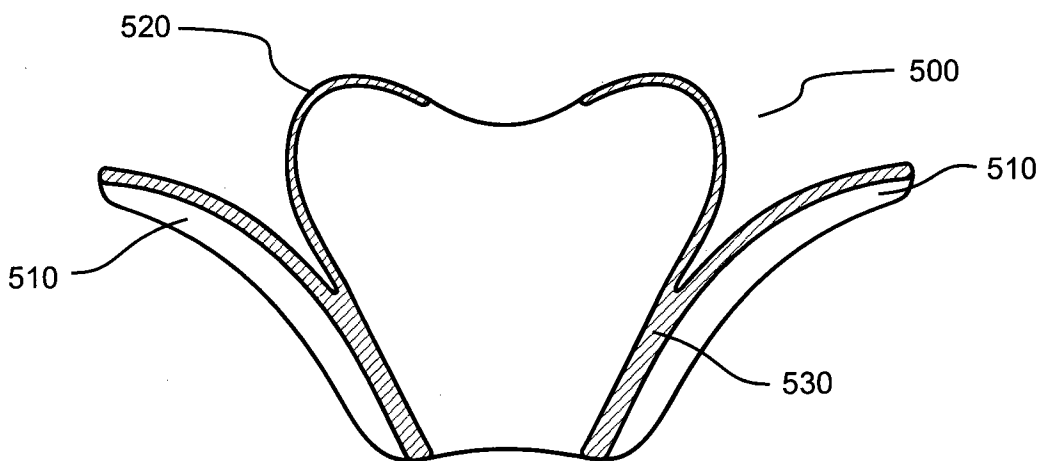


**FIGURE 56**


**37/47**

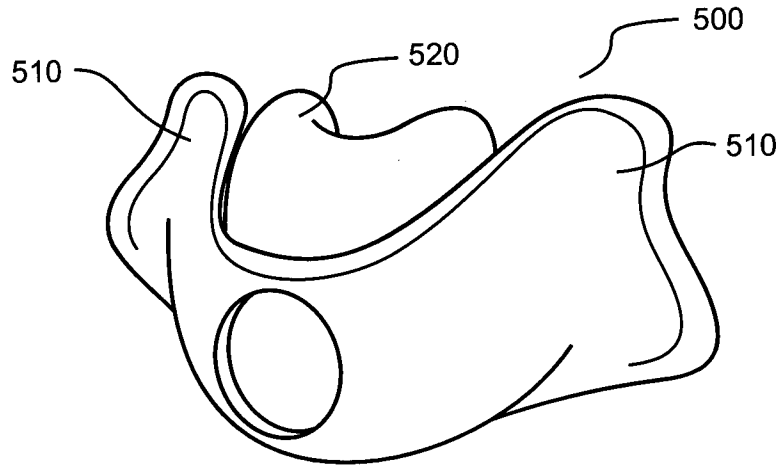

**FIGURE 57**

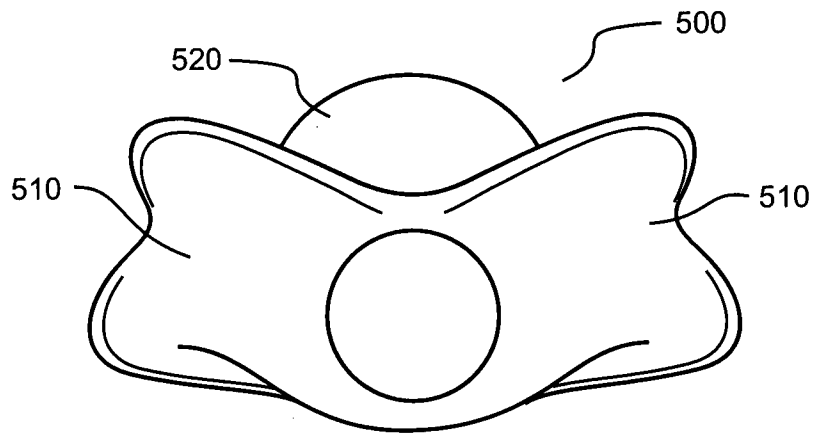


**FIGURE 58**

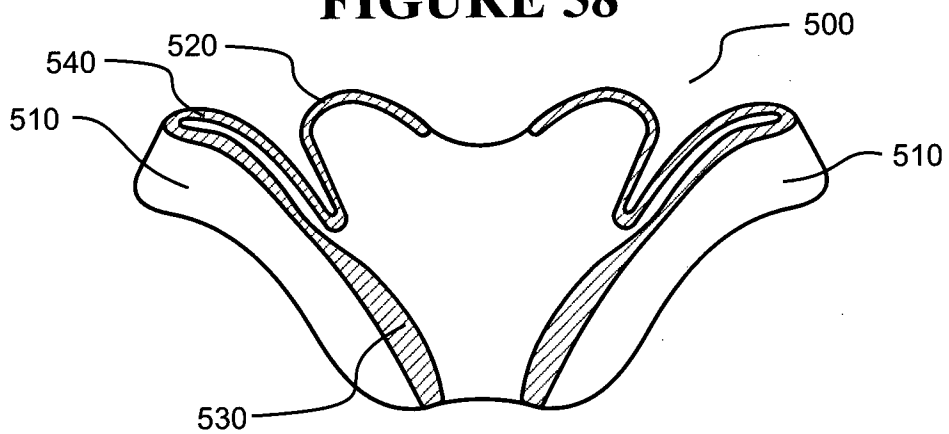


**FIGURE 59**

**38/47**

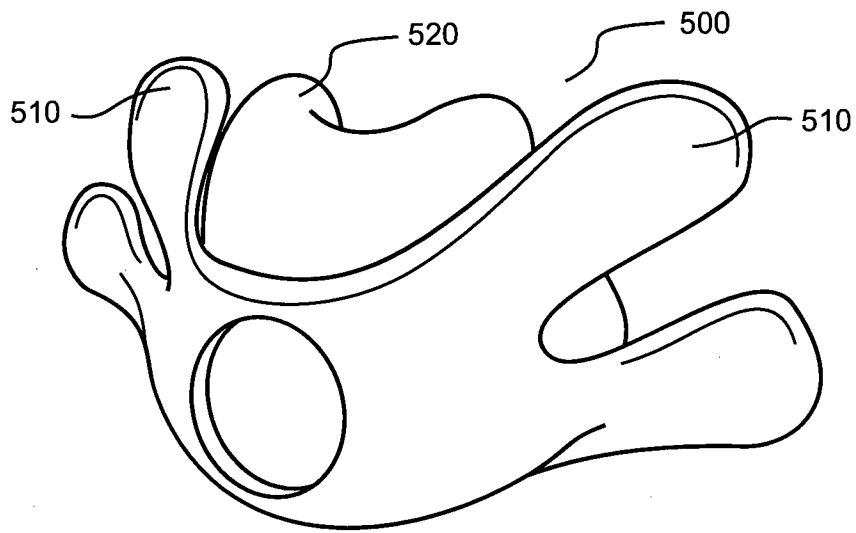


**FIGURE 60**

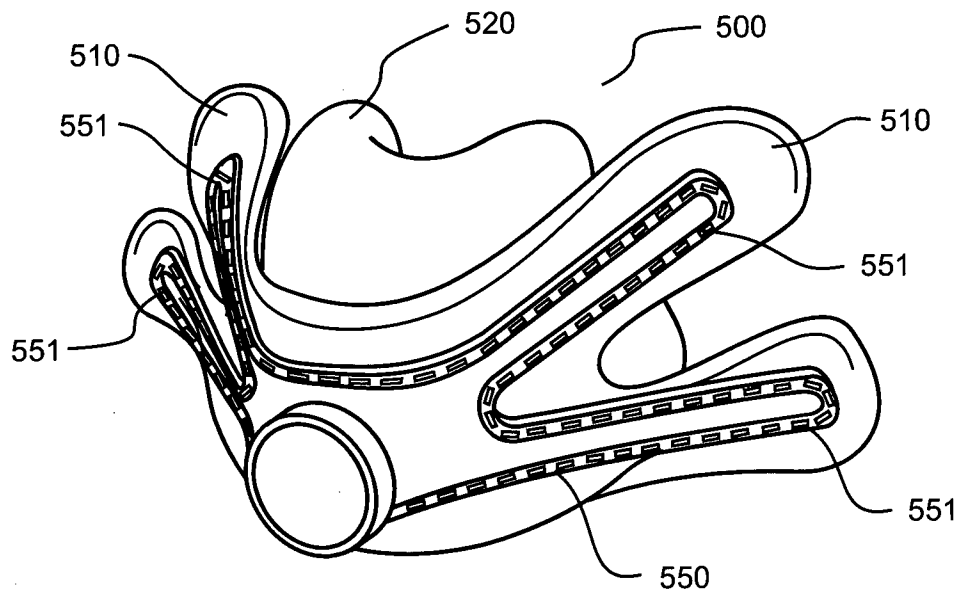

**FIGURE 61**

**39/47**

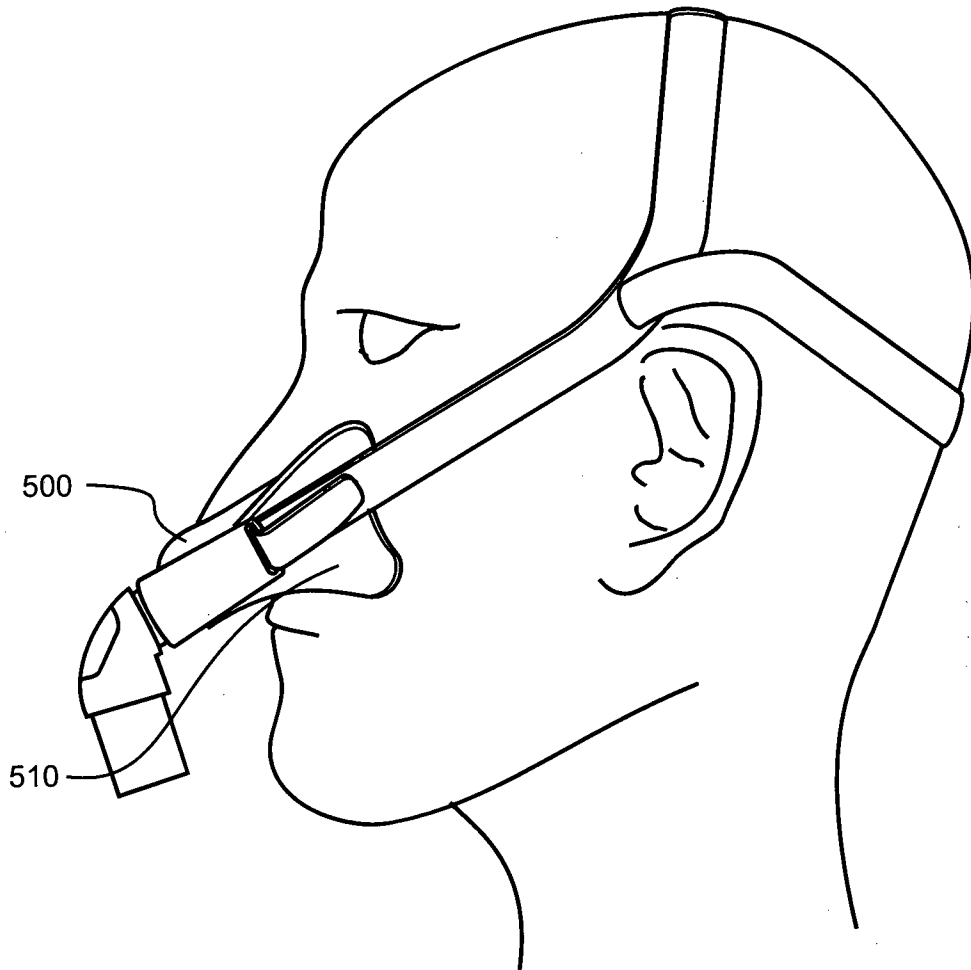

**FIGURE 62**

40/47

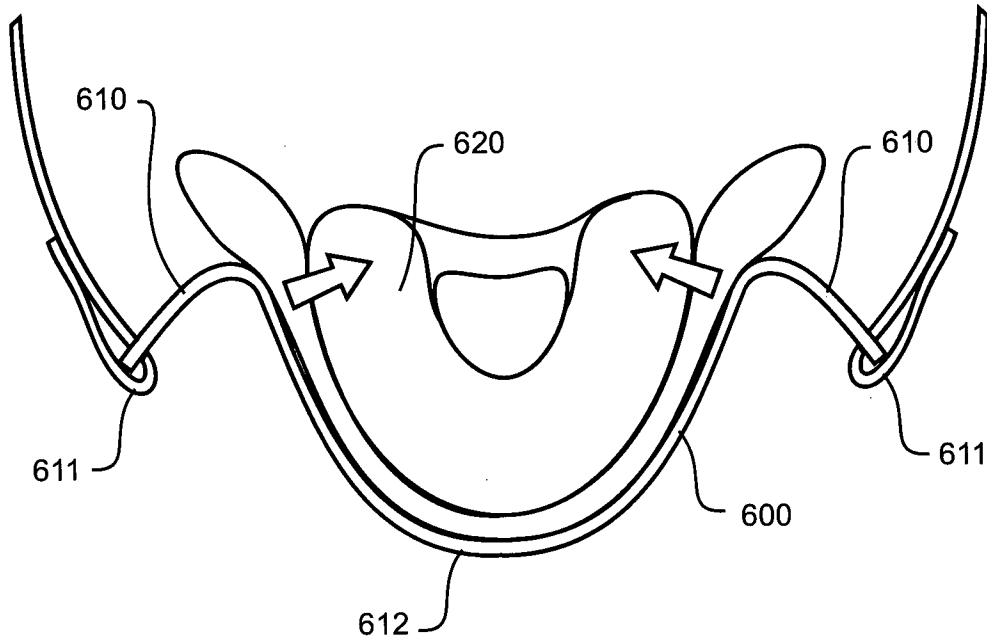


FIGURE 63

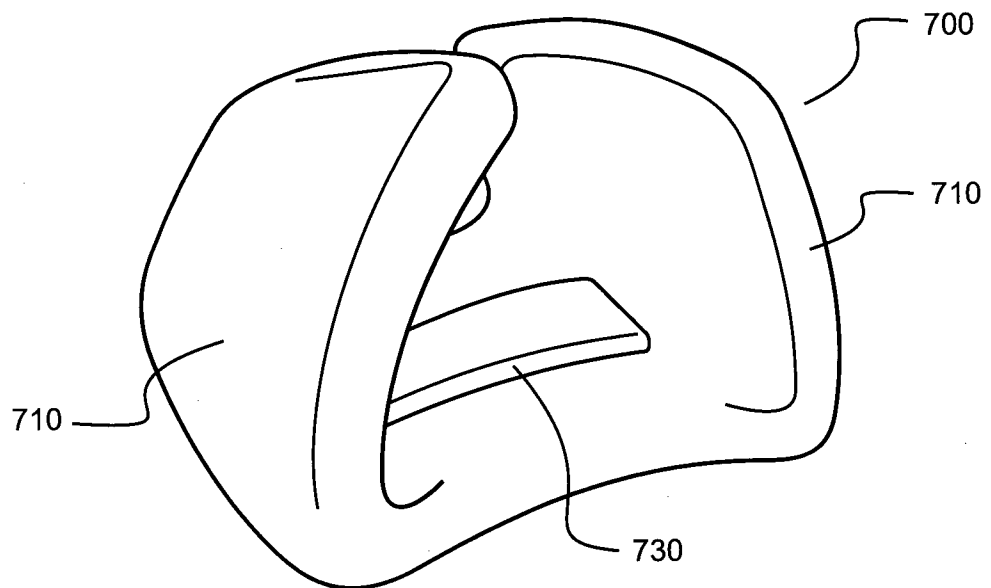


FIGURE 64

41/47

FIGURE 65

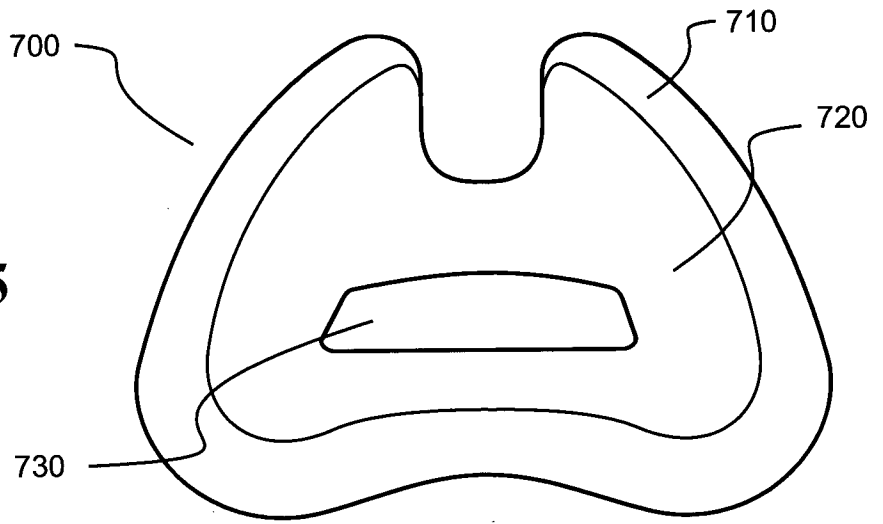


FIGURE 66



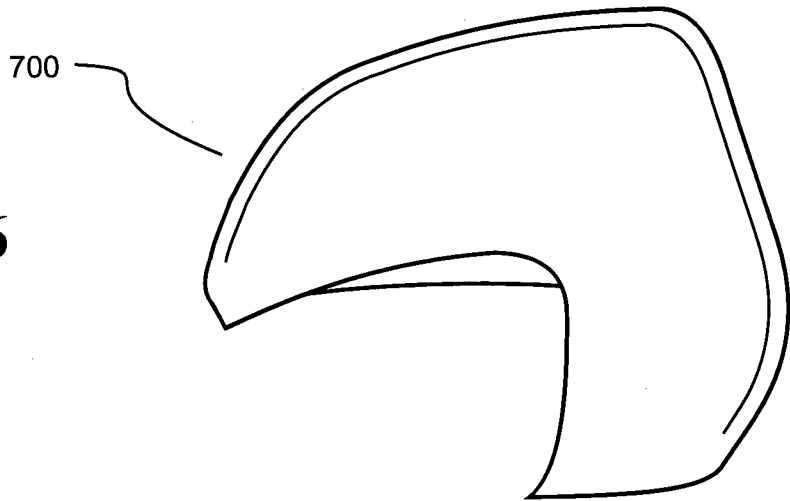


FIGURE 67

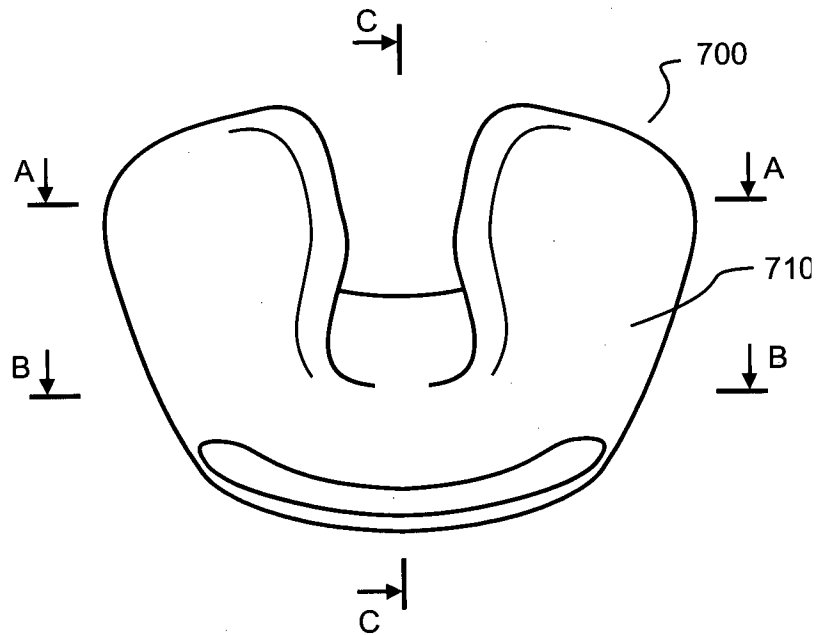


**42/47**


**FIGURE 68**

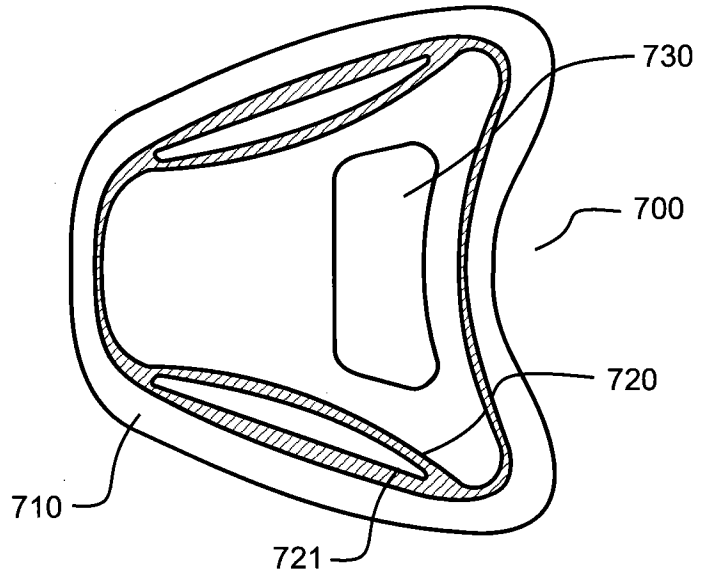

**FIGURE 69**

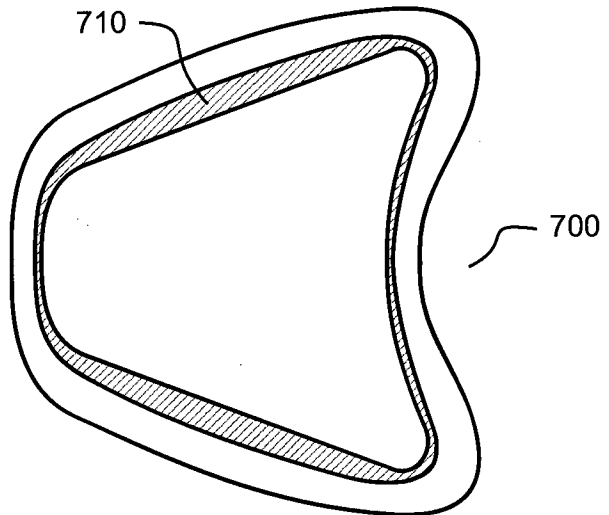


**FIGURE 70**

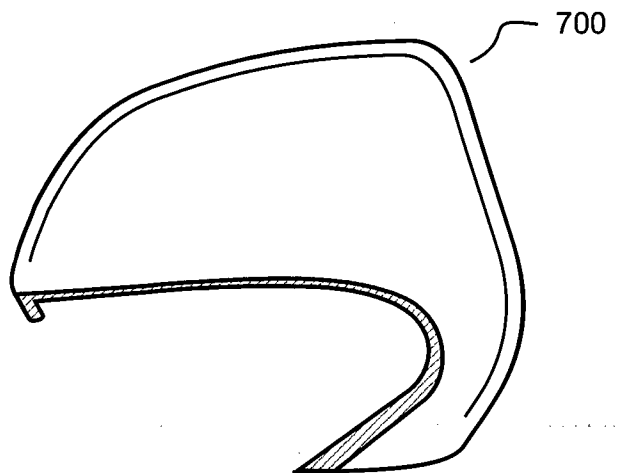




43/47


**FIGURE 71**

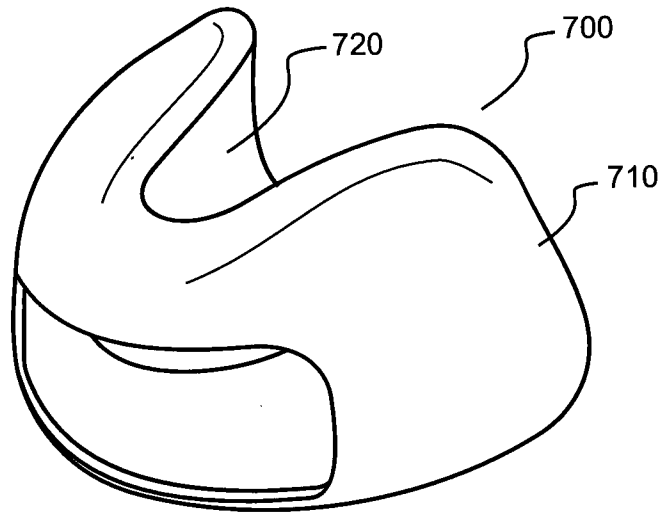

**FIGURE 72**

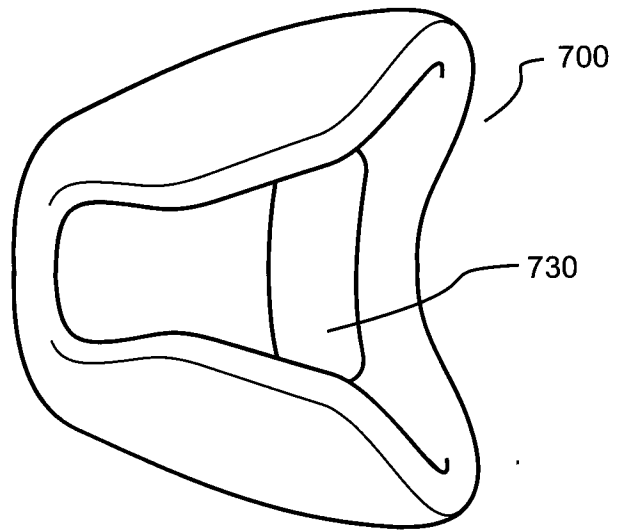

**FIGURE 73**

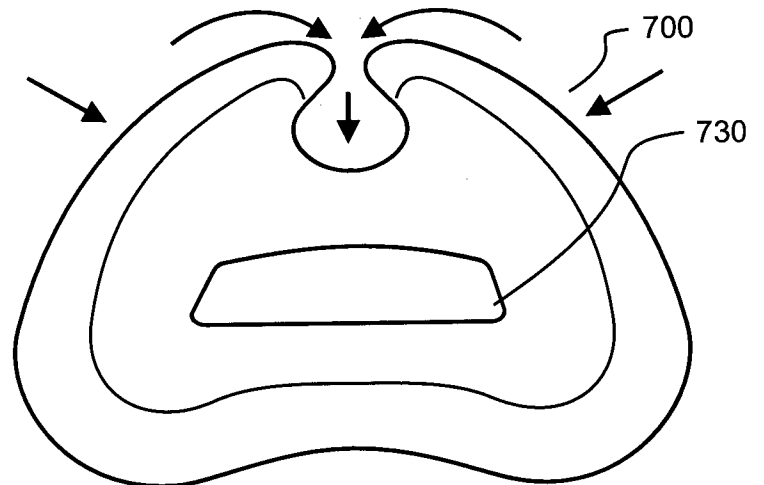

44/47

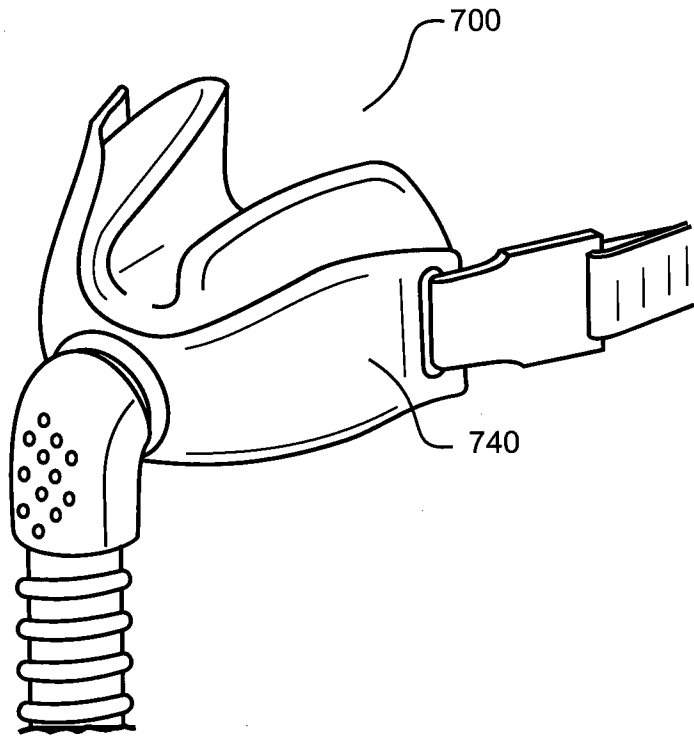


FIGURE 74


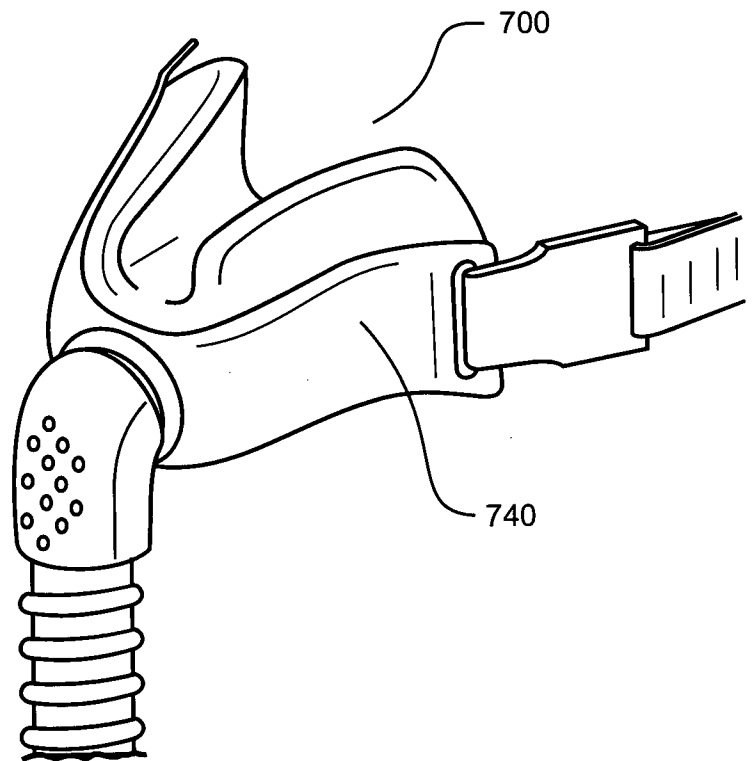



FIGURE 75

45/47


**FIGURE 76**

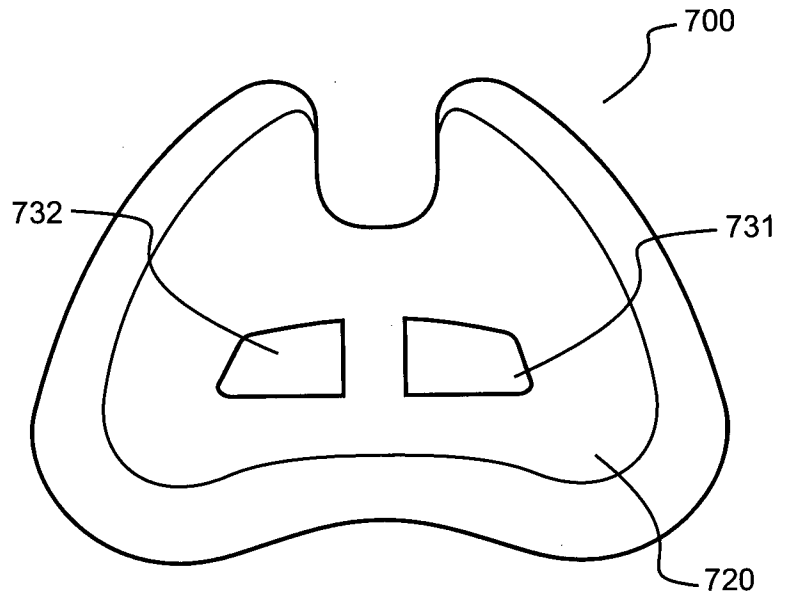

**FIGURE 77**

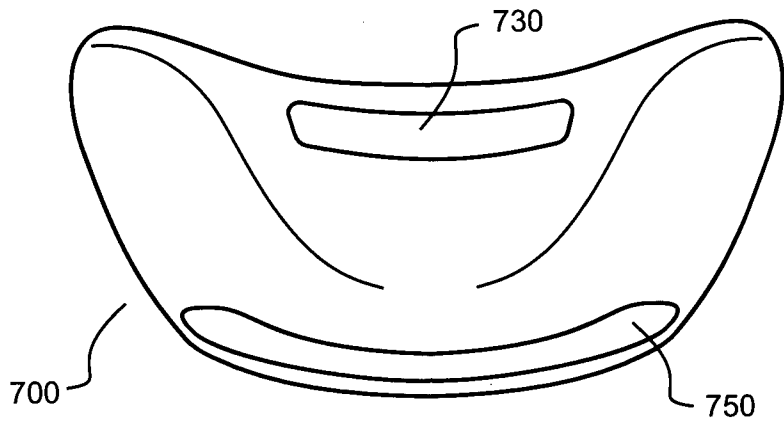


**FIGURE 78**

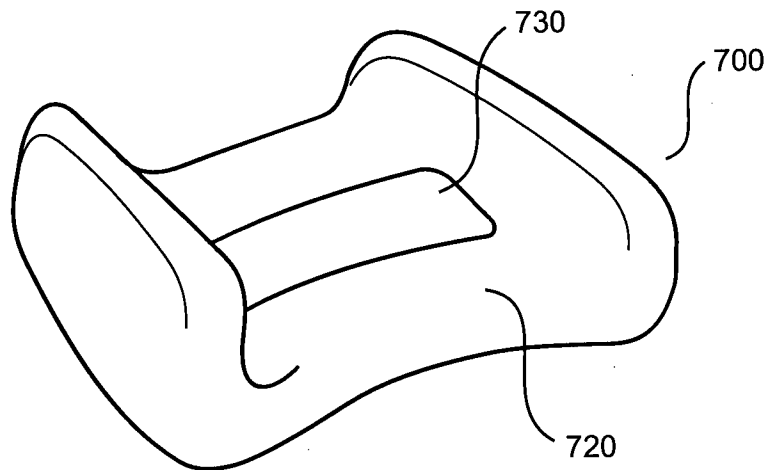


46/47


**FIGURE 79**

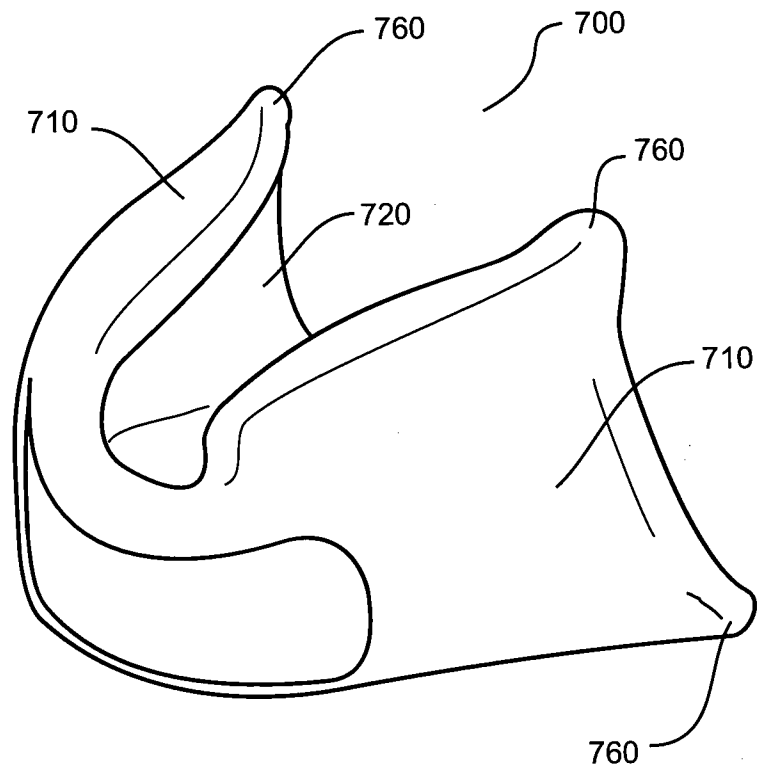

**FIGURE 80**

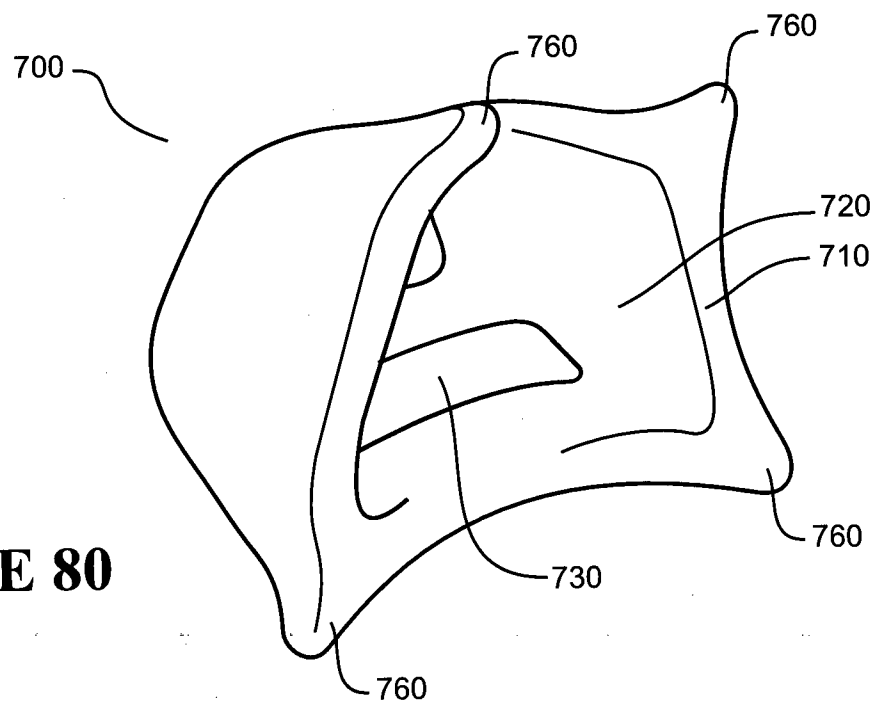


47/47

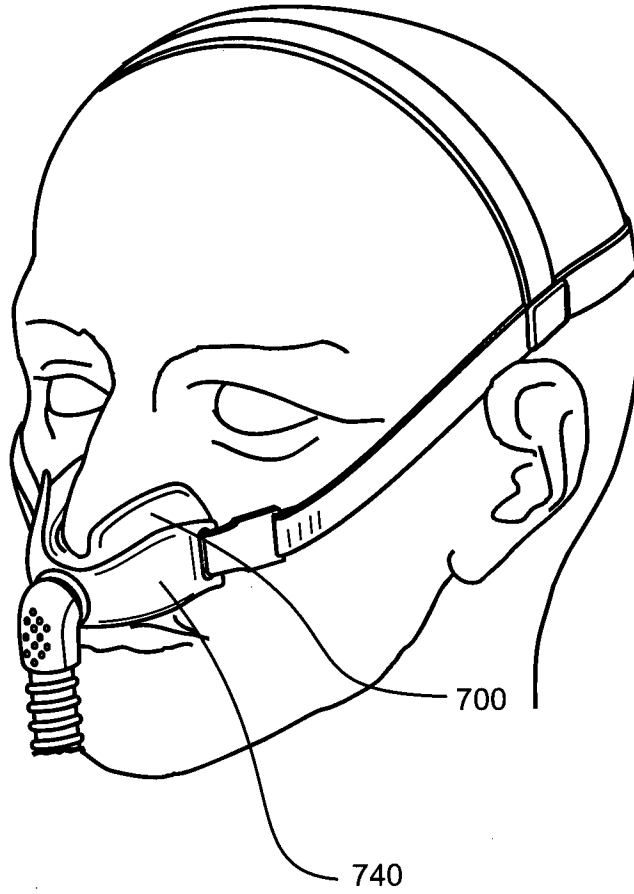

**FIGURE 81**

**FIGURE 82**

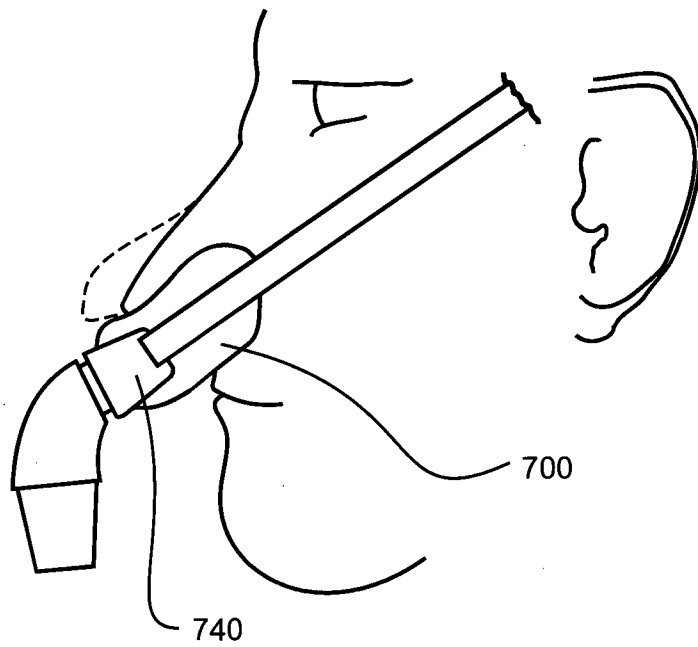

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ2013/000211

## A. CLASSIFICATION OF SUBJECT MATTER

**A61M 16/06 (2006.01) A62B 18/02 (2006.01)**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI: A61M16/-, A62B18/-, &amp; keywords: nasal, nose, wing, extension, side, lateral, membrane, cushion, stabilise, stiff, rigid, thick, contact, seal and like terms.

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search  
4 April 2014Date of mailing of the international search report  
04 April 2014

## Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
Email address: pct@ipaaustralia.gov.au  
Facsimile No.: +61 2 6283 7999

## Authorised officer

Ariane Le Guen  
AUSTRALIAN PATENT OFFICE  
(ISO 9001 Quality Certified Service)  
Telephone No. 0262832060

<b>INTERNATIONAL SEARCH REPORT</b>		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		<b>PCT/NZ2013/000211</b>
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/131189 A1 (FISHER & PAYKEL HEALTHCARE LIMITED) 18 November 2010 page 13 lines 27-29; page 14 lines 1-2; page 15 lines 7-8, lines 23-25; page 16 lines 14-18; page 19 lines 10-11; page 19 line 32-page 20 line 1; page 20 lines 5-6, line 28; Fig. 4a-4c, fig. 7a, 8, 9a, 28	1-52, 55
X	WO 2007/022562 A1 (COMPUMEDICS LIMITED) 01 March 2007 page 7 lines 16-20; page 9, lines 11-17; page 10 lines 6-10; lines 19-29; page 11 lines 21-27; page 12 lines 11-15; see page 16, line 12-13; page 19 line 33 - page 20 line 2; Fig. 2, 4, 4b, 5a, 7b	1-52, 55
A	WO 2009/052560 A1 (RESMED LTD) 30 April 2009 The Whole Document	1-52, 55
A	WO 2010/135785 A1 (RESMED LTD) 02 December 2010 The Whole Document	1-52, 55

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/NZ2013/000211	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
WO 2010/131189 A1	18 Nov 2010	AU 2010246985 A1	01 Dec 2011
		CA 2761741 A1	18 Nov 2010
		CA 2780310 A1	19 May 2011
		CN 102648018 A	22 Aug 2012
		CN 102892450 A	23 Jan 2013
		EP 2303378 A1	06 Apr 2011
		EP 2429623 A1	21 Mar 2012
		EP 2498853 A1	19 Sep 2012
		GB 2482092 A	18 Jan 2012
		GB 2494493 A	13 Mar 2013
		GB 2494493 B	25 Sep 2013
		GB 2506304 A	26 Mar 2014
		JP 2012526592 A	01 Nov 2012
		JP 2013510641 A	28 Mar 2013
		US 2011146685 A1	23 Jun 2011
WO 2007/022562 A1	01 Mar 2007	WO 2009139647 A1	19 Nov 2009
		WO 2010131189 A1	18 Nov 2010
		WO 2011059346 A1	19 May 2011
		AU 2006284507 B2	25 Aug 2011
		CA 2616496 A1	01 Mar 2007
		CN 101242866 A	13 Aug 2008
		CN 101242866 B	04 May 2011
		EP 1922103 A1	21 May 2008
		HK 1123513 A1	16 Dec 2011
		JP 2009504354 A	05 Feb 2009
		JP 4966307 B2	04 Jul 2012
		KR 20080038225 A	02 May 2008
		NZ 565243 A	26 Mar 2010
		NZ 581715 A	26 Mar 2010
		US 2008190432 A1	14 Aug 2008
WO 2007022562 A1	01 Mar 2007		
WO 2009/052560 A1	30 Apr 2009	AU 2007278766 B2	05 Dec 2013
		AU 2008316306 A1	30 Apr 2009
		CN 101495170 A	29 Jul 2009
		CN 101495170 B	29 May 2013

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.  
Form PCT/ISA/210 (Family Annex)(July 2009)



INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/NZ2013/000211	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		CN 101516427 A	26 Aug 2009
		CN 101516427 B	08 Aug 2012
		CN 101687085 A	31 Mar 2010
		CN 101687085 B	21 Aug 2013
		CN 101951984 A	19 Jan 2011
		CN 102698349 A	03 Oct 2012
		CN 103252008 A	21 Aug 2013
		CN 103418070 A	04 Dec 2013
		CN 103638586 A	19 Mar 2014
		EP 2046430 A1	15 Apr 2009
		EP 2051760 A1	29 Apr 2009
		EP 2051760 B1	12 Mar 2014
		EP 2083897 A1	05 Aug 2009
		EP 2101855 A1	23 Sep 2009
		EP 2101855 B1	21 Aug 2013
		EP 2425868 A1	07 Mar 2012
		EP 2428240 A1	14 Mar 2012
		EP 2428241 A1	14 Mar 2012
		EP 2481434 A2	01 Aug 2012
		EP 2481435 A2	01 Aug 2012
		JP 2009544371 A	17 Dec 2009
		JP 2009544372 A	17 Dec 2009
		JP 2010512193 A	22 Apr 2010
		JP 2011500229 A	06 Jan 2011
		JP 2013176631 A	09 Sep 2013
		JP 2013223805 A	31 Oct 2013
		JP 2013230397 A	14 Nov 2013
		JP 2014014718 A	30 Jan 2014
		NZ 567432 A	30 Mar 2012
		NZ 575405 A	28 Sep 2012
		NZ 584110 A	25 Jan 2013
		NZ 599372 A	25 Oct 2013
		US 2008060649 A1	13 Mar 2008
		US 8297285 B2	30 Oct 2012
		US 2012132209 A1	31 May 2012
		US 8573201 B2	05 Nov 2013

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.  
Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/NZ2013/000211	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2010307502 A1	09 Dec 2010
		US 8636007 B2	28 Jan 2014
		US 2008047560 A1	28 Feb 2008
		US 2009217929 A1	03 Sep 2009
		US 2009223518 A1	10 Sep 2009
		US 2010018534 A1	28 Jan 2010
		US 2010229868 A1	16 Sep 2010
		US 2014053844 A1	27 Feb 2014
		WO 2008011682 A1	31 Jan 2008
		WO 2008011683 A1	31 Jan 2008
		WO 2008070929 A1	19 Jun 2008
		WO 2009052560 A1	30 Apr 2009
		WO 2011014931 A1	10 Feb 2011
WO 2010/135785 A1	02 Dec 2010	AU 2010251884 B2	15 Aug 2013
		AU 2010256351 A1	08 Dec 2011
		AU 2010256351 B2	29 Aug 2013
		AU 2013206439 A1	11 Jul 2013
		AU 2013257413 A1	28 Nov 2013
		AU 2013257426 A1	28 Nov 2013
		CN 102458547 A	16 May 2012
		CN 102458548 A	16 May 2012
		CN 102725017 A	10 Oct 2012
		EP 2435120 A1	04 Apr 2012
		EP 2437837 A1	11 Apr 2012
		EP 2501425 A1	26 Sep 2012
		JP 2012527908 A	12 Nov 2012
		JP 2012528608 A	15 Nov 2012
		JP 2013511297 A	04 Apr 2013
		NZ 597254 A	20 Dec 2013
		US 2012067349 A1	22 Mar 2012
		US 2012138061 A1	07 Jun 2012
		US 2012222680 A1	06 Sep 2012
		WO 2010135785 A1	02 Dec 2010
		WO 2010139014 A1	09 Dec 2010
		WO 2011060479 A1	26 May 2011

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.  
Form PCT/ISA/210 (Family Annex)(July 2009)

<b>INTERNATIONAL SEARCH REPORT</b>		International application No.	
Information on patent family members		<b>PCT/NZ2013/000211</b>	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
<b>Patent Document/s Cited in Search Report</b>		<b>Patent Family Member/s</b>	
<b>Publication Number</b>	<b>Publication Date</b>	<b>Publication Number</b>	<b>Publication Date</b>
<b>End of Annex</b>			
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001. Form PCT/ISA/210 (Family Annex)(July 2009)			