

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 July 2002 (25.07.2002)

PCT


(10) International Publication Number
WO 02/058191 A2

- (51) International Patent Classification⁷: H01R
- (74) Agent: ZEITLER, Robert, J.; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532-1682 (US).
- (21) International Application Number: PCT/US02/01807
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 22 January 2002 (22.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/767,190 22 January 2001 (22.01.2001) US
- (71) Applicant: MOLEX INCORPORATED [US/US]; 2222 Wellington Court, Lisle, IL 60532-1282 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors: ZADEREJ, Victor; 35W822 Park Lane, St. Charles, IL 60175 (US). REGNIER, Kent; 541 South Grace Street, Lombard, IL 60148 (US). DUNHAM, David, E.; 600 Meyer Court, Aurora, IL 60506 (US). ALBERTS, Kevin; 1110 Darius Lane, Naperville, IL 60565 (US). BREARLEY, David, Jr.; 4060 Palmer Court, Naperville, IL 60564 (US).

Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: SHIELDED ELECTRICAL CONNECTOR

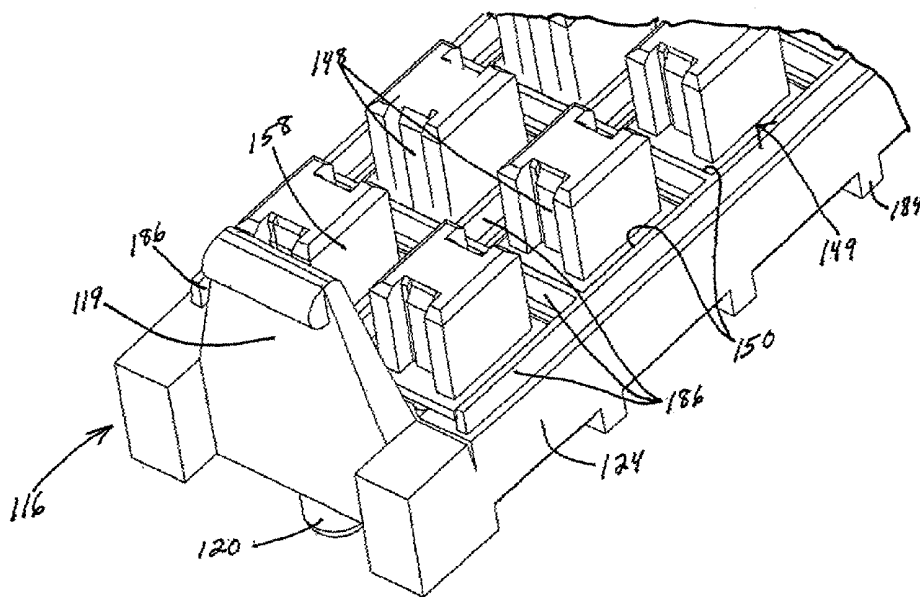

(57) **Abstract:** A shielded electrical connector is provided for mounting on a printed circuit board. The connector includes a dielectric housing having a plurality of terminal-receiving cavities and a plurality of board-engaging pads projecting from the bottom of the housing. A plurality of terminals are received in the cavities. Portions of the housing between the terminals are plated with conductive metal material to electrically shield the terminals from each other. The plating is continuous onto the pads for connection to appropriate ground circuit means on the printed circuit board. In an alternative embodiment, a shielded electrical connector assembly includes a pair of connectors both of which have plated housings with interengaging plated portions.

WO 02/058191 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SHIELDED ELECTRICAL CONNECTOR

Field of the Invention

This invention generally relates to the art of electrical connectors and, particularly, to shielded electrical connectors which are particularly useful for mounting on printed circuit boards.

Background of the Invention

Dramatic changes are occurring in the wireless, switching and networking industries which are creating a need to transmit information at an ever-increasing rate. For instance, Internet content is expected to be received by cell phones, notebook computers and the like without the need for wires and with considerable speed. In many applications, the challenge is to increase data rates between circuit boards and cables. As the speed and frequency of these devices increase, all of the components within a system must be capable of performing at those speeds. This, in turn, creates challenges with respect to "noise" and interference between the devices. Therefore, it is necessary to isolate or shield the signals from each other by placing an electrical shield between the signals. Heretofore, many electrical connectors have used terminal arrays which have signal terminals alternating with significantly sized shielding or ground terminals along the entire length of the terminal array. Of course, this approach significantly increases the sizes of the electrical connectors in high speed applications where miniaturization is a constant goal.

Electrical connectors often are mounted on printed circuit boards where the "real estate" on the boards is a premium. A "mezzanine" connector assembly provides electrical interconnection between parallel circuit boards. Mezzanine boards are frequently used where more function is needed than will fit on the primary board. Mezzanine boards also facilitate system partitioning necessary to offer multiple options and expandability. The connector assembly must be capable of operating at the same high data rates as the primary and mezzanine boards. The signals in such arrangements or systems must be electrically shielded or isolated so that the connector assembly has very low cross-talk between the signal lines.

Frequently, high speed mezzanine connectors must transmit differential pair signals, requiring that two signals or terminals are spaced within one cavity so that they are electrically coupled to significantly reduce the common noise and to electrically shield or isolate these differential pairs from each other.

The present invention is directed to solving these various problems and providing a simple and very efficient and effective shielding system in electrical connectors, such as connectors which are mounted on printed circuit boards.

Summary of the Invention

An object, therefore, of the invention is to provide a new and improved shielded electrical connector of the character described.

Another object of the invention is to provide a new and improved shielded electrical connector particularly adapted for mounting on a printed circuit board.

A further object of the invention is to provide a new and improved shielded connector assembly including two mating connectors having a common shield running therethrough.

In one embodiment of the invention, a shielded electrical connector includes a dielectric housing having a plurality of terminal-receiving cavities and a plurality of board-engaging pads projecting from the bottom of the housing. A plurality of terminals, preferably terminals that carry differential signals, are received in the cavities in the housing. Portions of the housing between the terminals are plated with conductive metal material to electrically shield the terminals from each other. The plating is continuous onto the board-engaging pads for connection to appropriate ground circuit means on the printed circuit board.

As disclosed herein, the housing is molded of dielectric plastic material, with the board-engaging pads being molded integrally therewith. The pads are located between the terminal-receiving cavities. Substantially the entire housing, including the board-engaging pads, is plated with the conductive metal material, with the terminals being insulated therefrom.

According to one aspect of the invention, the board-engaging pads are configured for surface engaging the printed circuit board. In addition, the terminals include portions adapted for surface connection to appropriate circuit means on the printed circuit board. Although the invention is not limited to such configurations, this avoids having to drill large holes in the printed circuit board.

According to another aspect of the invention, the terminals comprise elements of terminal modules. Specifically, the terminals are mounted in respective dielectric blocks received in the terminal-receiving cavities of the housing. The dielectric blocks may be overmolded about portions of the terminals. In the preferred embodiment, the terminals are mounted in pairs, with

one pair in each terminal-receiving cavity. At least portions of the housing between the cavities are plated with the conductive metal material, running to the plated board-engaging pads.

In a second embodiment of the invention, a shielded electrical connector assembly includes first and second shielded connectors. Both connectors have dielectric housings with terminal-receiving cavities mounting respective terminals. The two housings of the two connectors have complementary interengaging portions. Portions of both housings are plated with conductive metal material to shield the respective terminals from each other. The metal plating on the two housings run continuously onto the complementary interengaging portions to conductively common the shielding between both the first and second connectors.

In the second embodiment, the complementary interengaging portions between the two housings of the two connectors comprise a tongue-and-groove structure. Specifically, a network of ribs on the housing of one of the connectors interengage within a network of grooves in the housing of the other connector. The interengaging ribs and grooves extend between the respective terminals of the two connectors.

Like the first embodiment, the housings of the two connectors in the second embodiment include integrally molded board-engaging pads which also are plated with the conductive metal material, the pads being configured for surface connection to appropriate circuit means on printed circuit boards. The connectors of the connector assembly in the second embodiment also include terminal modules having respective terminals mounted in dielectric blocks received in the terminal-receiving cavities of the housings of the two connectors.

Other objects, features and advantages of the invention will be apparent from the following detailed description taken in connection with the accompanying drawings.

Brief Description of the Drawings

The features of this invention which are believed to be novel are set forth with particularity in the appended claims. The invention, together with its objects and the advantages thereof, may be best understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify like elements in the figures and in which:

FIGURE 1 is a perspective view of one embodiment of a connector assembly, including a primary connector and a mating connector, incorporating the concepts of the invention;

FIGURE 2 is a perspective view of the connector assembly looking at the bottom of the assembly as viewed in Figure 1;

FIGURE 3 is a perspective view showing a plurality of terminal modules during processing, the modules being mounted within the primary connector of the assembly of Figures 1 and 2;

FIGURE 4 is a perspective view of the terminals during processing, for the modules of Figure 3;

FIGURE 5 is a perspective view looking at the mating face of the primary connector which mounts the terminal modules of Figure 3;

FIGURE 6 is a perspective view looking at the terminating face of the primary connector;

FIGURE 7 is a perspective view of one of the signal terminals mounted in the mating connector of the assembly of Figures 1 and 2;

FIGURE 8 is a perspective view of one of the ground members mounted in the mating connector;

FIGURE 9 is a perspective view looking at the mating face of the mating connector;

FIGURE 10 is a perspective view of a second embodiment of a connector assembly incorporating the concepts of the invention;

FIGURE 11 is a perspective view of the connector assembly looking at the bottom of the assembly as viewed in Figure 10;

FIGURE 12 is a perspective view looking at the mating face of the primary connector of the assembly shown in Figure 10;

FIGURE 13 is a fragmented, enlarged perspective view of a portion of the mating face in Figure 12;

FIGURE 14 is a perspective view of one of the terminal modules of the primary connector shown in Figure 12;

FIGURE 15 is a perspective of the body of the terminal module of Figure 14;

FIGURE 16 is a perspective view of one of the terminals in the module of Figure 14;

FIGURE 17 is a perspective looking at the mating face of the mating connector in the connector assembly of Figure 10;

FIGURE 18 is a fragmented, enlarged perspective view of a portion of the mating face shown in Figure 17;

FIGURE 19 is a perspective view of one of the terminal modules in the mating connector of Figure 17;

FIGURE 20 is a perspective view of the body of the terminal module of Figure 19; and

FIGURE 21 is a perspective view of one of the terminals in the module of Figure 19.

Detailed Description of the Preferred Embodiments

Referring to the drawings in greater detail, Figures 1-9 show a first embodiment of a connector assembly incorporating the concepts of the invention, and Figures 10-21 show a second embodiment of a connector assembly also incorporating the concepts of the invention. Referring to the first embodiment of Figures 1-10, and first to Figures 1 and 2, the invention is incorporated in an electrical connector assembly, generally designated 12, which includes a first or primary connector, generally designated 14, and a second or mating connector, generally designated 16. The connector assembly is a "mezzanine" connector assembly in that it is provided for electrically interconnecting two parallel printed circuit boards. To that end, it can be seen that primary connector 14 includes a plurality of mounting posts 18 for insertion into appropriate mounting holes in a first printed circuit board (not shown) which may be a main or motherboard. Mating connector 16 includes a plurality of mounting posts 20 for insertion into a plurality of mounting holes in a second printed circuit board (not shown) which may be a smaller or daughterboard. Mounting posts 18 project from a housing 22 of primary connector 14 and mounting posts 20 project in an opposite direction from a housing 24 of mating connector 16. Therefore, connector assembly 12 is sandwiched between two parallel circuit boards when properly mounted. The circuit boards are not shown in the drawings in order to avoid unduly cluttering or complicating the depictions.

Referring to Figures 3-6 in conjunction with Figure 2, housing 22 of primary connector 14 is provided with a plurality of terminal-receiving cavities 26 for receiving a plurality of terminal modules, generally designated 28 and shown best in Figure 3. The terminal modules are fabricated by first stamping a plurality of pairs of signal terminals 30 from conductive sheet metal material as seen in Figure 4. The signal terminals are shown in Figure 4 still attached to a carrier strip 32 by means of webs 34 of metal material. Carrier strip 32 carries the terminals through the processing stations for terminal modules 28. Eventually, the terminals (i.e., modules) will be severed along severing lines 36 (Fig. 4). The terminals have enlarged sections 38 to facilitate holding the terminals within their respective modules.

After the signal terminals are stamped as shown in Figure 4, dielectric blocks 40 of plastic material are overmolded about the terminals including enlarged sections 38 thereof as shown in Figure 3. The modules then are severed from carrier strip 32 and appropriately inserted or mounted within terminal-receiving cavities 26 of housing 22 of primary connector 14. As best seen in Figure 2, terminals 30 project from a terminating or board-mounting face 42 of housing 22 for surface connection, as by soldering, to appropriate circuit means or traces on the main printed circuit board.

As best seen in Figure 2, housing 22 of primary connection 14 includes a plurality of standoffs or board-engaging pads 44 which project from terminating face 42 of the housing. It can be seen that the pads are elongated to span the width of signal terminal pairs 30 and are alternately disposed between the pairs lengthwise of the connector. In other words, the board-engaging pads are disposed between terminal-receiving cavities 26 of the connector housing. The bottom surfaces of the pads are flush or coplanar with the bottom ends of signal terminals 30 for surface mounting of the pads to the main circuit board, as described hereinafter.

As stated above and described in relation to Figures 2-4, signal terminals 30 of terminal modules 28 which are respectively mounted within terminal-receiving passages 26 of primary connector 14, are arranged in pairs lengthwise of the connector and are intended to carry differential signals, *i.e.*, +0.5 volts, -0.5 volts. Electrically, this is a differential pair connector design in which two differential signal terminals are spaced such that they are electrically coupled in order to significantly reduce the common noise within their signals. The coupling allows the optimization of bandwidth. The noise or cross-talk between signal pairs is greatly reduced by the invention, as described below.

More particularly, the invention contemplates that housing 22 of primary connector 14 be plated with conductive metal material to electrically shield the terminals (pairs) from each other. It is contemplated that the plating be continuous along the housing and onto board-engaging pads 44 seen best in Figures 2 and 6. Minimally, the housing is plated between the terminals, such as within cavities 26, and onto the board-engaging pads. In the preferred embodiment, the entire housing 22, including the interior of cavities 26 and the exterior of pads 44, along with mounting posts 18, is plated with the conductive metal material. This provides a total shielding environment about the pairs of signal terminals 30 so as to electrically isolate them from other signal pairs of terminals. When the signal terminals are surface connected, as by soldering, to appropriate circuit means or traces on the main printed circuit board, board-engaging pads are

connected, as by soldering, to appropriate ground circuit means or traces on the printed circuit board. Plated mounting posts 18 may also be connected to appropriate ground circuits on the board. Therefore, the entire housing not only completely shields the pairs of signal terminals 30 from each other, but the housing is totally grounded to the ground means of the main printed circuit board.

Figure 7 shows one of a plurality of signal terminals, generally designated 48, which are mounted in a plurality of terminal-receiving cavities 50 (Fig. 1) through housing 24 of mating connector 16. Each terminal 48 includes a bifurcated mating end defined by a pair of contacts 52 at the distal ends of a pair of resilient contact arms 54. The terminals are press-fit into cavities 50, and the terminals have barbs 56 for holding the terminals in the cavities. Spaced contacts 52 of contact arms 54 define a mouth, generally designated 58, therebetween, for receiving and electrically engaging one of the signal terminals 30 of primary connector 14. A terminating tail 60 projects from the opposite end of each terminal 48. Tails 60 project from a terminating face 62 of housing 24 of mating connector 16 as seen in Figure 1. Terminals 48 are mounted within cavities 50 in pairs lengthwise of housing 24, corresponding to the differential pairs of terminals 30 of primary connector 14.

Figure 8 shows one of a plurality of ground members, generally designated 66, which are mounted through housing 24 of mating connector 16. One ground member 66 is alternatingly mounted between the pairs of terminals 48 lengthwise of housing 24. Specifically, each ground member includes a body 68, a tail 70 at one end of the body and an angularly truncated edge 72 at the opposite end of the body. The body has barbs 74 at opposite edges thereof for facilitating mounting the ground member within passages in housing 24. Figure 1 shows tails 70 of the ground members projecting from terminating face 62 of housing 24. The tails extend the same distance from the mating face as terminating tails 60 of terminals 48, whereby all of the tails of the terminals and the ground members are surface connected, as by soldering, to signal circuit means and ground circuit means, respectively, on the daughter circuit board.

Figure 9 shows how angled truncated edges 72 of ground members 66 project from a mating face 76 of housing 24 of mating connector 16. Figure 9 also shows how contacts 52 of terminals 48 extend into a plurality of blocks 78 formed integrally with the housing and projecting from mating face 76. Referring back to Figure 5, housing 22 of primary connector 14 includes a plurality of slots 80 in a mating face 82 between cavities 26. When the connectors are mated such that mating face 76 of mating connector 16 abuts mating face 82 of primary connector 14,

blocks 78 of the mating connector move into cavities 26 of the primary connector, whereupon signal terminals 30 are engaged within contacts 52 of terminals 48. In addition, edges 72 of ground members 66 of the mating connector move into slots 80 of the primary connector with a press-fit so that the edges engage the sides of the slots. With housing 22 of the primary connector being plated with the conductive metal material, ground members 66 of the mating connector are interengaged with the grounded plating about the housing of the primary connector, thereby not only commoning the grounds of the two connectors but commoning the parallel circuit boards to which the connectors are mounted and respectively grounded. It can be understood that a complete grounding system from one circuit board to the other circuit board is achieved by ground members 66 of mating connector 16 and the conductive plating about housing 22 of primary connector 14.

As stated above, a second embodiment of the invention is shown in Figures 10-21. Referring first to Figures 10 and 11, an electrical connector assembly, generally designated 112, includes a first or primary connector, generally designated 114, and a second or mating connector, generally designated 116. Like the first embodiment, connector assembly 112 is a "mezzanine" connector assembly for electrically interconnecting two parallel printed circuit boards. Therefore, primary connector 114 includes a plurality of mounting posts 118 and mating connector 116 includes a plurality of mounting posts 120. As seen best in Figure 11, mating connector 116 has a pair of flexible latch arms 119 at opposite ends thereof for snap-latching engagement with latch shoulders 121 on primary connector 114 to hold the connectors latched in mating condition as shown. Primary connector 114 includes a housing 122, and mating connector 116 includes a housing 124.

Referring to Figures 12 and 13 in conjunction with Figures 1 and 2, housing 122 of primary connector 114 is provided with a plurality of terminal-receiving cavities 126 for receiving a plurality of terminal modules, generally designated 128. Figure 14 shows one of the terminal modules 128 removed from the connector. Each terminal module includes a dielectric body 130 defining a receptacle 132. The body is shown isolated in Figure 14 and includes a wall 134 at the bottom of receptacle 132. The wall has a pair of through holes 136 which mount a pair of signal terminals 138. One of the terminals is shown in Figure 16, and it can be seen that each signal terminal is a blade-like structure having a convex contact end 140. Figure 14 shows that the convex contacts ends 140 of the terminals face each other across receptacle 132. The receptacle has a pair of side walls 142 which are spaced a distance behind blade terminals 138 to allow the

terminals to flex in the direction of arrows "A" (Fig. 14). However, walls 142 provide an anti-overstress means backing the terminals when the two connectors are mated and the terminals engage the terminals of mating connector 116, described below.

Referring back to Figures 10-12, like the first embodiment, housing 122 of primary connector 114 includes a plurality of standoffs or board-engaging pads 144 which are arranged in an interconnecting grid as seen best in Figure 11. In essence, pads 144 are in a pattern to extend crosswise and lengthwise of the housing between all adjacent terminal modules 128. Also as with the first embodiment, Figure 11 shows that terminals 138 and pads 144 extend from housing 122 of primary connector 114 so that both the terminals and the pads are flush or coplanar with each other for surface connection, as by soldering, to appropriate conductive pads or circuit traces on the respective printed circuit board to which the primary connector is mounted. The entire housing 122, including the interior of terminal-receiving cavities 126 and the exterior of board-engaging pads 144, is plated with conductive metal material for shielding and grounding purposes. Lastly, Figure 12 best shows that housing 122 of the primary connector is formed with a grid of longitudinal and lateral grooves 146 which also are plated on the insides thereof with the conductive metal material.

Referring to Figures 17 and 18 in conjunction with Figure 10, a plurality of signal terminals 148 are mounted in a plurality of terminal modules, generally designated 149 which, in turn, are mounted within a plurality of terminal-receiving cavities 150 through housing 124 of mating connector 116. Figure 19 shows one of the terminal modules 149 which includes a dielectric body 152 (Fig. 20) mounting a pair of the terminals 148. Figure 21 shows that each terminal 148 is a blade terminal having a chamfered or angled distal end 148a for engaging the contact ends 140 of terminals 138. As seen best in Figure 20, dielectric body 152 has a pair of through holes 154 which mount terminals 148. The terminals are disposed in troughs 156 in opposite sides of a plug portion 158 of dielectric body 152. Therefore, the blade terminals are rigidly backed-up by the bottom walls of the troughs as can be seen clearly in Figure 18. When connectors 114 and 116 are mated, plug portions 158 and terminals 148 (as best seen in Figures 17-19), are inserted into receptacles 134 of terminal modules 128 as seen best in Figures 12-14. Rigidly backed terminals 148 engage contact ends 140 of flexible terminals 138.

Figure 10 shows that body 124 of mating connector 116 includes a grid of board-engaging pads 184 which, like primary connector 114, extend crosswise and lengthwise between all of the terminal modules 150. Again, signal terminals 148 and pads 184 extend from housing

124 so that they are coplanar for connection, as by soldering, to appropriate signal circuit traces and ground circuit traces on the printed circuit board.

Finally, Figures 17 and 18 best show that housing 124 of mating connector 116 includes a grid of interconnected ribs 186 which extend crosswise and lengthwise of the housing between and around terminal-receiving cavities 150 which receive terminal modules 149. The pattern of ribs 186 projecting from housing 124 of mating connector 116 is substantially identical to the pattern of grooves 146 in housing 122 of primary connector 114.

Housing 124 of mating connector 116 is plated with conductive metal material, including board-engaging pads 184 as well as ribs 186. Therefore, when housings 122 and 124 of primary and mating connectors 114 and 116, respectively, are mated as shown in Figures 10 and 11, ribs 186 of the mating connector interengage within grooves 146 of the primary connector with a press-fit in a type of tongue-and-groove configuration. With both of the connector housings, including the ribs and grooves, being plated with metal material, these complementary interengaging portions of the housings conductively common the shielding between both the first and second connectors through the entire connector assembly. With the plated housings being grounded to the mezzanine printed circuit boards through board-engaging pads 144 of the primary connector and pads 184 of the mating connector, a common ground extends between the parallel boards through the entire mated connector assembly.

It will be understood that the invention may be embodied in other specific forms without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive, and the invention is not to be limited to the details given herein.

CLAIMS

1. A shielded electrical connector for mounting on a printed circuit board, comprising:
 - a dielectric housing including a plurality of terminal-receiving cavities and a plurality of board-engaging pads projecting from the bottom of the housing;
 - a plurality of terminals received in said cavities; and
 - portions of said housing between the terminals being plated with conductive metal material to electrically shield the terminals from each other, the plating being continuous onto said pads for connection to appropriate ground circuit means on the printed circuit board.
2. The shielded electrical connector of claim 1 wherein said board-engaging pads are located between said terminal-receiving cavities.
3. The shielded electrical connector of claim 1 wherein substantially the entire interior of said terminal-receiving cavities are plated with the conductive metal material, with the terminals being insulated therefrom.
4. The shielded electrical connector of claim 3 wherein said board-engaging pads are located between said terminal-receiving cavities.
5. The shielded electrical connector of claim 1 wherein said housing is molded of dielectric plastic material with the board-engaging pads being molded integrally therewith.
6. The shielded electrical connector of claim 5 wherein substantially the entire housing, including the board-engaging pads, is plated with the conductive metal material, with the terminals being insulated therefrom.
7. The shielded electrical connector of claim 1 wherein said board-engaging pads are configured for surface engaging the printed circuit board.
8. The shielded electrical connector of claim 7 wherein said terminals include portions adapted for surface connection to appropriate circuit means on the printed circuit board.

9. The shielded electrical connector of claim 1 wherein said terminals comprise elements of terminal modules, with the terminals mounted in respective dielectric blocks received in the terminal-receiving cavities of the housing.
10. The shielded electrical connector of claim 9 wherein substantially the entire interior of said terminal-receiving cavities are plated with the conductive metal material.
11. The shielded electrical connector of claim 1 wherein said terminals are mounted in pairs with one pair in each terminal-receiving cavity, with portions of the housing between the pairs of terminals being plated with the conductive metal material.
12. A shielded electrical connector for mounting on a printed circuit board, comprising:
 - a housing molded of dielectric plastic material and including a plurality of terminal-receiving cavities and a plurality of integrally molded board-engaging pads projecting from the bottom of the housing between the terminal-receiving cavities, the pads being configured for surface engaging the printed circuit board;
 - a plurality of terminals received in said cavities, the terminals including portions adapted for surface connection to appropriate signal circuit means on the printed circuit board; and
 - portions of said housing between the terminals being plated with conductive metal material to electrically shield the terminals from each other, the plating being continuous onto said pads for connection to appropriate ground circuit means on the printed circuit board.
13. The shielded electrical connector of claim 12 wherein substantially the entire interior of said terminal-receiving cavities are plated with the conductive metal material, with the terminals being insulated therefrom.
14. The shielded electrical connector of claim 13 wherein substantially the entire housing, including the board-engaging pads, is plated with the conductive metal material, with the terminals being insulated therefrom.

15. The shielded electrical connector of claim 12 wherein said terminals comprise elements of terminal modules, with the terminals mounted in respective dielectric blocks received in the terminal-receiving cavities of the housing.
16. The shielded electrical connector of claim 15 wherein substantially the entire interior of said terminal-receiving cavities are plated with the conductive metal material.
17. The shielded electrical connector of claim 12 wherein said terminals are mounted in pairs with one pair in each terminal-receiving cavity, with portions of the housing between the pairs of terminals being plated with the conductive metal material.
18. A shielded electrical connector, comprising:
 - a housing molded of dielectric plastic material and including a plurality of terminal-receiving cavities and a plurality of integrally molded board-engaging pads projecting from the bottom of the housing between the cavities;
 - a plurality of terminal modules received in said cavities, each module including at least one terminal mounted in a dielectric block received in a respective one of the terminal-receiving cavities of the housing; and
 - portions of said housing between the terminal modules being plated with conductive metal material to electrically shield the terminals from each other, the plating being continuous onto said pads for connection to appropriate ground circuit means on the printed circuit board.
19. The shielded electrical connector of claim 18 wherein substantially the entire interior of said terminal-receiving cavities are plated with the conductive metal material.
20. The shielded electrical connector of claim 19 wherein substantially the entire housing, including the board-engaging pads, is plated with the conductive metal material.
21. The shielded electrical connector of claim 18 wherein each terminal module includes a differential pair of terminals, with the respective dielectric block being overmolded about the pair of terminals.

22. A shielded electrical connector assembly, comprising:
- a first shielded electrical connector including
 - a first dielectric housing having a plurality of terminal-receiving cavities,
 - a plurality of first terminals received in said cavities, and
 - portions of said first housing between the terminals being plated with conductive metal material to electrically shield the terminals from each other;
 - a second shielded electrical connector including
 - a second dielectric housing having a plurality of terminal-receiving cavities,
 - a plurality of second terminals received in said cavities and mateable with said first terminals, and
 - portions of said second housing between the second terminals being plated with conductive metal material to electrically shield the terminals from each other; and
 - complementary interengaging portions between said first and second housings of the first and second connectors, respectively, with the metal plating on the two housings being continuous onto the interengaging portions to conductively common the shielding between both the first and second connectors.
23. The shielded electrical connector assembly of claim 22 wherein said complementary interengaging portions between the first and second housings comprise a tongue-and-groove structure.
24. The shielded electrical connector assembly of claim 23 wherein said complementary interengaging portions between the first and second housings comprise a network of ribs on one of the housings interengaging within grooves in the other of the housings.
25. The shielded electrical connector assembly of claim 24 wherein said interengaging ribs and grooves extend between the respective terminals of the two connectors.
26. The shielded electrical connector assembly of claim 22 wherein substantially the entire interior of the terminal-receiving cavities in the dielectric housing of at least one of said connectors are plated with the conductive metal material, with the respective terminals being insulated therefrom.

27. The shielded electrical connector assembly of claim 26 wherein said board-engaging pads on the respective dielectric housing of at least one of said connectors are located between the respective terminal-receiving cavities of that connector.
28. The shielded electrical connector assembly of claim 22 wherein the dielectric housing of at least one of the connectors is molded of dielectric plastic material with the respective board-engaging pads of that housing being molded integrally therewith.
29. The shielded electrical connector assembly of claim 28 wherein substantially the entire dielectric housing of at least one of the connectors, including the respective board-engaging pads thereof, is plated with the conductive metal material, with the respective terminals being insulated therefrom.
30. The shielded electrical connector assembly of claim 22 wherein the dielectric housing of at least one of said connectors includes a plurality of board-engaging pads projecting from the bottom of the housing, with the plating of conductive metal material being continuous onto said pads for connection to appropriate ground circuit means on an appropriate printed circuit board.
31. The shielded electrical connector assembly of claim 30 wherein said board-engaging pads are configured for surface engaging the printed circuit board.
32. The shielded electrical connector assembly of claim 31 wherein the terminals of said at least one connector include portions adapted for surface connection to appropriate circuit means on the printed circuit board.
33. The shielded electrical connector assembly of claim 22 wherein the terminals of at least one of said connectors comprise elements of terminal modules, with those terminals mounted in respective dielectric bodies received in the terminal-receiving cavities of the housing of the at least one connector.

34. The shielded electrical connector assembly of claim 33 wherein substantially the entire interior of the terminal-receiving cavities in the housing of said at least one connector are plated with the conductive metal material.
35. The shielded electrical connector assembly of claim 22 wherein the terminals of at least one of said connectors are mounted in pairs with one pair in each terminal-receiving cavity of the housing of the at least one connector, and with portions of the housing between the pairs of terminals being plated with the conductive metal material.
36. The shielded electrical connector assembly of claim 22 wherein the housings of said first and second connectors include complementary interengaging latch means, with the plating of conductive metal material being continuous onto said latch means.

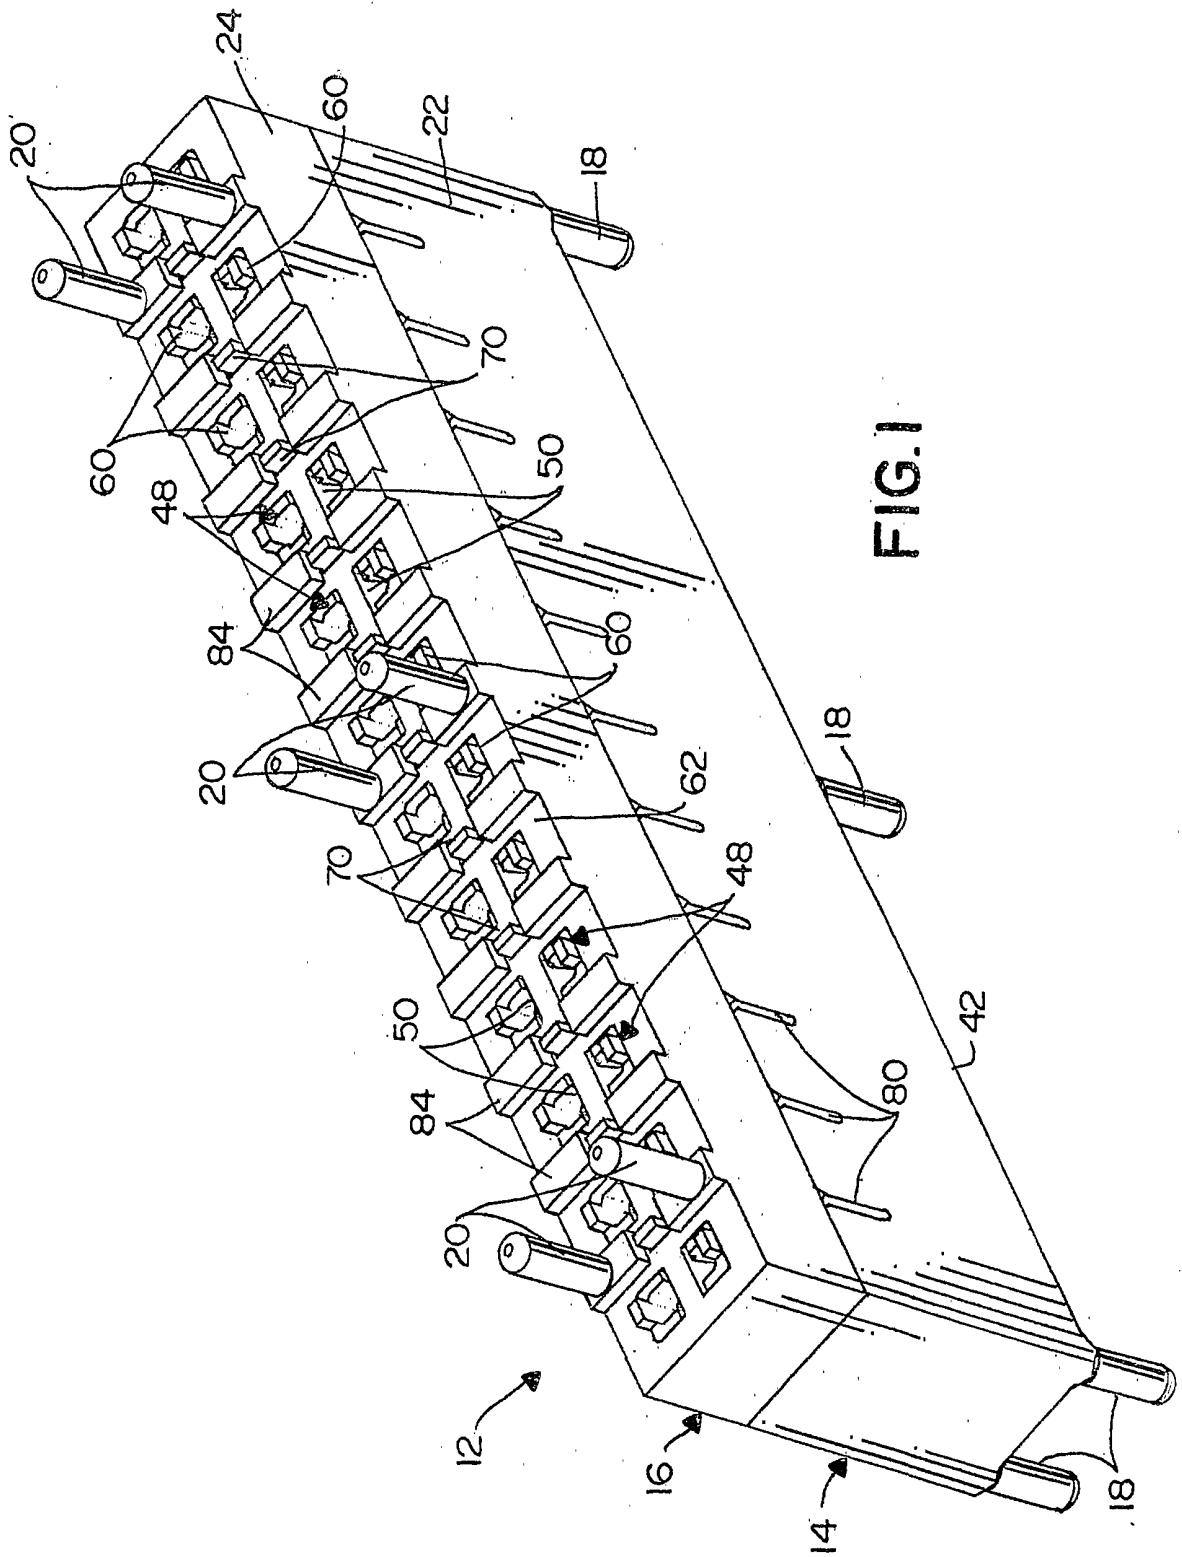


FIG. 1

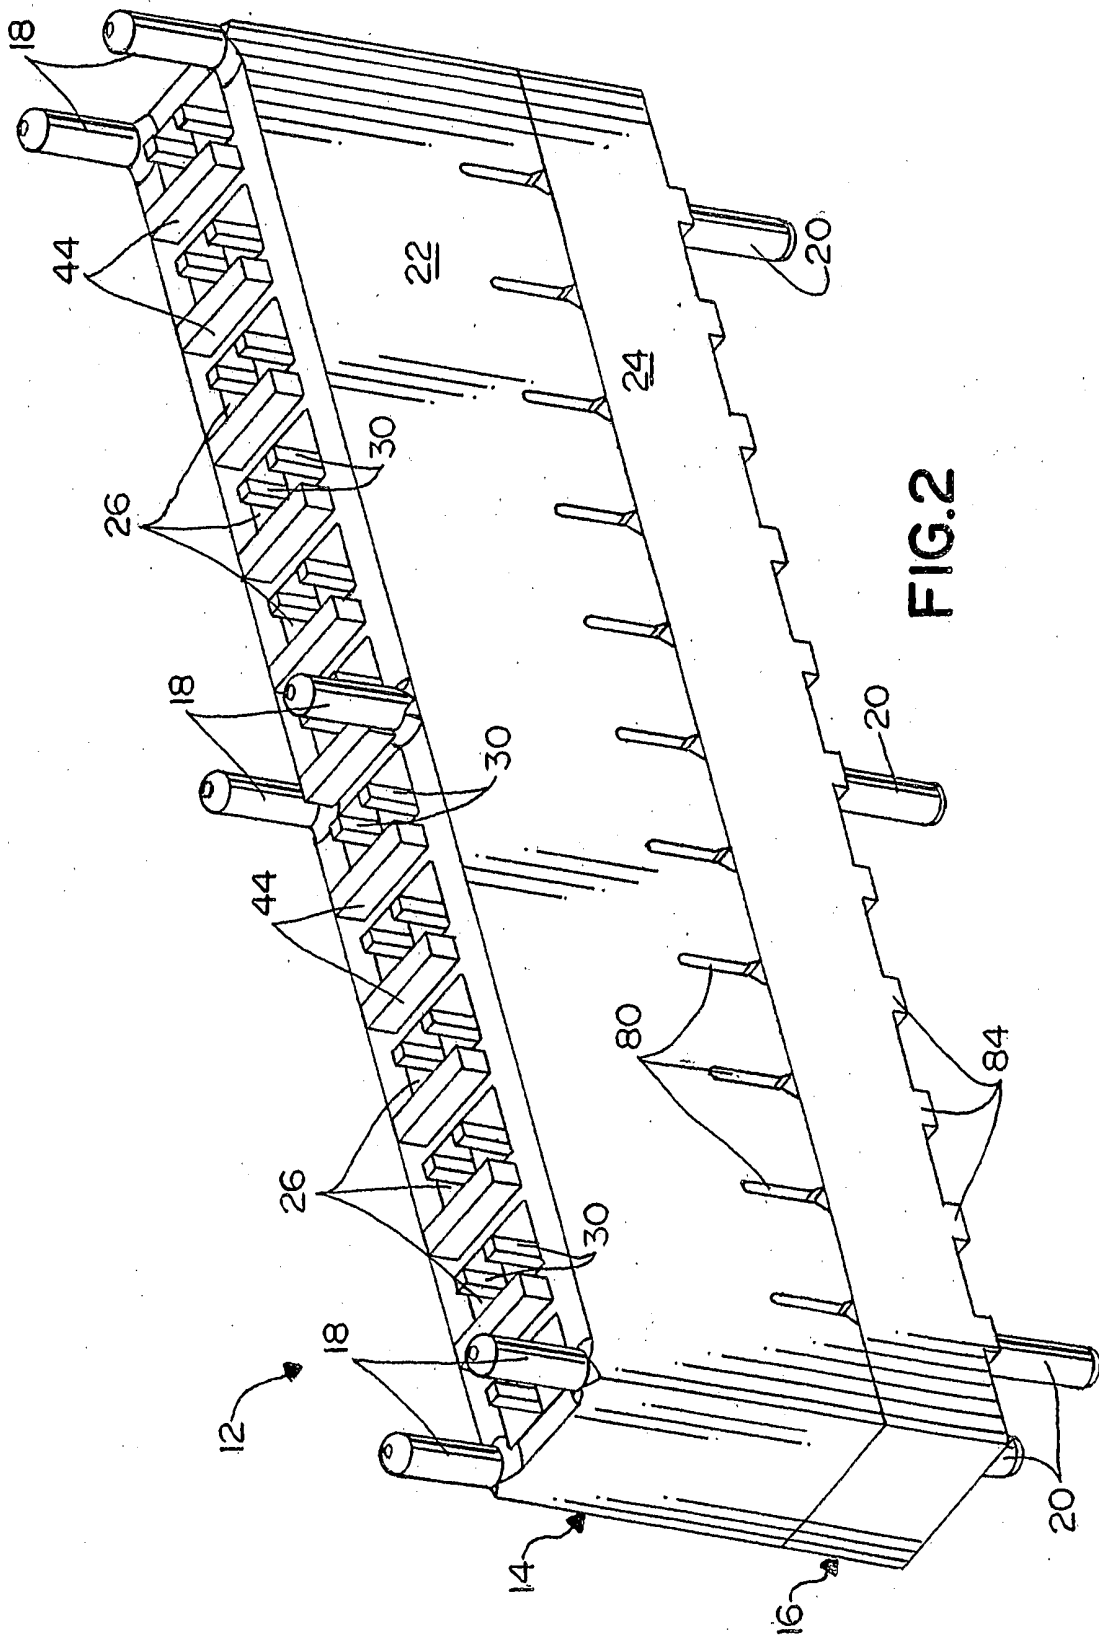


FIG. 2

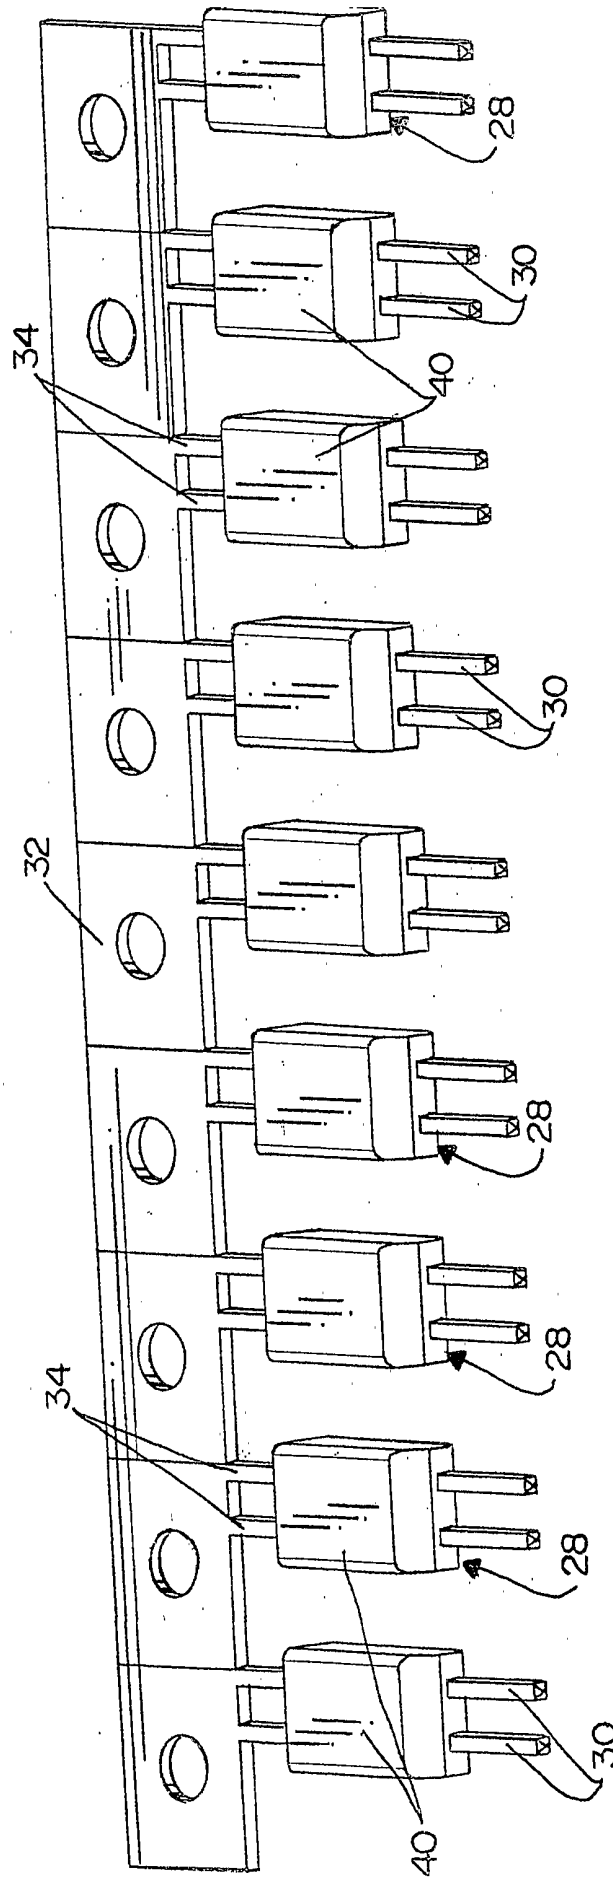


FIG.3

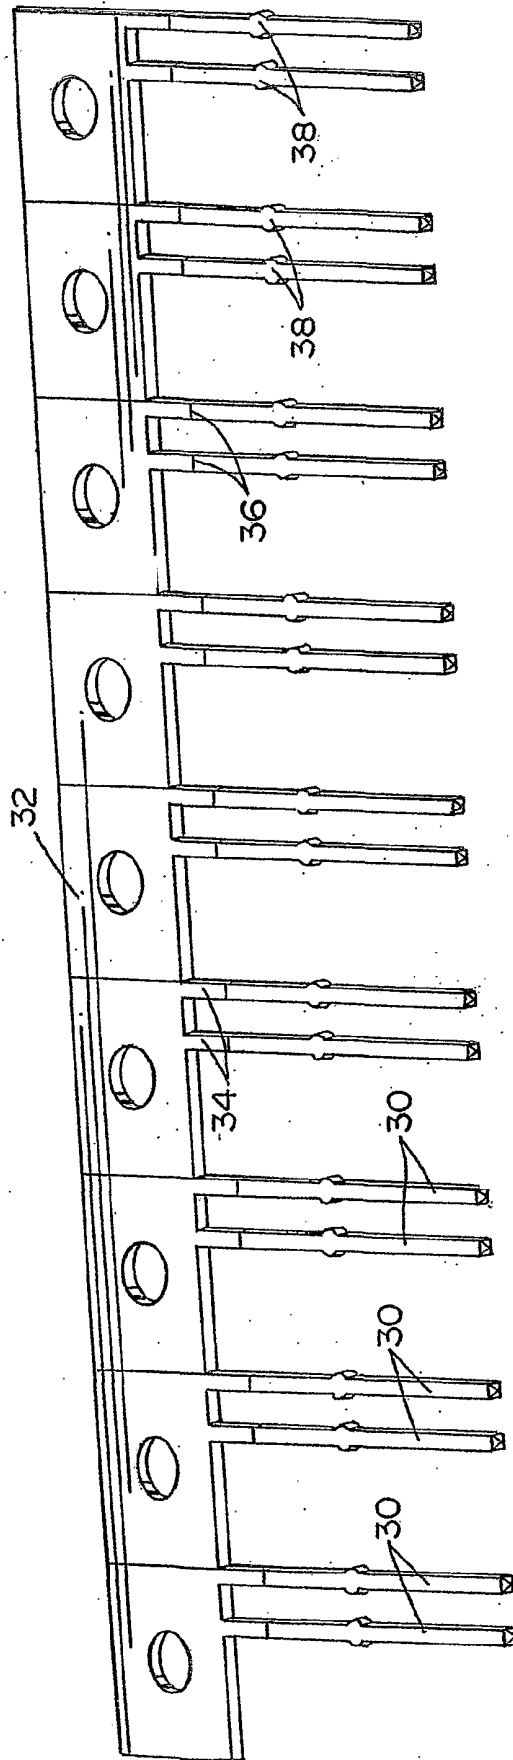


FIG.4

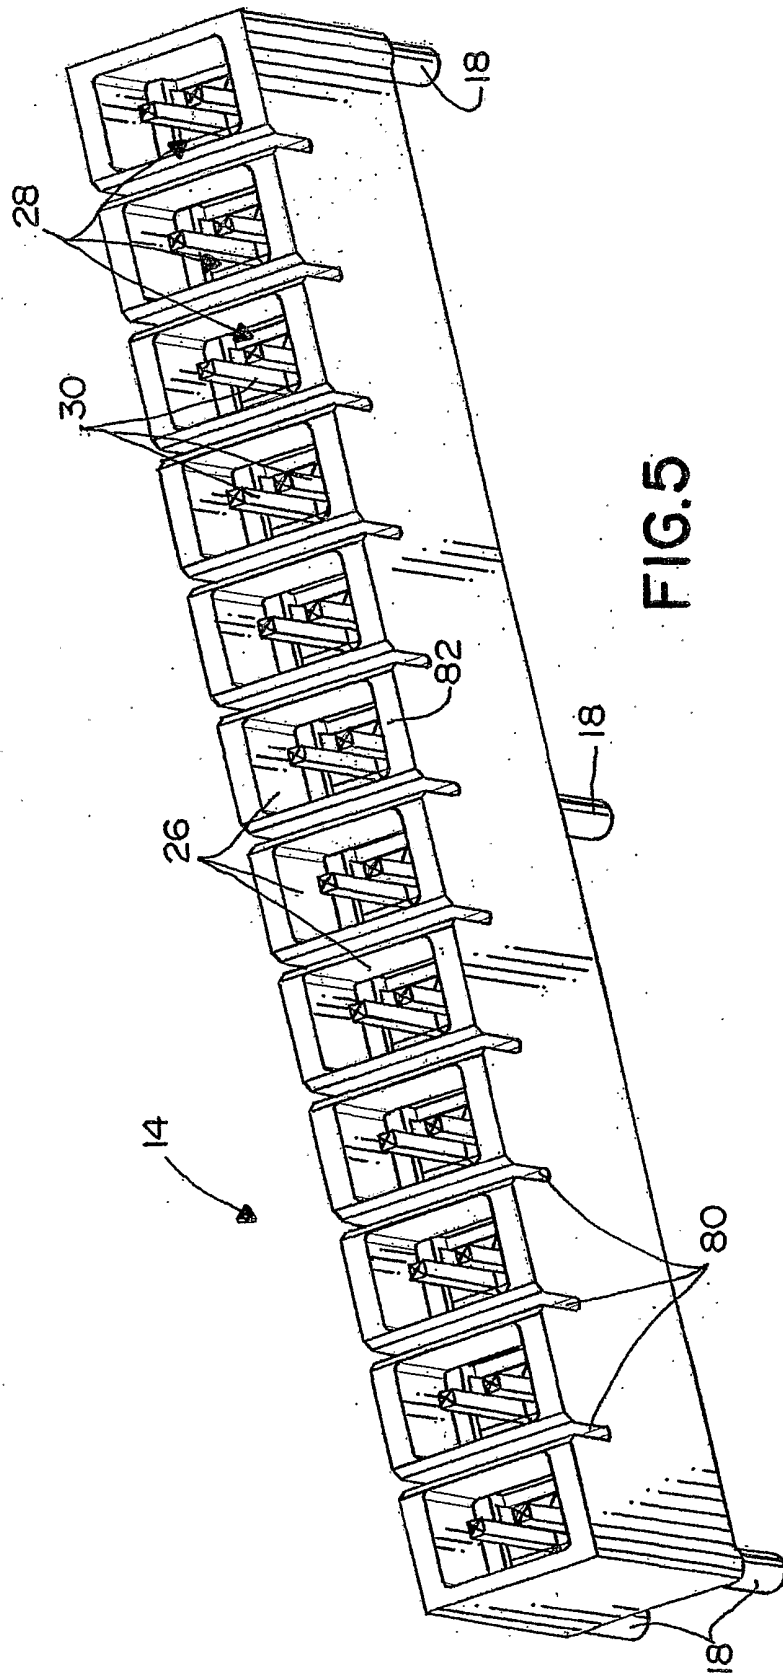


FIG.5

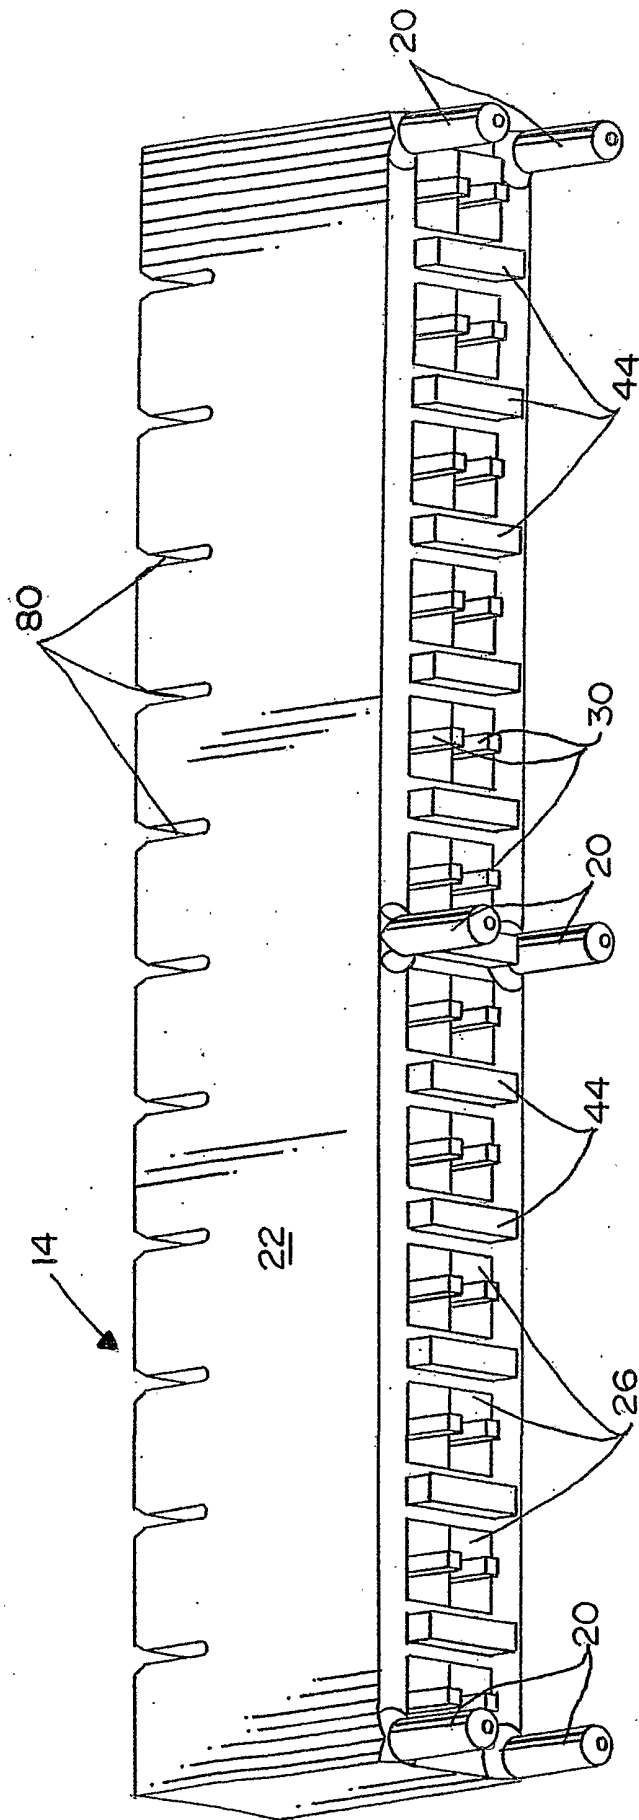


FIG.6

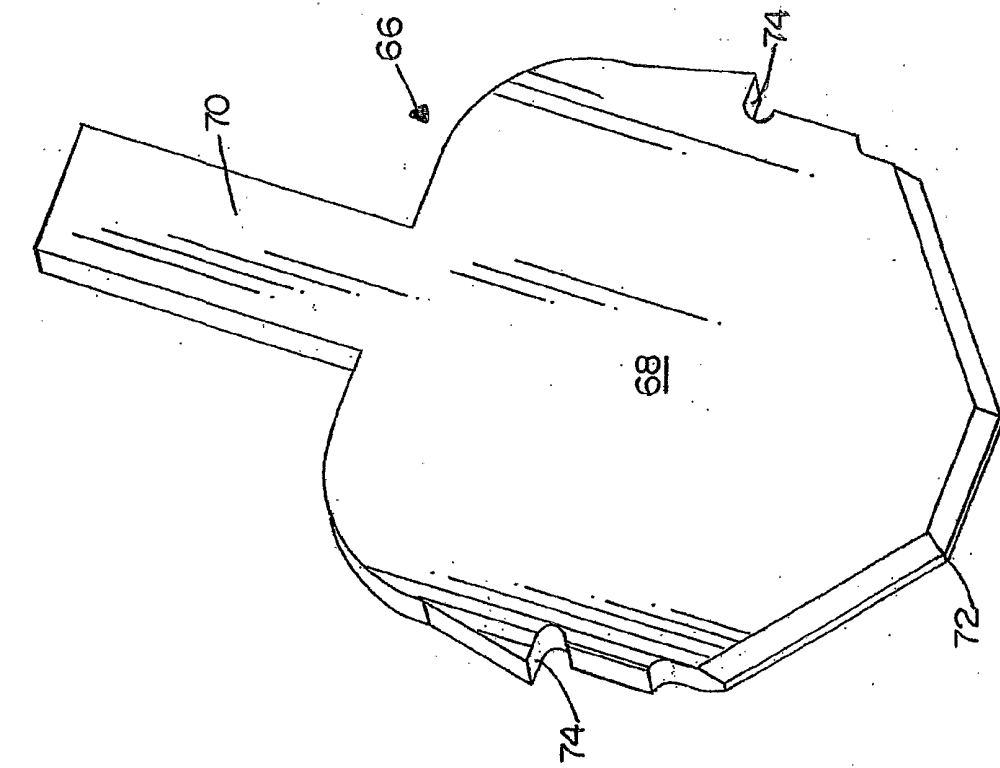


FIG. 8

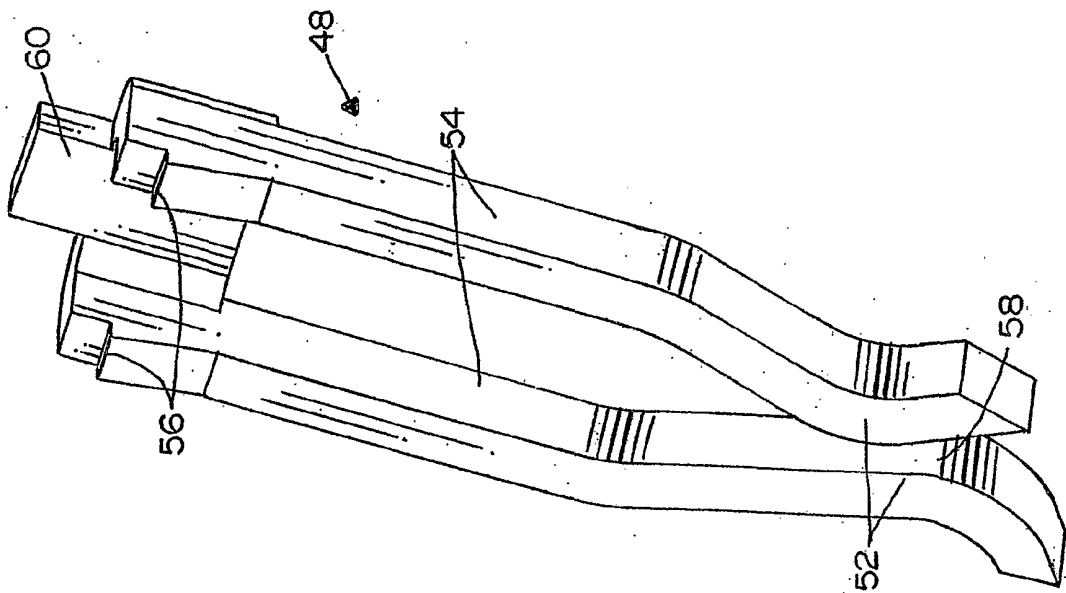


FIG. 7

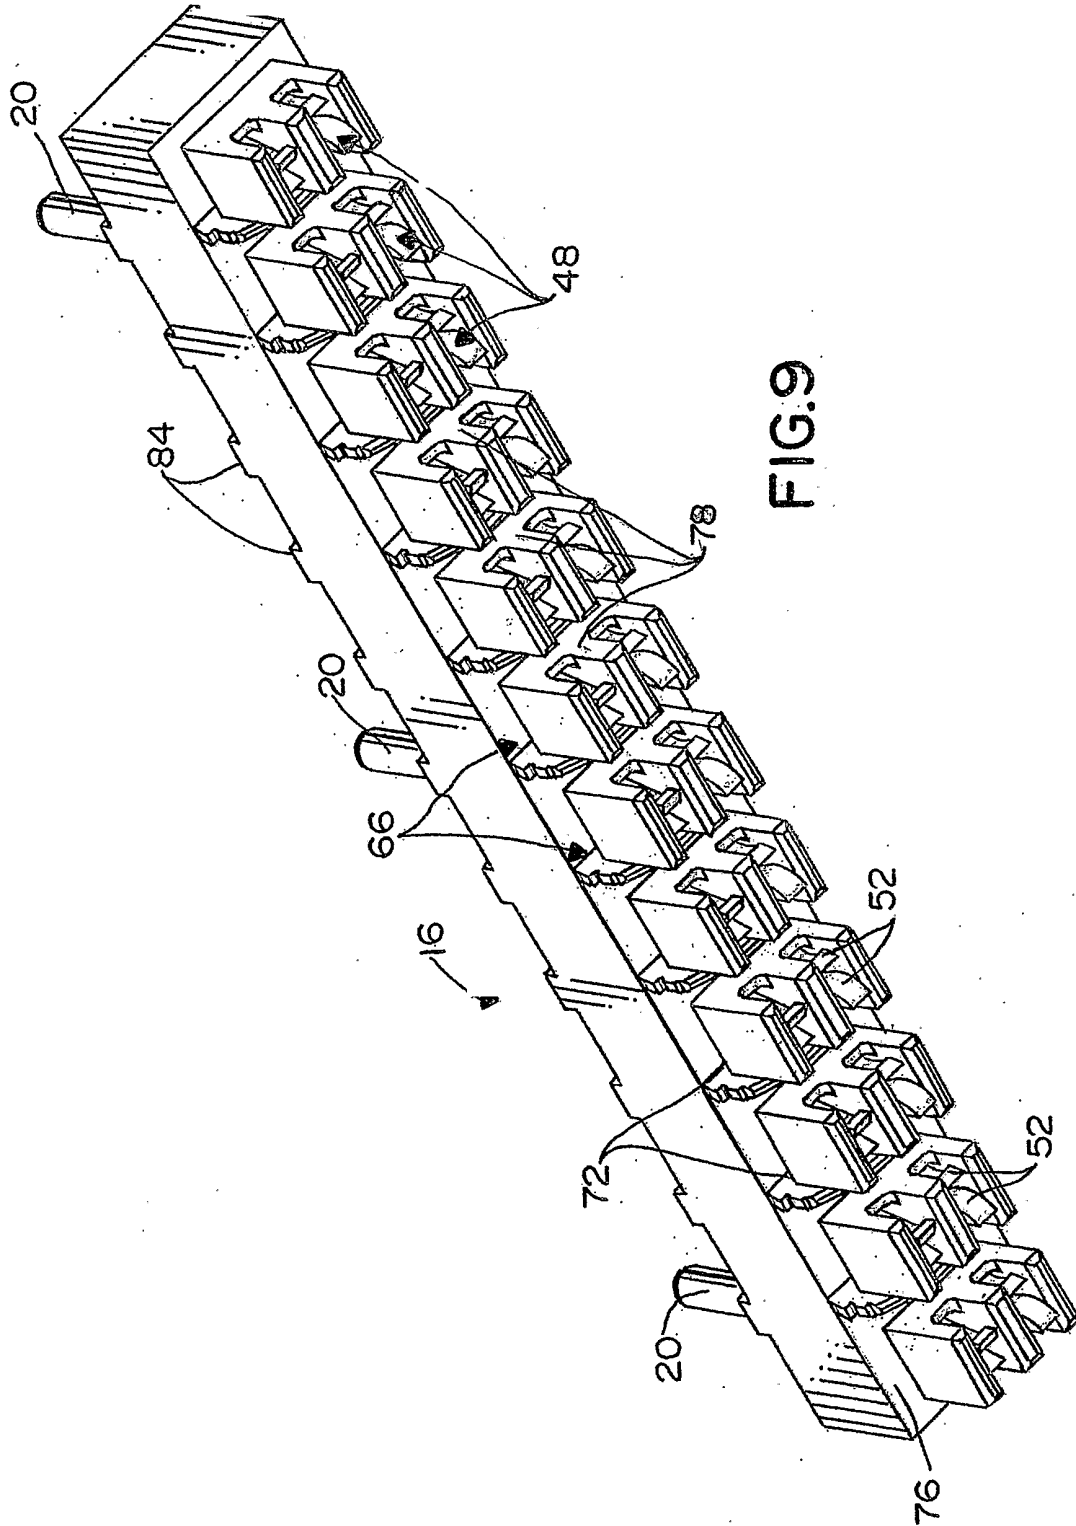


FIG. 9

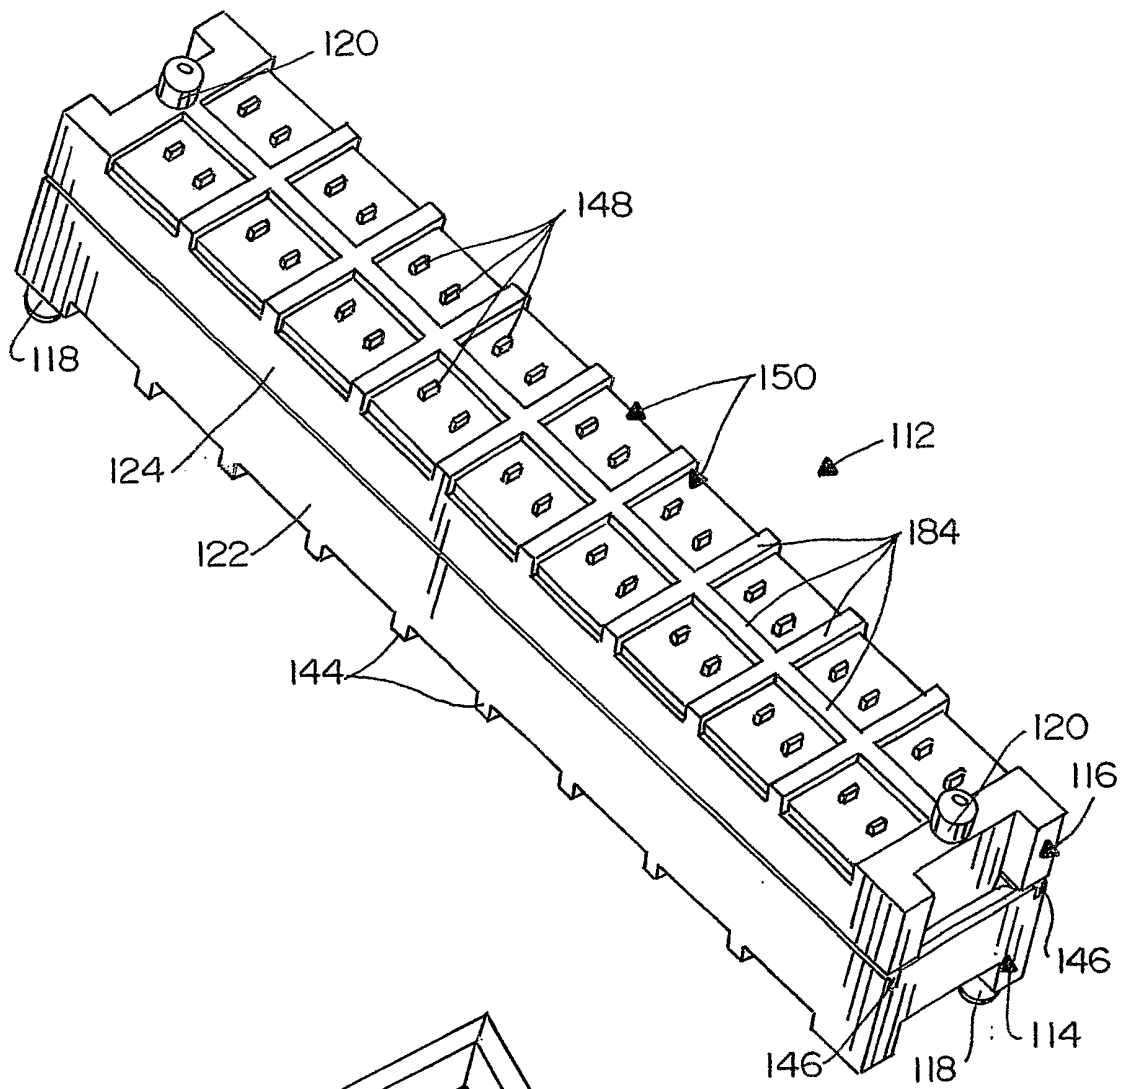


FIG. 10

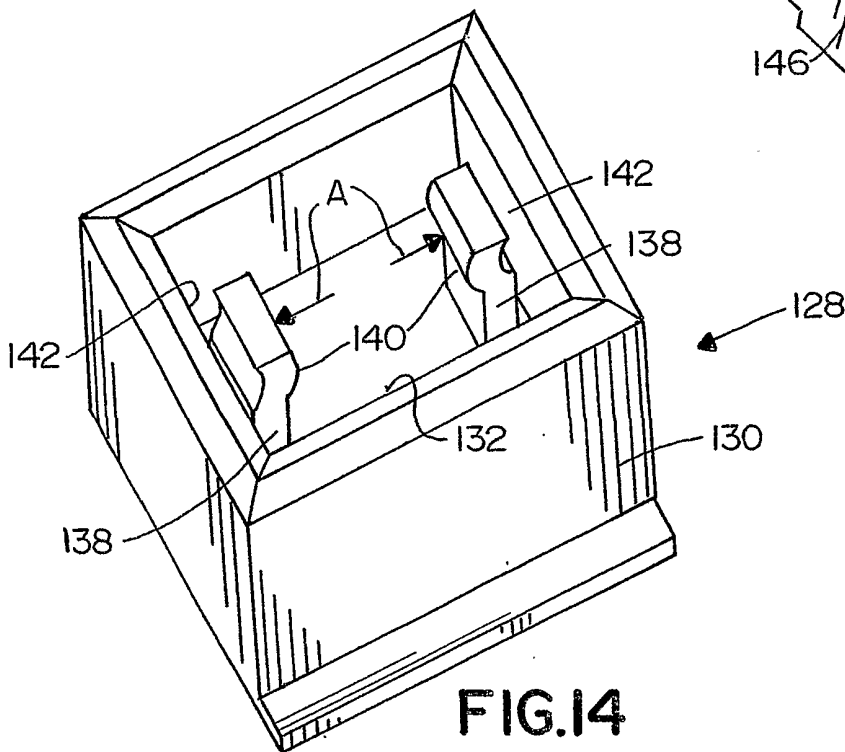


FIG. 14

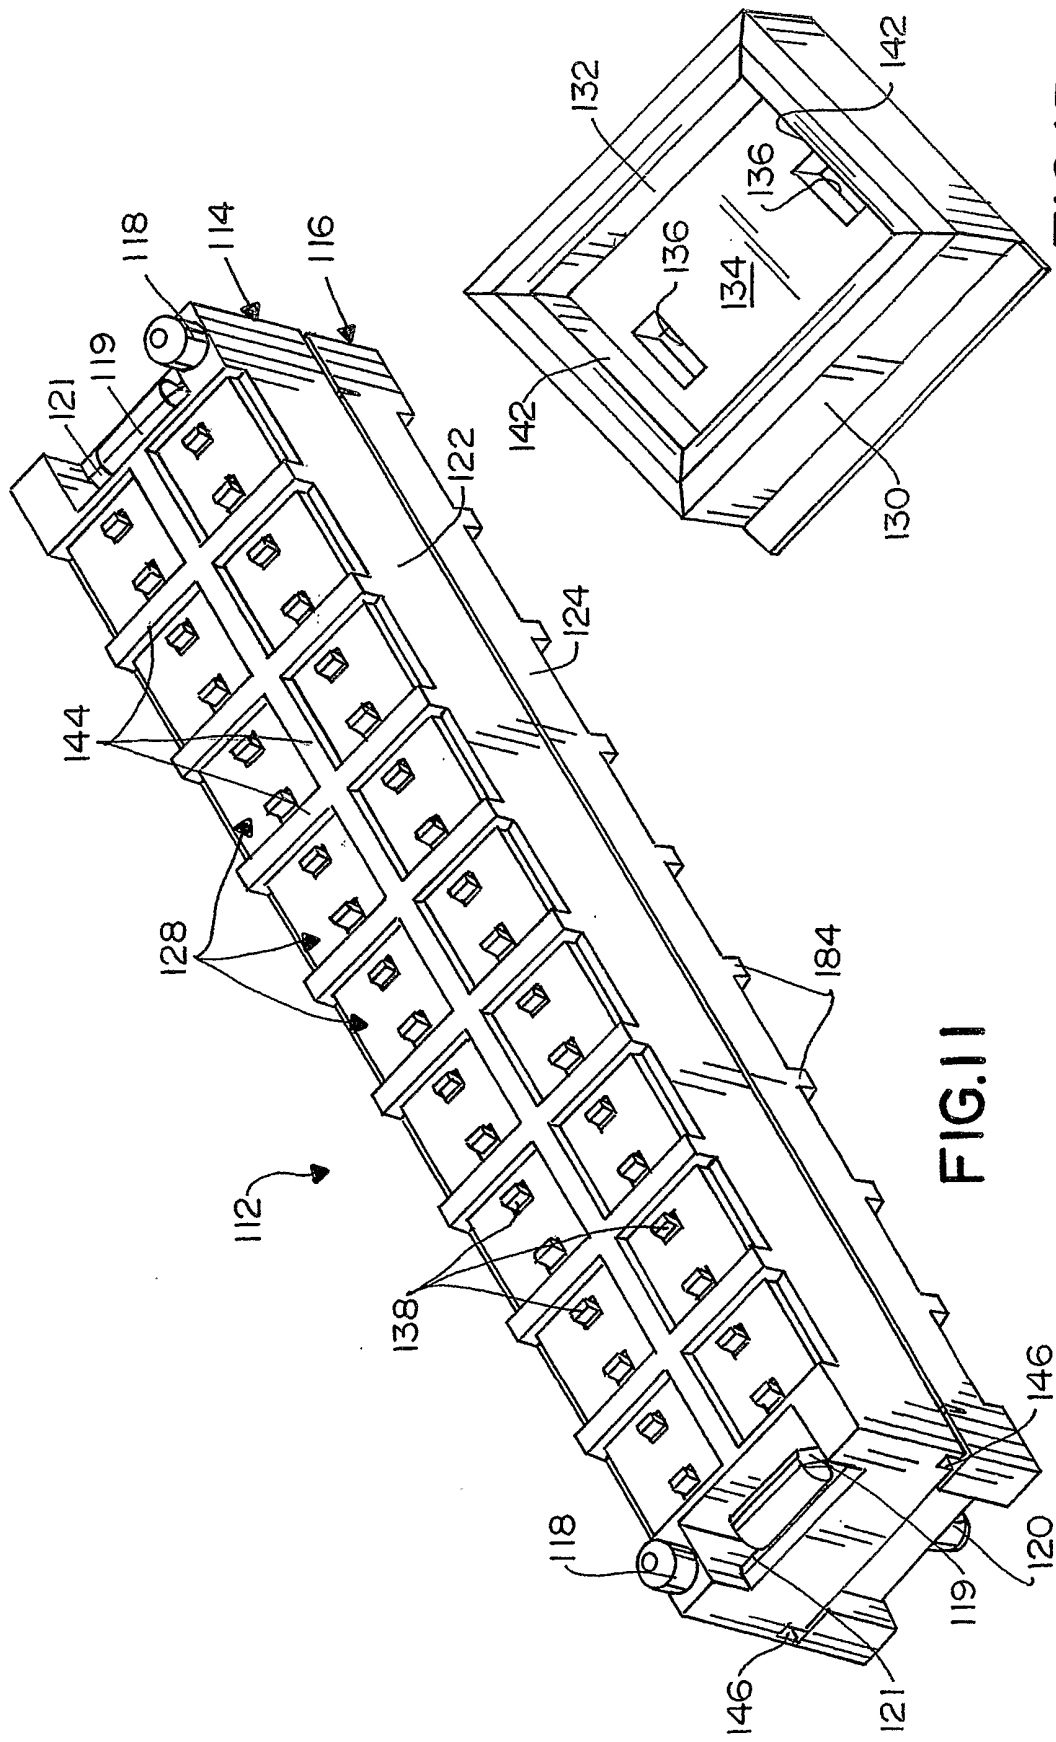


FIG. 11

FIG. 15

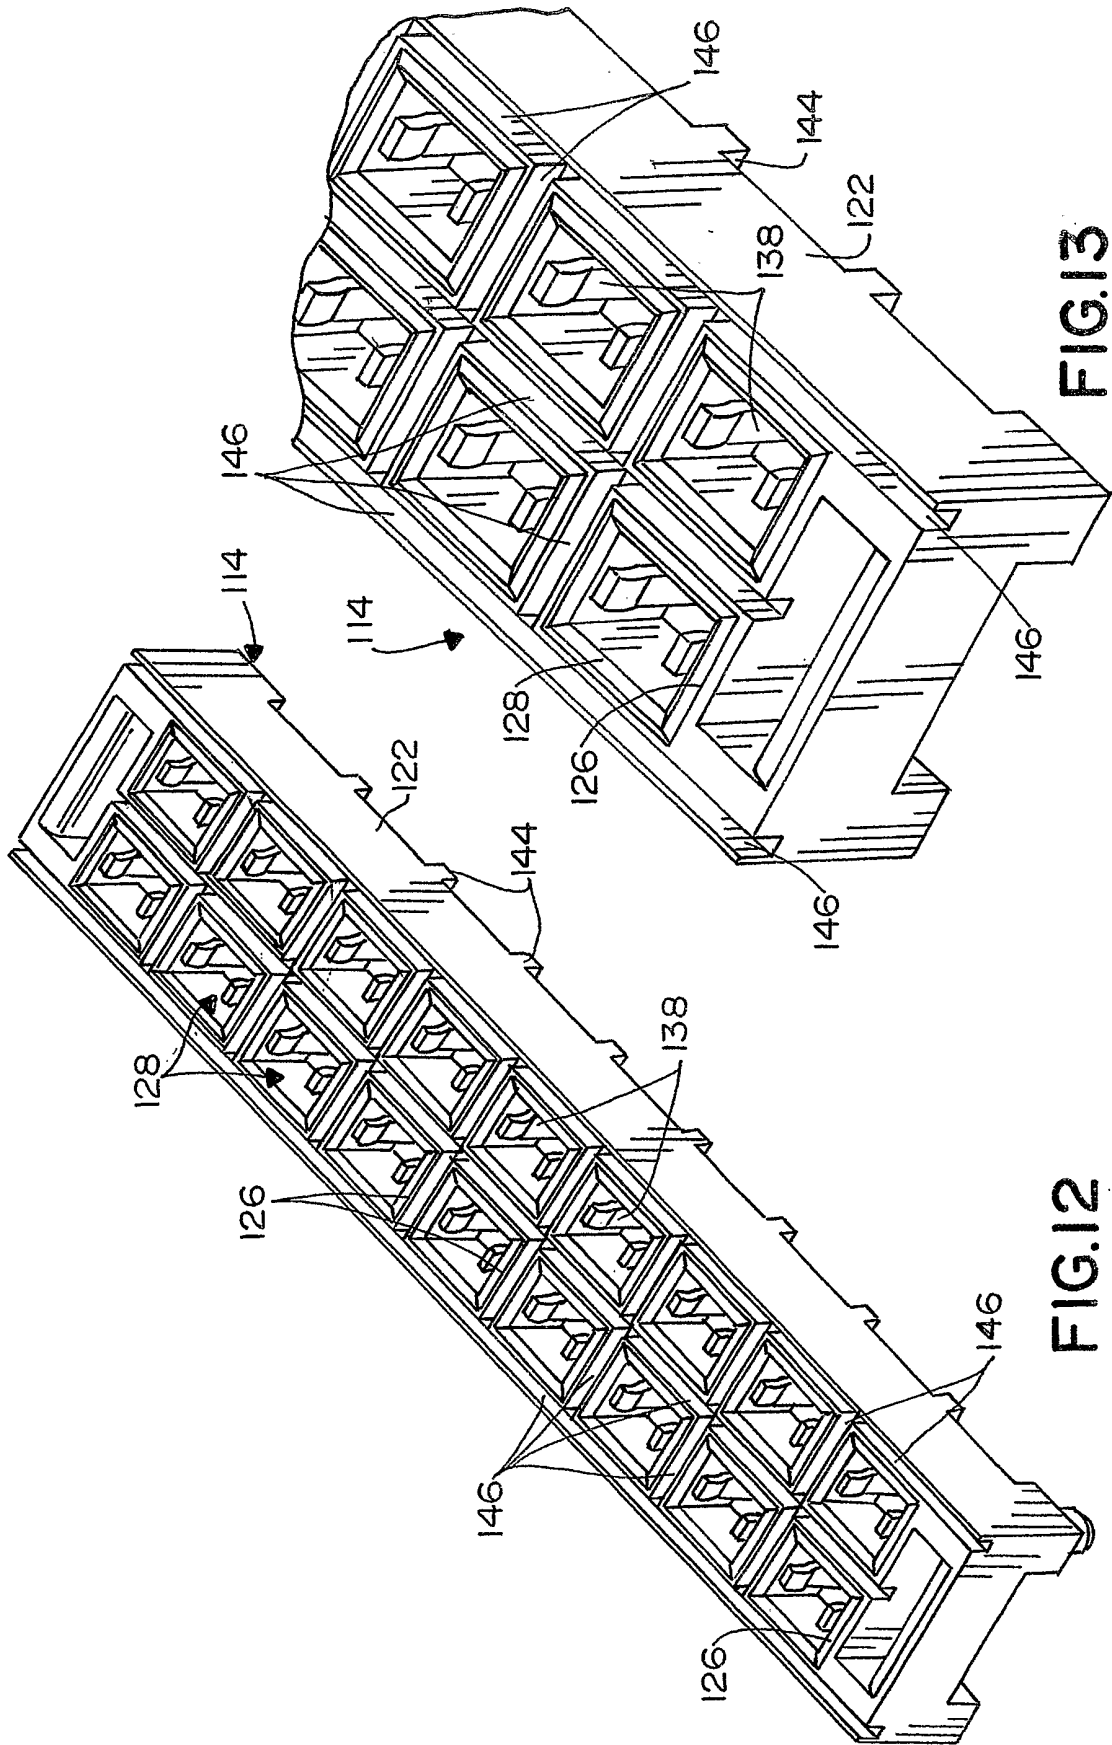
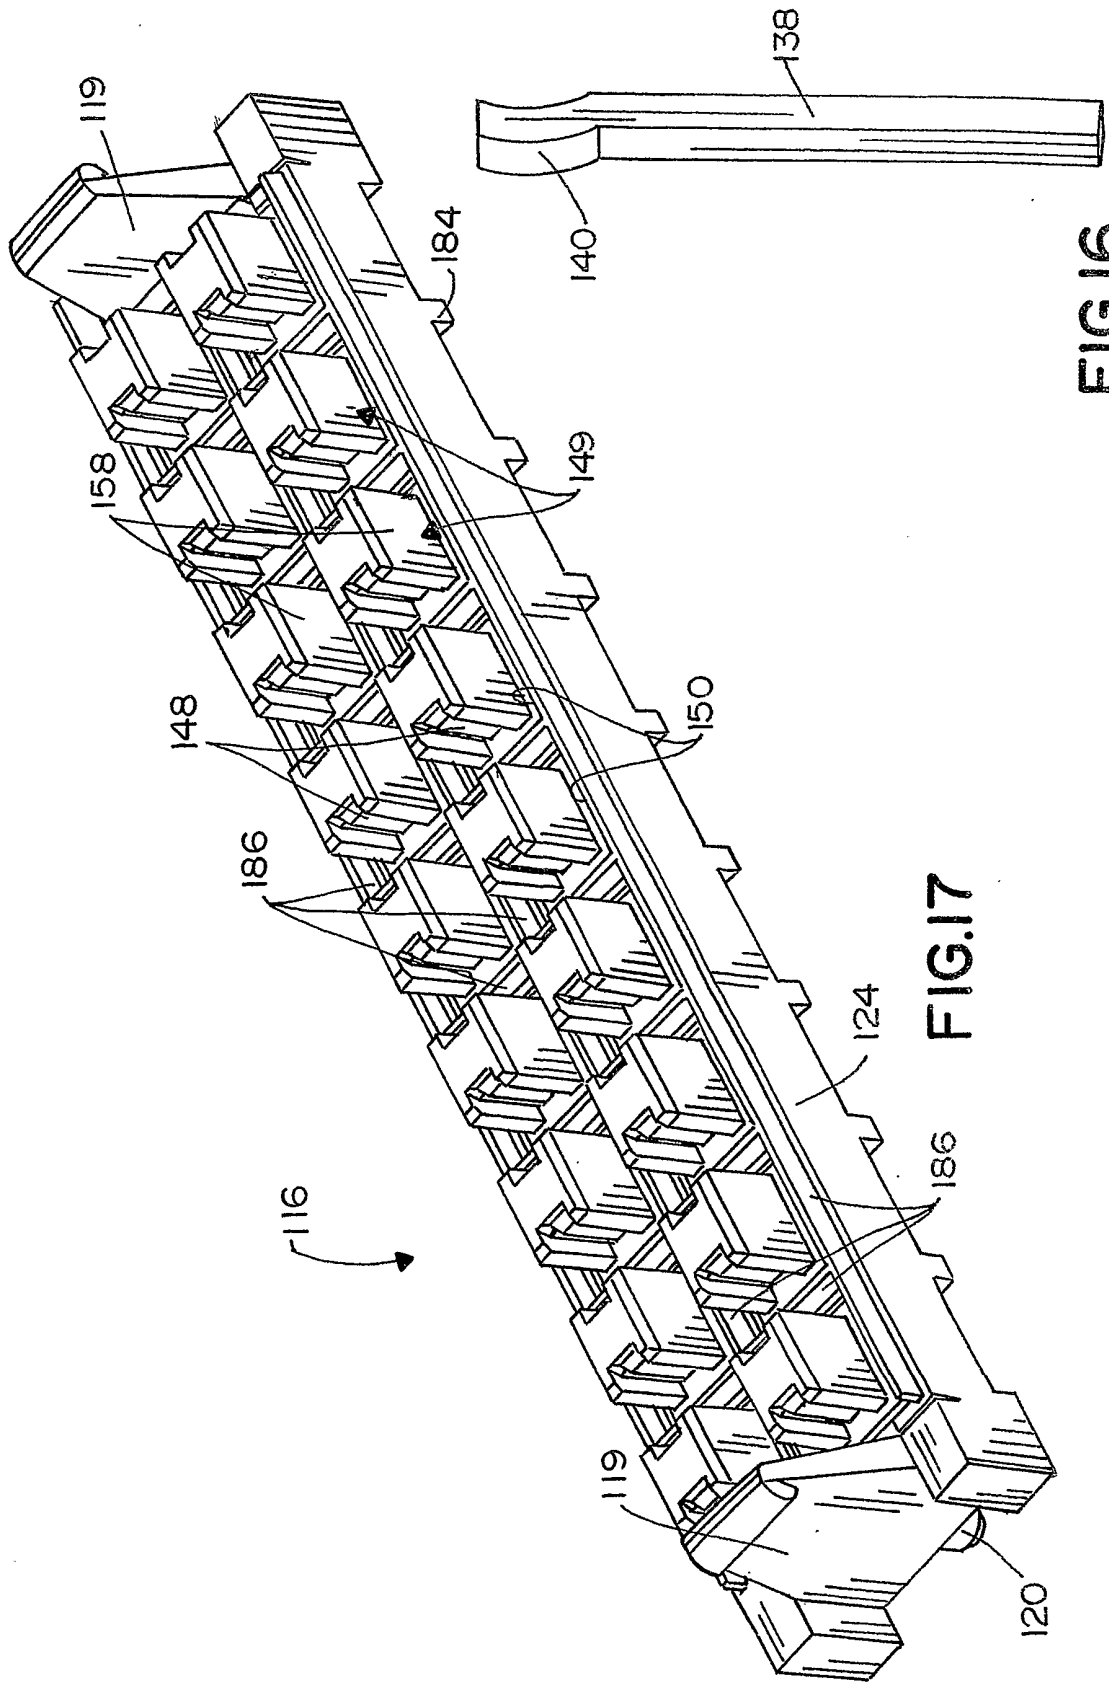


FIG.13

FIG.12



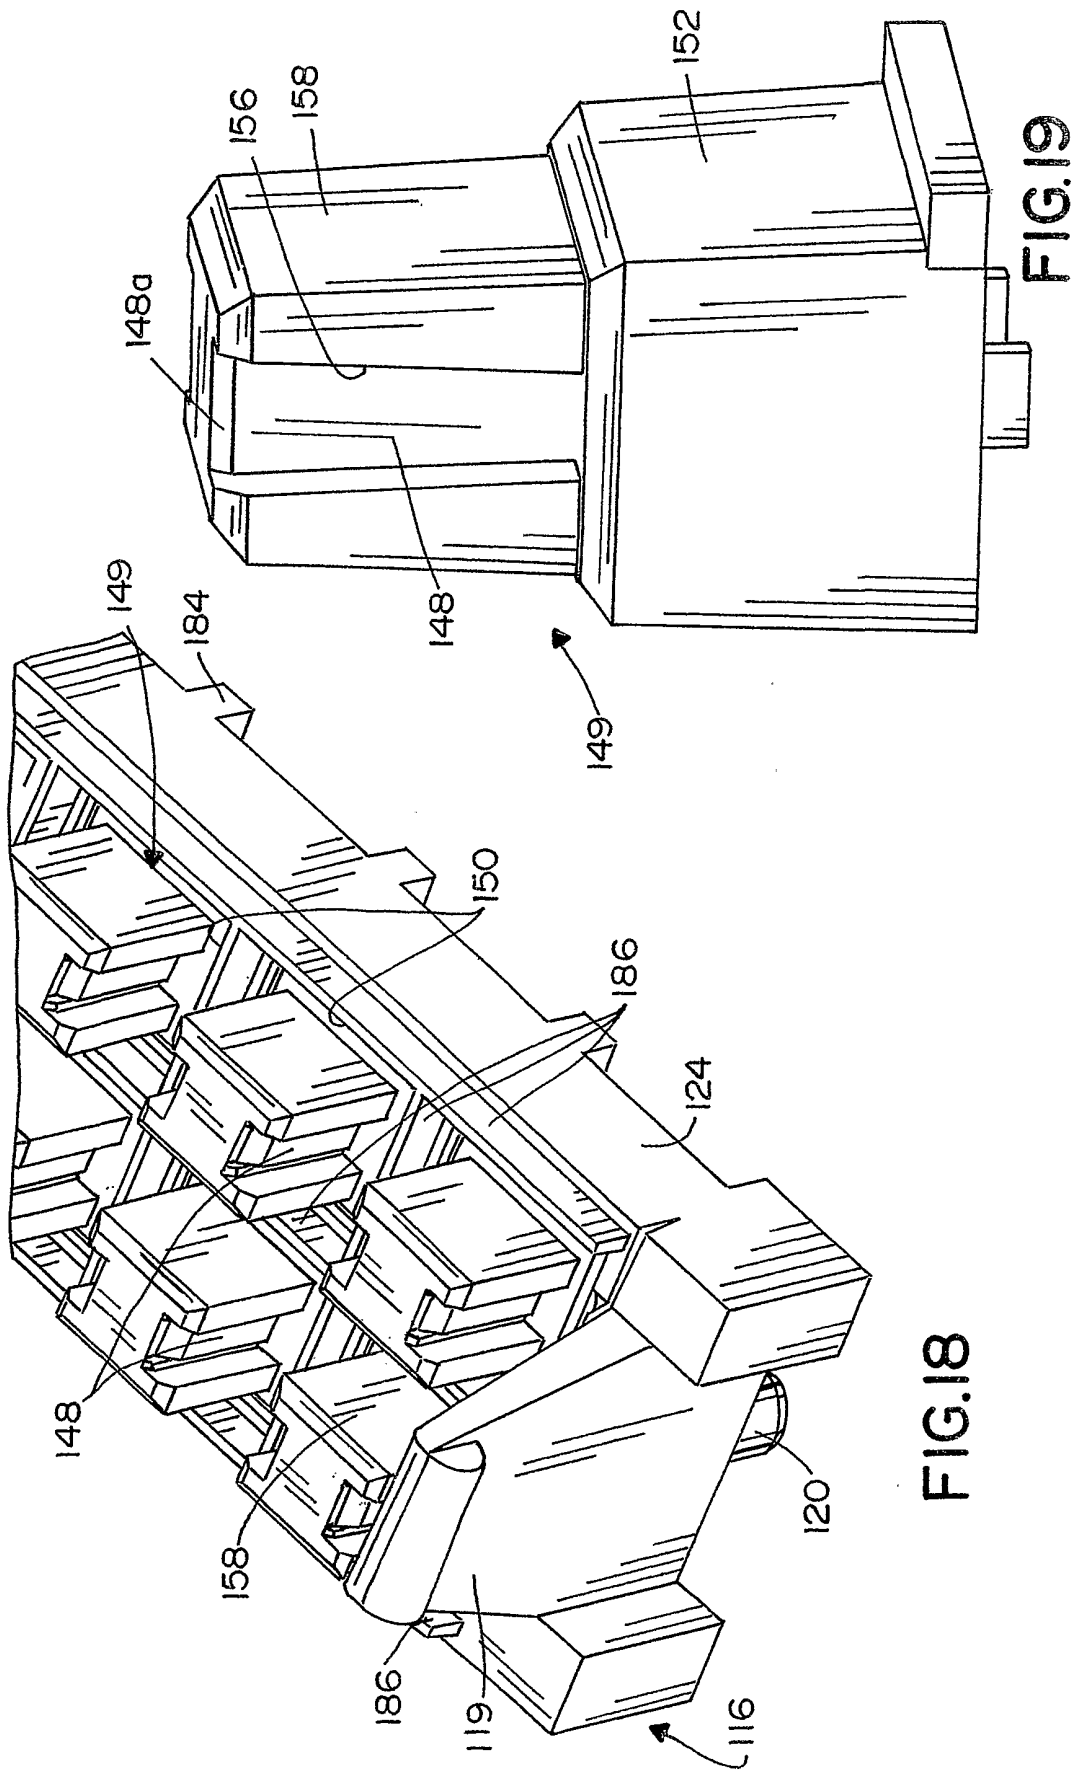


FIG.18

FIG.19

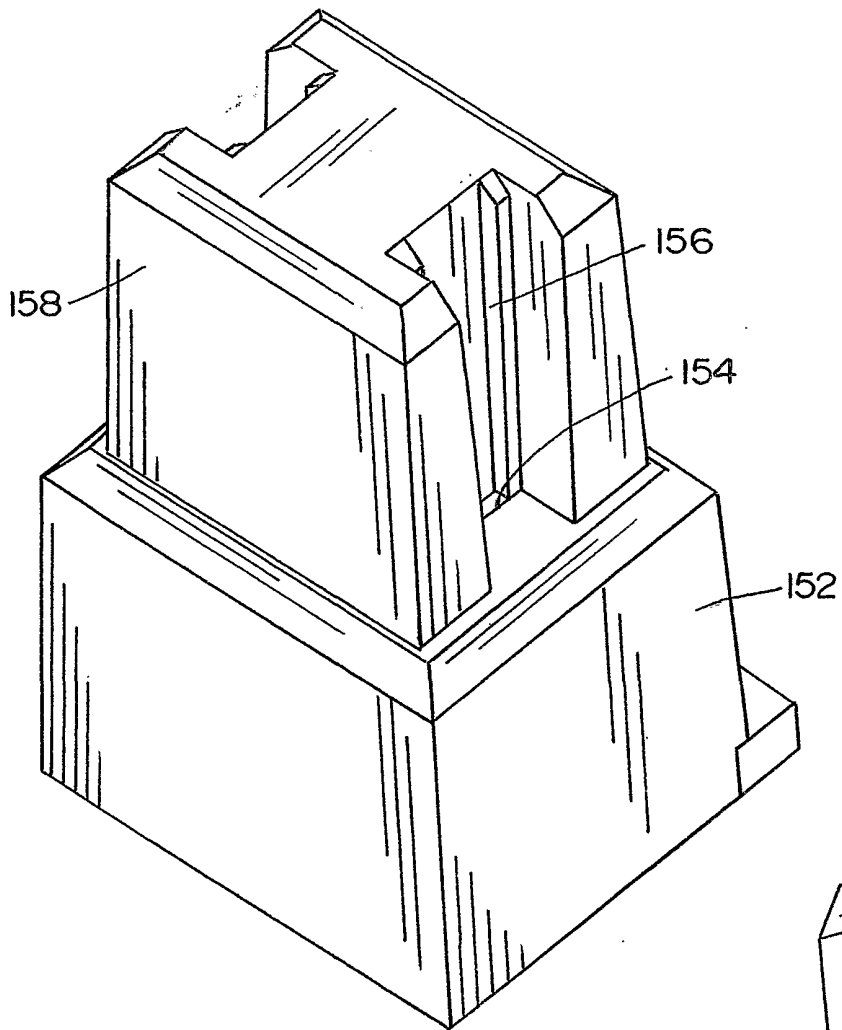


FIG. 20

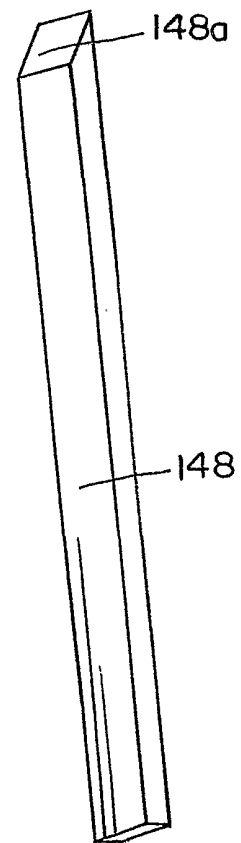


FIG. 21