

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
**WO 2004/008025 A1**

- (51) International Patent Classification<sup>7</sup>: **F21V 21/02**
- (21) International Application Number:  
PCT/US2003/021800
- (22) International Filing Date: 11 July 2003 (11.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10/192,797 11 July 2002 (11.07.2002) US  
10/411,878 10 April 2003 (10.04.2003) US
- (71) Applicant (*for all designated States except US*): **LOWE'S COMPANIES, INC.** [US/US]; 1605 Curtis Bridge Road, Wilkesboro, NC 28697 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **JACUMIN, Jeffrey, Forrest** [US/US]; 1605 Curtis Bridge Road, Wilkesboro, NC 28697 (US). **SEVERSON, Brian, J.** [US/US]; 1605 Curtis Bridge Road, Wilkesboro, NC 28697 (US). **WU, Wen-Chang** [CN/CN]; No. 10, Lane 191, His Hsin Street, Chung Ya Tsun, Hsiu Shui Hsiang, Chang Hua Hsien (CN).
- (74) Agents: **WARD, Henry, B., III** et al.; Alston & Bird LLP, Bank of America Plaza, 101 South Tryon Street, Suite 4000, Charlotte, NC 28280-4000 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— *with international search report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: MOUNTING BRACKET, AND METHOD THEREFOR

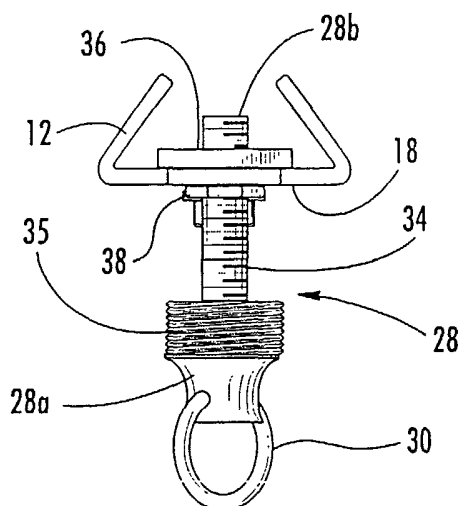

(57) Abstract: A bracket (12) for attachment to a support (16) for mounting a fixture (14), and method for installing the same are provided. The bracket (12) includes a base (18) having first and second sides (18a/b). The bracket (12) also includes first and second flanges (20a/b) extending from the first side of the base (18a), the first and second flanges (20a/b) defining an elongate aperture (40) therebetween. The elongate aperture (40) further extends from the first side of the base (18a) towards the second side of the base (18b). The elongate aperture (40) is adapted to movably receive one end of the fixture (14) so that the fixture (14) may be mounted to, and demounted from, the bracket (12) by sliding the end of the fixture (14) at least partially along the length of the elongate aperture (40) and wherein the first and second flanges (20a/b) are structured to contact the support (16) to provide lateral support to the base (18) and the fixture (14).

WO 2004/008025 A1

## MOUNTING BRACKET, AND METHOD THEREFOR

## BACKGROUND OF THE INVENTION

1) Field of the Invention

5           The present invention relates to overhead fixtures and, more particularly, to mounting brackets for overhead fixtures.

2) Description of Related Art

          There are currently available a wide variety of overhead or ceiling-mounted light fixtures, such as chandeliers, which extend from the ceiling of a room. When  
10   installing a ceiling-mounted light fixture, the light fixture must be attached to the ceiling support structure, *i.e.*, joist(s), to insure that the light fixture is secure. In this regard, an opening typically is made in the ceiling, which can be formed of drywall, plaster or a similar material. An electrical junction box is typically mounted within the opening to one or more ceiling joist(s) using fasteners, such as  
15   nails or screws, so that the bottom edge of the electrical junction box is flush with the ceiling. Electrical wiring is then wired into the electrical junction box so that it can be connected to wires from the light fixture.

          To mount a light fixture, a conventional mounting bracket is secured to the bottom edge of the electrical junction box using fasteners, such as screws or bolts.  
20   Conventional mounting brackets typically comprise a planar piece of metal that includes a threaded aperture for receiving a hollow threaded stem or nipple. Once the stem is threaded into the aperture in the bracket, a nut can be placed onto each end of the stem and tightened against the corresponding side of the bracket to insure that the stem is securely fastened to the bracket. The support member and

light fixture are then raised toward the stem so that the wiring of the light fixture can be threaded through the stem. To secure the light fixture to the mounting bracket, the support member of the light fixture is attached to the end of the stem, such as by threading the support member onto the stem, while the installer supports  
5 the weight of the light fixture. The wiring of the light fixture is then connected to the wiring in the electrical junction box. A canopy is then secured to the support member using a decorative locking nut to cover the aperture and conceal the electrical junction box, wiring and mounting bracket.

When mounting a light fixture to a conventional mounting bracket, the  
10 installer must use two hands such that one hand is supporting the light fixture while the other hand is inserting the wiring of the light fixture through the stem and, thereafter, threading the support member of the light fixture onto the stem. Since the installer must use two hands, installing and uninstalling ceiling-mounted light fixtures using conventional mounting brackets can be a difficult, if not  
15 dangerous task, particularly if the installer is working from a stool or ladder. In addition, adjusting the height of an overhead light fixture installed using a conventional mounting bracket generally requires that the entire light fixture be disassembled.

Thus, there exists a need for an improved mounting bracket for an overhead  
20 light fixture. The improved mounting bracket should simplify the installation of overhead light fixtures and should provide a secure engagement with improved lateral support in comparison to conventional mounting brackets.

#### BRIEF SUMMARY OF THE INVENTION

25 The present invention provides a bracket for attachment to a support for mounting a fixture, and method for installing the same. According to one embodiment, the bracket includes a base having first and second sides. The bracket also includes first and second flanges extending from the first side of the base. The first and second flanges define an elongate aperture therebetween. The  
30 elongate aperture further extends from the first side of the base towards the second side of the base. The elongate aperture is adapted to movably receive one end of the fixture so that the fixture may be mounted to, and demounted from, the bracket

by moving the end of the fixture at least partially along the length of the elongate aperture and wherein the first and second flanges are structured to contact the support to provide lateral support to the bracket and the fixture. In one embodiment, the base and the first and second flanges are integrally formed. In another embodiment, the base and the first and second flanges are formed of steel. In yet another embodiment, the first and second flanges extend from the base at least partially towards the second side of the base so as to define an acute angle between the base and each of the first and second flanges. In yet another embodiment, the bracket includes a third flange extending from the second side of the base. According to one embodiment, the third flange extends from the second side of the base at least partially towards the first side of the base so as to define an acute angle between the base and the third flange. The third flange is preferably structured to contact the support and provide lateral support to the bracket and fixture.

15 In another embodiment, the present invention provides a mounting system for attaching a fixture to a support. The mounting system includes a connector having first and second ends. The first end of the connector is structured for attachment to the fixture. In one embodiment, the connector comprises an elongate threaded portion extending at least partially between the first and second ends of the connector. The connector can include an expanded portion disposed at the second end of the connector and a fastener defining an aperture therethrough structured to threadingly engage the elongate threaded portion. The fastener is disposed adjacent to the expanded portion and is adjustable relative thereto along the length of the threaded portion.

25 The mounting system also includes a bracket comprising a base having first and second sides. The bracket also includes first and second flanges extending from the first side of the base. The first and second flanges define an elongate aperture therebetween. The elongate aperture further extends from the first side of the base towards the second side of the base. The elongate aperture is adapted to movably receive the second end of the connector so that the fixture may be mounted to, and demounted from, the bracket by moving the second end of the connector at least partially along the length of the elongate aperture and wherein

the first and second flanges are structured to contact the support to provide lateral support to the bracket and the fixture. Other variations of the bracket are discussed above.

The present invention also provides a method of attaching a fixture to a support. According to one embodiment, the method includes attaching a bracket to a support, the bracket comprising a base having first and second sides and first and second flanges extending from the first side of the base, the first and second flanges defining an elongate aperture therebetween, the elongate aperture further extending from the first side of the base towards the second side of the base, and wherein the first and second flanges are structured to contact the support to provide lateral support to the bracket and the fixture. One end of a fixture is moved at least partially along the length of the elongate aperture so that the fixture is mounted to the bracket. The end of the fixture is then secured to the bracket. In one embodiment, the securing step includes threading a fastener along a threaded portion of a connector so that the fastener secures at least a portion of the bracket between the fastener and an expanded portion of the connector. In another embodiment, the method includes connecting the electrical wiring from the fixture to the electrical wiring at the support. In yet another embodiment, one end of the fixture is moved at least partially along the length of the elongate aperture so that the fixture is demounted from the bracket.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

The foregoing and other advantages and features of the invention, and the manner in which the same are accomplished, will become more readily apparent upon consideration of the following detail description of the invention taken in conjunction with the accompanying drawings, which illustrate preferred and exemplary embodiments and which are not necessarily drawn to scale, wherein:

- Figure 1 is a perspective view illustrating a mounting bracket, according to one embodiment of the present invention;
- Figure 2 is a plan view illustrating the mounting bracket of Figure 1;
- Figure 3 is a plan view illustrating the mounting bracket of Figure 1;
- Figure 4 is an elevation view illustrating the mounting bracket of Figure 1;

Figure 5 is an elevation view illustrating the mounting bracket of Figure 1;

Figure 6 is an elevation view illustrating the mounting bracket of Figure 1;

Figure 7 is a perspective view illustrating the mounting bracket of Figure 1 attached to a junction box, according to one embodiment of the present invention;

5 Figure 8 is an elevation view illustrating a connector, according to one embodiment of the present invention;

Figure 9 is a perspective view illustrating the connector of Figure 7 being mounted onto the mounting bracket of Figure 1, according to one embodiment of the present invention;

10 Figure 10 is a perspective view illustrating the connector and mounting bracket of Figure 9 with the connector mounted onto the mounting bracket;

Figure 11 is an elevation view illustrating the connector and mounting bracket of Figure 10; and

15 Figure 12 is a perspective view illustrating the connector and mounting bracket of Figure 9 securing a fixture to a junction box.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments  
20 of the invention are shown. Indeed, this invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

Referring to Figure 12, there is illustrated a mounting system **10**, according  
25 to one embodiment of the present invention. The mounting system **10** includes a bracket **12** for attaching overhead fixtures **14** to a support **16**, which provides greater lateral support to the bracket and fixture and simplifies installation, removal, and height adjustment in comparison to conventional mounting brackets. The fixture **14** preferably includes an overhead light fixture, such as a chandelier or  
30 other light fixture that can be suspended using a hanging device, such as cordage, chains or elongate rods. However, fixture **14** is not limited to light fixtures, but

can also include other ornamental, artistic or aesthetic items such as pictures, plants, baskets, etc.

Referring to Figures 1-5, the bracket **12** includes a base **18** having first and second sides **16a**, **16b**. The base **18** can be configured as necessary depending on  
5 the configuration of the support **16**, but preferably comprises a planar web portion. According to the illustrated embodiment, the bracket **12** includes three flanges **20a**, **20b**, **20c** extending from the base **18**. The first and second flanges **20a**, **20b** extend from the first side **18a** of the base **18** and the third flange **20c** extends from the second side **18b** of the base. According to one embodiment, as illustrated in  
10 Figures 2 and 6, the first and second flanges **20a**, **20b** extend from the first side **18a** of the base **18** at least partially towards the second side **18b** of the base and the third flange **20c** extends from the second side **18b** of the base at least partially toward the first side **18a** of the base so that each flange forms an acute angle with the base. Advantageously, the acute angle of the flanges **20a**, **20b**, **20c** prevents  
15 the fixture **14** from becoming inadvertently dislodged from the bracket **12**. In other embodiments (not shown), the flanges **20a**, **20b**, **20c** can be disposed perpendicular to the base **18** or at an obtuse angle.

Preferably, the flanges **20a**, **20b**, **20c** are formed integrally with the base **18**, but the flanges can be formed separately and then attached to the base using  
20 mechanical fasteners or welding (not shown). The bracket **12** can be formed of a variety of materials, including, but not limited to, steel or other metals or composite materials, provided the materials have sufficient strength and, if necessary for outdoor applications, corrosion resistance for the particular applications contemplated.

Referring to Figures 2 and 3, the base **18** of the bracket **12** defines a pair of  
25 apertures **22** adapted to receive corresponding fasteners **24**. As illustrated in Figure 7, the fasteners **24** can comprise screws, bolts or the like. The fasteners **24** are used to secure the bracket **12** to the support **16**, which can include one or more joists or other framing members (not shown) or, as illustrated in Figure 7, an  
30 electrical junction box **26**. Referring to Figure 7, the angled flanges **20a**, **20b**, **20c** extend into the electrical junction box **26** when the bracket **12** is mounted to the box. Advantageously, since at least a portion of each of the angled flanges **20a**,

**20b, 20c** is in contact with a side of the electrical junction box **10**, the bracket **12** of the present invention has greater lateral support than a conventional planar mounting bracket. In addition, because the bracket **12** of the present invention has a greater load bearing surface area than a conventional planar mounting bracket, there is a reduction in the stress applied to the bracket **12** when supporting a fixture **14** so that the bracket of the present invention can support heavier fixtures. In other embodiments of the invention (not shown) where the flanges **20a, 20b, 20c** are disposed perpendicular to the base **18** or at an obtuse angle to the base, the flanges **20a, 20b, 20c** of the bracket **12** preferably will extend from the base **18** so that the flanges will at least partially contact the support to provide improved lateral support to the bracket **12** and fixture **14**.

Referring to Figures 8 and 12, the mounting system **10** includes a connector **28** having first and second ends **28a, 28b**. The first end **28a** of the connector **28** is structured for attachment to the fixture **14**. For example, certain overhead fixtures **14** are suspended using hanging devices, such as cordage, chains, or elongate rods. According to one embodiment of the present invention, as illustrated in Figures 11 and 12, the first end **28a** of the connector **28** includes a ring, loop or hook **30** that is structured to be connected to the hanging device **32** that is used to suspend the fixture **14**. For example, as illustrated in Figure 12, a chain **32** extending from the fixture **14** can be secured to the ring **30** of the connector **28** using a quick-link chain member **31**, as is well known in the art. In other embodiments (not shown), the first end **28a** of the connector **28** can define a threaded portion that engages a corresponded threaded aperture defined by the end of the fixture **14** or, alternatively, the first end **28a** of the connector **28** can be welded or formed integrally with the fixture.

According to one embodiment of the present invention, as illustrated in Figure 8, the connector **28** includes an elongate threaded portion or stem **34** extending at least partially between the first and second ends **28a, 28b** of the connector. The stem **34** is threaded into a threaded aperture defined by the bottom member **35**. Alternatively, the stem **34** can be formed integrally with, or be welded to, the bottom member **35**.



The connector **28** also includes an expanded portion or flange **36** disposed generally at the second end **28b** of the connector. For example, as illustrated in Figure 8, the expanded portion **36** can include a rectangular nut or fastener defining a threaded aperture therethrough structured to engage the threads defined by the stem **34**. Alternatively, the expanded portion **36** can include a nut or other fastener secured to a washer (not shown), which can be threaded unto the stem **34** of the connector **28**.

The connector **28** can further include a fastener **38** defining a threaded aperture therethrough structured to engage the threads defined by the elongate threaded portion **34**. The fastener **38** is disposed adjacent to the expanded portion **36** and is adjustable relative thereto along the length of the threaded portion **34**. As discussed in more detail below, the fastener **38** and expanded portion **36** are used to secure the connector **28** to the bracket **12**.

As illustrated in Figures 1-4, the bracket **12** defines a slot or elongate aperture **40**, which extends from the distal edge of the first and second flanges **20a**, **20b** to approximately the center of the base **18**. The slot **40** is structured to movably or slidably receive an end of the fixture **14**, and more specifically, the second end **28b** of the connector **28** so that the connector does not have to be threadably secured to the bracket **12**. Referring to Figure 8, the stem **34** is attached to the bottom member **35**, if necessary, and the expanded portion **36** and the fastener **38** are threaded onto the stem **34**. The position of the fastener **38** on the stem **34** is adjusted so that the fastener is adjacent the bottom member **35** to thereby define a gap between the fastener **38** and the expanded portion **36**. The height of the gap is approximately equal to or greater than the height of the pair of the first and second flanges **20a**, **20b** so that the expanded portion **36** will extend over the edge of the pair of flanges as the stem **34** is slid into and along the length of the slot **40**, as illustrated in Figures 9 and 10. According to one embodiment, as illustrated in Figure 4, the corners of the first and second flanges **20a**, **20b** can be removed so that the width of the slot **40** gradually increases proximate to the edge of the first and second flanges, which makes it easier to insert the stem **34** into the slot **40**.

Once the stem **34** is inserted into the slot **40**, the bottom member **35** of the connector **28** is moved away from the bracket **12** so that the expanded portion **36** is brought into contact with the bracket. The width of the expanded portion **36** is greater than the width of the slot **40** so that the stem **34** (and fixture **14**) are supported by the bracket **12** through the expanded portion. The fastener **38** can then be tightened against the bracket **12** to secure the stem **34** to the bracket, as illustrated in Figure 11. Advantageously, the height of the fixture **14** can be easily adjusted by removing the stem **34** from the slot **40**, modifying the position of the expanded portion **36** along the length of the stem **34**, and then reinserting the stem into the slot, as described above. In addition, the expanded portion **36** preferably is configured so that the expanded portion will restrict rotation of the connector **28** when the connector is mounted to the bracket **12**. For example, referring to Figure 7, if the connector **28** is rotated, the edges of the expanded portion **36**, which in the illustrated embodiment is a rectangular fastener, will contact the flanges **20a**, **20b**, **20c** thereby restricting further rotational movement of the connector.

As discussed above, the fixture **14** typically is attached to the bottom member **35** through a hanging device **32**, such as cordage, chains, or an elongate rod. Since the installer is not required to support the fixture for a prolonged period, the hanging device **32** (and fixture **14**) can be attached to the bottom member **35** when inserting the stem **34** into the slot **40**, or the hanging device **32** can be secured to the bottom member **35** after the stem has been inserted into the slot **40** and the bottom member **35** is suspended from the bracket **12**. If the fixture is a light fixture, then once the fixture **14** is secured to the bottom member **35** the wiring (not shown) of the light fixture can be connected to the wiring in the electrical junction box **26**. According to one embodiment (not shown), the stem **34** is hollow and the bottom member **35** defines an aperture therethrough so that the electrical wiring can be inserted through the stem and bottom member and easily connected to the wiring of the fixture **14**. A canopy (not shown) can then be secured in place on the threaded portion of the bottom member **35** using a decorative locking nut (not shown) to cover the bracket **12**, wiring, and electrical box **26**. If necessary, the bracket **12** also can be provided with a fastener **42** that provides a ground connection for the light fixture **14**.

Many modifications and other embodiments of the invention set forth herein will come to mind to one skilled in the art to which this invention pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the invention is not to  
5 be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

## THAT WHICH IS CLAIMED:

1. A bracket for attachment to a support for mounting a fixture,  
comprising:
- 5 a base having first and second sides;  
first and second flanges extending from said first side of said base, said first  
and second flanges defining an elongate aperture therebetween, said elongate  
aperture further extending from said first side of said base towards said second side  
of said base; and
- 10 wherein said elongate aperture is adapted to movably receive one end of the  
fixture so that the fixture may be mounted to, and demounted from, said bracket by  
moving the end of the fixture at least partially along the length of said elongate  
aperture and wherein said first and second flanges are structured to contact the  
support to provide lateral support to the bracket and the fixture.
- 15
2. A bracket according to Claim 1 wherein said base and said first and  
second flanges are integrally formed.
3. A bracket according to Claim 1 wherein said base and said first and  
20 second flanges are formed of steel.
4. A bracket according to Claim 1 wherein said first and second  
flanges extend from said base at least partially towards said second side of said  
base so as to define an acute angle between said base and each of said first and  
25 second flanges.
5. A bracket according to Claim 1 further comprising a third flange  
extending from said second side of said base.
- 30 6. A bracket according to Claim 5 wherein said third flange extends  
from said second side of said base at least partially towards said first side of said  
base so as to define an acute angle between said base and said third flange.

7. A bracket for attachment to a support for mounting a fixture, comprising:

a base having first and second sides;

5 first and second flanges extending from said first side of said base at least partially towards said second side of said base so as to define an acute angle between said base and each of said first and second flanges, said first and second flanges defining an elongate aperture therebetween, said elongate aperture further extending from said first side of said base towards said second side of said base;

10 a third flange extending from said second side of said base at least partially towards said first side of said base so as to define an acute angle between said base and said third flange; and

wherein said elongate aperture is adapted to movably receive one end of the fixture so that the fixture may be mounted to, and demounted from, said bracket by moving the end of the fixture at least partially along the length of said elongate aperture and wherein said first, second, and third flanges are structured to contact the support to provide lateral support to the bracket and the fixture.

8. A bracket according to Claim 7 wherein said base and said first, second and third flanges are integrally formed.

9. A bracket according to Claim 7 wherein said base and said first, second and third flanges are formed of steel.

25 10. A mounting system for attaching a fixture to a support, comprising: a connector having first and second ends, said first end of said connector structured for attachment to the fixture; and

a bracket, comprising:

a base having first and second sides;

30 first and second flanges extending from said first side of said base, said first and second flanges defining an elongate aperture therebetween, said

elongate aperture further extending from said first side of said base towards said second side of said base; and

wherein said elongate aperture is adapted to movably receive said second end of said connector so that the fixture may be mounted to, and  
5 demounted from, said bracket by moving said second end of said connector at least partially along the length of said elongate aperture and wherein said first and second flanges are structured to contact the support to provide lateral support to the bracket and the fixture.

10 11. A mounting system according to Claim 10 wherein said base and said first and second flanges are integrally formed.

12. A mounting system according to Claim 10 wherein said base and said first and second flanges are formed of steel.

15 13. A mounting system according to Claim 10 wherein said first and second flanges extend from said base at least partially towards said second side of said base so as to define an acute angle between said base and each of said first and second flanges.

20 14. A mounting system according to Claim 10 further comprising a third flange extending from said second side of said base.

25 15. A mounting system according to Claim 14 wherein said third flange extends from said second side of said base at least partially towards said first side of said base so as to define an acute angle between said base and said third flange.

30 16. A mounting system according to Claim 10 wherein said connector comprises:  
an elongate threaded portion extending at least partially between said first and second ends of said connector;  
an expanded portion disposed at said second end of said connector; and

a fastener defining an aperture therethrough structured to threadingly engage said elongate threaded portion, said fastener disposed adjacent to said expanded portion and adjustable relative thereto along the length of said threaded portion.

5

17. A mounting system for attaching a fixture to a support, comprising: a connector having first and second ends, said first end of said connector structured for attachment to the fixture; and

a bracket, comprising:

10

a base having first and second sides;

first and second flanges extending from said first side of said base at least partially towards said second side of said base so as to define an acute angle between said base and each of said first and second flanges, said first and second flanges defining an elongate aperture therebetween, said elongate aperture further extending from said first side of said base towards said second side of said base;

15

a third flange extending from said second side of said base at least partially towards said first side of said base so as to define an acute angle between said base and said third flange; and

20

wherein said elongate aperture is adapted to movably receive said second end of said connector so that the fixture may be mounted to, and demounted from, said bracket by moving said second end of said connector at least partially along the length of said elongate aperture and wherein said first, second, and third flanges are structured to contact the support to provide lateral support to the bracket and fixture.

25

18. A mounting system according to Claim 17 wherein said base and said first, second and third flanges are integrally formed.

30

19. A mounting system according to Claim 17 wherein said base and said first, second and third flanges are formed of steel.

20. A mounting system according to Claim 17 wherein said connector comprises:

an elongate threaded portion extending at least partially between said first and second ends;

5 an expanded portion disposed at said second end; and

a fastener defining an aperture therethrough structured to threadingly engage said elongate threaded portion, said fastener disposed adjacent to said expanded portion and adjustable relative thereto along the length of said threaded portion.

10

21. A method of attaching a fixture to a support, comprising:

attaching a bracket to the support, the bracket comprising a base having first and second sides and first and second flanges extending from the first side of the base, the first and second flanges defining an elongate aperture therebetween, the elongate aperture further extending from the first side of the base towards the second side of the base, and wherein said first and second flanges are structured to contact the support to provide lateral support to the bracket and fixture;

15

moving one end of the fixture at least partially along the length of the elongate aperture so that the fixture is mounted to the bracket; and

20

securing the end of the fixture to the bracket.

22. A method according to Claim 21 further comprising connecting electrical wiring from the fixture to the electrical wiring at the support.


25

23. A method according to Claim 21 further comprising moving one end of the fixture at least partially along the length of the elongate aperture so that the fixture is demounted from the bracket.



30




24. A method according to Claim 21 wherein said securing step comprises threading a fastener along a threaded portion of a connector so that the fastener secures at least a portion of the bracket between the fastener and an expanded portion of the connector.



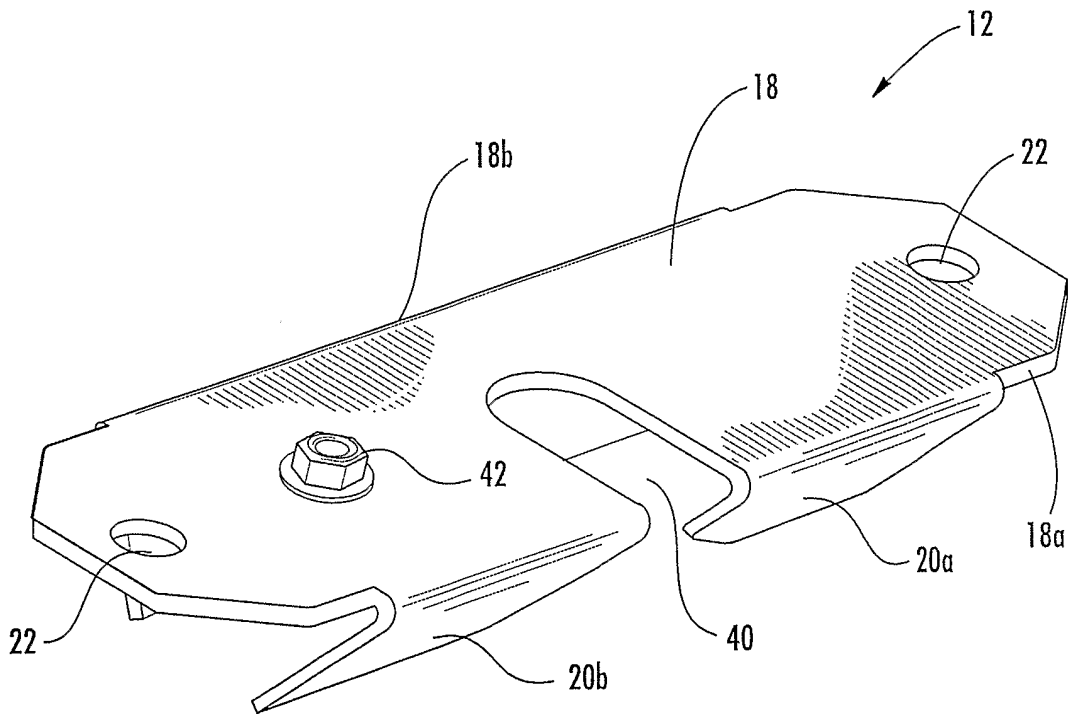

**FIGURE 1**

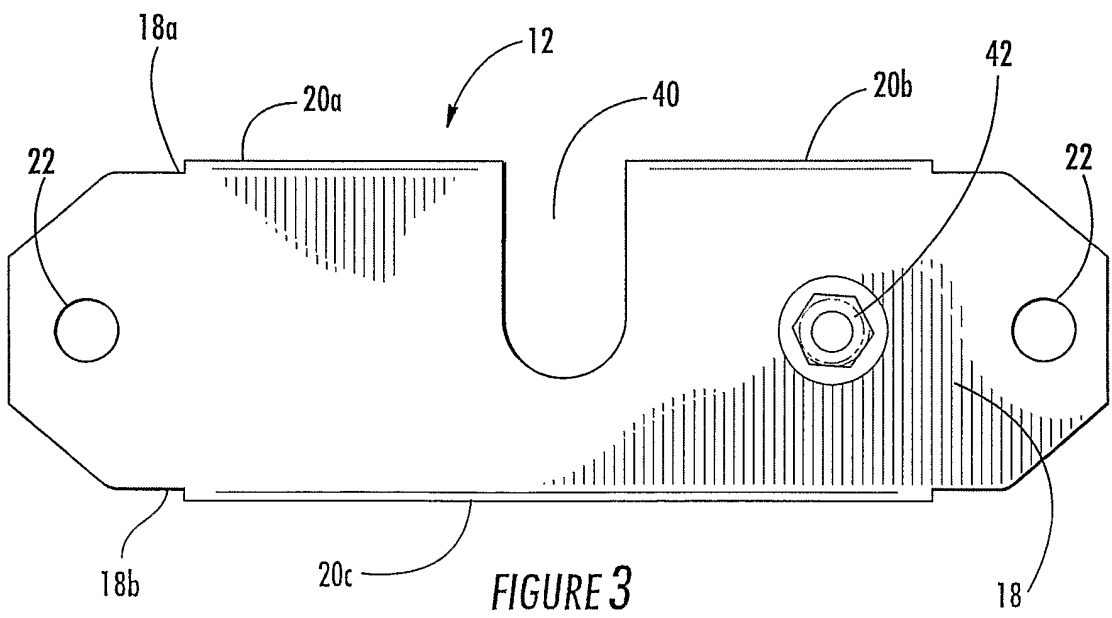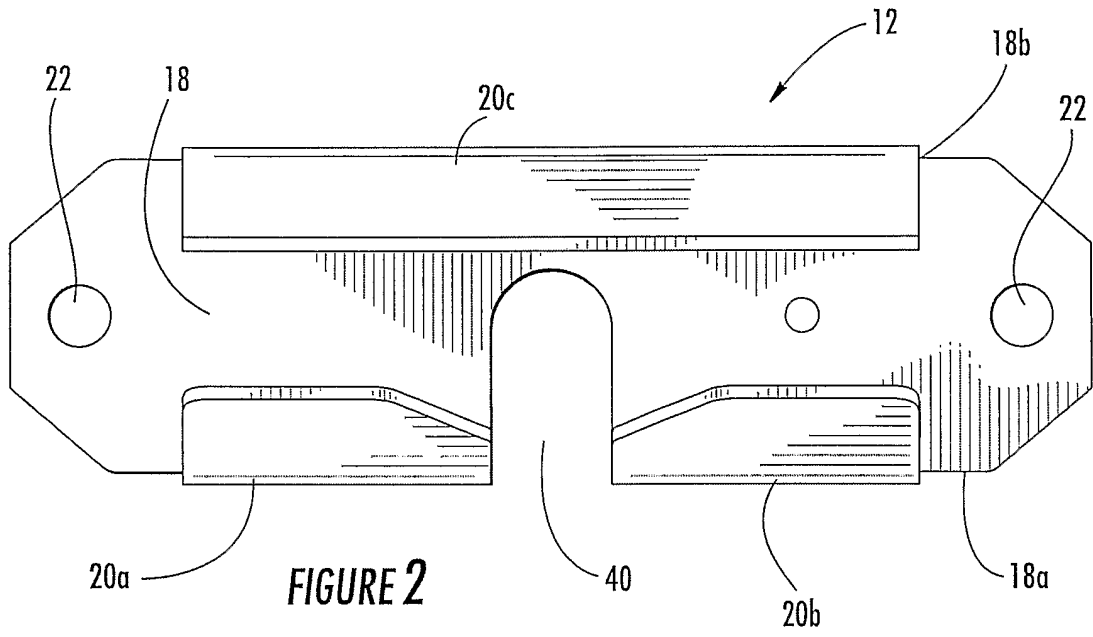

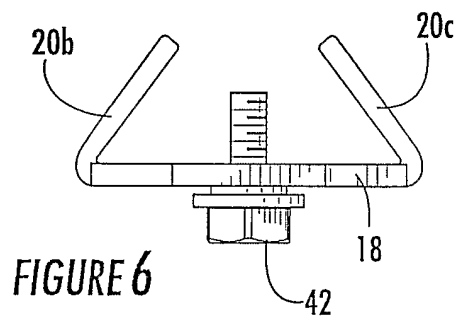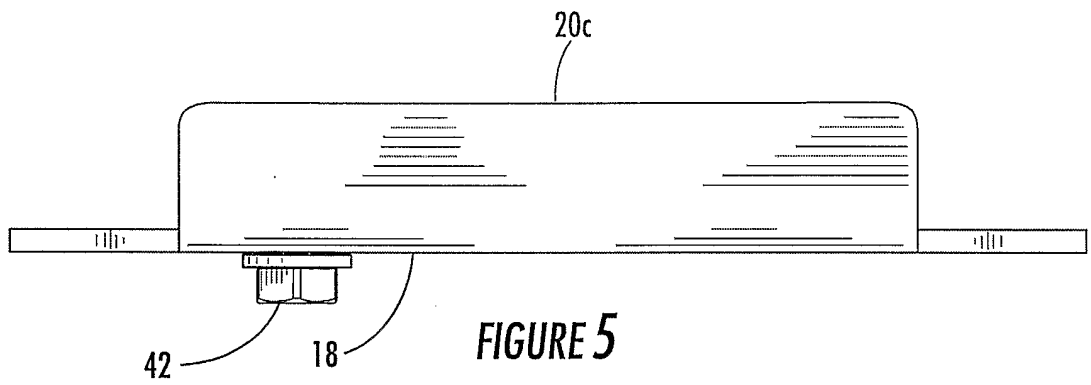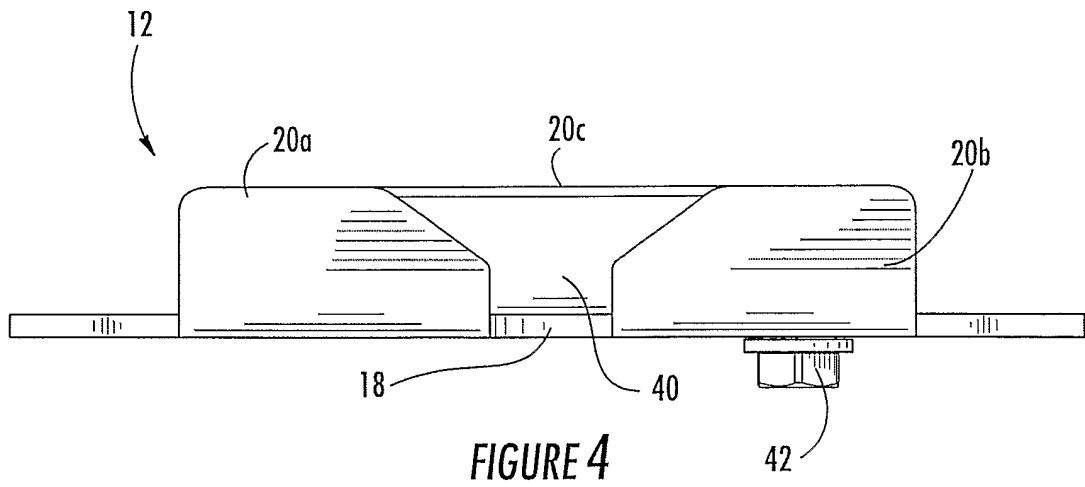

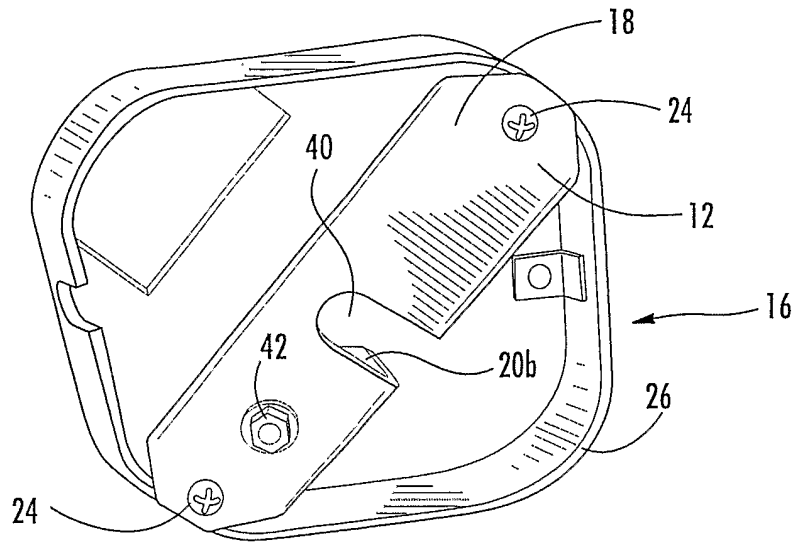


FIGURE 7

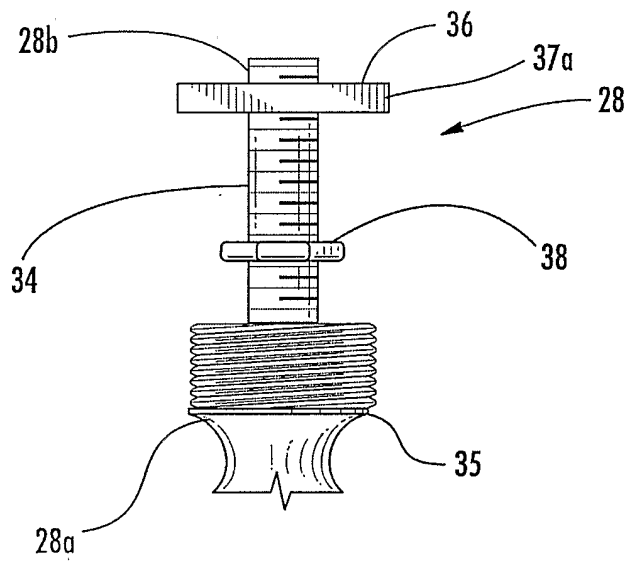
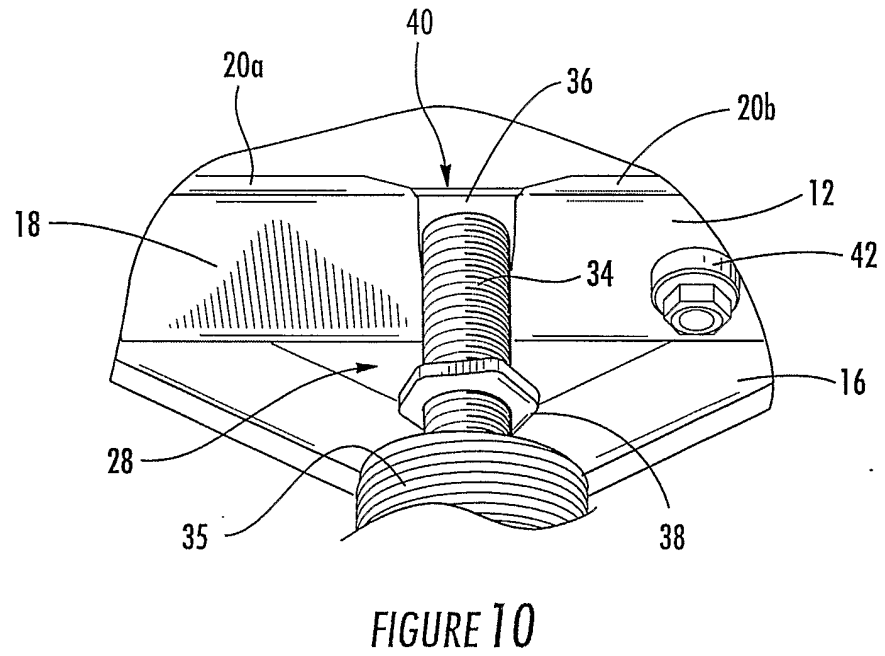
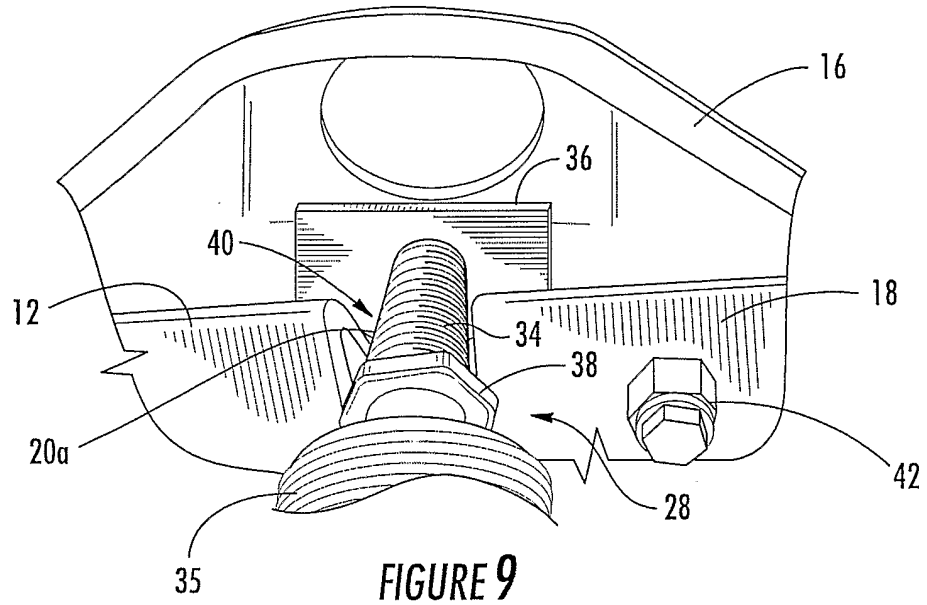


FIGURE 8



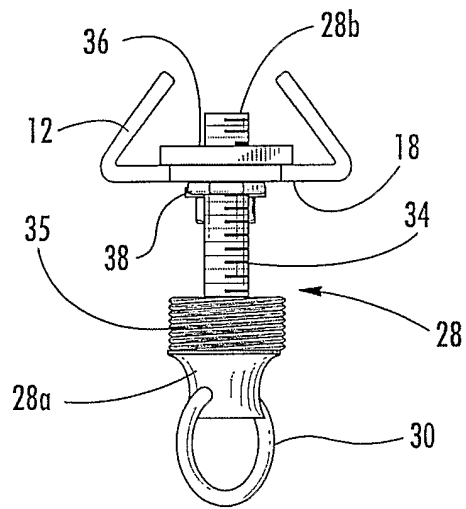


FIGURE 11

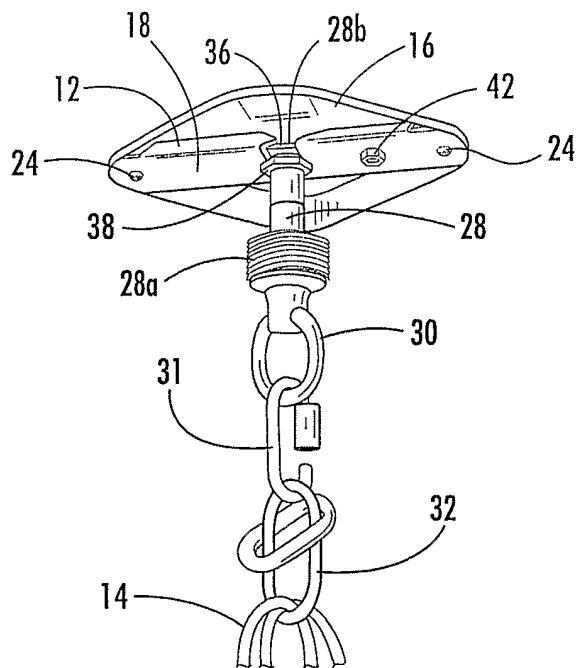


FIGURE 12

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/21800

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F21V21/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F21V F16M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 01, 31 January 2000 (2000-01-31) -& JP 11 283430 A (MATSUSHITA ELECTRIC WORKS LTD), 15 October 1999 (1999-10-15) abstract figure 7	1-15, 17-19, 21-23
Y	---	16, 20, 24
	-/--	

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

22 October 2003

Date of mailing of the international search report

29/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lange, C

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 03/21800

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 017, no. 433 (M-1461), 11 August 1993 (1993-08-11) -& JP 05 094710 A (TOSHIBA LIGHTING & TECHNOL CORP), 16 April 1993 (1993-04-16) abstract figures 1-4	16, 20, 24
A		1-3, 5, 7-12, 14, 17-19, 21-23
X	US 2 285 883 A (ANDERSON ERNST G K) 9 June 1942 (1942-06-09)  page 1, line 31 - line 53 figures 1, 3	1-15, 17-19, 21-23
Y		16, 20, 24
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 03, 31 March 1997 (1997-03-31) -& JP 08 298014 A (TEC CORP), 12 November 1996 (1996-11-12) abstract	1-3, 10-12, 16, 21, 23
A		7-9, 17-20, 22
A	US 1 453 233 A (BALL JR CHARLES M) 24 April 1923 (1923-04-24) page 1, line 32 - line 51	1-24
A	US 4 980 808 A (LILOS NICHOLAOS) 25 December 1990 (1990-12-25)  column 2, line 30 - line 32 figures 2, 6	1-3, 5, 7-12, 14, 16-20



## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 03/21800

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 11283430	A	15-10-1999	NONE	
JP 05094710	A	16-04-1993	NONE	
US 2285883	A	09-06-1942	NONE	
JP 08298014	A	12-11-1996	NONE	
US 1453233	A	24-04-1923	NONE	
US 4980808	A	25-12-1990	NONE	