



- (51) International Patent Classification:
B41J 2/195 (2006.01)
- (21) International Application Number:
PCT/US2018/026315
- (22) International Filing Date:
05 April 2018 (05.04.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/491,138 27 April 2017 (27.04.2017) US
62/491,155 27 April 2017 (27.04.2017) US
- (71) Applicant: **RETAIL INKJET SOLUTIONS, INC.**
[US/US]; 1916 Palomar Oaks Way, Suite 100, Carlsbad, CA 92008 (US).
- (72) Inventors: **WHITE, Kraig, David**; 1916 Palomar Oaks Way, Suite 100, Carlsbad, CA 92008 (US). **STRATFORD, Chris, Alan**; 1916 Palomar Oaks Way, Suite 100, Carlsbad, CA 92008 (US). **JIMENEZ, Juan, Manuel**; 1916 Palomar Oaks Way, Suite 100, Carlsbad, CA 92008 (US). **OWEN, Wallace, Earl**; 1916 Palomar Oaks Way, Suite 100, Carlsbad, CA 92008 (US).
- (74) Agent: **FULLER, Michael, L.**; Knobbe, Martens, Olson & Bear, LLP, 2040 Main Street, 14th Floor, Irvine, CA 92614 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: INKJET CARTRIDGE REFILLING SYSTEMS AND METHODS

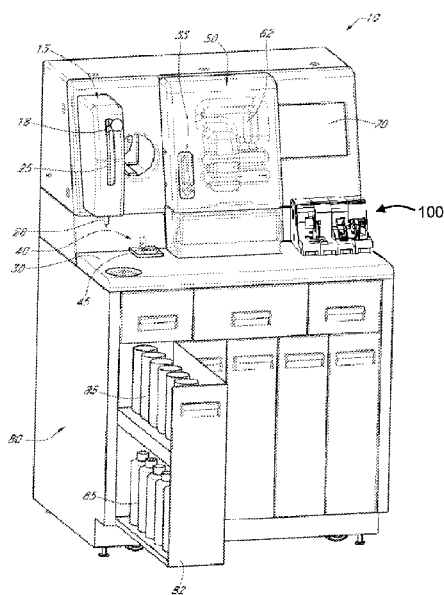


Figure 1

(57) Abstract: Embodiments provide a modular inkjet configuration modification system and method for use in modifying electronics, such as a PLC, on a remanufactured or refilled inkjet cartridge. The modular system can include a receiver and one or more interchangeable adapters. The interchangeable adapters can include structures and geometry which allow each of the interchangeable adapters to be used with the receiver and swapped by an operator on an as-needed basis. An inkjet refilling system with an integrated scale and method for determining a fill status of an inkjet cartridge is also discussed. The system can display the fill status on a user interface, and the fill status can be generalized based on the type of inkjet cartridge and range of measured weights and/or percentages of pre-set weight.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

INKJET CARTRIDGE REFILLING SYSTEMS AND METHODS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. provisional application Serial No. 62/491,155 entitled “SYSTEMS AND METHODS FOR RESETTING AN INKJET CARTRIDGE” filed on April 27, 2017, and U.S. provisional application Serial No. 62/491,138 entitled “SYSTEMS AND METHODS FOR DETERMINING A FILL STATUS OF AN INKJET CARTRIDGE” filed on April 27, 2017, both of which are incorporated by reference in their entirety.

BACKGROUND

Field

[0002] This disclosure relates to systems and methods for refilling inkjet cartridges. More specifically, this disclosure relates to systems and methods for resetting an inkjet cartridge, such as modifying electronics of an inkjet cartridge. This disclosure also relates to systems and methods for refilling an inkjet cartridge, such as determining the fill status of the inkjet cartridge.

Background

[0003] In the personal and business computer market, inkjet printers are very common. Inkjet printers are inexpensive, quiet, fast and produce high quality output. However, replacement cartridges can be expensive. Although some manual inkjet refilling kits are available, they can be difficult and messy for individuals to use, and inkjet cartridges may become damaged during the refilling task, especially when performed by inexperienced users. Moreover, many inkjet cartridges use programmable logic chips (PLCs) to control ink usage and other parameters of the inkjet cartridge and to properly identify an inkjet cartridge to the inkjet printer. A PLC is an electronic device that resides on an inkjet cartridge and communicates information, generally bi-directionally, with the inkjet printer and stores and provides data about the inkjet cartridge and inkjet cartridge status to and from the inkjet

printer. Resetting such PLCs enables the inkjet cartridge to be refilled with ink (e.g., when empty) and, with this PLC having been reset, to perform substantially the same as a new cartridge.

[0004] Original equipment manufacturers (OEMs) of printer and imaging products, such as Lexmark®, Canon®, Hewlett Packard® and the like, make replacement inkjet cartridges that fit their respective inkjet printers. Generally, a unique PLC is developed for each specific model and color of inkjet cartridge. Additionally, the placement of these PLCs and the geometry of each of inkjet cartridge differ among various cartridges, even among the same OEMs. As such, in a retail store environment for refilling inkjet cartridges, this variation in PLCs and geometry of cartridges requires a substantial number of PLC resetting or reprogramming devices which generally operate separately from the inkjet refilling system.

[0005] Additionally, individuals may bring inkjet cartridges to a retail store for refilling inkjet cartridges. In a retail store environment for refilling inkjet cartridges, customers may request a fill status of their inkjet cartridge prior to requesting that the retail store proceed with refilling the inkjet cartridge. Moreover, the retail store operator and/or customer may wish to confirm fill status of the inkjet cartridge after a refilling operation has been performed.

SUMMARY

[0006] Example embodiments described herein have several features, no single one of which is indispensable or solely responsible for their desirable attributes. Without limiting the scope of the claims, some of the advantageous features will now be summarized. While the features and structures are described below in connection with embodiments of inkjet cartridges such as inkjet cartridges having an integrated printhead and inkjet cartridges for use with inkjet printers having a printhead, it is to be understood that the features and structures can be implemented in any ink or toner source capable of being replaced or refilled (e.g., a laser toner cartridge for use with a laser printer, LED printed supplies for use with an LED printer, etc.) as well as any other consumable having programmable or resettable

electronics. After considering this discussion, and particularly after reading the section entitled “Detailed Description” one will understand how the features of the embodiments described herein provide advantages that include more efficient and environmentally friendly refilling of inkjet cartridges.

[0007] In some embodiments, a modular system can modify an inkjet cartridge configuration. The modular system can include a receiver having one or more docking regions comprising electrical interfaces. The modular system can include a first adapter configured to establish communications between a first type of inkjet cartridge and the receiver. The first adapter can include a base, a receiver interface which can contact an electrical interface of the receiver, and/or a cartridge interface which can contact electronics of a first type of inkjet cartridge. The modular system can include a control system. The control system can determine a type of inkjet cartridge based on at least one of: a type of adapter, and electronics of the inkjet cartridge. The control system can modify configuration information stored on the inkjet cartridge based on the determined type of inkjet cartridge.

[0008] In some embodiments, the system further can include a second adapter which can establish communications between a second type of inkjet cartridge and the receiver. The second adapter can include a base, a receiver interface which can contact an electrical interface of the receiver, and/or a cartridge interface which can contact electronics of the second type of inkjet cartridge. In some embodiments, the receiver can include a first docking region and a second docking region. In some embodiments, the first adapter can communicate with the receiver at the first docking region and the second adapter can communicate with the receiver at the second docking region. In some embodiments, the first adapter and the second adapter can interchangeably communicate with the receiver at the same docking region.

[0009] In some embodiments, the first adapter can include a support structure. The first type of inkjet cartridge can removably couple with the support structure. In some embodiments, the support structure can be removably coupled to a recess of the base. The support structure can include a first sidewall. The support structure can also include a second sidewall spaced apart from the first sidewall.

[0010] In some embodiments, the first adapter can include a retention mechanism which can removably couple with a docking region. In some embodiments, the retention mechanism can include a plug which can removably couple with a socket of the receiver. The socket can include the electrical interface of a docking region of the receiver. In some embodiments, the retention mechanism can include a hook configured to engage a lip in the docking region. The lip can be moved from an engaged configuration to a disengaged configuration. The lip can be biased towards the engaged configuration.

[0011] In some embodiments, the first adapter can include electronics provided within the base of the first adapter. The electronics can include programmed instructions that, when executed by the control system, modify configuration information stored on the inkjet cartridge based on the determined type of inkjet cartridge. The electronics can include an identification tag such that the control system can determine the type of adapter attached to the receiver.

[0012] In some embodiments, the system can include a user interface. The control system can display programming information based on the determined type of inkjet cartridge. The programming information can include credits for modifying configuration information stored on the inkjet cartridge.

[0013] In some embodiments, the system can include a fill station which can refill an inkjet cartridge. In some embodiments, the receiver can be attached to the fill station.

[0014] In some embodiments, a method for modifying configuration information stored on an inkjet cartridge is provided. The method can be utilized in connection with a modular system having a receiver and one or more interchangeable adapters. The method can include detecting a first electronic coupling between an interchangeable adapter and the receiver. The method can include detecting a second electronic coupling between an inkjet cartridge and the interchangeable adapter. The method can include determining a type of the inkjet cartridge based on the first and second electronic couplings. The method can include modifying configuration information stored on the inkjet cartridge based on the determined type of inkjet cartridge.

[0015] In some embodiments, determining a type of inkjet cartridge comprises detecting an identification tag of the interchangeable adapter based on the first electronic

coupling. In some embodiments, determining a type of inkjet cartridge comprises detecting identification information on electronics of the inkjet cartridge based on the second electronic coupling.

[0016] In some embodiments, the method can include determining credits based on the determined type of inkjet cartridge. In some embodiments, the method can include comparing the credits to a threshold amount prior to modifying the inkjet configuration. In some embodiments, the method can include displaying credits on a user interface.

[0017] In some embodiments, a system can refill an inkjet cartridge and/or determine a fill status of an inkjet cartridge. The system can include a fill station configured to refill an inkjet cartridge. The system can include a scale. The scale can include a sensor which can provide a measurement. The measurement can include at least one of a mass or weight of an inkjet cartridge. The system can include a user interface. The system can include a control system. The control system can determine a type of inkjet cartridge on which the measurement is based. The control system can determine a fill status of an inkjet cartridge based on the measurement. The control system can display the fill status on the user interface.

[0018] In some embodiments, the control system can determine the type of inkjet cartridge via a user input. In some embodiments, the control system can determine the type of inkjet cartridge by reading electronics of the inkjet cartridge.

[0019] In some embodiments, the fill status can be a general fill status. The general fill status can include a discrete number of statuses corresponding to ranges of pre-defined measurements of the type of inkjet cartridge. In some embodiments, the ranges of pre-defined measurements can include at least one of pre-defined masses or weights of the type of inkjet cartridge. In some embodiments, the ranges of pre-defined measurements can include percentages of a pre-defined mass or weight of the type of inkjet cartridge. In some embodiments, the ranges of pre-defined measurements can include percentages of a pre-defined fill mass or fill weight of the type of inkjet cartridge.

[0020] In some embodiments, a method of determining a fill status of an inkjet cartridge is provided. The method can be implemented with a scale. The method can include detecting an inkjet cartridge on the scale. The method can include measuring a mass or

weight of the inkjet cartridge on the scale in response to detecting the inkjet cartridge. The method can include obtaining cartridge information, the cartridge information providing a type of inkjet cartridge being measured. The method can include determining a fill status of the inkjet cartridge, the fill status being selected from one of multiple fill statuses based on a measured mass or weight of the inkjet cartridge.

[0021] In some embodiments, detecting an inkjet cartridge on the scale can include detecting a deviation from a default signal received from a sensor of the scale. In some embodiments, obtaining information on a type of inkjet cartridge can include receiving an input providing cartridge information. In some embodiments, obtaining information on a type of inkjet cartridge can include receiving cartridge information based on electronics on the inkjet cartridge.

[0022] In some embodiments, determining a fill status of the inkjet cartridge can include comparing a measured mass or weight of the inkjet cartridge with a table of providing fill statuses based on ranges of measured mass and weights.

[0023] In some embodiments, the method can include calibrating the scale. Calibrating the scale can be performed before measuring a mass or weight of the inkjet cartridge.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] These and other features, aspects and advantages are described below with reference to the drawings, which are intended to illustrate embodiments of inkjet refilling systems including embodiments of various components of these inkjet refilling systems.

[0025] FIG. 1 is a front perspective view of an embodiment of an inkjet refilling system.

[0026] FIG. 2 is a front perspective view of an embodiment of a modular cartridge configuration system having a receiver with four interchangeable adapters attached thereto.

[0027] FIG. 3 is a front perspective view of the receiver of FIG. 2 shown without the interchangeable adapters in place.

[0028] FIG. 4 is a left-side elevation view of the receiver of FIG. 3, with a side wall of the receiver removed to illustrate internal components.

[0029] FIG. 5 is a front perspective view of a first interchangeable adapter of FIG. 2 shown in isolation of other components of the modular cartridge configuration system.

[0030] FIG. 6 is a front perspective view of the first interchangeable adapter of FIG. 5 with a support structure detached from a base.

[0031] FIG. 7 is a rear perspective view of the first interchangeable adapter of FIG. 5.

[0032] FIG. 8 is a right-side elevation side view of the first interchangeable adapter of FIG. 5 with portions removed to illustrate internal components.

[0033] FIG. 9 is a front perspective view of a second interchangeable adapter of FIG. 2 shown in isolation of other components of the modular cartridge configuration system.

[0034] FIG. 10 is a front perspective view of the second interchangeable adapter of FIG. 9 with a support structure detached from a base.

[0035] FIG. 11 is a front perspective view of a third interchangeable adapter of FIG. 2 shown in isolation of other components of the modular cartridge configuration system.

[0036] FIG. 12 is a front perspective view of the third interchangeable adapter of FIG. 11 with a support structure detached from a base.

[0037] FIG. 13 is a front perspective view of a fourth interchangeable adapter of FIG. 2 shown in isolation of other components of the modular cartridge configuration system.

[0038] FIG. 14 is a front perspective view of the fourth interchangeable adapter of FIG. 13 with support structures detached from a base.

[0039] FIG. 15 is a right-side cross sectional view of the receiver and first interchangeable adapter for FIG. 2, shown in a detached configuration.

[0040] FIG. 16 is a right-side cross sectional view of the receiver and first interchangeable adapter for FIG. 15, shown in an attached configuration.

[0041] FIG. 17 is a flow diagram of an embodiment for modifying an inkjet cartridge configuration.

[0042] FIG. 18 is a front perspective view of an embodiment of an inkjet refilling system having an integrated scale.

[0043] FIG. 19 is a front perspective view of an embodiment of an integral scale attached to a frame of a modular cartridge configuration system.

[0044] FIG. 20 is a front perspective view of the integral scale of FIG. 19, with portions removed to illustrate internal components.

[0045] FIG. 21 is a diagram of a user interface illustrating a fill status.

[0046] FIG. 22 is a schematic of an embodiment of an inkjet refilling system.

[0047] FIG. 23 is a flow diagram of an embodiment for determining a fill status of an inkjet cartridge.

DETAILED DESCRIPTION

[0048] Certain terminology may be used in the following description for the purpose of reference only, and thus are not intended to be limiting. For example, terms such as “upper”, “lower”, “upward”, “downward”, “above”, “below”, “top”, “bottom” and similar terms refer to directions in the drawings to which reference is made. Such terminology may include the words specifically mentioned above, derivatives thereof, and words of similar import. Similarly, the terms “first”, “second”, and other such numerical terms referring to structures neither imply a sequence or order unless clearly indicated by the context.

[0049] While the present description sets forth specific details of various embodiments, it will be appreciated that the description is illustrative only and should not be construed in any way as limiting. Additionally, although particular embodiments may be disclosed or shown in the context of particular types of printing systems, such as an inkjet printer and associated inkjet cartridges, it is to be understood that any elements of the disclosure may be used in any type of printing system such as, but not limited to, laser printers, LED printers, and associated ink or toner sources.

[0050] While the embodiments described herein include electrical interfaces which are described in connection with mechanical structures (e.g., contacts, pins, sockets, plugs, and the like) to establish a connection between various systems, it is to be understood that one or more of these interfaces can include structures which establish a connection wirelessly. For example, one or more of the interfaces can include transmitters, receivers,

and/or transceivers which enable wireless communications such as NFC, Wi-Fi (i.e., 802.11 protocols), Bluetooth, and the like.

[0051] As used herein, the term “PLC” means any programmable storage that can be programmed by a user and maintains persistent storage without external power. For example, in one embodiment, the PLC generally takes the form of a small printed circuit assembly (PCA) or flexible electronic circuit that may, among other components, contain an application specific integrated circuit (ASIC) and/or an erasable programmable read only memory (EPROM) or the like. These forms of computer memory do not lose their contents when the power supply is removed, and can be easily erased and reused. EPROMs and the like are generally employed for programs designed for repeated use (such as a computer’s Buffered Input/Output system (BIOS) but can be upgraded with a later version of the program or other data. ASICs are highly customized electronic circuits that perform a very specific function. In other embodiments, flash memory or a one-time programmable EPROM may be used. However, any type of PLC with persistent programmable memory may be suitable for the uses described herein.

The Inkjet Refilling System

[0052] With reference first to **Figure 1**, an inkjet refilling system **10** is shown. As shown in the illustrated embodiment, the system can be a floor-standing unit. However, it is to be understood that the system can take on different form-factors, such as a desk-top unit. The system includes a drill station **15** having an actuator **18**. In the embodiment shown, the actuator **18** comprises a handle on a lever. In this embodiment, an on/off switch activates the drill. Thus, when the lever is moved downward, the drill becomes active. A slide channel **25** allows the actuator to slide up and down as the drill is engaged with an inkjet cartridge.

[0053] A covered self-centering drill bit **28** protrudes from the lower portion of the drill station, and is connected to the actuator **18** so that movement of the actuator **18** within the slide channel **25** results in the covered drill bit **28** moving up and down. Beneath the covered drill bit **28** is a flat surface **30** where adapters or fixtures are placed containing inkjet cartridges or tanks to be drilled. Once a fixture has been placed on the flat surface **30** and aligned beneath the drill bit **28**, any of several on/off switches, known in the art, can be

used to activate the self-centering drill bit **28**. The actuator **18** is then slid down within the slide channel **25** until the drill bit **28** drills a hole within the cartridge or tank. In one alternative embodiment, the drill mechanism may be configured such that the drill activates and begins to spin the drill bit as soon as the handle is lowered from the top of the spring-biased upper position in the slide channel **25**. As used herein, the term “inkjet cartridge” means a typical cartridge having a print head, and also includes an inkjet tank that does not include an inkjet print head.

[0054] Adjacent the drilling station **15** is a cleaning station **40** which is configured to receive an inkjet cartridge and remove any excess ink from the cartridge prior to refilling. In this embodiment, the cleaning station **40** includes a mounting station **45** which is adapted to receive the plurality of the fixtures described above. A portion of the mounting station **45** includes an evacuation station that communicates with a vacuum source in order to evacuate the ink from any cartridge that is inserted into the mounting station **45**.

[0055] Within a central portion **50** of the system **10** can include a nozzle refilling station **55** that is configured to receive an inkjet cartridge and refill that cartridge through its nozzles. As is known in the art, inkjet cartridges eject ink from a set of nozzles. In some cases it is possible to refill or clean inkjet cartridges by forcing ink or cleaning solutions into the cartridge through the nozzles. One example of such a cartridge is the Hewlett Packard Model HP45 inkjet cartridge. When the cartridge is placed within the nozzle refilling station **55**, the system forces a predetermined quantity of ink into the cartridge through the nozzles. In some embodiments, the nozzle refilling station **55** also includes a vacuum source so that prior to nozzle filling the inkjet cartridge it can be evacuated to remove any unused ink. As shown, the central portion **50** can include a door **62** that seals a vacuum chamber when closed to allow a low pressure environment to be created by the vacuum source. In this manner the system knows the proper amount of ink to use in refilling the cartridge. In another embodiment, the nozzle refilling station **55** includes a wash solution source that can be used to rinse the interior of the cartridge prior to refilling. Wash solution may include sterile filtered water, or a cleansing solution adapted for cleaning inkjet cartridges.

[0056] Adjacent the central portion **50** is a user interface **70** which is used by the operator to control each step in the refilling process. In some embodiments, the user interface

comprises a touch screen graphical user interface. However, it is to be understood that the user interface can include one or more visual displays and one or more input devices such as keypads. The user interface is linked to a central computer system (not shown) that controls all of the functions of the system **10**. By inputting commands through the user interface **70**, an operator can perform the functions described herein.

[0057] Within a lower portion **80** of the system **10** is a drawer **82** that provides a series of ink refill bottles **85**. These bottles provide the source of ink used within the system to refill the inkjet cartridges.

[0058] Below the user interface **70** is a modular cartridge configuration system **100**. The system **100** can be used to modify each inkjet cartridge before, during, or after it has been refilled so that the serviced inkjet cartridge can be usable when re-installed into a printer.

Modular Cartridge Configuration System

[0059] With reference next to **Figures 2-14**, an embodiment of a modular cartridge configuration system **100**, or components thereof, is illustrated. As shown in the illustrated embodiment, the system **100** can be a self-contained unit which can be physically and/or electrically coupled to the inkjet refilling system **10**. This can allow the modular cartridge configuration system **100** to be serviced separately from the inkjet refilling system **10** to minimize downtime of the inkjet refilling system **10**. However, it is to be understood that the modular cartridge configuration system **100**, or components thereof, can be built into the inkjet refilling system **10** itself.

[0060] The modular cartridge configuration system **100** can be used to modify an inkjet cartridge configuration. In some embodiments, the system **100** can be used to reset electronics, such as an original PLC or an existing customizable PLC, on an inkjet cartridge to ensure that the serviced inkjet cartridge is usable when replaced within an inkjet printer. For example, the system **100** can reset the PLC so that a cartridge having the PLC is recognized as being new or full by an inkjet printer. In some embodiments, the system **100** can be used to program electronics, such as a new customizable PLC, on an inkjet cartridge to ensure that the inkjet cartridge is compatible with an inkjet printer when the inkjet

cartridge is replaced within the inkjet printer. For example, a customizable PLC could replace the original PLC on the inkjet cartridge. The system **100** can then program the customizable PLC to emulate the specific PLC SKU that would otherwise be used for the inkjet cartridge SKU that is being refilled. Examples of customizable PLC systems and methods of programming are described in further detail in U.S. Patent No. 8,602,536 titled “Programming Customizable Smart-Chip in an Ink Refilling Station,” issued November 4, 2010, the entirety of which is incorporated herein by reference.

[0061] With reference first to **Figure 2** which illustrates a perspective view of the modular cartridge configuration system **100**, the modular cartridge configuration system **100** can include a receiver **110** and one or more interchangeable adapters. The interchangeable adapters, such as adapters **200, 300, 400, 500**, can allow the modular cartridge configuration system **100** to work with a variety of inkjet cartridge types. For example, each adapter can be sized and shaped to receive inkjet cartridges from a different family or series of inkjet cartridges (e.g., different manufacturers, different shapes of cartridges, and/or different sizes of cartridges). In some embodiments, the adapters, such as adapters **200, 300, 400, 500**, can establish electrical communications between inkjet cartridges and the receiver **110**. Moreover, the interchangeable adapters **200, 300, 400, 500** can allow the system **100** to be updated for use with newer types of inkjet cartridges which may not have been available at the time the system **100** was first put into use. As such, as new inkjet cartridges are developed, new interchangeable adapters can be manufactured to hold the new inkjet cartridge. This allows the system **100** to work with newly designed cartridges without resorting to alterations in the physical configuration of the system **100**.

[0062] In the event that an inkjet cartridge to be serviced is incompatible with the existing interchangeable adapters **200, 300, 400, 500** coupled to the receiver **110**, the operator can swap one of the existing interchangeable adapters **200, 300, 400, 500** with a different interchangeable adapter compatible with that particular type of inkjet cartridge. This reduces the amount of time needed to modify an inkjet cartridge configuration. Moreover, the small form factor of each of the interchangeable adapters facilitates organization and storage of such adapters which can further enhance efficiency of the operator.

[0063] While the embodiment of modular cartridge configuration system **100** illustrated in **Figure 2** includes four interchangeable adapters **200, 300, 400, 500**, it is to be understood that the system **100** can be used with a fewer number of interchangeable adapters or a greater number of interchangeable adapters. In some embodiments, the system **100** can include one interchangeable adapter to provide for a more compact configuration while still allowing an operator to swap interchangeable adapters. The interchangeable adapters can be swapped out on an as-needed basis based on the type of inkjet cartridge being serviced.

Receiver

[0064] With reference next to **Figures 3** and **4**, the receiver **110** is illustrated without interchangeable adapters attached thereto. **Figure 3** illustrates a perspective view of the receiver **110**, including a frame **112** having vertically-oriented side walls **114**, a horizontally-oriented floor **116**, and/or one or more support tabs **118a, 118b, 118c**. The frame **112** can be used to support various components of the receiver **110**, such as circuit board **120**. As shown in the illustrated embodiment, circuit board **120** is supported at least by the one or more support tabs **118a, 118b, 118c** along a lower edge of the circuit board **120**.

[0065] The receiver **110** can include four docking regions **130a, 130b, 130c, 130d** which have been illustrated with dash-dash broken lines. These docking regions are regions of the receiver **110** into which interchangeable adapters can be positioned or received. As shown in the illustrated embodiment, the docking regions **130a, 130b, 130c, 130d** can have similar geometry to allow each of the docking regions **130a, 130b, 130c, 130d** to be interchangeably used with interchangeable adapters. For example, the positioning of interchangeable adapters **200, 300, 400, 500** as shown in **Figure 2** can be swapped between different docking regions as desired by an operator. However, it is to be understood that one or more of the docking regions **130a, 130b, 130c, 130d** can have a geometry that differs with those of other docking regions in embodiments of the invention.

[0066] With continued reference to **Figure 3**, each of the docking regions **130a, 130b, 130c, 130d** can include an electrical interface **132a, 132b, 132c, 132d** which can be attached to the circuit board **120**. The circuit board **120** can be a printed circuit board (PCB), through which power and/or data can be transmitted to the various adapters. As shown in the

illustrated embodiment, the electrical interfaces **132a**, **132b**, **132c**, **132d** can be in the form of sockets configured to receive plugs or prongs of an interchangeable adapter. This can allow an interchangeable adapter to be quickly and easily be coupled to the receiver **110** (i.e., “plug-and-play”). In some embodiments, the sockets can be keyed or registered to ensure that only compatible interchangeable adapters are used with the receiver **110**. For example, the number of individual cavities in the sockets or the shape of the cavities themselves can be registered to receive only plugs or prongs of specific interchangeable adapters.

[0067] As shown in the illustrated embodiment, each of the electrical interfaces **132a**, **132b**, **132c**, **132d** can include similar structure and/or positioning with respect to a particular docking region **130a**, **130b**, **130c**, **130d**. This can allow an operator to utilize each docking region **130a**, **130b**, **130c**, **130d** interchangeably. However, it is to be understood that the structure or positioning of electrical interfaces for different docking regions can vary to allow compatibility with a greater degree of interchangeable adapters. Moreover, while the electrical interfaces **132a**, **132b**, **132c**, **132d** are shown in the form of sockets, it is to be understood that other structures can be used such as plugs, prongs, pins, or contacts on the circuit board **120**.

[0068] With continued reference to **Figure 3**, four docking regions **130a**, **130b**, **130c**, **130d** can include retention mechanisms **134a**, **134b**, **134c**, **134d** for coupling to corresponding structures of an interchangeable adapter. The retention mechanisms **134a**, **134b**, **134c**, **134d** can enhance securement of an interchangeable adapter positioned in the docking regions **130a**, **130b**, **130c**, **130d**. In some embodiments, such as that shown, the retention mechanisms **134a**, **134b**, **134c**, **134d** can be used to supplement the physical coupling at the electrical interfaces **132a**, **132b**, **132c**, **132d** such as the illustrated sockets. This can reduce the likelihood of the interchangeable adapter being inadvertently removed from the receiver **110**. For brevity, the structure of retention mechanism **134a** will be described in further detail. It is to be understood that the structures described with respect to retention mechanism **134a** can be utilized for other retention mechanisms, such as retention mechanisms **134b**, **134c**, **134d**.

[0069] As shown in the illustrated embodiment, the retention mechanism **134a** can include a plate **136a**. The plate **136a** can include a lip **138a** extending from the plate

136a at or proximate a forward edge of the plate **136a**. The lip **138a** can engage one or more corresponding structures on the interchangeable adapters such as, but not limited to, hooks or slots. In some implementations, such as that shown in the illustrated embodiment, the lip **138a** can include geometry which facilitates proper attachment of an interchangeable adapter to the receiver **110**. For example, the geometry can be keyed or registered to corresponding features on the interchangeable adapter to reduce the likelihood of the interchangeable adapter being installed in a misaligned orientation. This can reduce potential damage to more fragile components of the receiver **110**, such as the electrical interface **132a**. Moreover, the register geometry can inhibit installation of interchangeable adapters which may be incompatible with the receiver **110**, or at least the docking region **130a**, which can also reduce the likelihood of damage to more fragile components. As shown in the illustrated embodiment, the lip **138a** can include triangular cutouts **140a** at opposite sides of the lip **138a**; however, it is to be understood that other geometries can be used such as, but not limited to, circles, squares, slots, and the like. Moreover, it is to be understood that cutouts can be positioned along other portions of the lip **138a**.

[0070] To facilitate coupling and decoupling of an interchangeable adapter with the retention mechanism **134a**, the retention mechanism **134a** can be movable from an engaged configuration to a disengaged configuration. In the engaged configuration, the retention mechanism **134a** can be positioned to couple with a corresponding structure of the interchangeable adapter. In so doing, the retention mechanism **134a** can secure the interchangeable adapter within the docking region **130a** and reduce the likelihood that the interchangeable adapter is inadvertently removed from the docking region **130a**. In the disengaged configuration, the retention mechanism **134a** can be positioned to allow the interchangeable adapter to be removed from the docking region **130a** or inserted into the docking region **130a**. In some implementations, the plate **136a** and lip **138a** can be rotated and/or translated upwards relative to the position shown in **Figure 3**. For example, the plate **136a** can be rotatable about a pivot at or proximate a rearward edge of the plate **136a**.

[0071] As shown in the illustrated embodiment, the plate **136a** can be attached via one or more fasteners **142a** to a cross-member **144** coupled to the frame **112**. The cross-member **144** can be fixed relative to the frame **112** and the plate **136a** can function as a

cantilever about the fasteners **142a**. The plate **136a** can be formed from a resilient material that allows the plate **136a** to be moved upward upon application of a modest amount of force (e.g., between about 1 lb_f to about 20 lb_f, preferably between about 3 lb_f to about 15 lb_f, and more preferably between about 5 lb_f to about 10 lb_f). This ensures that the plate **136a** can be intentionally moved relatively easily while still exerting sufficient force to secure the interchangeable adapter to the receiver **110** against inadvertent movement. In some embodiments, the plate **136a** can be rotatably coupled to the frame **112** or cross-member **144** via a pivot (not shown). The retention member **134a** can include one or more biasing members, such as a cantilever spring, coil spring, torsion spring, or the like, which can bias the retention member **134a** towards the engaged configuration.

[0072] With reference next to **Figure 4**, a left side-view of the receiver **110** is illustrated with a left sidewall of the frame **112** removed to illustrate internal components of the receiver **110**. As shown in the illustrated embodiment, the receiver **110** can include one or more ports **150**, **152**, such as a USB port and a power port respectively. The one or more ports **150**, **152** can be coupled to a circuit board **122** positioned behind (to left as shown in **Figure 4**) circuit board **120**. The receiver **110** can be electrically coupled to an inkjet refilling system via one or more ports, such as port **150** or other ports (not shown), to establish communications between the inkjet refilling system and the modular cartridge configuration system **100**. This can allow the inkjet refilling system to control aspects of operation of the modular cartridge configuration system and vice-versa. For example, the modular cartridge configuration system can utilize some of the on-board processing power of the inkjet refilling system. The modular cartridge configuration system can be powered separately from the inkjet refilling system via a port **152**, which can be a power port (e.g., a 5V power port). In some implementations, this can allow the modular cartridge configuration system to be operated separately from the inkjet refilling system. The receiver **110** can include a power switch **154** to control the on-off state of the modular cartridge configuration system. While two ports **150**, **152** are shown, it is to be understood that a fewer number of ports or a greater number of ports can be used. For example, the receiver **110** and/or the interchangeable adapters can include additional ports, such as additional USB ports, which

can allow for systems to communicate with the modular configuration system and/or allow for other types of functions to be performed, such as diagnostics.

First Interchangeable Adapter

[0073] With reference next to **Figure 5**, the interchangeable adapter **200** is illustrated separate from its receiver. **Figure 5** illustrates a front perspective view of the interchangeable adapter **200**, which can include a base **210**. The base **210** can be used to support various components of the interchangeable adapter **200**. The base **210** can include a support plate **212** generally sized and shaped to fit inkjet cartridges of a particular type (i.e., a family or series of inkjet cartridges). As shown in the illustrated embodiment, the support plate **212** can include a horizontally-oriented portion **214a** and a vertically-oriented portion **214b**. In some implementations, this geometry may match certain families or series of Epson® cartridges. The base **210** can also include a vertically oriented rear wall **216** and vertically oriented sidewalls **218** to house electronics (as shown in **Figure 8**) within the base **210**. For example, the vertically oriented rear wall **216** and vertically oriented sidewalls **218** can cover electronics within the base **210**.

[0074] The interchangeable adapter **200** can include a support structure **230** sized and shaped to fit inkjet cartridges of a particular type (i.e., a different family or series of inkjet cartridges). The support structure **230** can be used to couple an inkjet cartridge (not shown) directly to the base **210**. In some embodiments, such as that shown, the support structure **230** can be separate from the base **210**. This can facilitate the manufacturing process. For example, the base **210** can be more generally sized and shaped to accommodate a wider range of inkjet cartridges while the support structure **230** is more specifically sized and shaped to accommodate a particular type of inkjet cartridge.

[0075] With continued reference to **Figure 5**, the interchangeable adapter **200** can include one or more retention mechanisms **224** for coupling to corresponding structures of the receiver, such as retention mechanisms **134a**, **134b**, **134c**, **134d** (as shown in **Figure 3**). The retention mechanisms **224** can enhance securement of the interchangeable adapter **200** to a docking region of the receiver, such as docking regions **130a**, **130b**, **130c**, **130d** (as shown in **Figure 3**). In some embodiments, such as that shown, the retention mechanisms **224** can

be used to supplement the physical coupling at an electrical interface between the receiver and the interchangeable adapter **200**. This can reduce the likelihood of the interchangeable adapter **200** being inadvertently removed from the receiver.

[0076] As shown in the illustrated embodiment, the retention mechanisms **224** can include hooks with slots extending from the rear wall **216** of the base **210**. The hooks can engage one or more corresponding structures on the receiver such as, but not limited to, lips **138a**, **138b**, **138c**, **138d** (as shown in **Figure 3**). In some implementations, such as that shown in the illustrated embodiment, the retention mechanisms **224** can include geometry which facilitates proper attachment of the interchangeable adapter **200** to the receiver. For example, the geometry can be keyed or registered to corresponding features on the interchangeable adapter to reduce the likelihood that the interchangeable adapters are installed in a misaligned orientation. Moreover, the register geometry can inhibit installation of the interchangeable adapter **200** to an incompatible receiver, or at least an incompatible docking region of the receiver. As shown in the illustrated embodiment, the hooks can engage the keyed features of the lip. However, it is to be understood that other geometries for the retention mechanisms **224** can be used such as, but not limited to, protrusions, slots, recesses, and the like. Moreover, it is to be understood that retention mechanisms **224** can be positioned along other portions of the base **210**.

[0077] As shown, the interchangeable adapter **200** can include other alignment features **226** to further facilitate alignment of the interchangeable adapter **200** with the receiver. For example, the alignment feature **226** can include a foot extending from the rear wall **216**. The alignment feature **226** can be received within a recess of the receiver. In some embodiments, the alignment feature **226** can include a cover **228**. The cover **228** can be formed from a material different (e.g., softer) than that of the base **210** to reduce the likelihood of damaging components of the receiver if an operator attempts to attach the interchangeable adapter **200** to the receiver in a misaligned orientation.

[0078] **Figure 6** illustrates the interchangeable adapter **200** with the support structure **230** removed. As shown in **Figure 6**, the support plate **212** of the base **210** can include a recessed area **220** sized to receive the support structure **230**. In some embodiments, such as that shown, the base **210** can include geometry which facilitates proper attachment of

the support structure **230** to the base **210**. For example, the geometry can be keyed or registered to corresponding features on the support structure **230** to reduce the likelihood that the support structure **230** is installed in a misaligned orientation. Moreover, the register geometry can inhibit installation of support structures **230** which may be incompatible with the base **210**. As shown in the illustrated embodiment, the base **210** can include one or more slots or cutouts **222a**, **222b**, **222c** in the recessed area **220** as well as a slot or cutout **222d** in the side wall **218** which can engage corresponding structures of the support structure **230**. It is to be understood that other geometries and features can be used such as, but not limited to, protrusions, and can be positioned along other portions of the base **210**.

[0079] The keyed features **222a**, **222b**, **222c**, **222d** can receive corresponding keyed or registered features **232a**, **232b**, **232c**, **232d** of the support structure **230** respectively to secure the support structure **230** to the base **210**. In some embodiments, the support structure **230** can be removably coupled to the base **210** via these structures. In other implementations, the support **230** can be intended to be permanently coupled upon engagement of the keyed features **232a**, **232b**, **232c**, **232d** with corresponding keyed features **222a**, **222b**, **222c**, **222d** of the base **210**.

[0080] The interchangeable adapter **200** can also include a cartridge interface **240** (e.g., an electrical or electro-mechanical interface) through which power and/or data can be transmitted from cartridge electronics, such as an original PLC or an existing customizable PLC. In some implementations, such as that shown in the illustrated embodiment, the cartridge interface **240** can include one or more contacts in the form of pogo connector pins sized and shaped to contact the cartridge electronics. This can allow an inkjet cartridge to be quickly and easily coupled to the interchangeable adapter **200**. The number and orientation of the contacts can be based on the type of inkjet cartridge intended to be serviced with the interchangeable adapter. For example, in the illustrated embodiment, the cartridge interface **240** extends horizontally from a vertically oriented surface of the support plate **212**. This can conform to particular types of inkjet cartridges such as certain families or series of Epson[®] cartridges. In some embodiments, the base **210** and/or support structure **230** can be sized and shaped such that the contacts of the inkjet cartridge are aligned with the cartridge interface **240** before the contacts of the inkjet cartridge are brought into contact with the cartridge

interface **240**. This can reduce side loads imposed on the cartridge interface **240** which may, in some implementations, be pogo connector pins. For example, the support structure **230** can be translated relative to the base **210** to allow the contacts of the inkjet cartridge to be brought into contact with the cartridge interface **240**. In some embodiments, the support structure **230** can be inhibited from translating towards the cartridge interface **240** until the cartridge is properly aligned. While a cartridge interface **240** in the form of contacts has been illustrated, it is to be understood that other types of interfaces, such as a socket, can be used.

[0081] **Figure 7** illustrates a rear perspective view of the interchangeable adapter **200**, which can include a receiver interface **242** through which power and/or data can be transmitted. As shown in the illustrated embodiment, the receiver interface **242** can be in the form of plugs or prongs configured to be inserted into electrical interfaces in the form of sockets, such as electrical interfaces **132a**, **132b**, **132c**, **132d** of receiver **110** (as shown in **Figure 3**). This can allow an interchangeable adapter **200** to be quickly and easily be coupled to the receiver (i.e., “plug-and-play”). In some implementations, the plugs or prongs can be keyed or registered to ensure that the interchangeable adapter **200** is used only with a compatible receiver. For example, the number of prongs or the shape of the prongs or plugs themselves can be registered to be inserted only into sockets of specific receivers. While a receiver interface **242** in the form of plugs or prongs has been illustrated, it is to be understood that other types of interfaces, such as a socket, can be used.

[0082] With reference next to **Figure 8**, the interchangeable adapter **200** is illustrated with a sidewall of the base **210** and a sidewall of the support structure **230** removed to show internal components of the interchangeable adapter **200**. As shown, the interchangeable adapter **200** can include a circuit board **244** to which the cartridge interface **240** and/or the receiver interface **242** can be electrically coupled. This can allow electronics of an inkjet cartridge to communicate with the receiver via the interchangeable adapter **200**. In some embodiments, the electronics of the interchangeable adapter **200** can include an identification tag. The identification tag can be incorporated onto the interchangeable adapter **200** such that the receiver can read the identification tag via the receiver interface **242**. Other types of identification tags can be incorporated. For example, it is to be understood that the

interchangeable adapter **200** can include a bar code, magnetic field identifier (MFID), and/or a radio frequency identifier (RFID).

[0083] In some embodiments, the electronics of the interchangeable adapter **200** can include programming for the particular types of inkjet cartridges used with the interchangeable adapter **200**. For example, the programming can include instructions for modifying an inkjet configuration, such as resetting an existing PLC and/or programming a customizable PLC. This programming can be incorporated into the circuit board **244**, such as via an integrated circuit or chip.

Second Interchangeable Adapter

[0084] With reference next to **Figure 9**, the interchangeable adapter **300** is illustrated separate from its receiver. The interchangeable adapter **300** can include components, structures, features and/or functionality which are the same or similar to those described above in connection with interchangeable adapter **200**. Of course, it is to be understood that aspects of the interchangeable adapter **300** can differ from that of interchangeable adapter **200** to allow the interchangeable adapter **300** to be used with inkjet cartridges of a different type (i.e., a different family or series of inkjet cartridges) than the type of inkjet cartridges used with interchangeable adapter **200**.

[0085] The interchangeable adapter **300** can include a base **310**. The base **310** can be used to support various components of the interchangeable adapter **300**. The base **310** can include a support plate **312** generally sized and shaped to fit inkjet cartridges of a particular type (i.e., a family or series of inkjet cartridges). In some embodiments, the geometry of the support plate **312** may match certain families or series of Brother® cartridges. The interchangeable adapter **300** can include a support structure **330** sized and shaped to fit inkjet cartridges of a particular type. The support structure **330** can be used to couple an inkjet cartridge (not shown) directly to the base **310**.

[0086] The interchangeable adapter **300** can include a cartridge interface **340** (e.g., an electrical or electro-mechanical interface) through which power and/or data can be transmitted from cartridge electronics, such as an original PLC or an existing customizable PLC. In some embodiments, the cartridge interface **340** can include one or more contacts in

the form of pogo connectors pins sized and shaped to contact the cartridge electronics. This can allow an inkjet cartridge to be quickly and easily be coupled to the interchangeable adapter **300**. The number and orientation of the contacts can be based on the type of inkjet cartridge intended to be serviced with the interchangeable adapter. For example, in the illustrated embodiment, the cartridge interface **340** extends horizontally from a vertically oriented surface of the support plate **312**. This can conform to particular types of inkjet cartridges, such as certain families or series of Brother[®] cartridges. In some embodiments, the base **310** and/or support structure **330** can be sized and shaped such that the contacts of the inkjet cartridge are aligned with the cartridge interface **340** before the contacts of the inkjet cartridge are brought into contact with the cartridge interface **340**. This can reduce side loads imposed on the cartridge interface **340** which may, in some implementations, be pogo connector pins. For example, the support structure **330** can be translated relative to the base **310** to allow the contacts of the inkjet cartridge to be brought into contact with the cartridge interface **340**. In some embodiments, the support structure **330** can be inhibited from translating towards the cartridge interface **340** until the cartridge is properly aligned. While a cartridge interface **340** in the form of contacts has been illustrated, it is to be understood that other types of interfaces, such as a socket, can be used.

[0087] Similar to the interchangeable adapter **200**, the interchangeable adapter **300** can include a circuit board (not shown) to which the cartridge interface **240** and/or the receiver interface (not shown) can be electrically coupled. This can allow electronics of an inkjet cartridge to communicate with the receiver via the interchangeable adapter **300**. In some embodiments, the electronics of the interchangeable adapter **300** can include an identification tag. The identification tag can be incorporated onto the interchangeable adapter **300** such that the receiver can read the identification tag via the receiver interface. Other types of identification tags can be incorporated. For example, it is to be understood that the interchangeable adapter **300** can include a bar code, magnetic field identifier (MFID), and/or a radio frequency identifier (RFID). The identification tag for the interchangeable adapter **300** can be different from that of interchangeable adapter **200** to allow the receiver to distinguish between the interchangeable adapters.

[0088] In some embodiments, the electronics of the interchangeable adapter **300** can include programming for the particular types of inkjet cartridges used with the interchangeable adapter **300**. For example, the programming can include instructions for modifying an inkjet configuration, such as resetting an existing PLC and/or programming a customizable PLC. This programming can be incorporated into the circuit board, such as via an integrated circuit or chip.

[0089] As noted above, in some embodiments, the interchangeable adapter **300** can include components, structures, features and/or functionality which are the same or similar to those described above in connection with interchangeable adapter **200**. This can allow the interchangeable adapter **300** to be used within the same docking region as the interchangeable adapter **200**.

[0090] For example, the electrical communication features such as a receiver interface (not shown) can be similar to receiver interface **242** of the interchangeable adapter **200**. This can allow the interchangeable adapter **300** to be used with the same electrical interface as the interchangeable adapter **200**, such as electrical interfaces **132a**, **132b**, **132c**, **132d** of receiver **110** (as shown in **Figure 3**). For example, in some embodiments, the receiver interface of interchangeable adapter **300** can be in the form of plugs or prongs configured to be inserted into electrical interfaces in the form of sockets. This can allow an interchangeable adapter **300** to be quickly and easily be coupled to the receiver (i.e., “plug-and-play”). In some embodiments, the plugs or prongs can be keyed or registered similarly to receiver interface **242**. However, it is to be understood that in some embodiments, the plugs or prongs can be keyed differently from those of receiver interface **242**. This can be in the event that interchangeable adapter **300** is incompatible with the electrical interface to which interchangeable adapter **200** is compatible.

[0091] As another example, the coupling features such as retention mechanisms **324** can be similar to retention mechanisms **224** of the interchangeable adapter **200**. This can allow the interchangeable adapter **300** to be used with the same coupling and/or alignment features as the interchangeable adapter **200**, such as retention mechanism **134a**, **134b**, **134c**, **134d** of receiver **110** (as shown in **Figure 3**). For example, in some implementations such as that illustrated, the retention mechanisms **324** can include hooks with slots. The hooks can

engage one or more corresponding structures on the receiver such as, but not limited to, lips **138a**, **138b**, **138c**, **138d** (as shown in **Figure 3**). Similar to retention mechanisms **224**, the retention mechanism **324** can include geometry which facilitates proper attachment of the interchangeable adapter **300** to the receiver. The hooks can engage the keyed features of the lip. However, it is to be understood that in some embodiments, the retention mechanisms **324** can be keyed differently from that of retention mechanisms **224**. This can be in the event that interchangeable adapter **300** is incompatible with the docking region to which interchangeable adapter **200** is compatible.

[0092] Other alignment features, such as alignment feature **326**, can be similar to alignment feature **226** of the interchangeable adapter **200**. This can allow the interchangeable adapter **300** to be used in the same docking regions of the receiver as the interchangeable adapter **200**. As shown, the alignment feature **326** can include a foot and a cover **328**. The cover **328** can be formed from a material different (e.g., softer) than that of the base **310** to reduce the likelihood of damaging components of the receiver if an operator attempts to attach the interchangeable adapter **300** to the receiver in a misaligned orientation. However, it is to be understood that in some embodiments, the alignment feature **326** can be sized and/or shaped differently from that of alignment feature **226**. This can be in the event that interchangeable adapter **300** is incompatible with the docking region to which interchangeable adapter **200** is compatible.

[0093] As shown in **Figure 10**, the support structure **330** can be separate from the base **310**. This allows the interchangeable adapter **300** to be configurable such that other inkjet cartridges in the same family may be used within the interchangeable adapter **300** by simple modification of the size or shape of only the support structure **330**. For example, making the support structure shorter or taller may allow other inkjet cartridges in the same family to fit within the interchangeable adapter **300**.

Third Interchangeable Adapter

[0094] With reference next to **Figure 11**, the interchangeable adapter **400** is illustrated separate from its receiver. The interchangeable adapter **400** can include components, structures, features and/or functionality which are the same or similar to those

described above in connection with interchangeable adapters **200**, **300**. Of course, it is to be understood that aspects of the interchangeable adapter **400** can differ from that of interchangeable adapters **200**, **300** to allow the interchangeable adapter **400** to be used with inkjet cartridges of a different type (i.e., a different family or series of inkjet cartridges) than the types of inkjet cartridges used with interchangeable adapters **200**, **300**.

[0095] The interchangeable adapter **400** can include a base **410**. The base **410** can be used to support various components of the interchangeable adapter **400**. The base **410** can include a support plate **412** generally sized and shaped to fit inkjet cartridges of a particular type (i.e., a family or series of inkjet cartridges). In some embodiments, the geometry of the support plate **412** may match certain families or series of Canon[®] cartridges. The interchangeable adapter **400** can include a support structure **430** sized and shaped to fit inkjet cartridges of a particular type. The support structure **430** can be used to couple an inkjet cartridge (not shown) directly to the base **410**. In some embodiments, such as that shown, the support structure **430** can be separate from the base **410**.

[0096] The interchangeable adapter **400** can include a cartridge interface **440** (e.g., an electrical or electro-mechanical interface) through which power and/or data can be transmitted from cartridge electronics, such as an original PLC or an existing customizable PLC. The cartridge interface **440** can include one or more contacts in the form of pogo connectors pins sized and shaped to contact the cartridge electronics. This can allow an inkjet cartridge to be quickly and easily be coupled to the interchangeable adapter **400**. The number and orientation of the contacts can be based on the type of inkjet cartridge intended to be serviced with the interchangeable adapter. For example, in the illustrated embodiment, the cartridge interface **440** extends perpendicularly from an obliquely-oriented surface of the support plate **412**. This can conform to particular types of inkjet cartridges, such as certain families or series of Canon[®] cartridges. In some embodiments, the base **410** and/or support structure **430** can be sized and shaped such that the contacts of the inkjet cartridge are aligned with the cartridge interface **440** before the contacts of the inkjet cartridge are brought into contact with the cartridge interface **440**. This can reduce side loads imposed on the cartridge interface **440** which may, in some implementations, be pogo connector pins. For example, the support structure **430** can be translated perpendicular to the oblique surface of base **410** to

allow the contacts of the inkjet cartridge to be brought into contact with the cartridge interface **440**. In some embodiments, the support structure **430** can be inhibited from translating towards the cartridge interface **440** until the cartridge is properly aligned. While a cartridge interface **440** in the form of contacts has been illustrated, it is to be understood that other types of interfaces, such as a socket, can be used.

[0097] Similar to the interchangeable adapters **200**, **300**, the interchangeable adapter **400** can include a circuit board (not shown) to which the cartridge interface **440** and/or the receiver interface (not shown) can be electrically coupled. This can allow electronics of an inkjet cartridge to communicate with the receiver via the interchangeable adapter **400**. In some embodiments, the electronics of the interchangeable adapter **400** can include an identification tag. The identification tag can be incorporated onto the interchangeable adapter **400** such that the receiver can read the identification tag via the receiver interface. Other types of identification tags can be incorporated. For example, it is to be understood that the interchangeable adapter **400** can include a bar code, magnetic field identifier (MFID), and/or a radio frequency identifier (RFID). The identification tag for the interchangeable adapter **400** can be different from that of interchangeable adapters **200**, **300** to allow the receiver to distinguish between the interchangeable adapters.

[0098] In some embodiments, the electronics of the interchangeable adapter **400** can include programming for the particular types of inkjet cartridges used with the interchangeable adapter **400**. For example, the programming can include instructions for modifying an inkjet configuration, such as resetting an existing PLC and/or programming a customizable PLC. This programming can be incorporated into the circuit board, such as via an integrated circuit or chip.

[0099] As noted above, in some embodiments, the interchangeable adapter **400** can include components, structures, features and/or functionality which are the same or similar to those described above in connection with interchangeable adapters **200**, **300**. This can allow the interchangeable adapter **400** to be used within the same docking region as the interchangeable adapters **200**, **300**.

[0100] For example, the electrical communication features such as a receiver interface (not shown) can be similar to receiver interfaces of the interchangeable adapters

200, 300, such as receiver interface **242** of the interchangeable adapter **200**. This can allow the interchangeable adapter **400** to be used with the same electrical interface as the interchangeable adapters **200, 300**, such as electrical interfaces **132a, 132b, 132c, 132d** of receiver **110** (as shown in **Figure 3**). For example, in some embodiments, the receiver interface of interchangeable adapter **400** can be in the form of plugs or prongs configured to be inserted into electrical interfaces in the form of sockets. This can allow an interchangeable adapter **400** to be quickly and easily be coupled to the receiver (i.e., “plug-and-play”). In some embodiments, the plugs or prongs can be keyed or registered similarly to receiver interface **242**. However, it is to be understood that in some implementations, the plugs or prongs can be keyed differently from those of receiver interface **242**. This can be in the event that interchangeable adapter **400** is incompatible with the electrical interface to which interchangeable adapters **200, 300** are compatible.

[0101] As another example, the coupling features such as retention mechanisms **424** can be similar to retention mechanisms **224, 324** of the interchangeable adapters **200, 300**. This can allow the interchangeable adapter **400** to be used with the same coupling and/or alignment features as the interchangeable adapters **200, 300**, such as retention mechanism **134a, 134b, 134c, 134d** of receiver **110** (as shown in **Figure 3**). For example, in some implementations such as that illustrated, the retention mechanisms **424** can include hooks with slots. The hooks can engage one or more corresponding structures on the receiver **110** such as, but not limited to, lips **138a, 138b, 138c, 138d** (as shown in **Figure 3**). Similar to retention mechanisms **224, 324**, the retention mechanisms **424** can include geometry which facilitates proper attachment of the interchangeable adapter **400** to the receiver. The hooks can engage the keyed features of the lip. However, it is to be understood that in some implementations, the retention mechanisms **424** can be keyed differently from that of retention mechanisms **224, 324**. This can be in the event that interchangeable adapter **400** is incompatible with the docking region to which interchangeable adapters **200, 300** are compatible.

[0102] Other alignment features, such as alignment feature **426**, can be similar to alignment features **226, 326** of the interchangeable adapters **200, 300**. This can allow the interchangeable adapter **400** to be used in the same docking regions of the receiver as the

interchangeable adapters **200, 300**. As shown, the alignment feature **426** can include a foot and a cover **428**. The cover **428** can be formed from a material different (e.g., softer) than that of the base **410** to reduce the likelihood of damaging components of the receiver if an operator attempts to attach the interchangeable adapter **400** to the receiver in a misaligned orientation. However, it is to be understood that in some implementations, the alignment feature **426** can be sized and/or shaped differently from that of alignment features **226, 326**. This can be in the event that interchangeable adapter **400** is incompatible with the docking region to which interchangeable adapters **200, 300** are compatible.

[0103] As shown in **Figure 12**, the support structure **430** can be separate from the base **410**. This allows the interchangeable adapter **400** to be configurable such that other inkjet cartridges in the same family may be used within the interchangeable adapter **400** by simple modification of the size or shape of only the support structure **430**. For example, making the support structure shorter or taller may allow other inkjet cartridges in the same family to fit within the interchangeable adapter **400**.

Fourth Interchangeable Adapter

[0104] With reference next to **Figure 13**, the interchangeable adapter **500** is illustrated separate from its receiver. The interchangeable adapter **500** can include components, structures, features and/or functionality which are the same or similar to those described above in connection with interchangeable adapters **200, 300, 400**. Of course, it is to be understood that aspects of the interchangeable adapter **500** can differ from that of interchangeable adapters **200, 300, 400** to allow the interchangeable adapter **500** to be used with inkjet cartridges of a different type (i.e., a different family or series of inkjet cartridges) than the types of inkjet cartridges used with interchangeable adapters **200, 300, 400**.

[0105] The interchangeable adapter **500** can include a base **510**. The base **510** can be used to support various components of the interchangeable adapter **500**. The base **510** can include a support plate **512** generally sized and shaped to fit inkjet cartridges of a particular type (i.e., a family or series of inkjet cartridges). In some embodiments, the geometry of the support plate **512** may match certain families or series of Canon[®] cartridges. The interchangeable adapter **500** can include a support structure **530** sized and shaped to fit

inkjet cartridges of a particular type. The support structure **530** can be used to couple an inkjet cartridge (not shown) directly to the base **510**. In some embodiments, such as that shown, the support structure **530** can be separate from the base **510**.

[0106] The interchangeable adapter **500** can include a cartridge interface **540** (e.g., an electrical or electro-mechanical interface), as shown in **Figure 14**, through which power and/or data can be transmitted from cartridge electronics, such as an original PLC or an existing customizable PLC. The cartridge interface **540** can include one or more contacts in the form of pogo connectors pins sized and shaped to contact the cartridge electronics. This can allow an inkjet cartridge to be quickly and easily be coupled to the interchangeable adapter **500**. The number and orientation of the contacts can be based on the type of inkjet cartridge intended to be serviced with the interchangeable adapter. For example, in the illustrated embodiment, the cartridge interface **540** extends vertically and is positioned at or proximate a horizontally-oriented portion of the support plate **512**. This can conform to particular types of inkjet cartridges, such as certain families or series of Canon[®] cartridges. In some embodiments, the base **510** and/or support structure **530** can be sized and shaped such that the contacts of the inkjet cartridge are aligned with the cartridge interface **540** before the contacts of the inkjet cartridge are brought into contact with the cartridge interface **540**. This can reduce side loads imposed on the cartridge interface **540** which may, in some implementations, be pogo connector pins. For example, the support structure **530** can be translated relative to the base **510** to allow the contacts of the inkjet cartridge to be brought into contact with the cartridge interface **540**. In some embodiments, the support structure **530** can be inhibited from translating towards the cartridge interface **540** until the cartridge is properly aligned. While a cartridge interface **540** in the form of contacts has been illustrated, it is to be understood that other types of interfaces, such as a socket, can be used.

[0107] Similar to the interchangeable adapters **200**, **300**, **400**, the interchangeable adapter **500** can include a circuit board (not shown) to which the cartridge interface **540** and/or the receiver interface (not shown) can be electrically coupled. This can allow electronics of an inkjet cartridge to communicate with the receiver via the interchangeable adapter **500**. In some implementations, the electronics of the interchangeable adapter **500** can include an identification tag. The identification tag can be incorporated onto the

interchangeable adapter **500** such that the receiver can read the identification tag via the receiver interface. Other types of identification tags can be incorporated. For example, it is to be understood that the interchangeable adapter **500** can include a bar code, magnetic field identifier (MFID), and/or a radio frequency identifier (RFID). The identification tag for the interchangeable adapter **500** can be different from that of interchangeable adapters **200**, **300**, **400** to allow the receiver **110** to distinguish between the interchangeable adapters.

[0108] In some embodiments, the electronics of the interchangeable adapter **500** can include programming for the particular types of inkjet cartridges used with the interchangeable adapter **500**. For example, the programming can include instructions for modifying an inkjet configuration, such as resetting an existing PLC and/or programming a customizable PLC. This programming can be incorporated into the circuit board, such as via an integrated circuit or chip.

[0109] As noted above, in some embodiments, the interchangeable adapter **500** can include components, structures, features and/or functionality which are the same or similar to those described above in connection with interchangeable adapters **200**, **300**, **400**. This can allow the interchangeable adapter **500** to be used within the same docking region as the interchangeable adapters **200**, **300**, **400**.

[0110] For example, the electrical communication features such as a receiver interface (not shown) can be similar to receiver interfaces of the interchangeable adapters **200**, **300**, **400** such as receiver interface **242** of the interchangeable adapter **200**. This can allow the interchangeable adapter **500** to be used with the same electrical interface as the interchangeable adapters **200**, **300**, such as electrical interfaces **132a**, **132b**, **132c**, **132d** of receiver **110** (as shown in **Figure 3**). For example, in some embodiments, the receiver interface of interchangeable adapter **500** can be in the form of plugs or prongs configured to be inserted into electrical interfaces in the form of sockets. This can allow an interchangeable adapter **500** to be quickly and easily be coupled to the receiver (i.e., “plug-and-play”). In some embodiments, the plugs or prongs can be keyed similarly to receiver interface **242**. However, it is to be understood that in some implementations, the plugs or prongs can be keyed differently from those of receiver interface **242**. This can be in the event

that interchangeable adapter **500** is incompatible with the electrical interface to which interchangeable adapters **200, 300, 400** are compatible.

[0111] As another example, the coupling features such as retention mechanisms **524** can be similar to retention mechanisms **224, 324, 424** of the interchangeable adapters **200, 300, 400**. This can allow the interchangeable adapter **500** to be used with the same coupling and/or alignment features as the interchangeable adapters **200, 300, 400**, such as retention mechanism **134a, 134b, 134c, 134d** of receiver **110** (as shown in **Figure 3**). For example, in some embodiments such as that illustrated, the retention mechanisms **524** can include hooks with slots. The hooks can engage one or more corresponding structures on the receiver **110** such as, but not limited to, lips **138a, 138b, 138c, 138d** (as shown in **Figure 3**). Similar to retention mechanisms **224, 324, 424**, the retention mechanisms **524** can include geometry which facilitates proper attachment of the interchangeable adapter **500** to the receiver **110**. As shown in the illustrated embodiment, the hooks can engage keyed features of the lip. However, it is to be understood that in some embodiments, the retention mechanisms **524** can be keyed differently from that of retention mechanisms **224, 324, 424**. This can be in the event that interchangeable adapter **500** is incompatible with the docking region to which interchangeable adapters **200, 300, 400** are compatible.

[0112] Other alignment features, such as alignment feature **526**, can be similar to alignment features **226, 326, 426** of the interchangeable adapters **200, 300, 400**. This can allow the interchangeable adapter **500** to be used in the same docking regions of the receiver as the interchangeable adapters **200, 300, 400**. As shown, the alignment feature **526** can include a foot and a cover **528**. The cover **528** can be formed from a material different (e.g., softer) than that of the base **510** to reduce the likelihood of damaging components of the receiver if an operator attempts to attach the interchangeable adapter **500** to the receiver in a misaligned orientation. However, it is to be understood that in some implementations, the alignment feature **526** can be sized and/or shaped differently from that of alignment features **226, 326, 426**. This can be in the event that interchangeable adapter **500** is incompatible with the docking region to which interchangeable adapters **200, 300, 400** are compatible.

[0113] As shown in **Figure 14**, the support structure **530** can be separate from the base **510**. This allows the interchangeable adapter **500** to be configurable such that other

inkjet cartridges in the same family may be used within the interchangeable adapter **500** by simple modification of the size or shape of only the support structure **530**. For example, making the support structure shorter or taller may allow other inkjet cartridges in the same family to fit within the interchangeable adapter **500**.

Method for Attaching Interchangeable Adapters

[0114] With reference next to **Figures 15 and 16**, a method of coupling the interchangeable adapter **200** with the receiver **110** is illustrated. Both **Figures 15 and 16** are side-views of a cross-section along a line separating docking regions **130a, 130b** (as shown in **Figure 3**).

[0115] As shown in **Figure 15**, the interchangeable adapter **200** is detached from the receiver **110**. The interchangeable adapter **200** can be advanced towards the receiver **110**. The retention mechanism **224a** of the interchangeable adapter **200** can be brought into contact with the lip **138a** of the retention mechanism **134a** and can be advanced towards the receiver **110**. For example, in some instances such as that shown in the illustrated embodiment, the interchangeable adapter **200** can be rotated towards the receiver **110**. As the cover **228** of the interchangeable adapter **200** contacts the floor **116**, at least a lip **138a** of the retention mechanism **134a** can be displaced upwards by the retention mechanism **224a** of the interchangeable adapter **200** thereby allowing the interchangeable adapter **200** to be rotated further towards the receiver **110**. That is, the retention mechanism **134a** can be displaced into the disengaged configuration. The retention mechanism **134a** can then be biased back downwards toward the engaged configuration, as the tip of the foot **228** passes directly below the contact point at **138a**, and as the interchangeable adapter **200** is further rotated towards the receiver **110** and ultimately coupled to the receiver **110**. This can secure the interchangeable adapter **200** to the receiver **110**. This can facilitate installation of interchangeable adapters **200** into the receiver **110** by allowing an operator to install the interchangeable adapters **200** via a single motion. However, it is to be understood that the operation can differ from that described above. For example, an operator can install the interchangeable adapter **200** by first pulling the retention mechanism **134a** upwards towards a disengaged configuration prior to advancing the interchangeable adapter **200** towards the

receiver **110**. The operator can then allow the retention mechanism **134a** to return back to the engaged position or, in embodiments where the retention mechanism **134a** is not biased, manually move the retention mechanism **134a** back towards the engaged position.

[0116] As shown in **Figure 16**, the interchangeable adapter **200** is attached to the receiver **110**. In this engaged position, the retention mechanism **134a** of the receiver **110** can engage the corresponding retention mechanism **224a** of the interchangeable adapter **200**. The receiver interface **242** of the interchangeable adapter **200** can be positioned in contact with the electrical interface **132a** of the receiver **110**. For example, in some implementations such as that shown in the illustrated embodiment, plugs or prongs of the receiver interface **242** can be received within a socket of electrical interface **132a**. The alignment feature **226** of the interchangeable adapter **200** can be positioned beneath the circuit board **120** of the receiver **110**.

[0117] While the modular system **100** illustrated in **Figures 1-16** include components designed to allow for horizontal coupling of interchangeable adapters to a receiver, it is to be understood that other configurations can be used. For example, the electrical interface of the receiver and receiver interface of the interchangeable adapter can be positioned along a horizontally extending surface to allow for vertical coupling of interchangeable adapters to a receiver.

Method for Modifying the Inkjet Cartridge Configuration

[0118] Referring now to **Figure 17**, a flowchart of an embodiment of a method **600** for modifying an inkjet cartridge configuration using a modular configuration modification system, such as modular system **100**, is shown. The method **600** as described herein may be employed after using the other components of the refilling system **10** as described above and shown in **Figure 1**; however, the order of this sequence can be reversed, with the refilling system **10** being utilized after, or in between, any of the steps described in method **600**. In some embodiments, one goal of the configuration modification method **600** is to reset an existing PLC or to reprogram a new customizable PLC; however, in other embodiments the method **600** may be used to configure other electronics of the inkjet cartridge.

[0119] In some embodiments, the system and method **600** described below is an integrated part of the inkjet refilling system **10** which can include the modular cartridge configuration system **100** attached thereto. In other embodiments, the method **600** can be implemented in a standalone version of the modular cartridge configuration system **100**. For example, the method **600** can be implemented on the modular cartridge configuration system **100** without connecting the modular cartridge configuration system **100** to the inkjet refilling system **10**. For purposes of the disclosure below, the method **600** will be described in connection with inkjet refilling system **10** which can include the modular cartridge configuration system **100**. However, it is to be understood that in some embodiments the method may instead be performed by the modular cartridge configuration system **100** separately from the inkjet refilling system **10**.

[0120] The method **600** can start at block **602** and move to block **610** where the inkjet refilling system detects whether an interchangeable adapter, such as interchangeable adapter **200**, has been coupled to the receiver, such as receiver **110**. The system can perform this process by exchanging electrical signals to and from the interchangeable adapter. For example, the system can transmit electrical signals to and from the interchangeable adapter via an interface, such as receiver interface **242**, which can be electrically coupled to an interface of the receiver, such as electrical interface **132a**. In some embodiments, the system can detect the adapter coupled to the receiver as soon as a circuit is formed at one of the docking regions, such as docking regions **130a**, **130b**, **130c**, **130d**.

[0121] Optionally, upon detecting coupling of an interchangeable adapter to the receiver, the system can determine the type of interchangeable adapter attached to the receiver. In some embodiments, the system can determine the type of interchangeable adapter based on detection of an identification tag of the interchangeable adapter. In instances where the identification tag is implemented as part of the electronics of the interchangeable adapter, the system can detect the identification tag by exchanging electrical signals to and from the interchangeable adapter. In embodiments where the system determines the type of interchangeable adapter installed, aspects of the system can be modified based on the type of interchangeable adapter. For example, a user interface, such as user interface **70**, can be updated to display information pertinent to the interchangeable

adapter such as, but not limited to, a status of credentials which is described in further detail below.

[0122] The method **600** can then move to block **615** where the inkjet refilling system detects whether an inkjet cartridge has been coupled to the interchangeable adapter, such as interchangeable adapter. The system can perform this process by exchanging electrical signals to and from electronics, such as a PLC, on the inkjet cartridge. For example, the system can transmit electrical signals to and from the inkjet cartridge via interfaces on the interchangeable adapter and the receiver.

[0123] The method **600** can then move to block **620** where the inkjet refilling system determines the type of inkjet cartridge attached to the receiver. In some embodiments, the system can determine the type of inkjet cartridge based on detection of identification information from the electronics, such as a PLC, on the inkjet cartridge. This identification information can be obtained from the electronics during the detection step described in block **615**. In some embodiments, the system can determine the type of inkjet cartridge based on detection of one or more identification tags of the interchangeable adapter to which the inkjet cartridge is attached. This identification tag can be pulled from the interchangeable adapter during the optional detection step described in connection with block **610**.

[0124] In some embodiments, the system can modify an inkjet configuration only if certain credentials are available. For example, the credentials can include credits which can be expended each time an inkjet configuration modification is performed. In such an embodiment, the method **600** can then move to block **625** where the inkjet refilling system **10** determines the status of these credentials. In instances where the credentials are credits, the system **10** can determine credit information for the particular inkjet cartridge. For example, the system **10** can obtain credit information from a database which is locally stored in memory residing within the modular system (e.g., on an interchangeable adapter or the receiver), locally stored in memory residing within other components of the system, or stored offsite.

[0125] The method **600** can then move to block **630** where a determination is made as to whether or not the proper credentials are received. In instances where the

credentials are credits, the inkjet refilling system can determine whether these credits meet or exceed a threshold to modify the inkjet configuration. In some embodiments, the system can compare the number of credits with a threshold amount. For example, the system can pull the threshold amount from a database which is locally stored in memory residing within the modular system (e.g., on an interchangeable adapter or the receiver), locally stored in memory residing within other components of the system, or stored offsite.

[0126] Should the inkjet refilling system determine that proper credentials have not been met, the method **600** can move to block **635**. The system can provide a prompt to the operator, such as via a user interface, indicating the current credentials and the required credentials. In some embodiments where the credentials are credits, the system can provide the operator with an option to increase the number of credits. For example, the system can provide the operator with a prompt on the user interface providing one or more options, such as a purchase, to increase the number of credits. In the event that an operator chooses to increase the number of credits, the system can process the request for additional credits. In some instances, the system can communicate with an offsite source (e.g., an offsite server) which handles the transaction and transfers these credits to the system. For example, a database which stores credit information can be updated (e.g., increased) based on the transaction.

[0127] The method **600** can then move to block **640** where the inkjet refilling system determines whether proper credentials exist after having provided a notification to the operator at block **635**. In embodiments where the credentials are credits, the system can determine whether the number of credits increased after provision of the prompt to the operator or whether the operator declined the opportunity to increase the number of credits. Should the system detect an increased number of credits, the system can then compare the increased number of credits with the threshold amount in a manner similar to that performed at block **630**.

[0128] Should the operator have declined the opportunity to increase the number of credits or the inkjet refilling system determines that the number of credits still does not meet or excess the threshold, the method **600** can move to block **670** thereby ending the method **600**. In some embodiments, the method **600** can provide an error prompt to the

operator. This error prompt can provide an indication that the inkjet cartridge configuration has not been modified.

[0129] Should the inkjet refilling system determine that the number of credits meets or exceeds the threshold at either blocks **630** or **640**, the method can proceed to step **650**. The system can proceed with modifying the inkjet cartridge configuration. In some embodiments, the system can begin modifying the inkjet cartridge configuration as soon as the system determines that sufficient credits exist. In other embodiments, the system does not start modifying the inkjet cartridge configuration until the operator initiates the procedure such as via a user interface. The system can modify the inkjet cartridge configuration by exchanging electrical signals to and from electronics, such as a PLC, on the inkjet cartridge. For example, the system can transmit electrical signals to and from the inkjet cartridge via interfaces on the interchangeable adapter and the receiver.

[0130] In instances where an existing PLC is being reused on the inkjet cartridge, the system can reset the inkjet cartridge configuration. This ensures that the serviced inkjet cartridge is usable when replaced within an inkjet printer. For example, the system can reset the PLC so that the PLC is recognized as being new or full by the inkjet printer. In some embodiments, the system can delete an existing configuration on the PLC and reprogram the configuration of the PLC to a state similar to that when the PLC was originally manufactured. In some embodiments, the system can reset “fill level” functionality on the PLC.

[0131] In instances where a new, customizable PLC is added to the inkjet cartridge, the system can program the inkjet cartridge configuration. A unique set of programmed instructions is communicated to the customizable PLC, thus configuring that PLC for use with one particular inkjet cartridge SKU. In some embodiments, the PLC contains a basic configuration specific for a particular cartridge family or series. In other embodiments, the PLC has no configuration information, or a limited configuration information, and the configuration step consists of downloading a more complete configuration to provide for full PLC functionality and configuration. The specific PLC SKU information, that is, the configuration indicative of the cartridge’s color, ink volume, size and/or type, is transmitted to the PLC on the inkjet cartridge using a methodology that can be unique to each PLC manufacturer. This configuration, after downloaded to a generic

configurable PLC, allows the PLC to respond correctly to the various queries of the inkjet cartridge by the inkjet printer about the inkjet cartridge's type, size, color, ink level, etc. In one embodiment, this PLC SKU configuration information is a binary code. In other embodiments, this PLC SKU configuration information is sent via ASCII, hexadecimal, or other communication schema. Further details pertaining to programming a new, customizable PLC can be found in U.S. Patent No. 8,602,536 entitled "Programming Customizable Smart-Chip in an Ink Refilling Station," issued December 10, 2013, the entirety of which has been incorporated by reference herein.

[0132] The method **600** can then move to block **655** where a determination is made as to whether or not the modification of the inkjet cartridge configuration is complete. Should the inkjet refilling system determine that modifications have not yet been completed, the method **600** can move to block **660** in which the system can display the status of the modification. For example, the system can display a progress bar on a user interface. The method **600** can then return to block **650** to continue modification of the inkjet cartridge configuration. Should the system determine that modifications have been completed, the method **600** can move to block **665** in which the system can display completion of the modification process. For example, the system can display such information on a user interface **70** and may provide a notice to the operator that the inkjet cartridge can be safely removed. The system can then move to block **670** thereby ending the method **600**. In some embodiments, the system can apply the requisite number of credits for the modification. For example, a database which stores credit information can be updated (e.g., decreased) based on the applied number of credits.

[0133] It is to be understood that the steps of method **600** can be interchanged. Moreover, it is to be understood that one or more of the steps of method **600** can be omitted. For example, in some embodiments, the system can apply the requisite number of credits before, or during, modification of the inkjet cartridge configuration at block **650**. As another example, in embodiments where credentials are not required to modify the inkjet cartridge configuration, the method **600** can omit any of steps **625**, **630**, **635**, **640**. In such an embodiment, the method **600** can immediately move from determining the type of inkjet cartridge at block **620** to modifying the inkjet cartridge configuration at block **650**. It is also

to be understood that additional steps may be added to method **600**. For example, the method **600** can include steps in which the system verifies operability of one or more of the receiver, interchangeable adapter, and/or the inkjet cartridge.

Inkjet Refilling System with Integrated Scale

[0135] With reference first to **Figure 18**, an inkjet refilling system **1010** with an integrated scale **1200** is shown. As shown in the illustrated embodiment, the system can be a floor-standing unit. However, it is to be understood that the system can take on different form-factors, such as a desk-top unit. The system includes a drill station **1015** having an actuator **1018**. In the embodiment shown, the actuator **1018** comprises a handle on a lever. In this embodiment, an on/off switch activates the drill. Thus, when the lever is moved downward, the drill becomes active. A slide channel **1025** allows the actuator to slide up and down as the drill is engaged with an inkjet cartridge.

[0136] A covered self-centering drill bit **1028** protrudes from the lower portion of the drill station, and is connected to the actuator **1018** so that movement of the actuator **1018** within the slide channel **1025** results in the covered drill bit **1028** moving up and down. Beneath the covered drill bit **1028** is a flat surface **1030** where adapters or fixtures are placed containing inkjet cartridges or tanks to be drilled. Once a fixture has been placed on the flat surface **1030** and aligned beneath the drill bit **1028**, any of several on/off switches, known in the art, can be used to activate the self-centering drill bit **1028**. The actuator **1018** is then slid down within the slide channel **1025** until the drill bit **1028** drills a hole within the cartridge or tank. In one alternative embodiment, the drill mechanism may be configured such that the drill activates and begins to spin the drill bit as soon as the handle is lowered from the top of the spring-biased upper position in the slide channel **1025**. As used herein, the term “inkjet cartridge” means a typical cartridge having a print head, and also includes an inkjet tank that does not include an inkjet print head.

[0137] Adjacent the drilling station **1015** is a cleaning station **1040** which is configured to receive an inkjet cartridge and remove any excess ink from the cartridge prior to refilling. In this embodiment, the cleaning station **1040** includes a mounting station **1045** which is adapted to receive the plurality of the fixtures described above. A portion of the

mounting station **1045** includes an evacuation station that communicates with a vacuum source in order to evacuate the ink from any cartridge that is inserted into the mounting station **1045**.

[0138] Within a central portion **1050** of the system **1010** can include a nozzle refilling station **1055** that is configured to receive an inkjet cartridge and refill that cartridge through its nozzles. As is known in the art, inkjet cartridges eject ink from a set of nozzles. In some cases it is possible to refill or clean inkjet cartridges by forcing ink or cleaning solutions into the cartridge through the nozzles. One example of such a cartridge is the Hewlett Packard Model HP45 inkjet cartridge. When the cartridge is placed within the nozzle refilling station **1055**, the system forces a predetermined quantity of ink into the cartridge through the nozzles. In some embodiments, the nozzle refilling station **1055** also includes a vacuum source so that prior to nozzle filling the inkjet cartridge it can be evacuated to remove any unused ink. As shown, the central portion **1050** can include a door **1062** that seals a vacuum chamber when closed to allow a low pressure environment to be created by the vacuum source. In this manner the system knows the proper amount of ink to use in refilling the cartridge. In another embodiment, the nozzle refilling station **1055** includes a wash solution source that can be used to rinse the interior of the cartridge prior to refilling. Wash solution may include sterile filtered water, or a cleansing solution adapted for cleaning inkjet cartridges.

[0139] Adjacent the central portion **1050** is a user interface **1070** which is used by the operator to control each step in the refilling process. In some embodiments, the user interface comprises a touch screen graphical user interface. However, it is to be understood that the user interface can include one or more visual displays and one or more input devices such as keypads. The user interface is linked to a central computer system (not shown) that controls all of the functions of the system **1010**. By inputting commands through the user interface **1070**, an operator can perform the functions described herein.

[0140] Within a lower portion **1080** of the system **1010** is a drawer **1082** that provides a series of ink refill bottles **1085**. These bottles provide the source of ink used within the system to refill the inkjet cartridges.

[0141] As shown in the illustrated embodiment, the integrated scale **1200** can include a cover **1205** which can be moved to shield the scale **1200** when the scale **1200** is not in use.

[0142] **Figure 19** illustrates a front perspective view of the scale **1200** without the cover. The scale **1200** can be attached to components of an inkjet refilling system, such as inkjet refilling system **1010**. The scale can be used to measure a mass and/or weight of an inkjet cartridge. In some embodiments, the scale **1200** can be used to provide a fill status of the inkjet cartridge. For example, the scale **1200** can provide fill statuses based on the measured mass or weight of the inkjet cartridge. In some embodiments, the scale **1200** can provide generalized fill statuses. These generalized fill statuses provide an approximation of the fill status (as shown in **Figure 21**). In some implementations, the scale **1200** can provide specific fill statuses such as a percentage based on a range of weights of the type of inkjet cartridge being measured and/or the measured weight itself.

[0143] As shown in the illustrated embodiment, the scale **1200** can include a housing **1210** and a plate **1220** upon which an object, such as an inkjet cartridge (not shown), can be placed. The housing **1210** can be attached to another component of the inkjet refilling system, such as a frame **1240**. In some embodiments, the housing **1210** can include a connector wall **1212** which can be coupled to the frame **1240** of another system, such as an inkjet refilling system. The coupling can be a snap-fit or slide-fit coupling to allow the scale **1200** to be more easily removed for replacement and/or servicing. As shown in **Figure 20**, the scale **1200** is coupled to the frame **1240** via multiple fasteners **1214a**, **1214b**, **1214c** inserted into keyholes. The scale **1200** can include one or more retention mechanisms, such as a magnet, to ensure that the scale **1200** remains stationary. In some embodiments, the scale **1200** can include a cover (not shown) which can be opened and closed to provide access to the plate **1220**. The cover can reduce the likelihood of contacting other scale components, such as the plate **1220**, when the scale **1200** is not in use.

[0144] **Figure 20** illustrates portions of the housing **1212** removed to illustrate internal components of the scale **1200**, a mass or weight sensor **1222** can be positioned below the plate **1220**. The sensor **1222** can be electrically coupled to a circuit board **1224**. As shown in the illustrated embodiment, the scale **1200** can include an interface **1226** which can

allow the scale to communicate with other components of an inkjet refilling system as discussed in further detail below. The interface **1226** can be attached to a port of another system, such as an inkjet refilling system.

[0145] With reference next to **Figure 22**, an inkjet refilling system **1250** is shown with a scale **1255**, which is an icon of the scale **1200** described above in connection with **Figures 19 and 20**. The inkjet refilling station **1250** can include a fill system **1260** which can allow an operator to refill an inkjet cartridge and can include components, structures, features and/or functionality which are similar to, or the same as, those of the inkjet refilling system **1010** described in connection with **Figure 18**. For example, the fill station **1260** can include stations such as a drill station, cleaning station, mounting station, and nozzle refilling station similar to those described above in connection with the inkjet refilling system **1010** described in **Figure 18**. The fill station **1260** can include other stations including, but not limited to, a test station.

[0146] The inkjet refilling system **1250** can also include a user interface **1280** which can include control inputs such as buttons and/or a screen such as a touchscreen. The user interface **1280** can include components, structures, features and/or functionality similar to the user interface **70**

[0147] The inkjet refilling system **1250** can include a housing **1290**. For example, the housing **1290** can be a floor-standing unit on which the scale **1255**, fill system **1260**, and/or user interface **1280** can be attached. However, it is to be understood that the system can take on different form-factors, such as a desk-top unit. The scale **1255** can communicate with one or more of the fill system **1260**, and/or user interface **1280** via the interface **1226**.

Method for Determining Fill Status

[0148] Referring now to **Figure 23**, a flowchart of an embodiment of a method **1300** for providing a fill status of an inkjet cartridge. The method **1300** as described herein may be employed after using the other components of the refilling system **1250** as described above and shown in **Figure 22**; however, the order of this sequence can be reversed, with the refilling system **1250** being utilized after, or in between, any of the steps described in method **1300**. In some embodiments, one goal of the fill status determination method **1300** is to

provide an approximation of the fill status of the inkjet cartridge after the inkjet cartridge has been serviced and refilled. This can ensure that the refilling operation was successful. However, the fill status determination method **1300** can be performed prior to servicing and refilling of an inkjet cartridge. This can provide the existing fill status of the inkjet cartridge prior to servicing and refilling. In some instances, the inkjet cartridge may be sufficiently filled that the operator (or customer) may decide to hold off on servicing and refilling the inkjet cartridge.

[0149] In some embodiments, the system and method **1300** described below is an integrated part of the inkjet refilling system **1250** which can include scale **1200** attached thereto. In other embodiments, the method **1300** can be implemented in a standalone version of the scale **1200**. For example, the method **1300** can be implemented on the scale **1200** without connecting the scale **1200** to the inkjet refilling system **1250**. For purposes of the disclosure below, the method **1300** will be described in connection with inkjet refilling system **1250** which can include the scale **1200**. However, it is to be understood that in some embodiments the method may be performed by the scale **1200** separately from the inkjet refilling system **1250**.

[0150] The method **1300** can start at block **1302** and move to block **1310** where the inkjet refilling system detects whether an inkjet cartridge has been placed on a scale, such as scale **1220**. The system can perform this process by comparing an electrical signal received from a sensor, such as sensor **1222**, with a default (e.g., “zeroed” or calibrated) signal from the sensor. If the system does not detect a deviation from the default signal, the method **1300** can proceed to block **1315**. In some embodiments, the system can provide a notification to the user that the system remains in an idle state. The method **1300** can proceed to block **1357** whereby the method ends.

[0151] If the system detects a deviation from the default signal, the method **1300** can proceed to block **1320**. At block **1320**, the system measures a mass or weight of the inkjet cartridge based on a deviation of the received signal from the sensor and the default signal. In some embodiments, the system can be calibrated to increase accuracy of the system. In some instances, such calibration can be performed periodically.

[0152] The method **1300** can then proceed to block **1325**, where the system can obtain cartridge information, such as a cartridge type. In some embodiments, the system can obtain this information from other components of the system. For example, the system can include a reader which can detect a cartridge type based on electronics on the inkjet cartridge. In some embodiments, the system can obtain this information from a user input or from the inkjet cartridge itself.

[0153] The method **1300** can then proceed to block **1330**, where the system can determine whether cartridge information for the obtained cartridge type exists. The cartridge information can be stored in memory residing within the scale, memory residing within other components of the inkjet refilling system, or offsite. If the system does not detect cartridge information, the method **1300** can proceed to block **1335**. At block **1335**, the system can provide a notification to the user that the system cannot locate information (e.g., a table) for the inkjet cartridge and move to block **1357** wherein the method ends. In some embodiments, the system may provide the user with options to obtain this information. For example, the system may prompt a user to allow the system to attempt to download this information from an offsite source (e.g., an offsite server) or for the user to provide a location from which the information can be downloaded (e.g., web address, removable drive, etc.).

[0154] If the system locates cartridge information, the method **1300** can proceed to block **1340**. At block **1340**, the system can save the measurement in memory. In some embodiments, the saved measurement can be utilized to update the cartridge information and/or to track performance of the inkjet refilling system.

[0155] The method **1300** can then proceed to block **1345**, where the system can compare a mass or weight of the inkjet cartridge with measurements within the cartridge information. If the system determines that the measurement is outside the range for the inkjet cartridge (i.e., greater than the highest mass or less than a lowest mass in the cartridge information), the method **1300** can proceed to block **1350**. At block **1350**, the system can provide a notification to the operator that the inkjet cartridge appears to be outside the range for the inkjet cartridge. This can indicate to an operator that either the wrong type of inkjet cartridge was analyzed, the cartridge was improperly filled, or that there may be a defect with

the inkjet cartridge. The system may provide additional information to the operator to resolve the issue. The method **1300** can proceed to block **1357** whereby the method ends.

[0156] If the system determines that the measurement is within the range for the inkjet cartridge, the method **1300** can proceed to block **1355**. At block **1355**, the system can display fill status of the inkjet cartridge. In some embodiments, the fill status can be displayed as a general estimate based on pre-defined ranges within the cartridge information – an example of which is shown below as **Table T1**. This general estimate may be sufficient due to variances in inkjet cartridge construction which may cause variances in measured weights among a cartridge type. In some embodiments, the displayed fill status can be more specific and provide either a percentage and/or a measured weight of the inkjet cartridge. After displaying the fill status, the method **1300** can proceed to block **1357** whereby the method ends.

Fill Status	Mass
Completely Full	48g – 50g
Almost Full	44g – 48g
Half Full	36g – 44g
Low	32g – 36g
Empty	30g – 32g

TABLE T1 – CARTRIDGE INFORMATION

[0157] In some embodiments, the fill status can be based on a calculated percentage of a pre-defined mass or weight for that cartridge – an example of which is shown below as **Table T2**. For example, the inkjet cartridge may have a pre-defined mass of 50g. The system may measure the mass of the inkjet cartridge and determine that the inkjet cartridge has a mass of 48g thereby resulting in a percentage of 96% or “completely full” status. In some implementations, the same or similar range of percentages can be applied across multiple types of inkjet cartridges. For example, the same or similar range of percentages can be applied across inkjet cartridges within the same family, or even to all inkjet cartridges.

Fill Status	Mass
Completely Full	95% - 100%
Almost Full	85% - 95%
Half Full	75% - 85%
Low	65% - 75%
Empty	60% - 65%

TABLE T2 – CARTRIDGE INFORMATION

[0158] In some embodiments, the fill status can be based on a calculated percentage of a pre-defined fill mass or fill weight for that cartridge – an example of which is shown below as **Table T3**. For example, the inkjet cartridge may have a pre-defined full mass of 50g and a pre-defined empty mass of 30g. As such, the pre-defined fill mass of this particular inkjet cartridge would be 20g. The system may measure the mass of the inkjet cartridge and determine that the inkjet cartridge has a mass of 49g thereby resulting in a fill mass of 19g. A fill mass of 19g is 95% of the pre-defined fill mass (i.e., “completely full” status). In some implementations, the same or similar range of percentages can be applied across multiple types of inkjet cartridges. For example, the same or similar range of percentages can be applied across inkjet cartridges within the same family, or even to all inkjet cartridges.

Fill Status	Mass
Completely Full	90% - 100%
Almost Full	70% - 90%
Half Full	30% - 70%
Low	10% - 20%
Empty	0% - 10%

TABLE T3 – CARTRIDGE INFORMATION

[0159] It is to be understood that the steps of method **1300** can be interchanged. Moreover, it is to be understood that one or more of the steps of method **1300** can be omitted. For example, the method **1300** can omit the step of saving measurements in memory as shown in block **1340**.

Other Embodiments

[0160] While certain embodiments have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the disclosure. Indeed, the novel methods and systems described herein may be embodied in a variety of other forms. Furthermore, various omissions, substitutions and changes in the systems and methods described herein may be made without departing from the spirit of the disclosure. The accompanying claims and their equivalents are intended to cover such forms or modifications as would fall within the scope of the disclosure. Accordingly, the scope of the present disclosure is defined only by reference to the claims presented herein or as presented in the future.

[0161] Features, materials, characteristics, or groups described in conjunction with a particular aspect, embodiment, or example are to be understood to be applicable to any other aspect, embodiment or example described in this section or elsewhere in this specification unless incompatible therewith. All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive. The protection is not restricted to the details of any foregoing embodiments. The protection extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

[0162] Furthermore, certain features that are described in this disclosure in the context of separate implementations can also be implemented in combination in a single implementation. Conversely, various features that are described in the context of a single

implementation can also be implemented in multiple implementations separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations, one or more features from a claimed combination can, in some cases, be excised from the combination, and the combination may be claimed as a subcombination or variation of a subcombination.

[0163] For purposes of this disclosure, certain aspects, advantages, and novel features are described herein. Not necessarily all such advantages may be achieved in accordance with any particular embodiment. Thus, for example, those skilled in the art will recognize that the disclosure may be embodied or carried out in a manner that achieves one advantage or a group of advantages as taught herein without necessarily achieving other advantages as may be taught or suggested herein.

[0164] Conditional language, such as “can,” “could,” “might,” or “may,” unless specifically stated otherwise, or otherwise understood within the context as used, is generally intended to convey that certain embodiments include, while other embodiments do not include, certain features, elements, and/or steps. Thus, such conditional language is not generally intended to imply that features, elements, and/or steps are in any way required for one or more embodiments or that one or more embodiments necessarily include logic for deciding, with or without user input or prompting, whether these features, elements, and/or steps are included or are to be performed in any particular embodiment.

[0165] Conjunctive language such as the phrase “at least one of X, Y, and Z,” unless specifically stated otherwise, is otherwise understood with the context as used in general to convey that an item, term, etc. may be either X, Y, or Z. Thus, such conjunctive language is not generally intended to imply that certain embodiments require the presence of at least one of X, at least one of Y, and at least one of Z.

[0166] The scope of the present disclosure is not intended to be limited by the specific disclosures of preferred embodiments in this section or elsewhere in this specification, and may be defined by claims as presented in this section or elsewhere in this specification or as presented in the future. The language of the claims is to be interpreted broadly based on the language employed in the claims and not limited to the examples

described in the present specification or during the prosecution of the application, which examples are to be construed as non-exclusive.

WHAT IS CLAIMED IS:

1. A modular system for modifying inkjet cartridge configuration, the system comprising:

a receiver comprising one or more docking regions comprising electrical interfaces;

a first adapter configured to establish communications between a first type of inkjet cartridge and the receiver, the first adapter comprising a base, a receiver interface configured to contact an electrical interface of the receiver, and a cartridge interface configured to contact electronics of a first type of inkjet cartridge; and

a control system configured to:

determine a type of inkjet cartridge based on at least one of: a type of adapter, and electronics of the inkjet cartridge; and

modify configuration information stored on the inkjet cartridge based on the determined type of inkjet cartridge.

2. The modular system of Claim 1, wherein the system further comprises a second adapter configured to establish communications between a second type of inkjet cartridge and the receiver, the second adapter comprising a base, a receiver interface configured to contact an electrical interface of the receiver, and a cartridge interface configured to contact electronics of the second type of inkjet cartridge.

3. The modular system of Claim 2, wherein the receiver comprises a first docking region and a second docking region, wherein the first adapter is configured to communicate with the receiver at the first docking region and the second adapter is configured to communicate with the receiver at the second docking region.

4. The modular system of Claim 2, wherein the first adapter and the second adapter are configured to interchangeably communicate with the receiver at the same docking region.

5. The modular system of Claim 1, wherein the first adapter comprises a support structure, wherein the first type of inkjet cartridge is configured to removably couple with the support structure.

6. The modular system of Claim 5, wherein the support structure is configured to removably couple to a recess of the base.

7. The modular system of Claim 5, wherein the support structure comprises a first sidewall.

8. The modular system of Claim 7, wherein the support structure comprises a second sidewall spaced apart from the first sidewall.

9. The modular system of Claim 1, wherein the first adapter comprises a retention mechanism configured to removably couple with the docking region.

10. The modular system of Claim 9, wherein the retention mechanism comprises a hook configured to engage a lip in the docking region.

11. The modular system of Claim 10, wherein the lip is configured to move from an engaged configuration to a disengaged configuration.

12. The modular system of Claim 11, wherein the lip is biased towards the engaged configuration.

13. The modular system of Claim 9, wherein the retention mechanism comprises a plug configured to removably couple with a socket, the socket comprising the electrical interface of the docking region.

14. The modular system of Claim 1, wherein the first adapter comprises electronics provided within the base of the first adapter.

15. The modular system of Claim 14, wherein the electronics comprise programmed instructions that, when executed by the control system, modify configuration information stored on the inkjet cartridge based on the determined type of inkjet cartridge.

16. The modular system of Claim 14, wherein the electronics comprise an identification tag such that the control system can determine the type of adapter attached to the receiver.

17. The modular system of Claim 1, wherein the system comprises a user interface and the control system is configured to display programming information based on the determined type of inkjet cartridge.

18. The modular system of Claim 17, wherein the programming information comprises credits for modifying configuration information stored on the inkjet cartridge.

19. The modular system of Claim 1, wherein the system comprises a fill station configured to refill an inkjet cartridge.

20. The modular system of Claim 19, wherein the receiver is attached to the fill station.

21. A method for modifying configuration information stored on an inkjet cartridge via a modular system having a receiver and one or more interchangeable adapters, the method comprising:

detecting a first electronic coupling between an interchangeable adapter and the receiver;

detecting a second electronic coupling between an inkjet cartridge and the interchangeable adapter;

determining a type of the inkjet cartridge based on the first and second electronic couplings;

modifying configuration information stored on the inkjet cartridge based on the determined type of inkjet cartridge.

22. The method of Claim 21, wherein determining a type of inkjet cartridge comprises detecting an identification tag of the interchangeable adapter based on the first electronic coupling.

23. The method of Claim 21, wherein determining a type of inkjet cartridge comprises detecting identification information on electronics of the inkjet cartridge based on the second electronic coupling.

24. The method of Claim 21, wherein the method comprises determining credits based on the determined type of inkjet cartridge.

25. The method of Claim 24, wherein the method comprises comparing the credits to a threshold amount prior to modifying the inkjet configuration.

26. The method of Claim 24, wherein the method comprises displaying credits on a user interface.

27. The method of Claim 24, wherein the method comprises applying credits based on the determined type of inkjet cartridge.

28. A system for refilling an inkjet cartridge and determining a fill status of an inkjet cartridge, the system comprising:

a fill station configured to refill an inkjet cartridge;

a scale comprising a sensor configured to provide a measurement, the measurement comprising at least one of a mass or weight of an inkjet cartridge;

a user interface; and

a control system configured to:

- determine a type of inkjet cartridge on which the measurement is based;
- determine a fill status of an inkjet cartridge based on the measurement;

and

display the fill status on the user interface.

29. The system of Claim 28, wherein the control system is configured to determine the type of inkjet cartridge via a user input.

30. The system of Claim 28, wherein the control system is configured to determine the type of inkjet cartridge by reading electronics of the inkjet cartridge.

31. The system of Claim 28, wherein the fill status is a general fill status comprising a discrete number of statuses corresponding to ranges of pre-defined measurements of the type of inkjet cartridge.

32. The system of Claim 31, wherein the ranges of pre-defined measurements comprise at least one of pre-defined masses or weights of the type of inkjet cartridge.

33. The system of Claim 31, wherein the ranges of pre-defined measurements comprise percentages of a pre-defined mass or weight of the type of inkjet cartridge.

34. The system of Claim 31, wherein the ranges of pre-defined measurements comprise percentages of a pre-defined fill mass or fill weight of the type of inkjet cartridge.

35. A method of determining a fill status of an inkjet cartridge with a scale, the method comprising:

detecting an inkjet cartridge on the scale;
measuring a mass or weight of the inkjet cartridge on the scale in response to detecting the inkjet cartridge;
obtaining cartridge information, the cartridge information providing a type of inkjet cartridge being measured; and
determining a fill status of the inkjet cartridge, the fill status being selected from one of multiple fill statuses based on a measured mass or weight of the inkjet cartridge.

36. The method of Claim 35, wherein detecting an inkjet cartridge on the scale comprises detecting a deviation from a default signal received from a sensor of the scale.

37. The method of Claim 35, wherein obtaining information on a type of inkjet cartridge comprises receiving an input providing cartridge information.

38. The method of Claim 35, wherein obtaining information on a type of inkjet cartridge comprises receiving cartridge information based on electronics on the inkjet cartridge.

39. The method of Claim 35, wherein determining a fill status of the inkjet cartridge comprises comparing a measured mass or weight of the inkjet cartridge with a table of fill statuses based on ranges of pre-defined masses and weights of the type of inkjet cartridge.

40. The method of Claim 35, wherein determining a fill status of the inkjet cartridge comprises comparing a measured mass or weight of the inkjet cartridge with a table of fill statuses based on ranges of percentages of a pre-defined mass or weight of the type of inkjet cartridge.

41. The method of Claim 35, wherein determining a fill status of the inkjet cartridge comprises comparing a measured mass or weight of the inkjet cartridge with a table of fill statuses based on ranges of percentages of a pre-defined fill mass or fill weight of the type of inkjet cartridge.

42. The method of Claim 35, further comprising calibrating the scale.

43. The method of Claim 42, wherein calibrating the scale is performed before measuring a mass or weight of the inkjet cartridge.

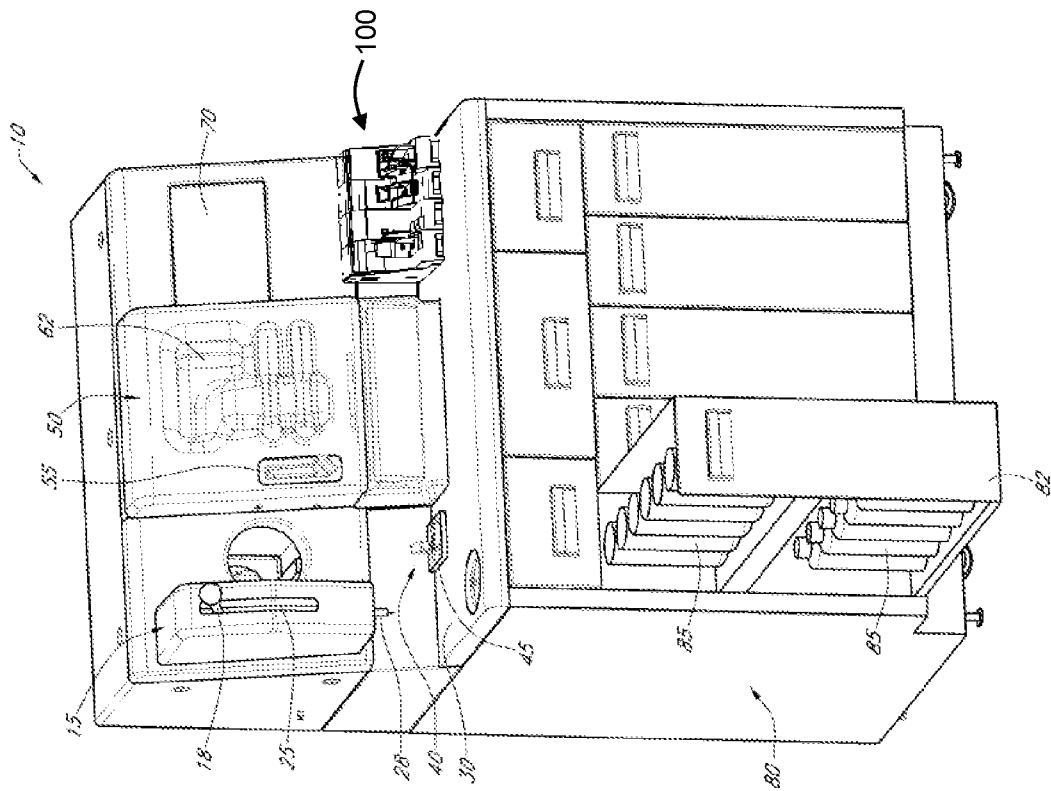


Figure 1

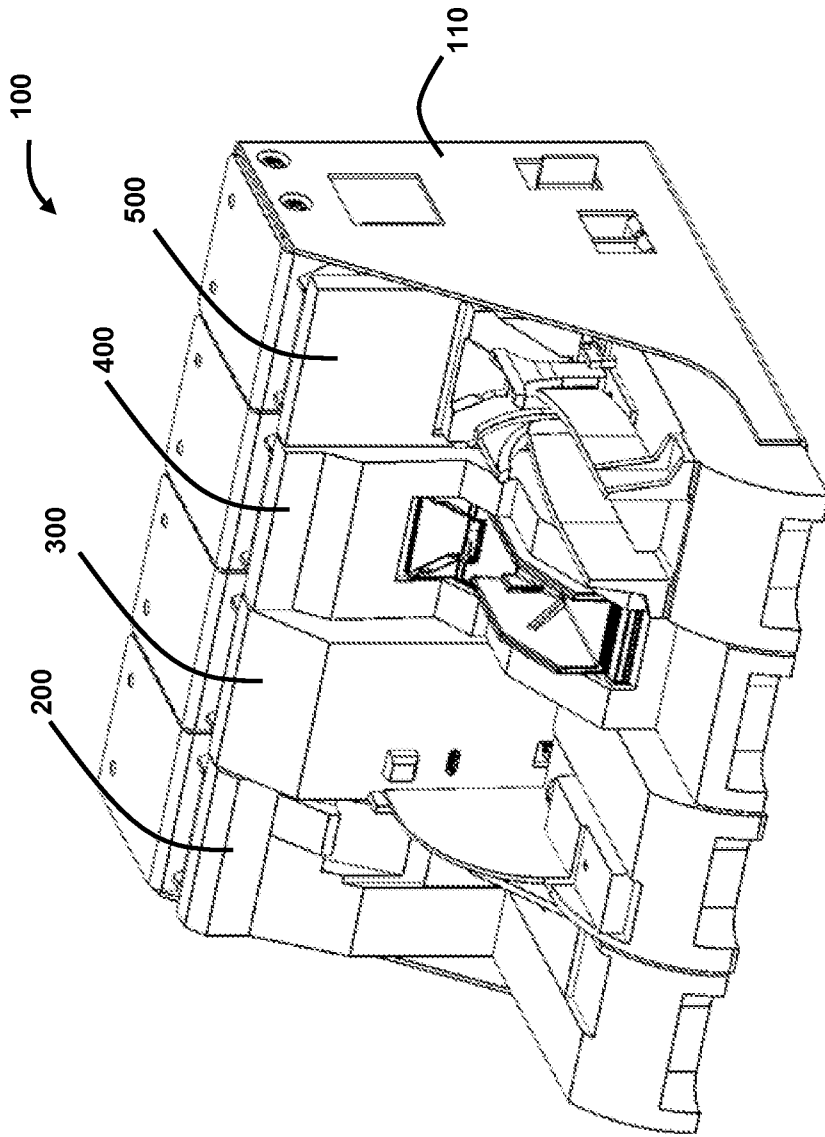


Figure 2

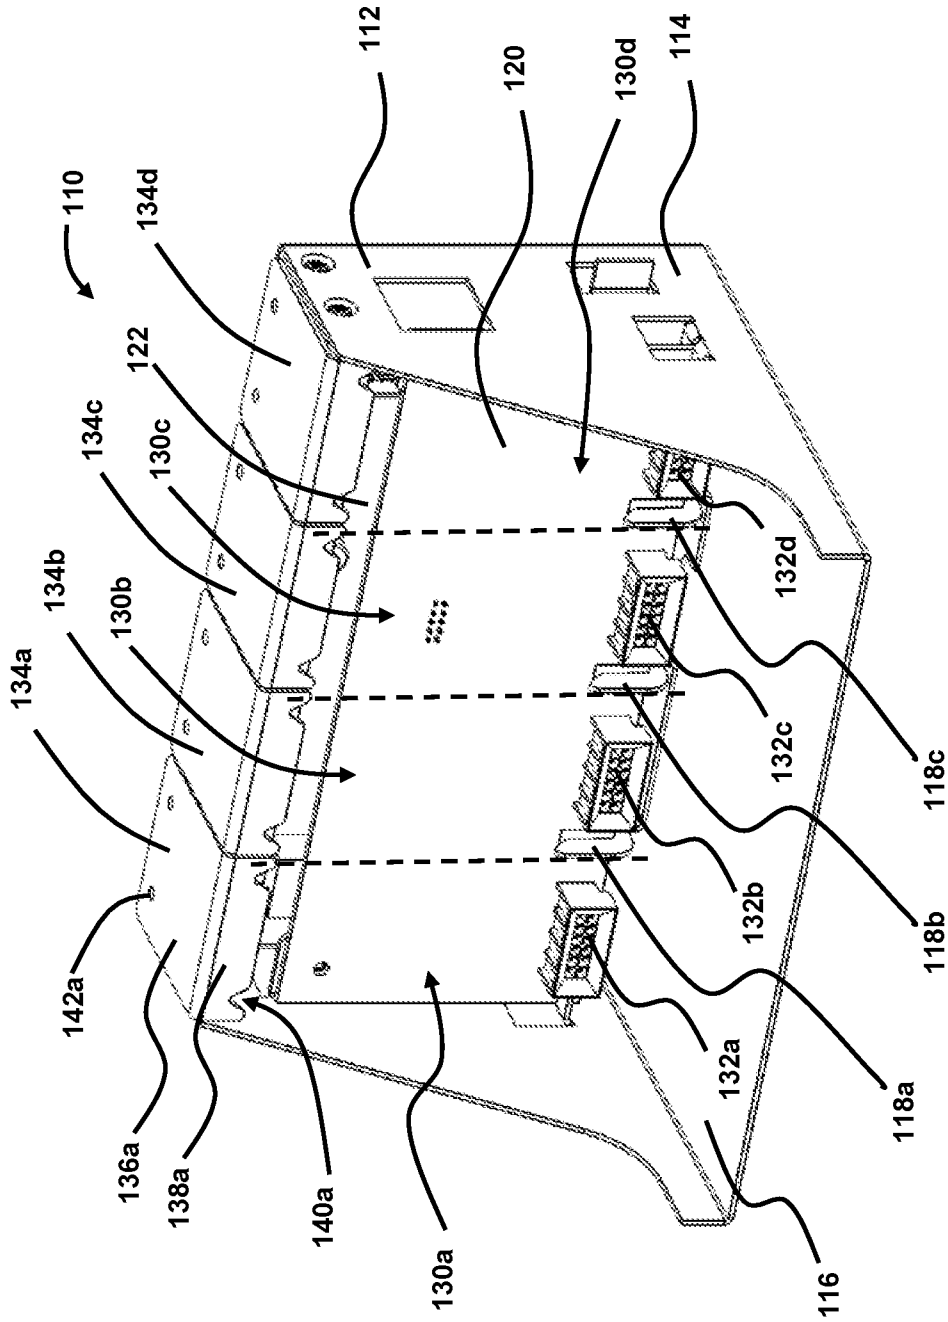


Figure 3

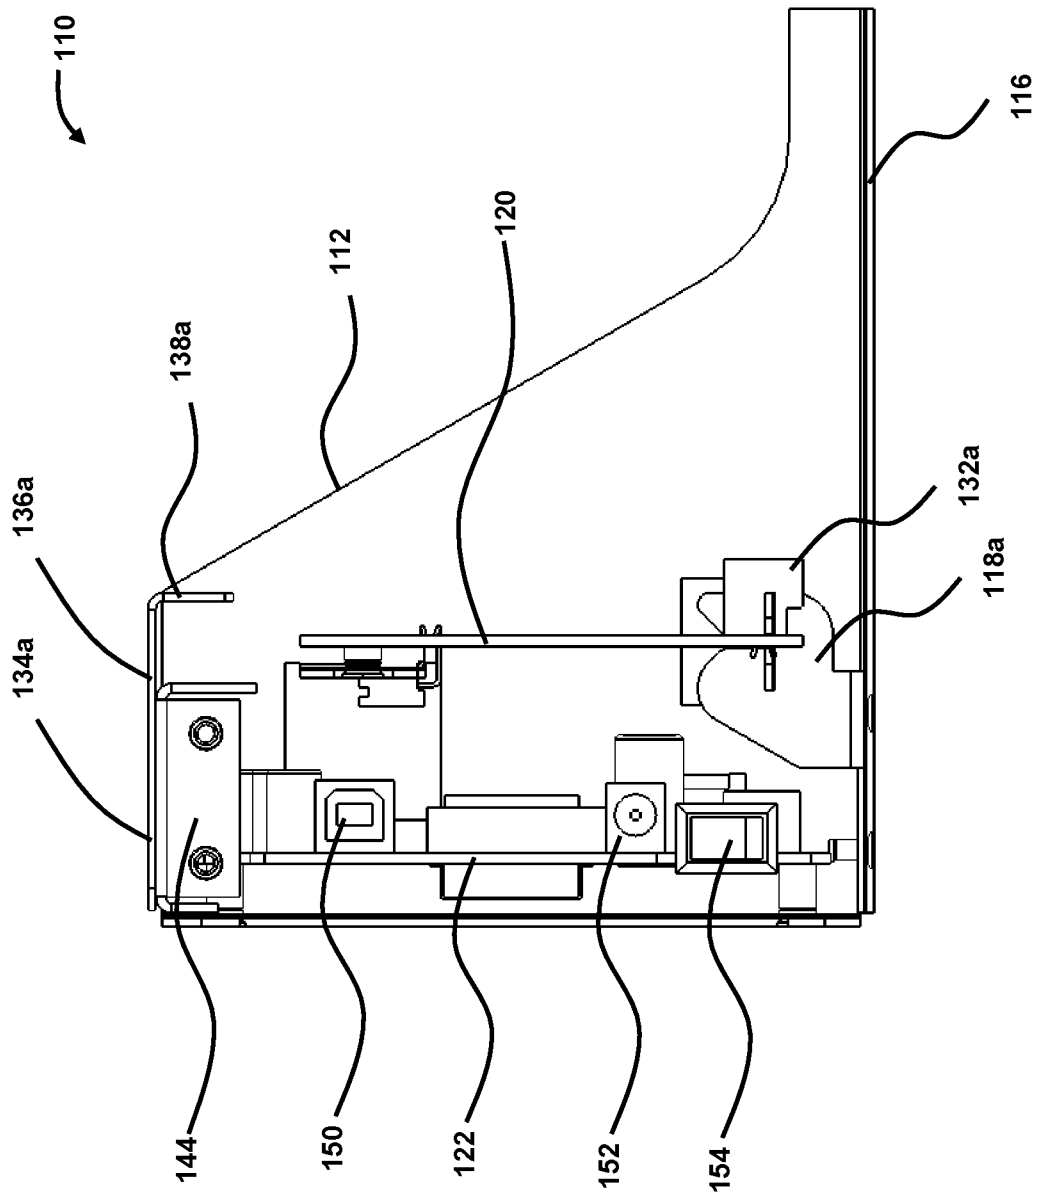


Figure 4

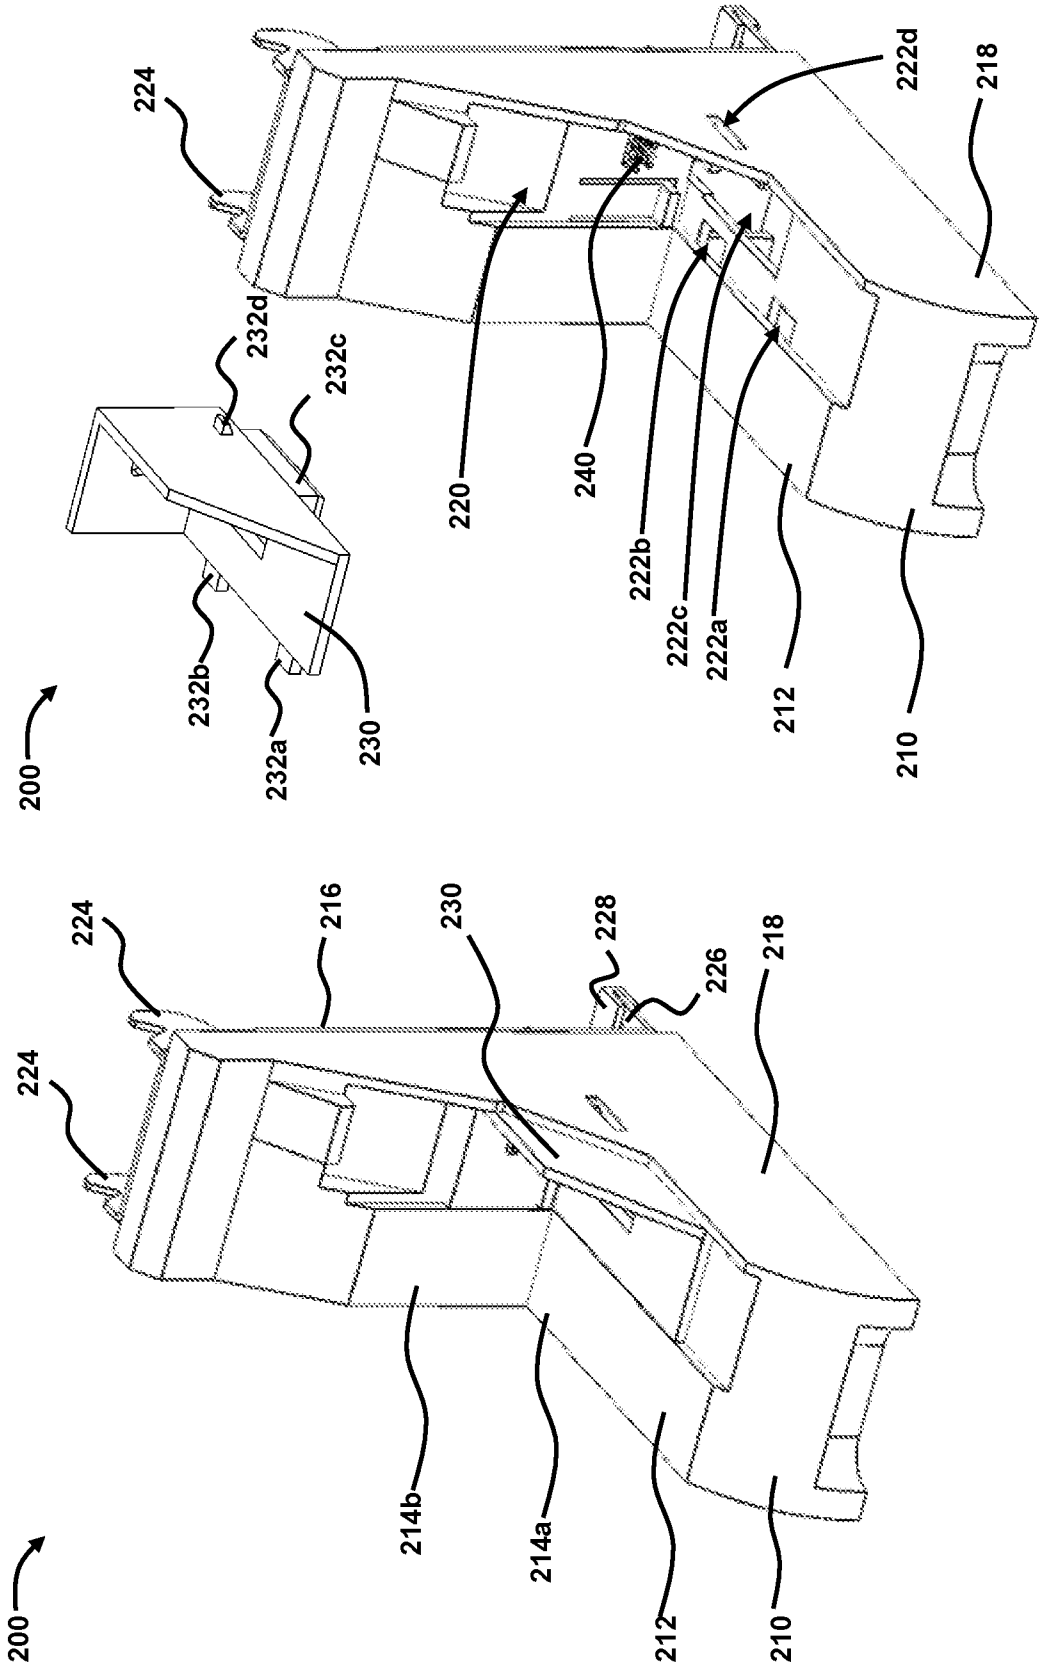


Figure 6

Figure 5

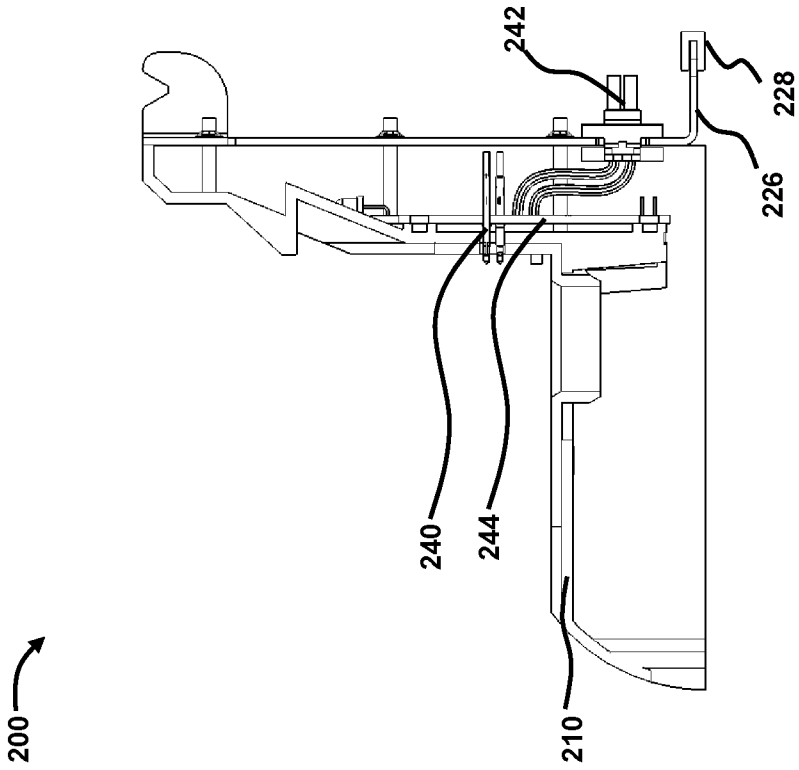


Figure 7

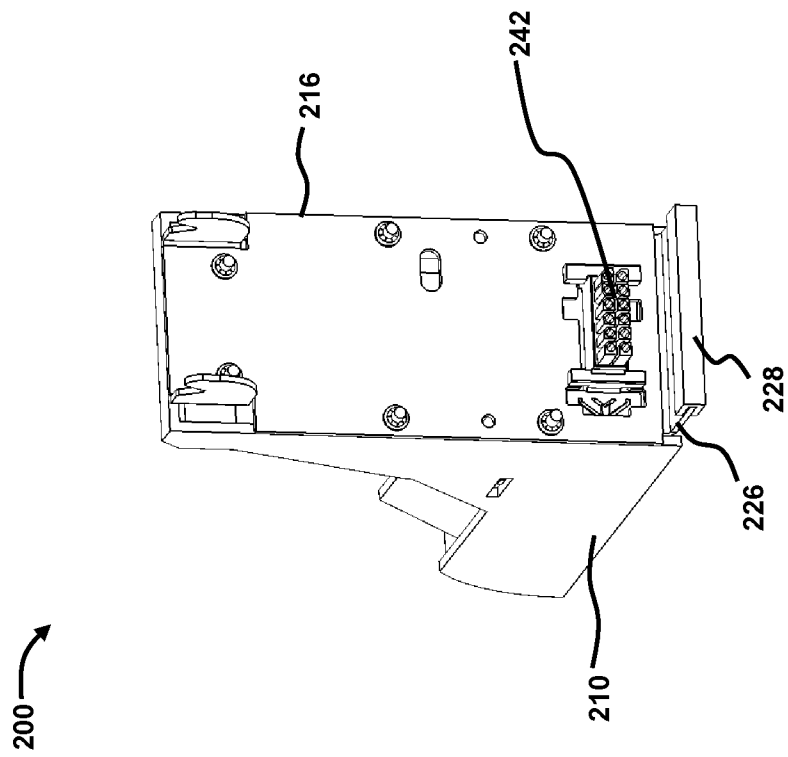


Figure 8

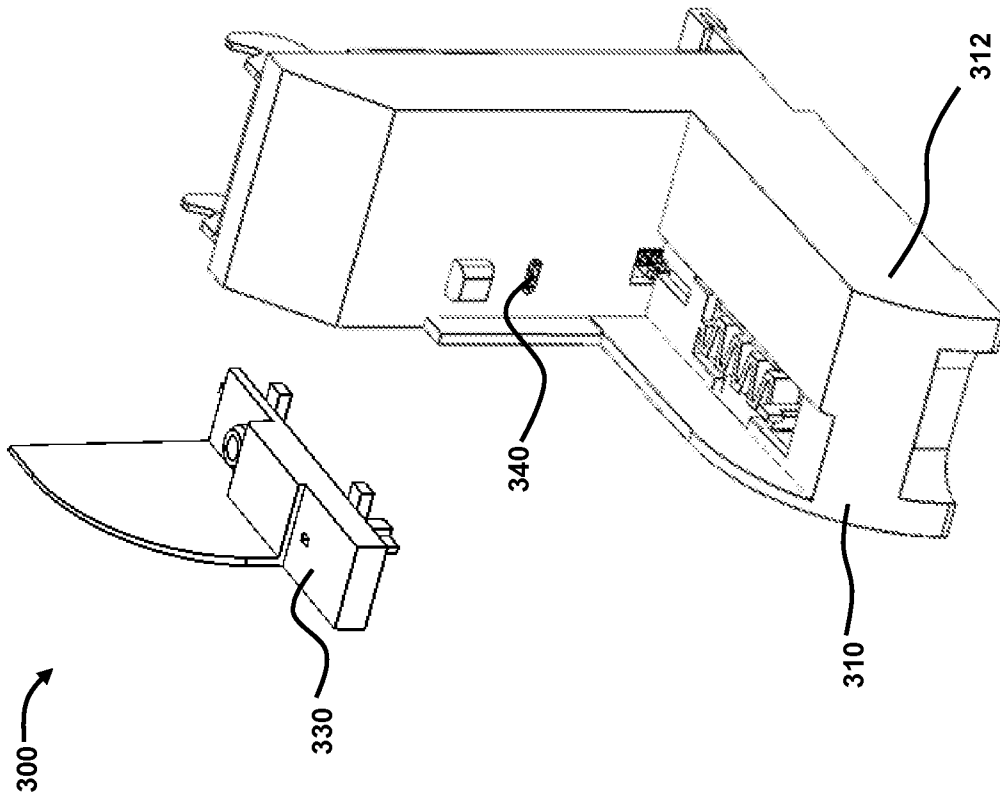


Figure 10

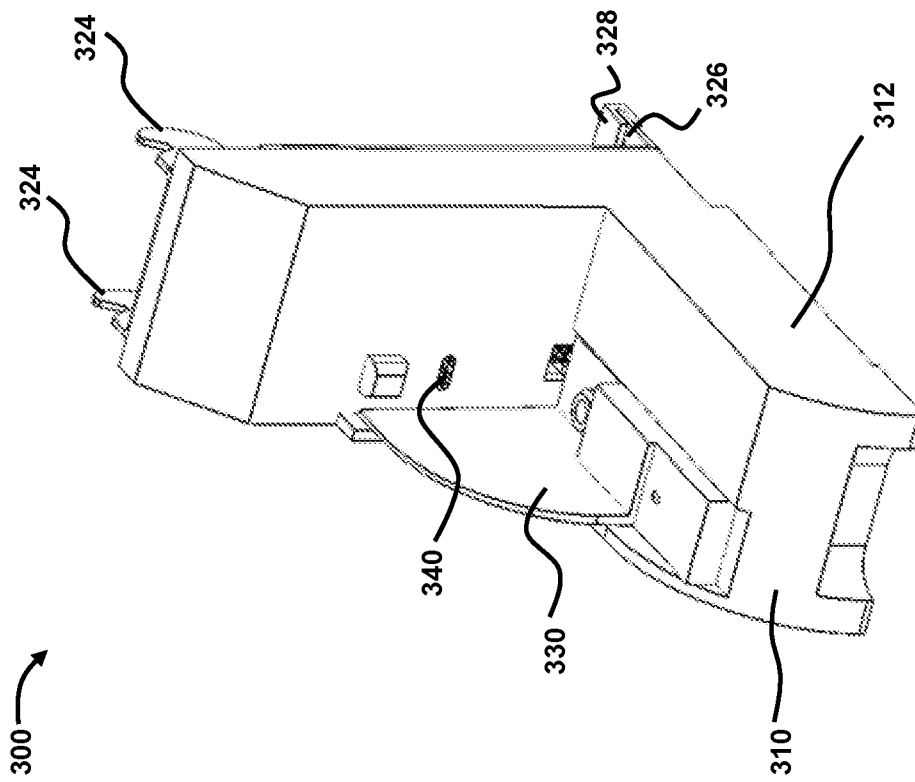


Figure 9

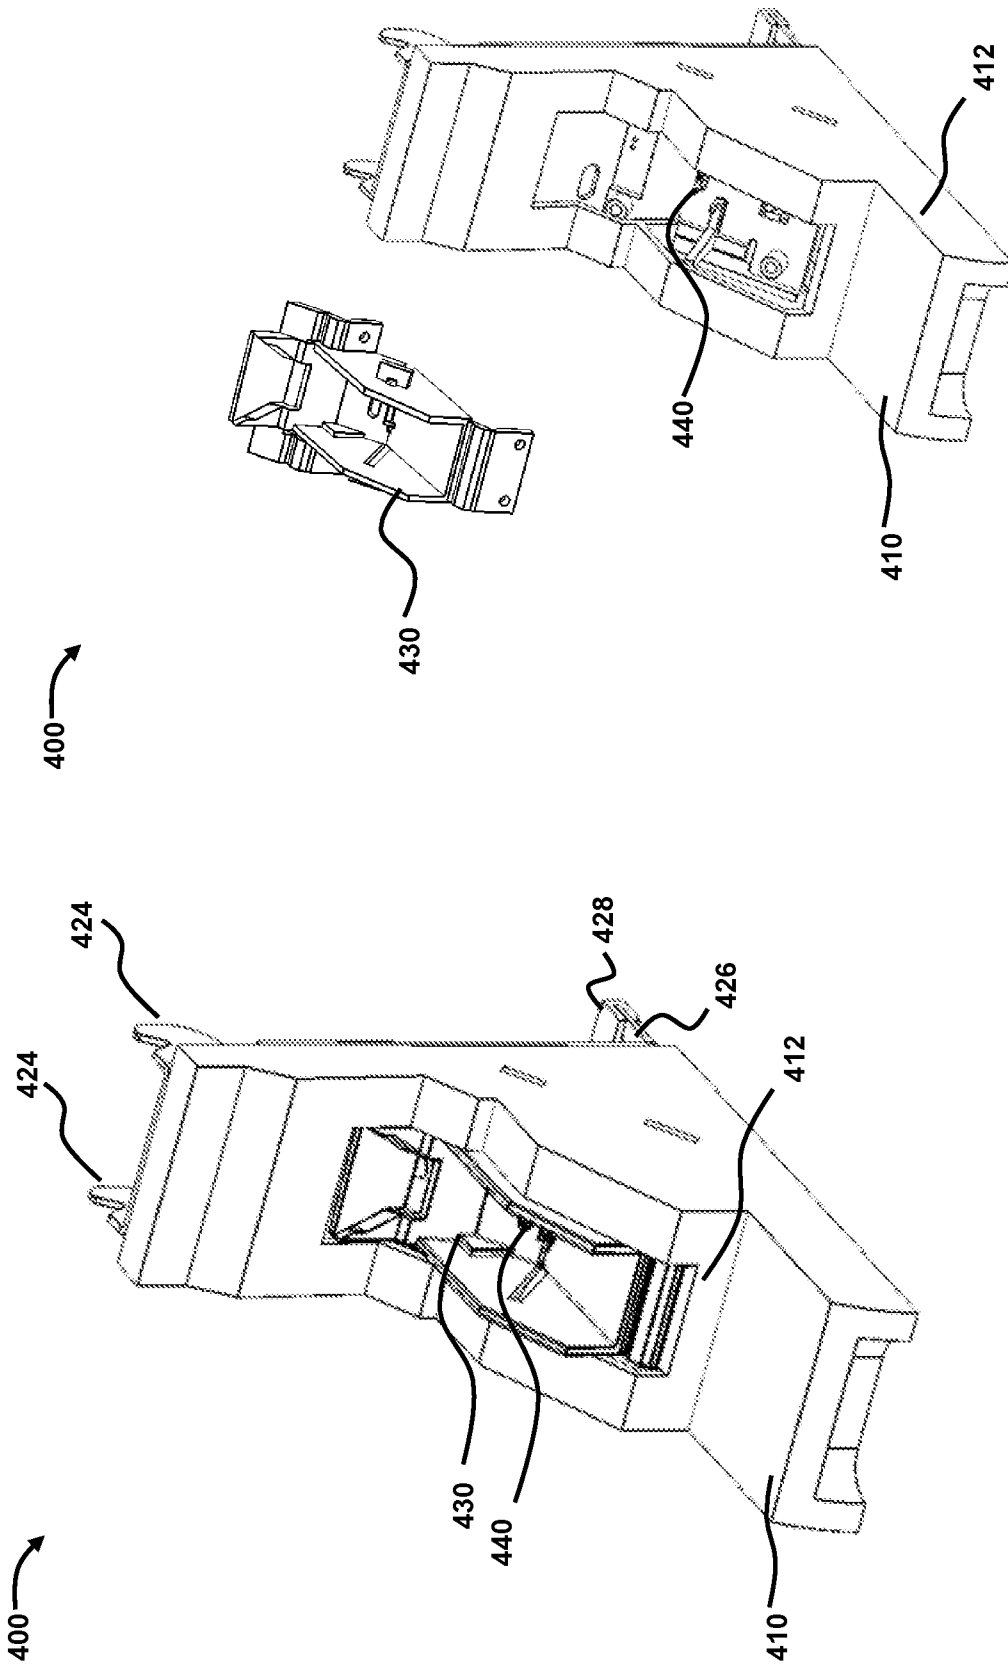


Figure 12

Figure 11

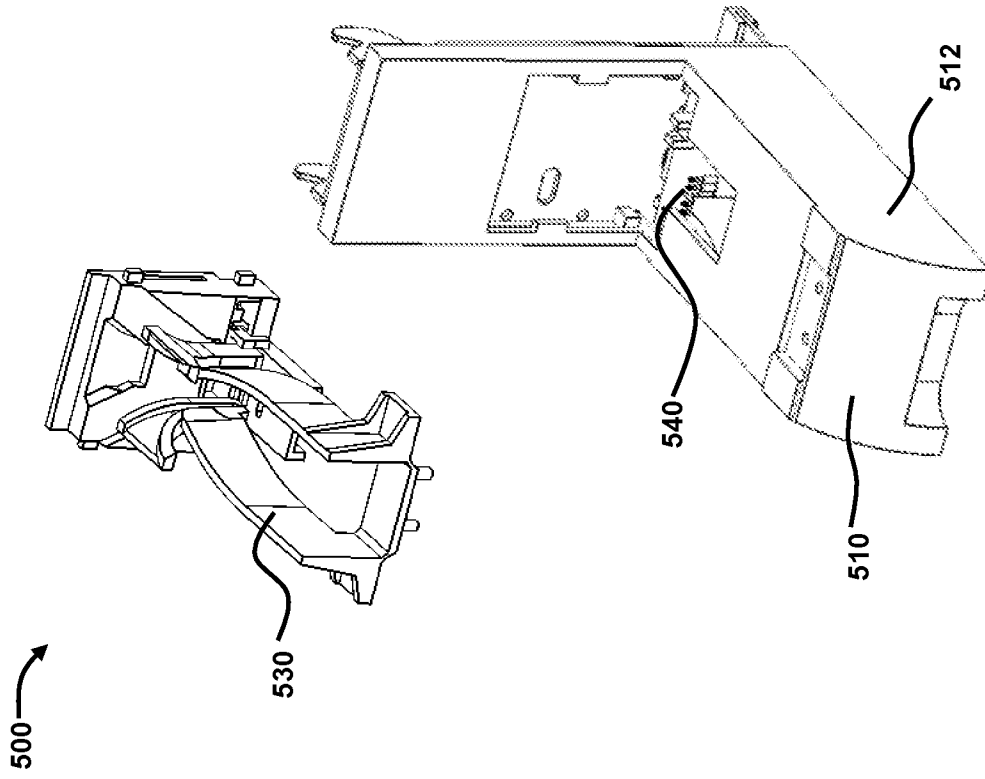


Figure 13

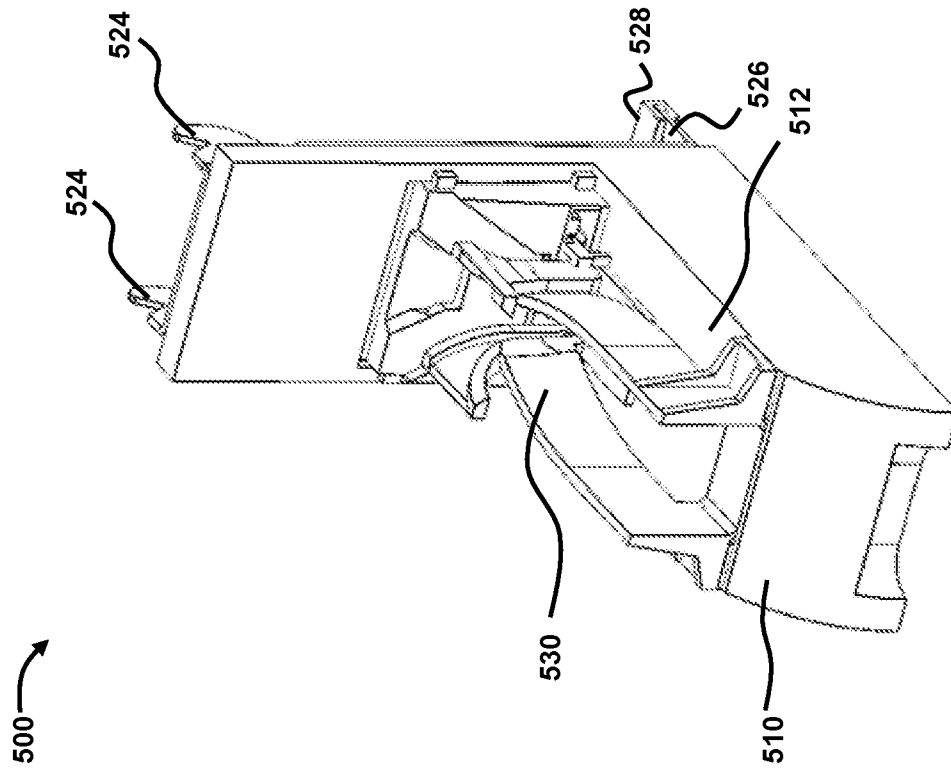


Figure 14

10/15

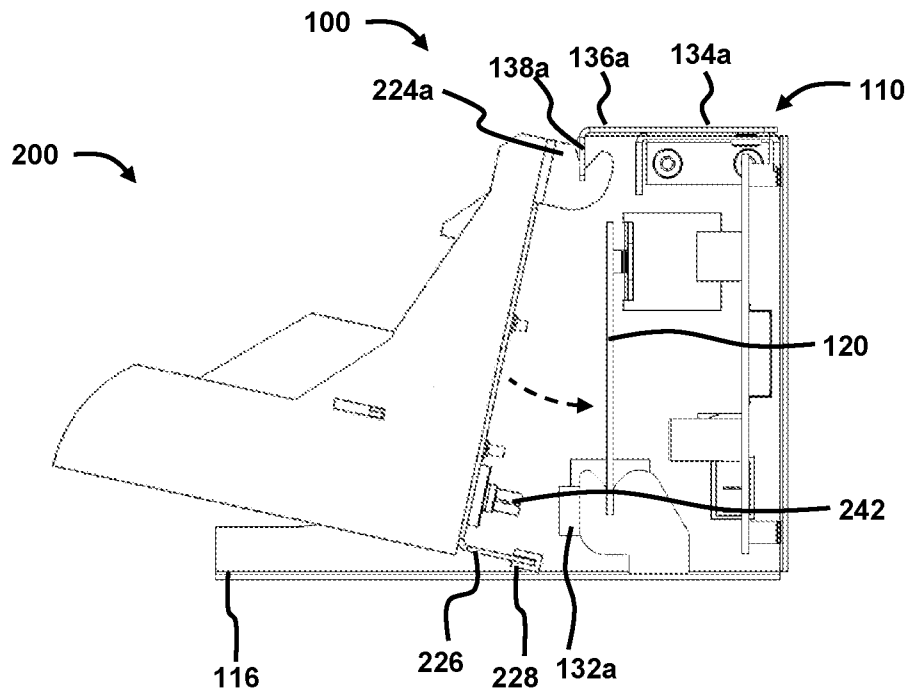


Figure 15

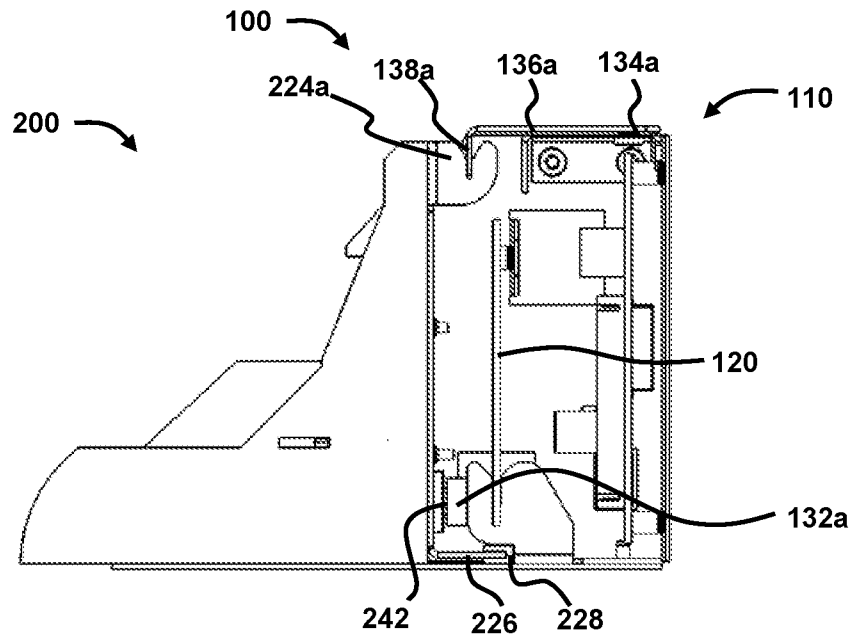


Figure 16

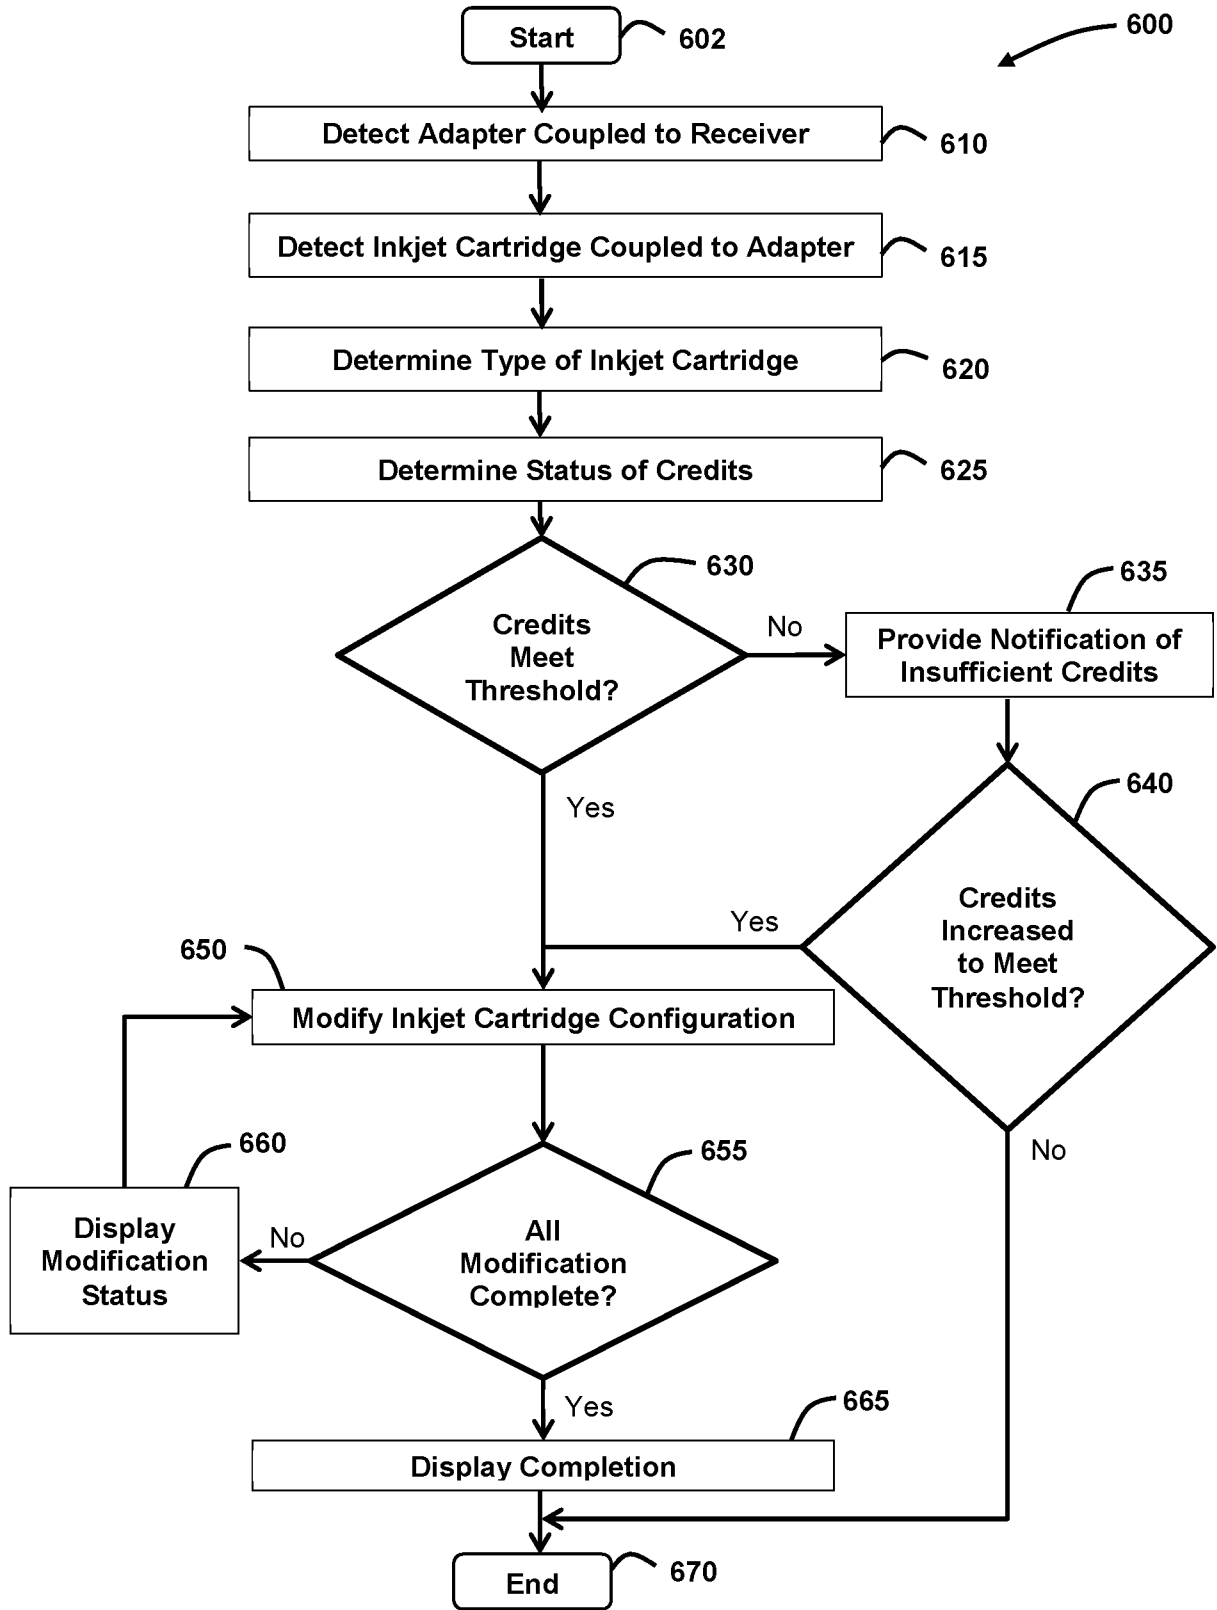


Figure 17

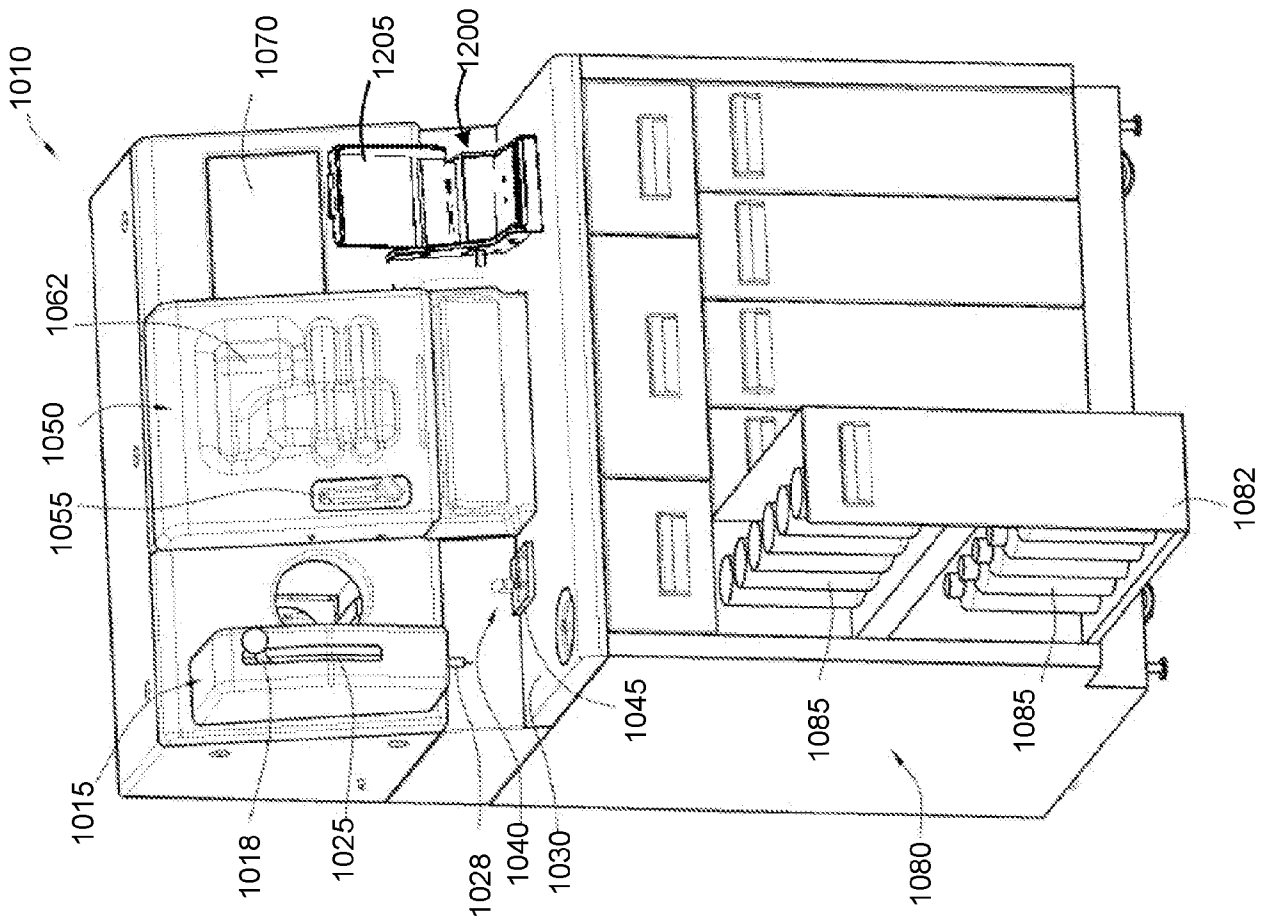


Figure 18

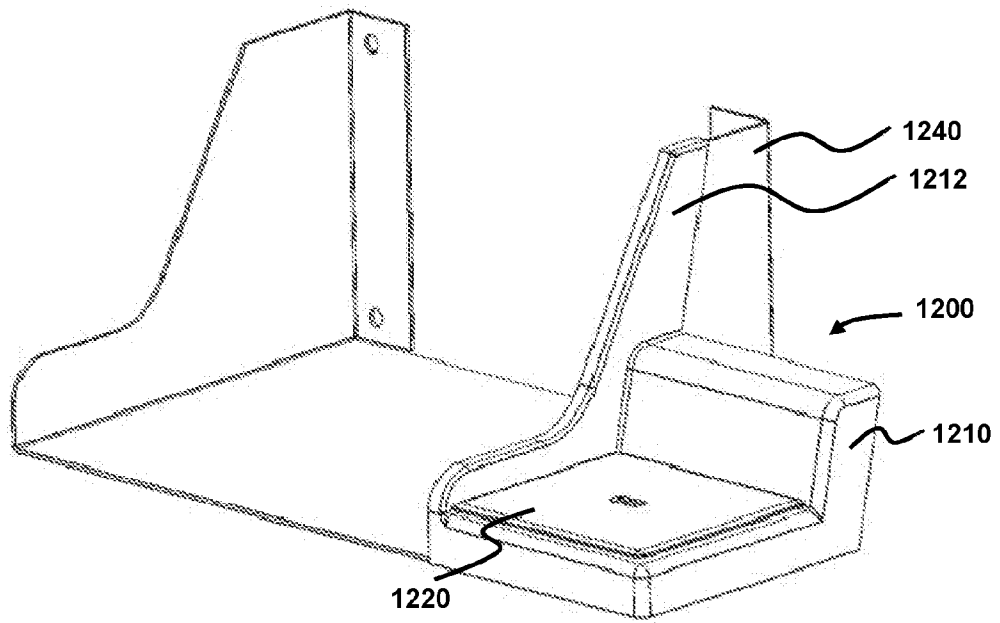


Figure 19

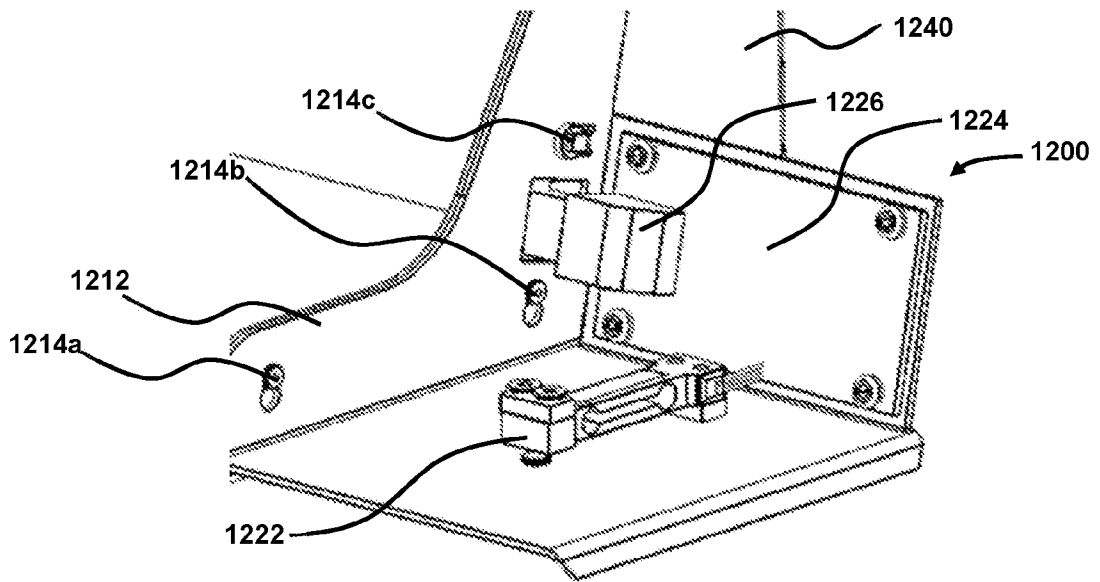


Figure 20

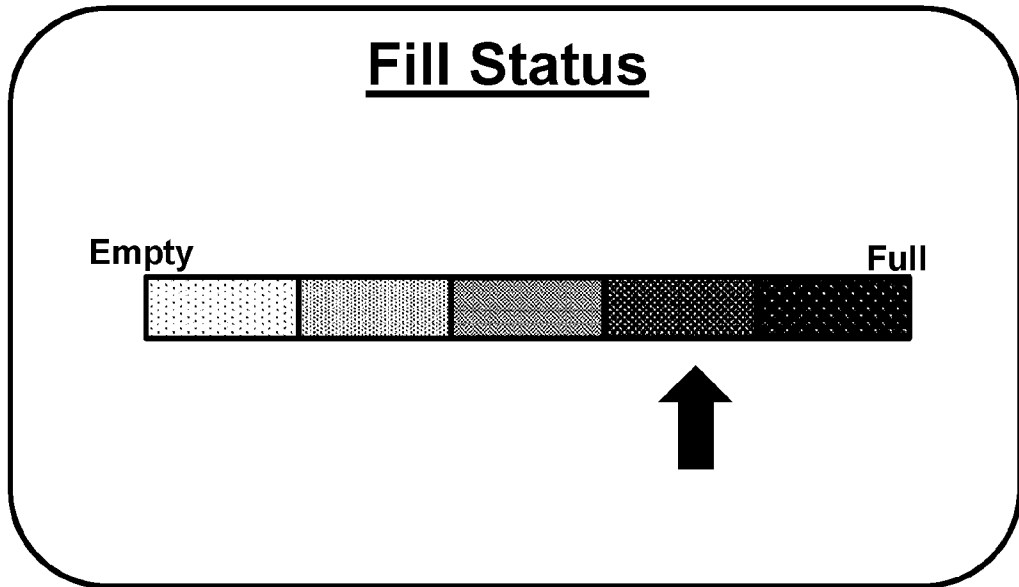


Figure 21

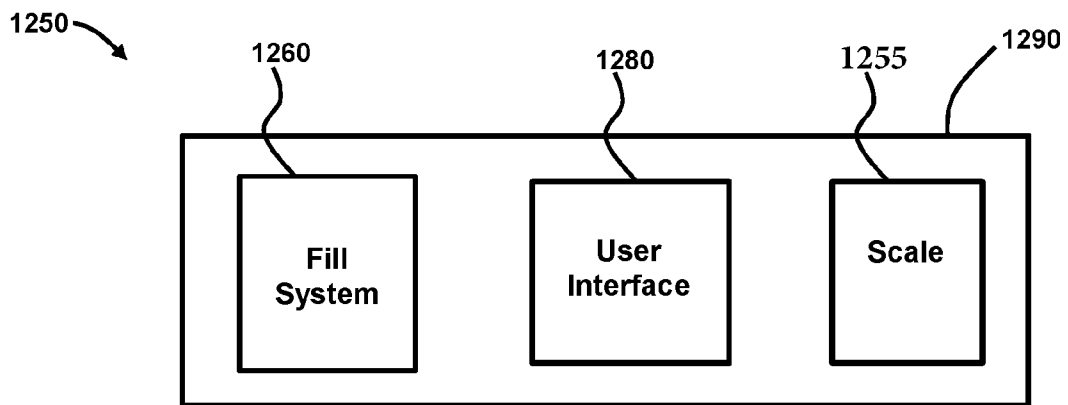


Figure 22

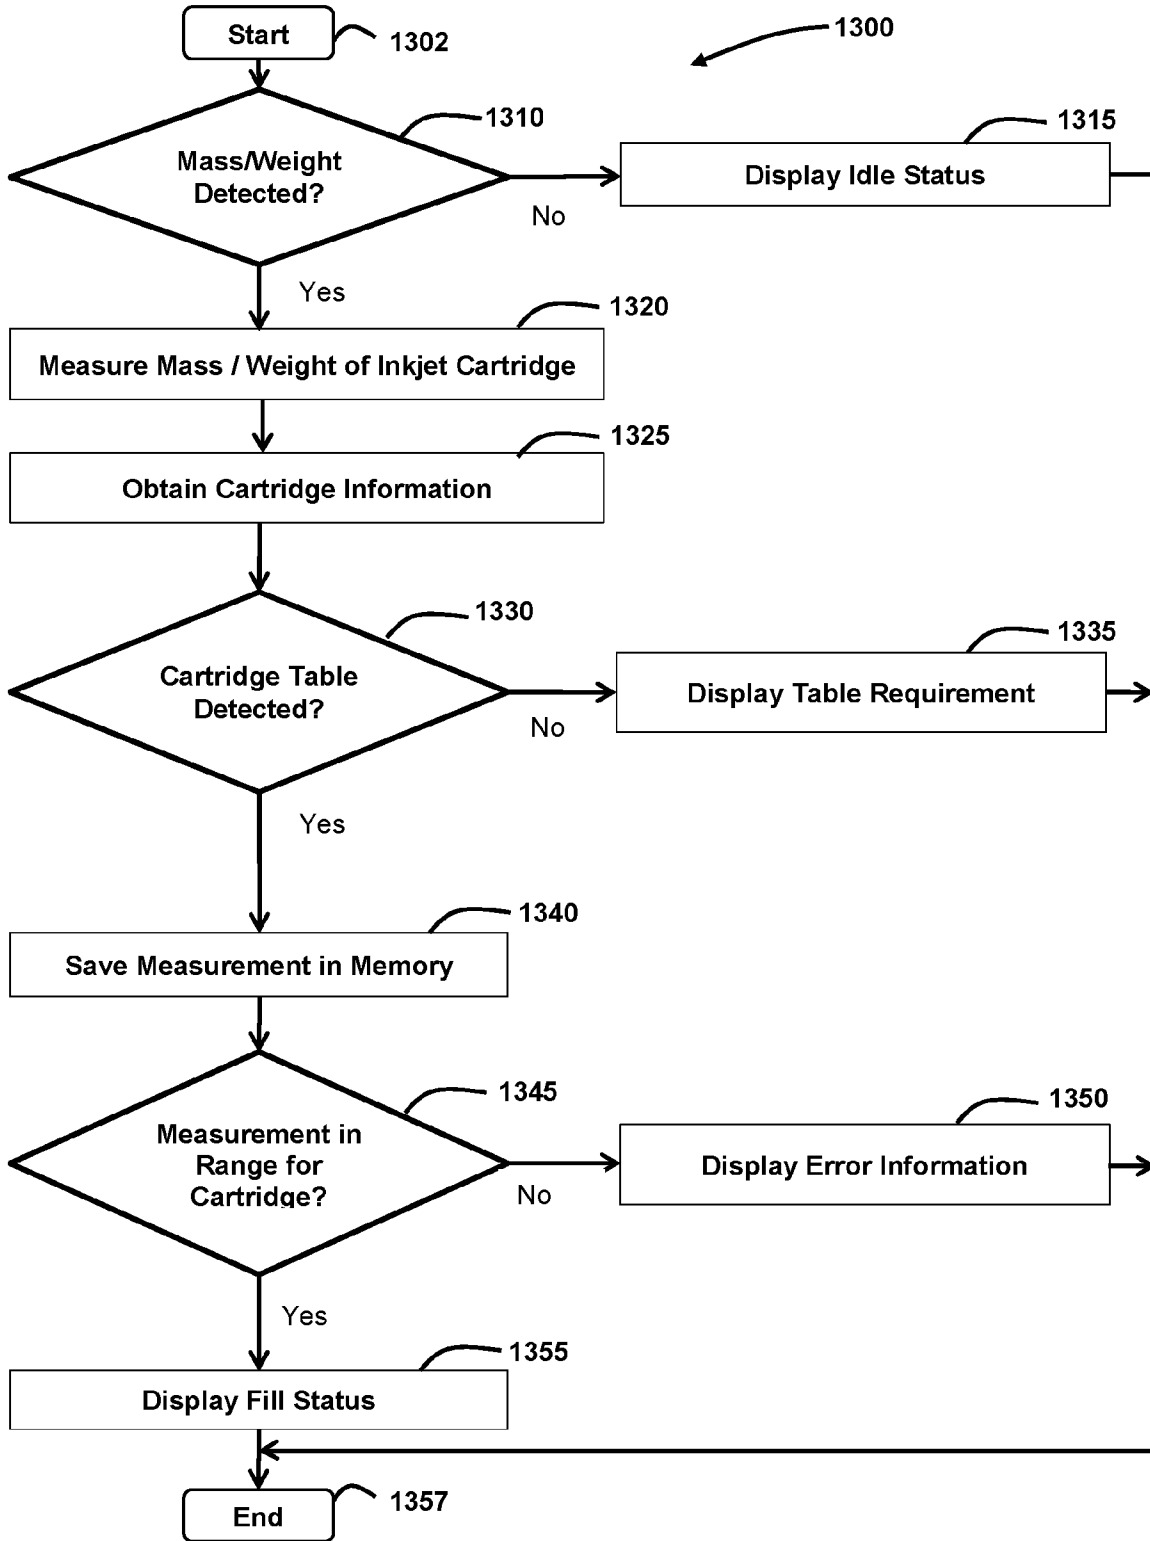


Figure 23

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 18/26315

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B41J 2/195 (2018.01)

CPC - B41J 2/17506, B41J 2/17509, B41J 2/1753, B41J 2/17546, B41J 2/17553

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---- Y	US 2007/0285481 A1 (Scanlan et al.) 13 December 2007 (13.12.2007) entire oducment (especially para [0042], [0046], [0053]-[0054], [0060]-[0063])	28-29, 31-37 and 39-41 ----- 30, 38, 42-43
Y	US 2004/0040614 A1 (Sesek, et al.) 04 March 2004 (04.03.2004) para [0023],[0027]-[0029])	30 and 38
Y	US 2009/0278872 A1 (Turgeman) 12 November 2009 (12.11.2009) (para [0093])	42-43
Y	US 2012/0081422 A1 (Kura) 05 April 2012 (05.04.2012) entire oducment (especially para [0010], [0029]-[0031], [0049]-[0050])	1-27
Y	US 8,161,199 B1 (Weiser et al.) 17 April 2012 (17.04.2012) (col. 5, ln 6-17)	1-27
Y	US 2007/0051421 A1 (Sarnoff et al.) 08 March 2007 (08.03.2007) (para [0039], [0113]-[0115]).	1-27
Y	US 2004/0252337 A1 (Takabayashi et al.) 16 December 2004 (16.12.2004) (para [0054]-[0055])	18 and 24-27

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 July 2018 (23.07.2018)

Date of mailing of the international search report

03 AUG 2018

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 18/26315

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

-see extra sheet-

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

Continuation of Box III: Lack of Unity

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I: claims 1-27 are drawn to a system comprising a receiver, an adapter, and a control system configured to modify the configuration information stored in the inkjet cartridge by determining the type of inkjet cartridge.

Group II: claims 28-43 are drawn to a system comprising a fill station, a scale comprising a sensor, a user interface; and a control system configured to detecting and measuring the ink cartridge, obtaining cartridge information, and determining a fill status based on a measured mass or weight of the inkjet cartridge.

The inventions listed as Groups I through II do not relate to a single general inventive concept under PCT Rule 13.1 because under PCT Rule 13.2 they lack the same or corresponding technical features for the following reasons:

Special Technical Features:

The special technical feature of Group I is a system comprising a receiver, an adapter, and a control system configured to modify the configuration information stored in the inkjet cartridge by determining the type of inkjet cartridge, not present in any other group.

The special technical feature of Group II is a system comprising a fill station, a scale comprising a sensor, a user interface; and a control system configured to detecting and measuring the ink cartridge, obtaining cartridge information, and determining a fill status based on a measured mass or weight of the inkjet cartridge, not present in any other group.

Common Technical Features:

Groups I and II share the technical feature of the system comprising: an interface; a control system configured to: determine a type of inkjet cartridge. However, this shared technical features does not represent a contribution over

US 2012/0081422 A1 (Kura) 05 April 2012 (05.04.2012)

Kura teaches the system (e.g. apparatus, para [0029]-[0031]) comprising: an interface (e.g. electrical interfaces 44, para [0050]); a control system configured to (e.g. the controller 81 includes a storage 84, a timer 87, a counter 88, and the A/D converter 89., para [0116]; para [0111]-[0112]); determine a type of inkjet cartridge (e.g. The first determination table contains predetermined values (hereinafter referred to as first values) for determining the type of the ink cartridge 60 mounted in the cartridge accommodating section 40, para [0116]-[0117],[0146]).

Thus, unity of invention is lacking under PCT Rule 13.1 because Groups I-II do not share a same or corresponding special technical feature that would provide a unifying contribution over the prior art. None of these special technical features are common to the other groups.