



- (51) International Patent Classification:  
*B65D 75/32* (2006.01)    *B65D 81/24* (2006.01)  
*B05B 11/04* (2006.01)    *B65D 55/02* (2006.01)  
*B65D 75/36* (2006.01)    *B65B 55/02* (2006.01)
- (21) International Application Number:  
PCT/US2015/059559
- (22) International Filing Date:  
6 November 2015 (06.11.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/077,132    7 November 2014 (07.11.2014)    US
- (71) Applicant: **CORIUM INTERNATIONAL, INC.**  
[US/US]; 235 Constitution Drive, Menlo Park, CA 94025 (US).
- (72) Inventors: **FAASSE, Adrian, L.**; 235 Constitution Drive, Menlo Park, CA (US). **SINGH, Parminder**; 5504 Alvelais Drive, Union City, CA 94587 (US).
- (74) Agents: **MAHONEY, Jacqueline, F** et al.; McDermott Will & Emery LLP, 500 North Capitol Street, NW, Washington, DC 20001 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

[Continued on next page]

(54) Title: MEDICAL DEVICE PACKAGING

(57) Abstract: A packaging system providing for sterile enclosure of devices including medical devices and systems such as delivery systems is described. The packaging system is comprised of a primary chamber and includes at least one vent or opening covered by a barrier.

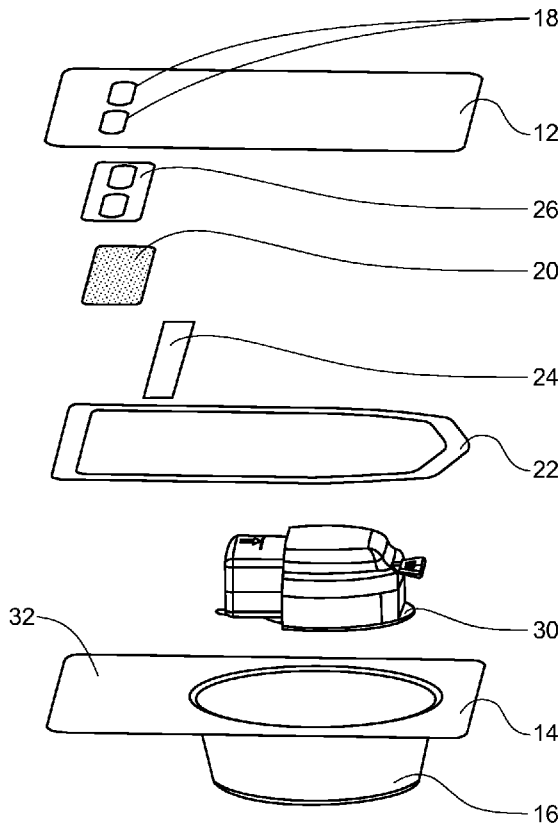


FIG. 2

WO 2016/073908 A1

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

**Published:**

— with international search report (Art. 21(3))

## MEDICAL DEVICE PACKAGING

### CROSS-REFERENCE TO RELATED APPLICATIONS

**[0001]** This application claims the benefit of U.S. Provisional Application No. 62/077,132, filed November 7, 2014, which is incorporated herein by reference in its entirety.

### TECHNICAL FIELD

**[0002]** The disclosure relates generally to device packaging that may be sterilized and sealed, and related features thereof. The packaging includes one or more vents or openings, preferably including a breathable, microbial barrier.

### BACKGROUND

**[0003]** Packaging for devices, especially medical devices, are well known in the art. Packaging is varied and includes pouches formed of medical grade paper, films, fiber based materials, foils, among others. Many medical devices are produced in aseptic environments and/or require sterilization of the packaging. The ability to sterilize and maintain sterility of packaging is especially true for medical devices that are implanted in or otherwise contact the body to prevent infection.

**[0004]** The MicroCor® product is a biodegradable microstructure patch technology for transdermal delivery of agents. The MicroCor® product must be produced in an aseptic environment and requires a batch drying process of approximately 12 hours. The packaging is hermetically sealed under nitrogen and is required to have a zero or near zero O<sub>2</sub> and MVTR transmission rate to maintain sterility of the device. Processing and packaging under aseptic conditions would require an enormous investment in aseptic processing and equipment as well as requiring a great amount of space.

**[0005]** There exists a current need for sterile packaging of devices and delivery systems. The need is especially seen for devices such as medical devices and delivery systems that require additional processing of the packaging once the device is placed in the packaging to meet regulatory standards and/or maintain the viability of the device.

### BRIEF SUMMARY

**[0006]** The following aspects and embodiments described and illustrated below are meant to be exemplary and illustrative, and are no way intended to be limiting in scope.

**[0007]** In one aspect, a package for a medical device or delivery system is contemplated. In one embodiment, the package generally comprises a first substantially planar member; a second substantially planar member; a first seal; at least one opening formed in at least one of the first and/or second planar members; at least one microbial-resistant barrier covering at least a portion of the at least one opening; and a second seal or sealable member. In another

embodiment, the package generally comprises a substantially planar member having a first section and a second section adjacent the first section. The package includes at least one cavity for receiving a medical device or delivery system. In embodiments at least one of the first or second planar members/sections includes one or more cavities. The first and second planar members/sections are opposable such that the cavity is covered when the first and second planar members/sections are opposed. In an embodiment, the first planar member/section covers at least the cavity of the second planar member/section.

**[0008]** In an embodiment, the first seal is positioned between the first planar member/section and the second planar member/section for sealing the first planar member/section to the second planar member/section. In another embodiment, the first seal seals the first planar member/section and the second planar member/section at a periphery of either or both of the first planar member/section or the second planar member/section.

**[0009]** In an embodiment, the second sealable member adheres the first and second planar members/sections together at a position between the at least one opening and the cavity such that the cavity is no longer in communication with the at least one opening.

**[0010]** In embodiments, the barrier is formed of an antimicrobial material. In other embodiments, the barrier is formed of a microbial impervious material. In further embodiments, the antimicrobial material or microbial impervious material is comprised of polyolefin fibers. In yet more embodiments, the polyolefin is selected from polyethylene or polypropylene. In additional embodiments, the polyolefin fibers are nonwoven.

**[0011]** In embodiments, the at least one opening is formed in the first planar member or section and the barrier is attached to the first planar member or section such that the barrier covers an entirety of the at least one opening. In further embodiments, the at least one opening is formed in the second planar member or section and the barrier is attached to the second planar member or section such that the barrier covers an entirety of the at least one opening.

**[0012]** In embodiments, the barrier seal is positioned between the first planar member or section and the barrier to secure the barrier to the first planar member or section. In other embodiments, the barrier seal is positioned between the second planar member or section and the barrier to secure the barrier to the second planar member or section. In further embodiments, the barrier is a breathable barrier.

**[0013]** In embodiments, at least one of the first planar member or section or the second planar member or section is formed of a material selected from a gas impermeable polymer and/or a metal foil. In further embodiments, each of the first and second planar members or sections are formed of a metal foil. In additional embodiments, the metal foil is selected from an aluminum foil and a stainless steel foil.

**[0014]** In embodiments, at least one of the first seal, the second seal and/or the barrier seal is formed of an adhesive coating. In additional embodiments, the adhesive coating is selected from a heat sealable adhesive coating and a pressure sealable adhesive coating.

**[0015]** In embodiments, the package includes a desiccant. In some embodiments, the interior of the package is sterile when the first planar member or section and second planar member or section are sealed together. In further embodiments, the cavity has a shape selected from rectangular, square, polygonal, oval, or circular.

**[0016]** In, the first planar member or section overhangs at least a portion of the second planar member or section at an edge when the first and second planar members or sections are sealed together. In further embodiments, the first planar member or section and the second planar member or section each have an outer periphery where at least a portion of the outer peripheries are substantially aligned when the first and second planar members or sections are sealed together.

**[0017]** In embodiments, the second seal intersects the first seal at two sides of the periphery of the first and second planar members or sections. In other embodiments, the at least one opening includes at least two openings. In further embodiments, the at least two openings are covered by a single barrier. In other embodiments, each of the at least two openings are covered by a separate barrier.

**[0018]** In another aspect, a method of preparing an aseptic package containing a medical device or delivery system is contemplated. The method generally comprises placing the medical device or delivery system in a cavity of a package as described herein; sealing the first substantially planar member or section to the second substantially planar member or section at the first seal; hermetically sealing the sealed package; and sealing the first planar member or section to the second planar member or section at the second seal such that the cavity is no longer in communication with the at least one opening. In embodiments, the method further comprises removing the portion of the sealed first and second planar members or sections containing the at least one opening. In further embodiments, hermetically sealing includes a process selected from at least one of vacuum drying, nitrogen purging, heat drying, and terminal sterilization. In other embodiments, hermetically sealing includes a process selected from a combination of at least two of the processes selected from vacuum drying, nitrogen purging, heat drying, and terminal sterilization.

**[0019]** In embodiments, the method comprises sterilizing the package after the first sealing step. In some embodiments, the sterilizing step is selected from at least one of ethylene oxide sterilization, gamma electron-beam sterilization, and/or low temperature oxidative sterilization. In further embodiments, the sterilizing step includes a combination of two or more of ethylene oxide sterilization, gamma electron-beam sterilization, and low temperature oxidative sterilization.

**[0020]** Additional embodiments of the present packaging, methods, and the like, will be apparent from the following description, drawings, examples, and claims. As can be appreciated from the foregoing and following description, each and every feature described herein, and each and every combination of two or more of such features, is included within the scope of the present disclosure provided that the features included in such a combination are not mutually inconsistent. In addition, any feature or combination of features may be specifically excluded from any embodiment of the present invention.

**[0021]** Additional aspects and advantages of the present invention are set forth in the following description and claims, particularly when considered in conjunction with the accompanying examples and drawings.

#### BRIEF DESCRIPTION OF DRAWINGS

**[0022]** FIGS. 1A-1B are illustrations of exemplary packaging showing a top view (FIG. 1A) and side view (FIG. 1B).

**[0023]** FIG. 2 is an exploded view of the packaging shown in FIGS. 1A-1B.

**[0024]** FIG. 3 is an illustration of an exemplary method of forming the packaging.

**[0025]** FIGS. 4A-4C are illustrations of exemplary packaging showing a top view with exemplary dimensions (FIG. 4A), a top view after trimming with exemplary dimensions (FIG. 4B); and a side view after trimming with exemplary dimensions (FIG. 4C).

**[0026]** FIGS. 5A-5B are illustrations of an exemplary packaging comprising a foldable or opposable planar substrate or member showing a top view (FIG. 5A) and a side view after folding or opposing the planar substrate or member (FIG. 5B).

#### DETAILED DESCRIPTION

**[0027]** Various aspects of the packaging and related methods will be described more fully hereinafter. Such aspects may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey its scope to those skilled in the art.

**[0028]** The practice of the present disclosure will employ, unless otherwise indicated, conventional methods of mechanical engineering, chemistry, biochemistry, and pharmacology, within the skill of the art. Some of these techniques are explained fully in the literature. See, e.g.; A.L. Lehninger, *Biochemistry* (Worth Publishers, Inc., current addition); Morrison and Boyd, *Organic Chemistry* (Allyn and Bacon, Inc., current addition); J. March, *Advanced Organic Chemistry* (McGraw Hill, current addition); *Remington: The Science and Practice of Pharmacy*, A. Gennaro, Ed., 20<sup>th</sup> Ed.; *Goodman & Gilman The Pharmacological Basis of Therapeutics*, J. Griffith Hardman, L. L. Limbird, A. Gilman, 10<sup>th</sup> Ed.

**[0029]** Where a range of values is provided, it is intended that each intervening value between the upper and lower limit of that range and any other stated or intervening value in that stated range is encompassed within the disclosure. For example, if a range of 1 mm to 8 mm is stated, it is intended that 2 mm, 3 mm, 4 mm, 5 mm, 6 mm, and 7 mm are also explicitly disclosed, as well as the range of values greater than or equal to 1 mm and the range of values less than or equal to 8 mm.

#### Definitions

**[0030]** As used in this specification, the singular forms "a," "an," and "the" include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to a "polymer" includes a single polymer as well as two or more of the same or different polymers, reference to an "excipient" includes a single excipient as well as two or more of the same or different excipients, and the like.

**[0031]** In describing and claiming the present invention, the following terminology will be used in accordance with the definitions described below.

**[0032]** "Antimicrobial" as used herein refers to an agent or material that works against (e.g. kills or inhibits the growth of) microorganisms. "Antimicrobial" includes antibacterial, anti-mycobacterial, antifungal, antiviral, and anti-parasitic agents and materials.

**[0033]** "Biodegradable" refers to natural or synthetic materials that degrade enzymatically, non-enzymatically or both to produce biocompatible and/or toxicologically safe by-products which may be eliminated by normal metabolic pathways.

**[0034]** "Breathable" as used herein refers to the ability of a material to allow transmission of air, water and/or moisture vapor through the material. The breathability of a material may be determined in part by determining the moisture vapor transmission rate (MVTR) (also water vapor transmission rate (WVTR)) as a measure of the passage of gaseous water through a material or barrier. In one embodiment, MVTR is measured in  $g/m^2/day$  using a measurement chamber and usually under known temperature and humidity conditions. The lower the MVTR rate, the longer the package prevents movement of moisture across the barrier or material.

**[0035]** "Gas impermeable" refers to a material or substance that is impermeable to (e.g. does not allow or substantially does not allow passage of) one or more gases across the material or substance.

**[0036]** "Hydrophobic polymer" as used herein refers to polymers that are insoluble or poorly soluble in aqueous solvents. "Hydrophilic polymer" as used herein refers to polymers that are soluble or substantially soluble in aqueous solvents.

**[0037]** "Medical device" as used herein refers to any of a number of devices relating to or used in medical procedures. Examples include, but are not limited to diagnostic products or devices, general purpose laboratory equipment, reagents and reagent containers, test kits, and treatment devices and kits.

**[0038]** “Microbe” refers to microscopic organisms. Microbes include, without limitation, bacteria, fungi, algae, animals, plants, and viruses.

**[0039]** “Microbial-resistant” refers to resistance by a material to entry and/or passage of microbes. “Microbial impervious” in relation to a material refers to a material that does not allow microbes or microbial agents to enter and/or pass through.

**[0040]** “Moisture-resistant” refers to resistance by a material to permeability of moisture or water.

**[0041]** “Optional” or “optionally” means that the subsequently described circumstance may or may not occur, so that the description includes instances where the circumstance occurs and instances where it does not.

**[0042]** “Oxygen Transmission Rate” (OTR or O<sub>2</sub>) is a measurement of the amount of oxygen that passes through a substance or material in a given period of time.

**[0043]** “Substantially” or “essentially” means nearly totally or completely, for instance, 80-85%, 80-90%, 80-95%, 85-90%, 85-95%, 90-95% or greater of some given quantity.

**[0044]** “Transdermal” refers to the delivery of an agent into and/or through the skin for local and/or systemic therapy. The same principles apply to administration through other biological membranes such as those which line the interior of the mouth, gastro-intestinal tract, blood-brain barrier, or other body tissues or organs or biological membranes which are exposed or accessible during surgery or during procedures such as laparoscopy or endoscopy.

**[0045]** A material that is “water-soluble” may be defined as soluble or substantially soluble in aqueous solvents. A material that is “water-soluble” preferably dissolves into, within or below the skin or other membrane which is substantially aqueous in nature.

#### Overview

**[0046]** The present disclosure is directed, at least in part, to systems, devices, and methods relating to sterile or aseptic packaging, especially packaging for medical devices and/or delivery systems.

#### System and Device

**[0047]** Before describing the present subject matter in detail, it is to be understood that this invention is not limited to specific materials or device structures, as such may vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting.

**[0048]** In one aspect, a sterilizable, sealable packaging for a medical device or delivery system is described herein. The packaging may be used to contain any apparatus, device, or system that should be maintained in a sterile, aseptic, or hermetically sealed environment. An embodiment of an exemplary packaging system is shown in Figs. 1A-1B. Fig. 1A is a top view looking down at the packaging system from an elevated position. Fig. 1B is a side view



of the packaging system showing a device contained within the package. Fig. 1B shows a microprojection device and applicator as the medical device. The discussion of the figures and packaging below is with reference to the device shown in Fig. 1B and 5B. However, it will be appreciated that the packaging may be suitable for use with any device or system that requires sterilized, aseptic, or hermetically sealed packaging.

**[0049]** As seen in Figs. 1A-1B, the packaging system 10 includes a first substantially planar member 12 having first and second opposed sides and a second substantially planar member 14 having first and second opposed sides. In the embodiment shown in Fig. 1A, the first planar member 12 has a rectangular shape. It will be appreciated that the first planar member may have any suitable shape including, but not limited to, rectangular, square, circular, elliptical, and polygonal. The second member includes a cavity or depression 16 within a portion of the planar portion of the second planar member for holding the medical device 30. As seen in Fig. 2, the second substantially planar member includes a planar section or portion 32 and a cavity section or portion 16. In this embodiment, the cavity section or portion opening is surrounded by the planar section or portion. The cavity may be formed in the second planar member using any suitable means. In non-limiting embodiments, the cavity is formed by molding including injection molding and thermoforming. It will be appreciated that the cavity may be specifically molded to hold a particular device or apparatus. In another embodiment, a further holder, which may be a molded piece, may be included within the cavity to hold a particular device or apparatus. It will further be appreciated that both of the first planar member and the second planar member may include a cavity or depression. In one embodiment, when the first and second planar members are opposed, the cavities in the first and second members form a space suitable for containing the device.

**[0050]** The first and substantially planar members are opposable so that the first member covers at least a portion of the second member. Preferably, the second opposed side of the first planar member contacts and at least partially covers the first opposable side of the second planar member. In the embodiment shown in Figs. 1A-1B, the first member covers substantially all of the planar portion of the second member. It will be appreciated that the first member may cover only a portion of the planar portion of the second member. At least the cavity opening should be covered by the first planar member. It will be appreciated that at least a portion of the first and second substantially planar members have a surface that is conducive for contact with each other. For example, in the embodiment shown in Fig. 2, the first and second substantially planar members each have a flat portion where the members are contacted and sealed together. In an embodiment, the first and second substantially planar members each have an outer periphery, see items 62 and 64 in Fig. 3, where the outer peripheries are substantially aligned when the first and second substantially planar members are opposed or sealed.

**[0051]** The first and second substantially planar members may be formed or comprised of any material suitable for packaging a device and maintaining a sealed and/or sterile environment. Suitable materials are preferably gas and/or moisture impermeable. Suitable materials include, but are not limited to polymers, foils, and laminates. One suitable polymer is a gas and/or moisture impermeable polymer. In other embodiments, the polymer is a high barrier plastic that prevents moisture, oxygen, and/or other gases from permeating the packaging. In other embodiments, the polymer provides a barrier to ultraviolet light and/or radiation. Exemplary polymers include, but are not limited to, polyolefins, polyesters, acrylics and the like. In other embodiments, the polymers include, but are not limited to polyethylene terephthalate (PET), polyethylene terephthalate glycol (PETG), high-density polyethylene (HDPE), low-density polyethylene (LDPE), polyvinyl chloride (PVC), polyurethane, polypropylene (PP), polystyrene (PS), high impact polystyrene (HIPS), polycarbonate (PC), acrylonitrile butadiene styrene (ABS).

**[0052]** In one embodiment the foil is a metal foil. The metal foil may be comprised of any suitable metal that maintains sterility and does not react with the device contained therein. Exemplary metal foils include, but are not limited to, aluminum foil, stainless steel foil, and tin foil. In a further embodiment, the material used for the first and/or second planar member is a metalized polymer, a polymer/metal laminate, and/or a coated polymer. A polymer/metal laminate may be formed by any method as known in the art. In one non-limiting embodiment, the laminate comprises one or more layers of a suitable polymer that are coated onto a metal foil. In an embodiment, the metal foil laminate is a heat-sealable foil laminate. It will be appreciated that both the first and the second substantially planar members may be formed of a heat-sealable laminate foil. It will be appreciated that the first and second planar members may be formed or comprised of the same or different materials. Preferably, the material used for the first and/or second planar members can withstand, without limitation, steam, autoclaving, ethylene oxide, nitrogen, heat drying, vacuum drying, terminal sterilization via dry heat, chemical sterilization (including chlorine dioxide, vaporized hydrogen peroxide, and hydrogen peroxide plasma), and/or radiation (including gamma ray and electron beam) sterilization without being degraded or substantially degraded. The first and/or second planar member may further be coated with a material that reduces or decreases at least one of gas permeability, moisture permeability and ultraviolet light permeability.

**[0053]** As seen in Fig. 2, the second substantially planar member 14 includes at least one cavity 16 for holding or containing the device 30. The cavity should have a sufficient width, depth and shape to contain the device. The cavity can have any size or shape suitable for holding the device. Suitable shapes include circular, oval, elliptical, rectangular, square, polygonal, or combinations thereof. Preferably, at least a portion of the second substantially planar member around the cavity has a flat, planar, or otherwise regular surface. This surface

allows for better sealing of the first substantially planar member to the second substantially planar member.

**[0054]** Although the Figs. 1 and 2 depict the first and second substantially planar members as separate, it will be appreciated that the members may be formed of a single planar material that is folded. As shown in Figs. 5A-5B, a substantially planar packaging member 66 includes a first portion 68 and a second portion 70. A cavity 16 as described above is formed at least one of the first or second portions. One or more openings 18 are further formed in at least one of the first and/or second portions. The planar packaging member is folded along an axis 72 such that the first and second portions are opposed when the planar member is folded (Fig. 5B). It will be appreciated that the further seal and barrier, etc. features and embodiments thereof described with reference at least to Figs. 1A-1B and 2 also apply to this embodiment. Briefly, a first seal 22 is positioned on at least one of the first or second portions for sealing the first section to the second section when the planar member is folded and the first and second sections are opposed. A microbial-resistant barrier 20 covers the at least one opening. A second seal 24 is positioned at a position between the at least one opening and the cavity. The second seal, when sealed, adheres the first and second portions together such that the cavity is no longer in communication with the at least one opening.

**[0055]** In one embodiment, the system includes a first sealing member or first seal for sealing at least a portion of the first substantially planar member to the second substantially planar member. In one embodiment, the first sealing member or first seal is formed from an adhesive coating on the first substantially planar member, the second substantially planar member, or both. It will be appreciated that the sealing member may be comprised of any material or structure that sufficiently adheres or attaches at least a portion of the first and second planar members. It will further be appreciated that the choice of adhesive may be guided by the materials used for the first and/or second planar members. In one embodiment, the sealing member is an adhesive seal positioned at a periphery of either or both of the first and second planar members. In a further embodiment, the sealing member is an adhesive seal positioned at least partially at a periphery of the cavity. As seen in Fig. 2, the first sealing member 22 may be a single sealing member positioned between the first 12 and second 14 planar members. It will be appreciated that the first sealing member may be a separate structure or may be an adhesive composition that is applied to the first and/or second planar members. Suitable adhesives include, but are not limited to, solvent-based, water-based, cold seal, and heat-seal or melt adhesives. In an embodiment, the adhesive is a pressure-sensitive adhesive or adhesive coating. In a further embodiment, the adhesive is a pressure sealable adhesive or adhesive coating. In another embodiment, the adhesive is a heat sealable adhesive or adhesive coating. In an embodiment, the first sealing member is a peelable adhesive such that the first planar member and second planar member may be

separated to access the medical device within the cavity by peeling the first and/or second planar members apart. Exemplary adhesives include, but are not limited to acrylics, epoxies, silicones, cyanoacrylates, and styrene block co-polymers. Further exemplary adhesives include, but are not limited to, the Xhale® adhesive with DotCoat® technology and the SealScience® water-based adhesive, both available from Oliver-Tolas® (Grand Rapids, MI). Suitable pressure-sensitive adhesives include adhesive polymers or co-polymers. Polymers having auto-adhesion characteristics include, but are not limited to, natural rubber, polyisoprene, butyl, and certain formulations of silicone rubber. In an embodiment, the adhesive provides a hermetic seal. It will be appreciated that the adhesives may include appropriate excipients as known in the art. Once sealed, the adhesives used should maintain sterility of the interior of the packaging. Preferably, the adhesive is non-permeable at least to oxygen and/or moisture vapor. It will further be appreciated that, depending on the materials used for the first and/or second planar members, the members may be adhered or affixed together without the use of a sealing member. For example, the first and second planar members may be heat sealed by at least partially melting the members. In an embodiment, application of heat at a suitable selected temperature to the heat-sealable laminate causes the polymer to melt and fuse with or into the opposite planar member. If the first and second members are sealed without the use of an adhesive (e.g. by heat sealing), the seal should maintain sterility of the interior of the packaging. Preferably, the seal is non-permeable at least to oxygen and/or moisture vapor.

**[0056]** At least one of the first and/or second substantially planar members includes at least one opening or vent. The openings may be of any suitable size and shape to facilitate sterilization of the packaging and device. In the embodiment as shown in Figs. 1A and 2, two openings 18 are formed in the first substantially planar member. In other embodiments, at least one, two, three, four or five openings are formed in at least one of the first or second substantially planar members. In the embodiment shown in Fig. 1A, the openings are shown side by side. It will be appreciated that where multiple openings are included, the openings may be adjacent and/or set apart from each other. The openings or vents may be positioned in any suitable portion of the first and/or second planar members. However, the openings or vents should not be positioned over or within the cavity so that the openings may be sealed off from the cavity after sterilization or other processing.

**[0057]** The openings or vents are covered with one or more barrier materials. The barrier material is preferably a microbial-resistant barrier. In other embodiments, the barrier is microbial impervious. The barrier material allows for sterilization of the packaging and/or device contained therein. The barrier may be any suitable size or shape that allows for coverage of the opening or vent 18 in the first and/or second planar members. As seen in Fig. 2, a single barrier 20 may be used to cover multiple openings or vents 18. It will be

appreciated that a separate barrier may be used to cover each separate opening or vent. It will be appreciated that more than one material may be used where multiple openings or vents are formed in the first and/or second planar members. Further, more than one material may be used to cover the openings or vents. For example, the barrier materials may be stacked, laminated, or positioned in overlying configurations. In another embodiment, the multiple openings/vents may be covered with different barrier materials. This may be advantageous where more than one sterilization or processing steps are performed. For example, different openings/vents may be covered with a barrier material suitable for use with the different sterilization or other processing steps. As an illustration, one of opening/vent may be covered with a barrier material that is permeable to steam and another covered with a material that is permeable to ethylene oxide gas. Regardless of the barrier material configuration, all of each of the openings or vents should be covered by at least one barrier material.

**[0058]** The barrier may be made of any suitable material that allows for and/or facilitates one or more sterilization procedures. In one embodiment, the barrier is a breathable material that is suitably permeable to permit sterilizing gases such as steam, ethylene oxide (EtO), hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>), chlorine dioxide (CD), ozone, glutaraldehyde, peracetic acid, nitrogen, and/or Freon to pass the barrier. The barrier may additionally be transparent to allow for irradiative sterilization. The barrier is preferably impermeable or substantially impermeable to moisture, bacteria, fungi, viruses, and/or other substances that may compromise the sterility of the medical device and the packaging. In one embodiment, the barrier is formed of a microbial-resistant, microbial-impermeable, or microbial impervious material. One exemplary material is comprised of polyolefin including, but not limited to, one or more polyolefin fibers. In embodiments, the polyolefin fibers may be woven or non-woven. Polyolefins include, but are not limited to polystyrene, polycarbonate, acrylics, polyethylene, polypropylene, silicone rubber, and synthetic rubbers. In some embodiments, the material is comprised of polyethylene and/or polypropylene fibers. One suitable material for the barrier is the water resistive and antimicrobial barrier material sold under the trademark TYVEK® available from DuPont (Wilmington, DE). TYVEK® is a fabric made from spun high-density polyethylene (HDPE). Each of the Type 10, 14 or 16 styles of TYVEK® may be suitable for use as the barrier material. Type 10 style products are hard or stiff products. Types 14 and 16 are fabric-like flexible products. The Type 14 style products are particularly suitable for use as the barrier material as they are flexible yet have lower moisture permeability than the Type 16 style products. Further exemplary materials for use as the barrier material include the P3 technology™ available from Porex® (Fairburn, GA) and OVANTEX® available from Oliver-Tolas Healthcare Packaging (Grand Rapids, MI). The P3 technology™ is a porous polytetrafluoroethylene (PTFE) material that provides venting capability for EtO sterilization.

OVANTEX® is an adhesive-coated medical grade material comprised of a blend of synthetic fibers and cellulose-based components. OVANTEX® may be used with EtO and radiation (gamma irradiation) sterilization.

**[0059]** Optionally, a barrier seal is positioned at least partially between the barrier material and the first and/or second planar member to adhere or affix the barrier material. In one embodiment, the barrier seal is formed of an adhesive coating applied to the barrier material and/or the planar member to which the barrier material is attached. The barrier seal may be comprised of any material or structure that sufficiently adheres or attaches at least a portion of the first and second planar members to the barrier material. It will be appreciated that the selection of the barrier seal may depend upon the choice of barrier material and/or material for the first and/or second planar members to ensure the desired adhesion or affixation. The barrier seal may be formed of any adhesive as described above for the first sealing member. In an embodiment as shown in Fig. 2, the barrier seal 26 is positioned around a perimeter of the opening/vent 18 and/or the barrier material 20. It will be appreciated that the barrier seal may be positioned around a perimeter of the barrier material and contacting the first or second substantially planar member. Alternatively, the barrier member may be adhered or affixed to the first or second substantially planar member without the use of an adhesive.

**[0060]** The system includes one or more second sealing members or seals for sealing at least a portion of the first substantially planar member to the second substantially planar member. As seen in Fig. 2, the second sealing member 24 is positioned between the opening/vent 18 and the cavity 16. Prior to sterilization processes, the second sealing member is adhered or affixed to one of the first or second substantially planar members. After the sterilization procedure(s), the second sealing member is adhered or affixed to the other of the first or second substantially planar members. In this manner, the cavity may be sealed apart from the openings/vents to preserve the sterility of the cavity and the contents therein. The second sealing member may be placed in any suitable position such that the opening/vent is sealed from contact with the cavity. In the embodiment shown in Fig. 2, the second seal 24 is placed across the first and second substantially planar members with the ends being in contact with the first sealing member. In some embodiments, the second sealing member intersects the first sealing member at two sides of the periphery of the first and second substantially planar members. Once the second sealing member is sealed, the cavity is sealed apart from the opening/vent by the first and second sealing members. In other embodiments, the second sealing member may be placed around a perimeter of the openings/vents. In embodiments where more than one opening/vent is included at positions apart from each other, a separate second or secondary sealing member may be used to seal off multiple or each of the opening/vents. It will also be appreciated that where the packaging includes two, or more, openings/vents that are spaced apart, multiple secondary seals may be

positioned between the multiple openings/vents and the cavity. The secondary seals may be used to seal contact between all of the multiple openings/vents or only a portion of the multiple openings/vents at one time. For example, the packaging may include a first vent that is covered with a barrier material that is steam permeable and a second vent that is covered with a barrier material that is permeable to ethylene oxide. The packaging may first be autoclaved and then ethylene oxide sterilized. The secondary seal associated with the steam permeable barrier material may be sealed apart from the cavity prior to ethylene oxide sterilization. In this manner, the packaging may be sequentially sterilized with openings associated with each sterilization step being sealed after the appropriate sterilization step. The multiple secondary seals may be formed of the same or different materials. In an embodiment, the second sealing member or seal is formed from an adhesive coating on the first substantially planar member and/or the second substantially planar member.

**[0061]** The second sealing member may be comprised of any material or structure that sufficiently adheres or attaches at least a portion of the first and second planar members together. It will be appreciated that the selection of the second sealing member may depend upon the choice of material for the first and/or second planar members to ensure the desired adhesion or affixation. The second sealing member may further be formed of any adhesive as described above for the first sealing member. The second sealing member may be any suitable shape for sealing the opening/vent from contact with the cavity. In the embodiment shown in Fig. 2, the second sealing member 24 is rectangular and extends transverse across the first and second substantially planar members 12, 14. In other embodiments, the second sealing member may be positioned around the opening/vent. The second sealing member may be, without limitation, rectangular, square, circular, or elliptical.

**[0062]** The packaging, when assembled, may include any feature or configuration that improves ease of opening the sealed package. In an embodiment, one of the first or second substantially planar members overhangs at least a portion of the opposing member. In some embodiments, the overhang makes it easier for a user to grip the overhanging member and separate the first and second members to access the device. In another embodiment, one of the first or second members includes a tab or otherwise stiffer portion to ease grip and/or separation of the first and second members. The overhang may be at a corner, at one side or at a perimeter of the first or second members.

**[0063]** Packaging may further include any suitable feature for maintaining the contents in a suitable and sterile or aseptic environment. In one embodiment, the packaging includes one or more desiccants. In an embodiment, the packaging includes a desiccant at least in the cavity. Any suitable desiccant as known in the art is suitable for use with the packaging.

**[0064]** It will be appreciated that the embodiments and features described with respect to specific elements above may be combined with the embodiments and features described with

respect to other specific elements. For example, and without limitation, the specific embodiments of the planar member(s), seals, barrier, etc. may be combined in the contemplated packaging.

#### Methods of Use

**[0065]** The methods, kits, packaging, and related devices described herein are used to provide sterile packaging for an apparatus, medical device, or delivery system. The packaging is configured such that the packaged device may be sterilized within the packaging, which can thereafter be easily sealed. In one aspect, a method of preparing an aseptic or sterilized package containing a device such as a medical device, apparatus or delivery system is contemplated.

**[0066]** An exemplary process of packaging a medical device, or other device or apparatus, is shown in Fig. 3. The packaging process is described hereafter with reference to Fig. 3, which shows one particular embodiment of the packaging system in use. However, it will be appreciated that other embodiments of the system as described above are suitable for use with the methods described below.

**[0067]** The packaging method is described below with reference to some particular steps. It will be appreciated that further steps may be included with the described method. It will further be appreciated that some steps may be omitted or combined as appropriate. In a first step, a first member 46 and a second member 40 are obtained or manufactured. At least the second member 40 is formed with a cavity or depression 42 in a substantially planar member. The cavity or depression may have any suitable shape or size to contain the device. In some embodiments, the second member is formed of a moldable or shapeable metal or polymer. In the embodiment as shown in Fig. 3, the second member 40 is a pre-formed aluminum shell. The first member 46 has first 52 and second 50 opposing sides. The first member may be formed of any suitable material as described above. The first and/or second member is formed with one or more vents or openings 54 extending through the first and/or second member. In the embodiment shown in Fig. 3, two vents are formed in the first member. The vents or openings are covered with one or more barrier materials 48. The barrier material is typically, but not always, affixed to the second side 50 of the first member. As also seen in Fig. 3, one or more barrier seals 58 are included to adhere or affix the barrier material 48 over the vents/openings and to the first member 46. In this embodiment, the barrier seal 58 is adhered to the barrier material 48 around a perimeter of and overlapping the barrier material 48. In this embodiment, the barrier seal contacts both a perimeter of the barrier material and the second side 50 of the first member 46. It will be appreciated that the barrier 48 may be affixed or adhered to the first member 46 by any suitable means. In embodiments, the barrier material is affixed or adhered to the first member without the use of a separate barrier seal. In the embodiment of Fig. 3, a rectangular barrier material formed of Tyvek® material is sealed,



affixed, or adhered to the second side of the first member. In this embodiment, a single barrier material is used to cover both of the vents formed in the first member.

**[0068]** In a second step, the device 44 is placed within the cavity or depression 42 in any suitable manner. In a third step, the first member 46 is placed at least partially over the second member 40. The first member is placed so that at least the cavity 42 is covered by the first member 46. In the embodiment as shown in Fig. 3, the second side 50 is placed adjacent the second member 40. The first member 46 functions as a cover or lid for the cavity. In a fourth step, the first member 46 is affixed or adhered to the second member 40 using any suitable seal, adhesive or other mechanism. In the embodiment as shown in Fig. 3, a perimeter heat seal 56 is included between the first and second members. Once the first member is placed over the second member, the packaging is sealed. In an embodiment, the packaging is heated, at least at the perimeter seal, to a suitable temperature to adhere the first and second members together. It will be appreciated that the first and second members should be sealed such that a perimeter at least around the barrier material and the cavity are sealed. Preferably, the seal is a hermetic seal to preserve the sterility of the packaging after sterilization. In a fifth step, the packaging is subjected to one or more suitable sterilization processes or procedures. In an embodiment, at least one of the sterilization processes makes use of the barrier material and the vent. For example, in one embodiment, the sterilization process is gas sterilization where the barrier material is permeable to the gas used in the sterilization process. In another embodiment, the sterilization process uses a vacuum. Any suitable sterilization process or combination of sterilization processes may be used. In some embodiments, the packaging is sterilized by one or more of autoclaving, gas purging, vacuum drying, heat drying, irradiation, low temperature oxidative sterilization, and/or terminal sterilization via dry heat. In other embodiments, the packaging is sterilized by irradiation. In an embodiment the irradiation comprises gamma and/or electron-beam sterilization. In some embodiments, the gas purging uses steam, EtO, H<sub>2</sub>O<sub>2</sub>, chlorine dioxide, nitrogen, peracetic acid, and/or Freon as the gas. In embodiments, the packaging is sterilized by one or more processes described herein or known to those of skill in the art to be suitable for sterilizing packaging. In another embodiment, the packaging is sterilized by steam autoclaving and/or dry autoclaving. In other embodiments, the packaging is sterilized using gas plasma technology. It will be appreciated that the packaging may be sterilized using at least two or two or more of the above recited processes. In one exemplary combination, the packaging is sterilized by two or more processes selected from gas purging, irradiation, and low temperature oxidative sterilization. In another exemplary combination, the packaging is sterilized by two or more processes selected from EtO sterilization, gamma irradiation, electron-beam sterilization, and low temperature oxidative sterilization. The FDA ([fda.gov](http://fda.gov)) lists several traditional methods for sterilization of medical devices including dry heat

sterilization, moist heat sterilization, EtO sterilization using devices placed in a fixed chamber, radiation (gamma and electron-beam), and liquid chemical sterilants. The FDA also lists several other methods of sterilizing medical devices including EtO not using a fixed chamber (e.g. porous polymer bag, diffusion method, sterilization pouch, injection, etc.), high intensity light, chlorine dioxide, ultraviolet light, combined vapor and gas plasma, and vapor systems (e.g. peroxide or peracetic acid). In embodiments, the packaging is sterilized using one or more of the methods described by the FDA. A sterility assurance level (SAL) of  $10^{-3}$  is generally accepted as adequately sterile for many medical devices. In other embodiments, the packaging is sterilized to achieve a SAL of between at least about  $10^{-3}$  to about  $10^{-6}$ . In specific embodiments, the packaging is sterilized to achieve a SAL of at least about  $10^{-3}$ , about  $10^{-4}$ , about  $10^{-5}$ , or about  $10^{-6}$ . In further embodiments, the packaging is sealed to maintain a SAL of between at least about  $10^{-3}$  to about  $10^{-6}$ . In specific embodiments, the packaging is sealed to maintain a SAL of at least about  $10^{-3}$ , about  $10^{-4}$ , about  $10^{-5}$ , or about  $10^{-6}$ .

**[0069]** In a sixth step, a portion of the first and second members are sealed between the openings/vents and the cavity. In an embodiment, a second seal 60 is positioned between the vents/openings and the cavity to seal the first and second members. Placement of the second seal is not critical; however, the second seal should be positioned such that the vents/openings are sealed apart from the cavity when the second seal is adhered to the first and second members. In the embodiment as shown in Fig. 3, the second seal 60 is a rectangular cross seal that is positioned transverse across the first and second members and contacts the perimeter seal 56 at both ends. It will be appreciated that the second seal is not initially sealed to both of the first 46 and the second members 40. Accordingly, the openings/vents are initially in communication with the cavity such that the packaging interior may be sterilized through the vents/openings. Optionally, in a seventh step, at least a portion of the first and/or second members is cut or otherwise removed to present a more compact packaging. In the embodiment as shown in Fig. 3, the vent section is removed. Where a portion of the packaging is removed, the cavity should remain sealed at a perimeter to preserve the sterility of the packaging interior.

**[0070]** Alternatively, a planar member having a first portion and a second portion is obtained or manufactured. One or both of the first and second portions includes a cavity. The device is placed in the cavity as described above. The planar member is folded such that at least a portion of the first and second portions are opposed and the cavity is covered by the other of the first or second portions. The planar member is then sealed and processed as described above.

**[0071]** It will be appreciated that the embodiments and features described with respect to specific steps of the method may be combined with the embodiments and features described with respect to other specific steps of the method.

**[0072]** While a number of exemplary aspects and embodiments have been discussed above, those of skill in the art will recognize certain modifications, permutations, additions and sub-combinations thereof. It is therefore intended that the following appended claims and claims hereafter introduced are interpreted to include all such modifications, permutations, additions and sub-combinations as are within their true spirit and scope.

**[0073]** All patents, patent applications, and publications mentioned herein are hereby incorporated by reference in their entireties. However, where a patent, patent application, or publication containing express definitions is incorporated by reference, those express definitions should be understood to apply to the incorporated patent, patent application, or publication in which they are found, and not necessarily to the text of this application, in particular the claims of this application, in which instance, the definitions provided herein are meant to supersede.

**[0074]** Embodiments:

1. A package for a medical device or delivery system, comprising:
  - a first substantially planar member;
  - a second substantially planar member comprising at least one cavity for receiving a medical device or delivery system, wherein the first and second planar members are opposable such that the first planar member covers at least the cavity of the second planar member;
  - a first seal positioned between the first planar member and the second planar member for sealing the first planar member to the second planar member at a periphery of either or both of the first planar member or the second planar member;
  - at least one opening formed in at least one of the first or second planar members;
  - a microbial-resistant barrier covering the at least one opening; and
  - a second sealable member that adheres the first and second planar members together at a position between the at least one opening and the cavity such that the cavity is no longer in communication with the at least one opening.
2. A package for a medical device or delivery system, comprising:
  - a substantially planar member having a first section and a second section adjacent the first section;
  - at least one cavity for receiving medical device or delivery system positioned in the second section, wherein the device is foldable along an axis between the first and second sections such that the first and second sections are opposable and the first section covers at least the cavity of the second section when the sections are opposed;

a first seal positioned on at least one of the first or second portions for sealing the first section to the second section at a periphery of either or both of the first section or the second section when the sections are opposed;

at least one opening formed in at least one of the first or second portions;

a microbial-resistant barrier covering the at least one opening; and

a second sealable member that adheres the first and second portions together at a position between the at least one opening and the cavity such that the cavity is no longer in communication with the at least one opening.

3. The package of embodiments 1 or 2, wherein the barrier is formed of an antimicrobial material.

4. The package of the combined or separate embodiments 1-3, wherein the barrier is formed of a microbial impervious material.

5. The package of the combined or separate embodiments 1-4, wherein the antimicrobial material or microbial impervious material is comprised of polyolefin fibers.

6. The package of the combined or separate embodiments 1-5, wherein the polyolefin is selected from polyethylene or polypropylene.

7. The package of the combined or separate embodiments 1-6, wherein the polyolefin fibers are nonwoven.

8. The package of the combined or separate embodiments 1-7, wherein the at least one opening is formed in the first planar member or section and the barrier is attached to the first planar member or section such that the barrier covers an entirety of the at least one opening.

9. The package of the combined or separate embodiments 1-8, wherein the at least one opening is formed in the second planar member or section and the barrier is attached to the second planar member or section such that the barrier covers an entirety of the at least one opening.

10. The package of the combined or separate embodiments 1-9, further comprising a barrier seal positioned between the first planar member or section and the barrier to secure the barrier to the first planar member or section.

11. The package of the combined or separate embodiments 1-10, further comprising a barrier seal positioned between the second planar member or section and the barrier to secure the barrier to the second planar member or section.

12. The package of the combined or separate embodiments 1-11, wherein the barrier is a breathable barrier.

13. The package of the combined or separate embodiments 1-12, wherein at least one of the first planar member or section or the second planar member or section is formed of a material selected from a gas impermeable polymer and a metal foil.

14. The package of the combined or separate embodiments 1-13, wherein each of the first and second planar members or sections are formed of a metal foil.
15. The package of the combined or separate embodiments 1-14, wherein the metal foil is selected from an aluminum foil and a stainless steel foil.
16. The package of the combined or separate embodiments 1-15, wherein the at least one of the first seal, the second seal or the barrier seal is formed of an adhesive coating.
17. The package of the combined or separate embodiments 1-16, wherein the adhesive coating is selected from a heat sealable adhesive coating and a pressure sealable adhesive coating.
18. The package of the combined or separate embodiments 1-17, further including a desiccant.
19. The package of the combined or separate embodiments 1-18, wherein the interior of the package is sterile when the first planar member or section and second planar member or section are sealed together.
20. The package of the combined or separate embodiments 1-19, wherein the cavity has a shape selected from rectangular, square, polygonal, oval, or circular.
21. The package of the combined or separate embodiments 1-20, wherein the first planar member or section overhangs at least a portion of the second planar member or section at an edge when the first and second planar members or sections are sealed together.
22. The package of the combined or separate embodiments 1-21, wherein the first planar member or section and the second planar member or section each have an outer periphery where the outer peripheries are substantially aligned when the first and second planar members or sections are sealed together.
23. The package of the combined or separate embodiments 1-22, wherein the second seal intersects the first seal at two sides of the periphery of the first and second planar members or sections.
24. The package of the combined or separate embodiments 1-23, wherein the at least one opening includes at least two openings.
25. The package of the combined or separate embodiments 1-24, wherein each of the at least two openings are covered by a single barrier.
26. The package of the combined or separate embodiments 1-25, wherein each of the at least two openings are covered by a separate barrier.
27. A method of preparing an aseptic package containing a medical device or delivery system, comprising:
  - placing the medical device or delivery system in a cavity of a package of the combined or separate embodiments 1-26;

sealing the first substantially planar member or section to the second substantially planar member or section at the first seal;

hermetically sealing the sealed package; and

sealing the first planar member or section to the second planar member or section at the second seal such that the cavity is no longer in communication with the at least one opening.

28. The method of embodiment 27, further comprising:

removing the portion of the sealed first and second planar members or sections containing the at least one opening.

29. The method of the combined or separate embodiments 27-28, wherein hermetically sealing includes a process selected from at least one of vacuum drying, nitrogen purging, heat drying, and terminal sterilization.

30. The method of the combined or separate embodiments 27-29, wherein hermetically sealing includes a process selected from a combination of at least two of the processes selected from vacuum drying, nitrogen purging, heat drying, and terminal sterilization.

31. The method of the combined or separate embodiments 27-30, further comprising:  
sterilizing the package after the first sealing step.

32. The method of the combined or separate embodiments 27-31, wherein the sterilizing step is selected from at least one of ethylene oxide sterilization, gamma electron-beam sterilization, and low temperature oxidative sterilization.

33. The method of the combined or separate embodiments 27-32, wherein the sterilizing step includes a combination of two or more of ethylene oxide sterilization, gamma electron-beam sterilization, and low temperature oxidative sterilization.

## WHAT IS CLAIMED IS:

1. A package for a medical device or delivery system, comprising:
  - a first substantially planar member;
  - a second substantially planar member comprising at least one cavity for receiving a medical device or delivery system, wherein the first and second planar members are opposable such that the first planar member covers at least the cavity of the second planar member;
  - a first seal positioned between the first planar member and the second planar member for sealing the first planar member to the second planar member at a periphery of either or both of the first planar member or the second planar member;
  - at least one opening formed in at least one of the first or second planar members;
  - a microbial-resistant barrier covering the at least one opening; and
  - a second sealable member that adheres the first and second planar members together at a position between the at least one opening and the cavity such that the cavity is no longer in communication with the at least one opening.
2. A package for a medical device or delivery system, comprising:
  - a substantially planar member having a first section and a second section adjacent the first section;
  - at least one cavity for receiving medical device or delivery system positioned in the second section, wherein the device is foldable along an axis between the first and second sections such that the first and second sections are opposable and the first section covers at least the cavity of the second section when the sections are opposed;
  - a first seal positioned on at least one of the first or second portions for sealing the first section to the second section at a periphery of either or both of the first section or the second section when the sections are opposed;
  - at least one opening formed in at least one of the first or second portions;
  - a microbial-resistant barrier covering the at least one opening; and
  - a second sealable member that adheres the first and second portions together at a position between the at least one opening and the cavity such that the cavity is no longer in communication with the at least one opening.
3. The package of claim 1 or 2, wherein the barrier is formed of an antimicrobial material.
4. The package of claim 1 or 2, wherein the barrier is formed of a microbial impervious

material.

5. The package of claim 3 or 4, wherein the antimicrobial material or microbial impervious material is comprised of polyolefin fibers.
6. The package of claim 5, wherein the polyolefin is selected from polyethylene or polypropylene.
7. The package of claim 5 or 6, wherein the polyolefin fibers are nonwoven.
8. The package of any previous claim, wherein the at least one opening is formed in the first planar member or section and the barrier is attached to the first planar member or section such that the barrier covers an entirety of the at least one opening.
9. The package of any previous claim, wherein the at least one opening is formed in the second planar member or section and the barrier is attached to the second planar member or section such that the barrier covers an entirety of the at least one opening.
10. The package of claim 8, further comprising a barrier seal positioned between the first planar member or section and the barrier to secure the barrier to the first planar member or section.
11. The package of claim 9, further comprising a barrier seal positioned between the second planar member or section and the barrier to secure the barrier to the second planar member or section.
12. The package of any previous claim, wherein the barrier is a breathable barrier.
13. The package of any previous claim, wherein at least one of the first planar member or section or the second planar member or section is formed of a material selected from a gas impermeable polymer and a metal foil.
14. The package of claim 13, wherein each of the first and second planar members or sections are formed of a metal foil.
15. The package of claim 13 or 14, wherein the metal foil is selected from an aluminum foil and a stainless steel foil.
16. The package of any previous claim, wherein the at least one of the first seal, the second seal or the barrier seal is formed of an adhesive coating.



17. The package of claim 16, wherein the adhesive coating is selected from a heat sealable adhesive coating and a pressure sealable adhesive coating.
18. The package of any previous claim, further including a desiccant.
19. The package of any previous claim, wherein the interior of the package is sterile when the first planar member or section and second planar member or section are sealed together.
20. The package of any previous claim, wherein the cavity has a shape selected from rectangular, square, polygonal, oval, or circular.
21. The package of any previous claim, wherein the first planar member or section overhangs at least a portion of the second planar member or section at an edge when the first and second planar members or sections are sealed together.
22. The package of any previous claim, wherein the first planar member or section and the second planar member or section each have an outer periphery where the outer peripheries are substantially aligned when the first and second planar members or sections are sealed together.
23. The package of any previous claim, wherein the second seal intersects the first seal at two sides of the periphery of the first and second planar members or sections.
24. The package of any previous claim, wherein the at least one opening includes at least two openings.
25. The package of claim 24, wherein each of the at least two openings are covered by a single barrier.
26. The package of claim 24, wherein each of the at least two openings are covered by a separate barrier.
27. A method of preparing an aseptic package containing a medical device or delivery system, comprising:
  - placing the medical device or delivery system in a cavity of a package of any one of claims 1-26;
  - sealing the first substantially planar member or section to the second substantially planar member or section at the first seal;
  - hermetically sealing the sealed package; and

sealing the first planar member or section to the second planar member or section at the second seal such that the cavity is no longer in communication with the at least one opening.

28. The method of claim 27, further comprising:  
removing the portion of the sealed first and second planar members or sections containing the at least one opening.
29. The method of claim 27 or 28, wherein hermetically sealing includes a process selected from at least one of vacuum drying, nitrogen purging, heat drying, and terminal sterilization.
30. The method of claim 27 or 28, wherein hermetically sealing includes a process selected from a combination of at least two of the processes selected from vacuum drying, nitrogen purging, heat drying, and terminal sterilization.
31. The method of any one of claims 27 to 29, further comprising:  
sterilizing the package after the first sealing step.
32. The method of claim 31, wherein the sterilizing step is selected from at least one of ethylene oxide sterilization, gamma electron-beam sterilization, and low temperature oxidative sterilization.
33. The method of claim 31, wherein the sterilizing step includes a combination of two or more of ethylene oxide sterilization, gamma electron-beam sterilization, and low temperature oxidative sterilization.

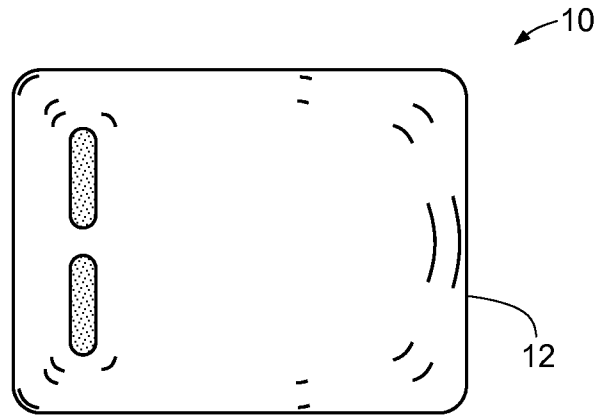


FIG. 1A

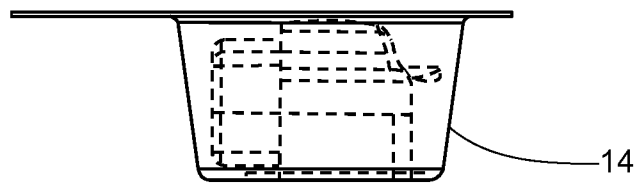


FIG. 1B



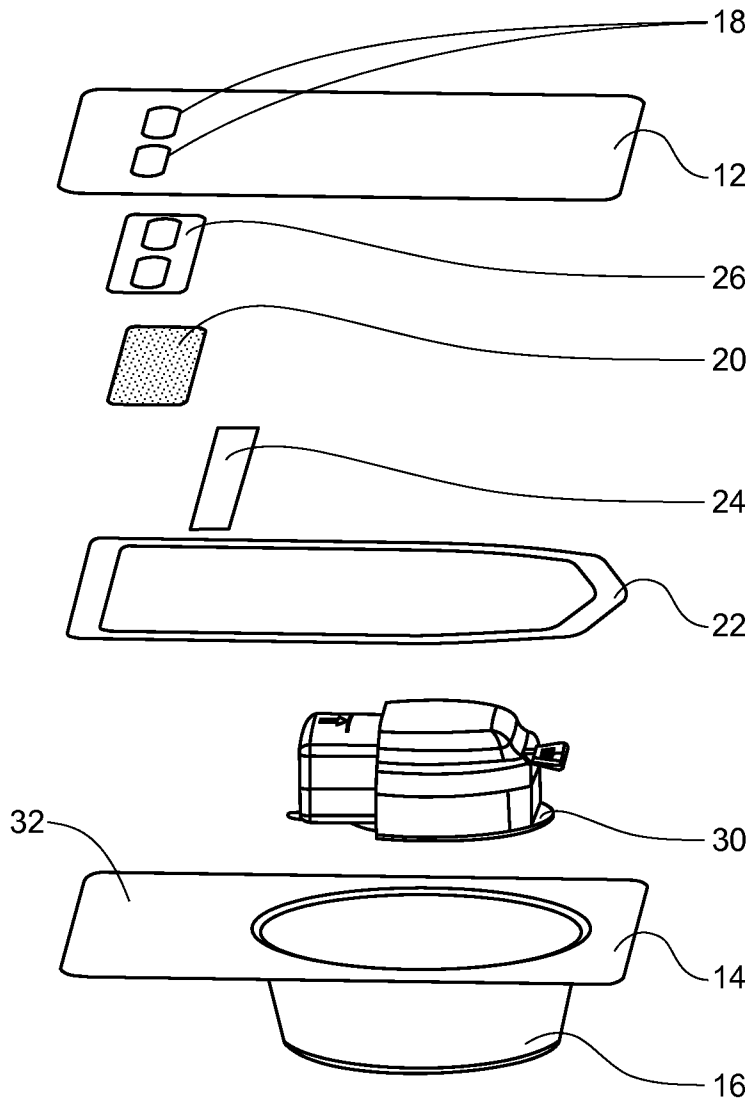



FIG. 2

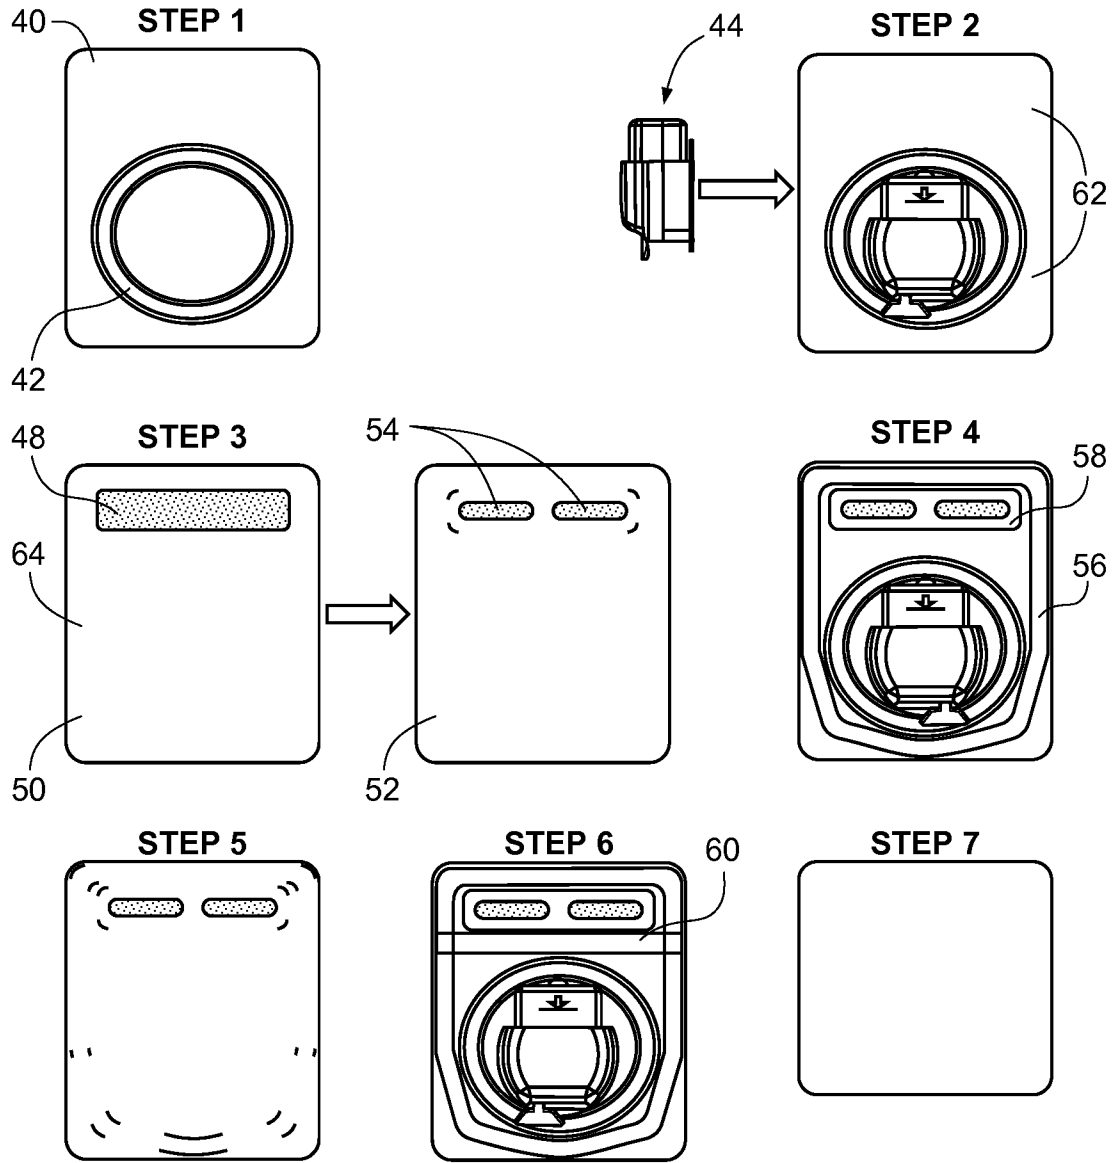


**FIG. 3**

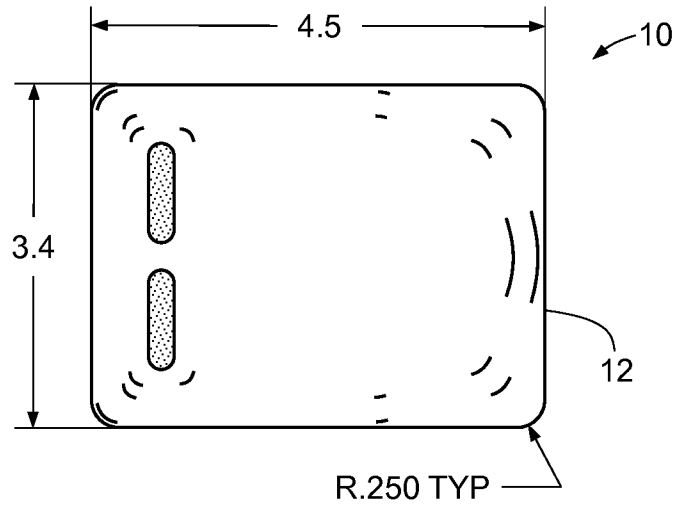

**FIG. 4A**

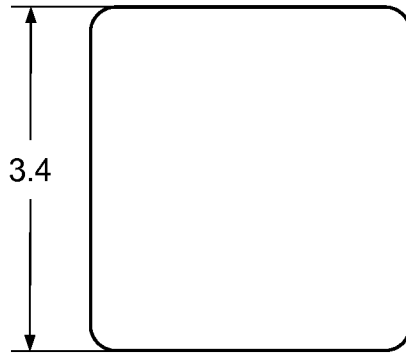

**FIG. 4B**

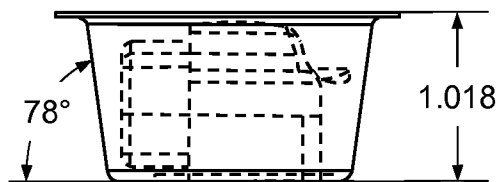

**FIG. 4C**

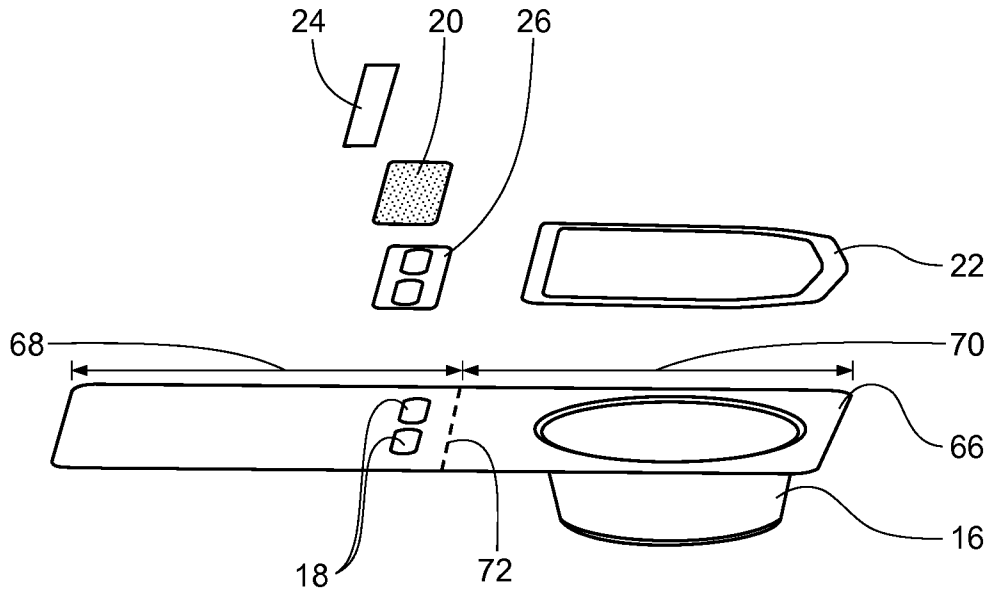


FIG. 5A

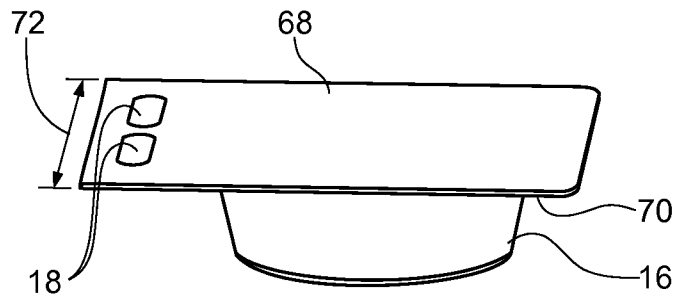


FIG. 5B

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2015/059559

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. B65D75/32 B05B11/04 B65D75/36 B65D81/24 B65D55/02  
 B65B55/02  
 ADD.  
 According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
 Minimum documentation searched (classification system followed by classification symbols)  
 B65D B65B A61B B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2006 271781 A (TOPPAN PRINTING CO LTD) 12 October 2006 (2006-10-12) the whole document -----	1-33
X	US 5 868 244 A (IVANOV KONSTANTIN [US] ET AL) 9 February 1999 (1999-02-09) column 7, line 43 - column 12, line 39; claims 1-45; figures 1-12 -----	1-33
A	US 4 660 721 A (MYKLEBY LAURIE G [US]) 28 April 1987 (1987-04-28) column 5, line 54 - column 8, line 53; claims 1-8; figures 1-6 -----	1-33

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search  13 January 2016	Date of mailing of the international search report  21/01/2016
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Janosch, Joachim
--	--



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/059559

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2006271781	A	12-10-2006	NONE
-----			
US 5868244	A	09-02-1999	BR 9805032 A 16-11-1999
		DE 69824118 D1	01-07-2004
		DE 69824118 T2	30-06-2005
		EP 0919204 A1	02-06-1999
		US 5868244 A	09-02-1999
-----			
US 4660721	A	28-04-1987	NONE
-----			