



(86) Date de dépôt PCT/PCT Filing Date: 2003/01/23  
(87) Date publication PCT/PCT Publication Date: 2003/08/07  
(85) Entrée phase nationale/National Entry: 2004/07/26  
(86) N° demande PCT/PCT Application No.: US 2003/002019  
(87) N° publication PCT/PCT Publication No.: 2003/064909  
(30) Priorité/Priority: 2002/01/25 (60/351,916) US


(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> F16L 9/14, F16L 11/00

(71) Demandeur/Applicant:  
NATVAR HOLDINGS, INC., US

(72) Inventeurs/Inventors:  
DONOHUE, ROBERT JAMES, US;  
COGGINS, GEORGE, III, US;  
BENSON, PERRY, US;  
POPE, LIBBY, US

(74) Agent: MOFFAT & CO.

(54) Titre : TUBAGE COEXTRUDE  
(54) Title: CO-EXTRUDED TUBING

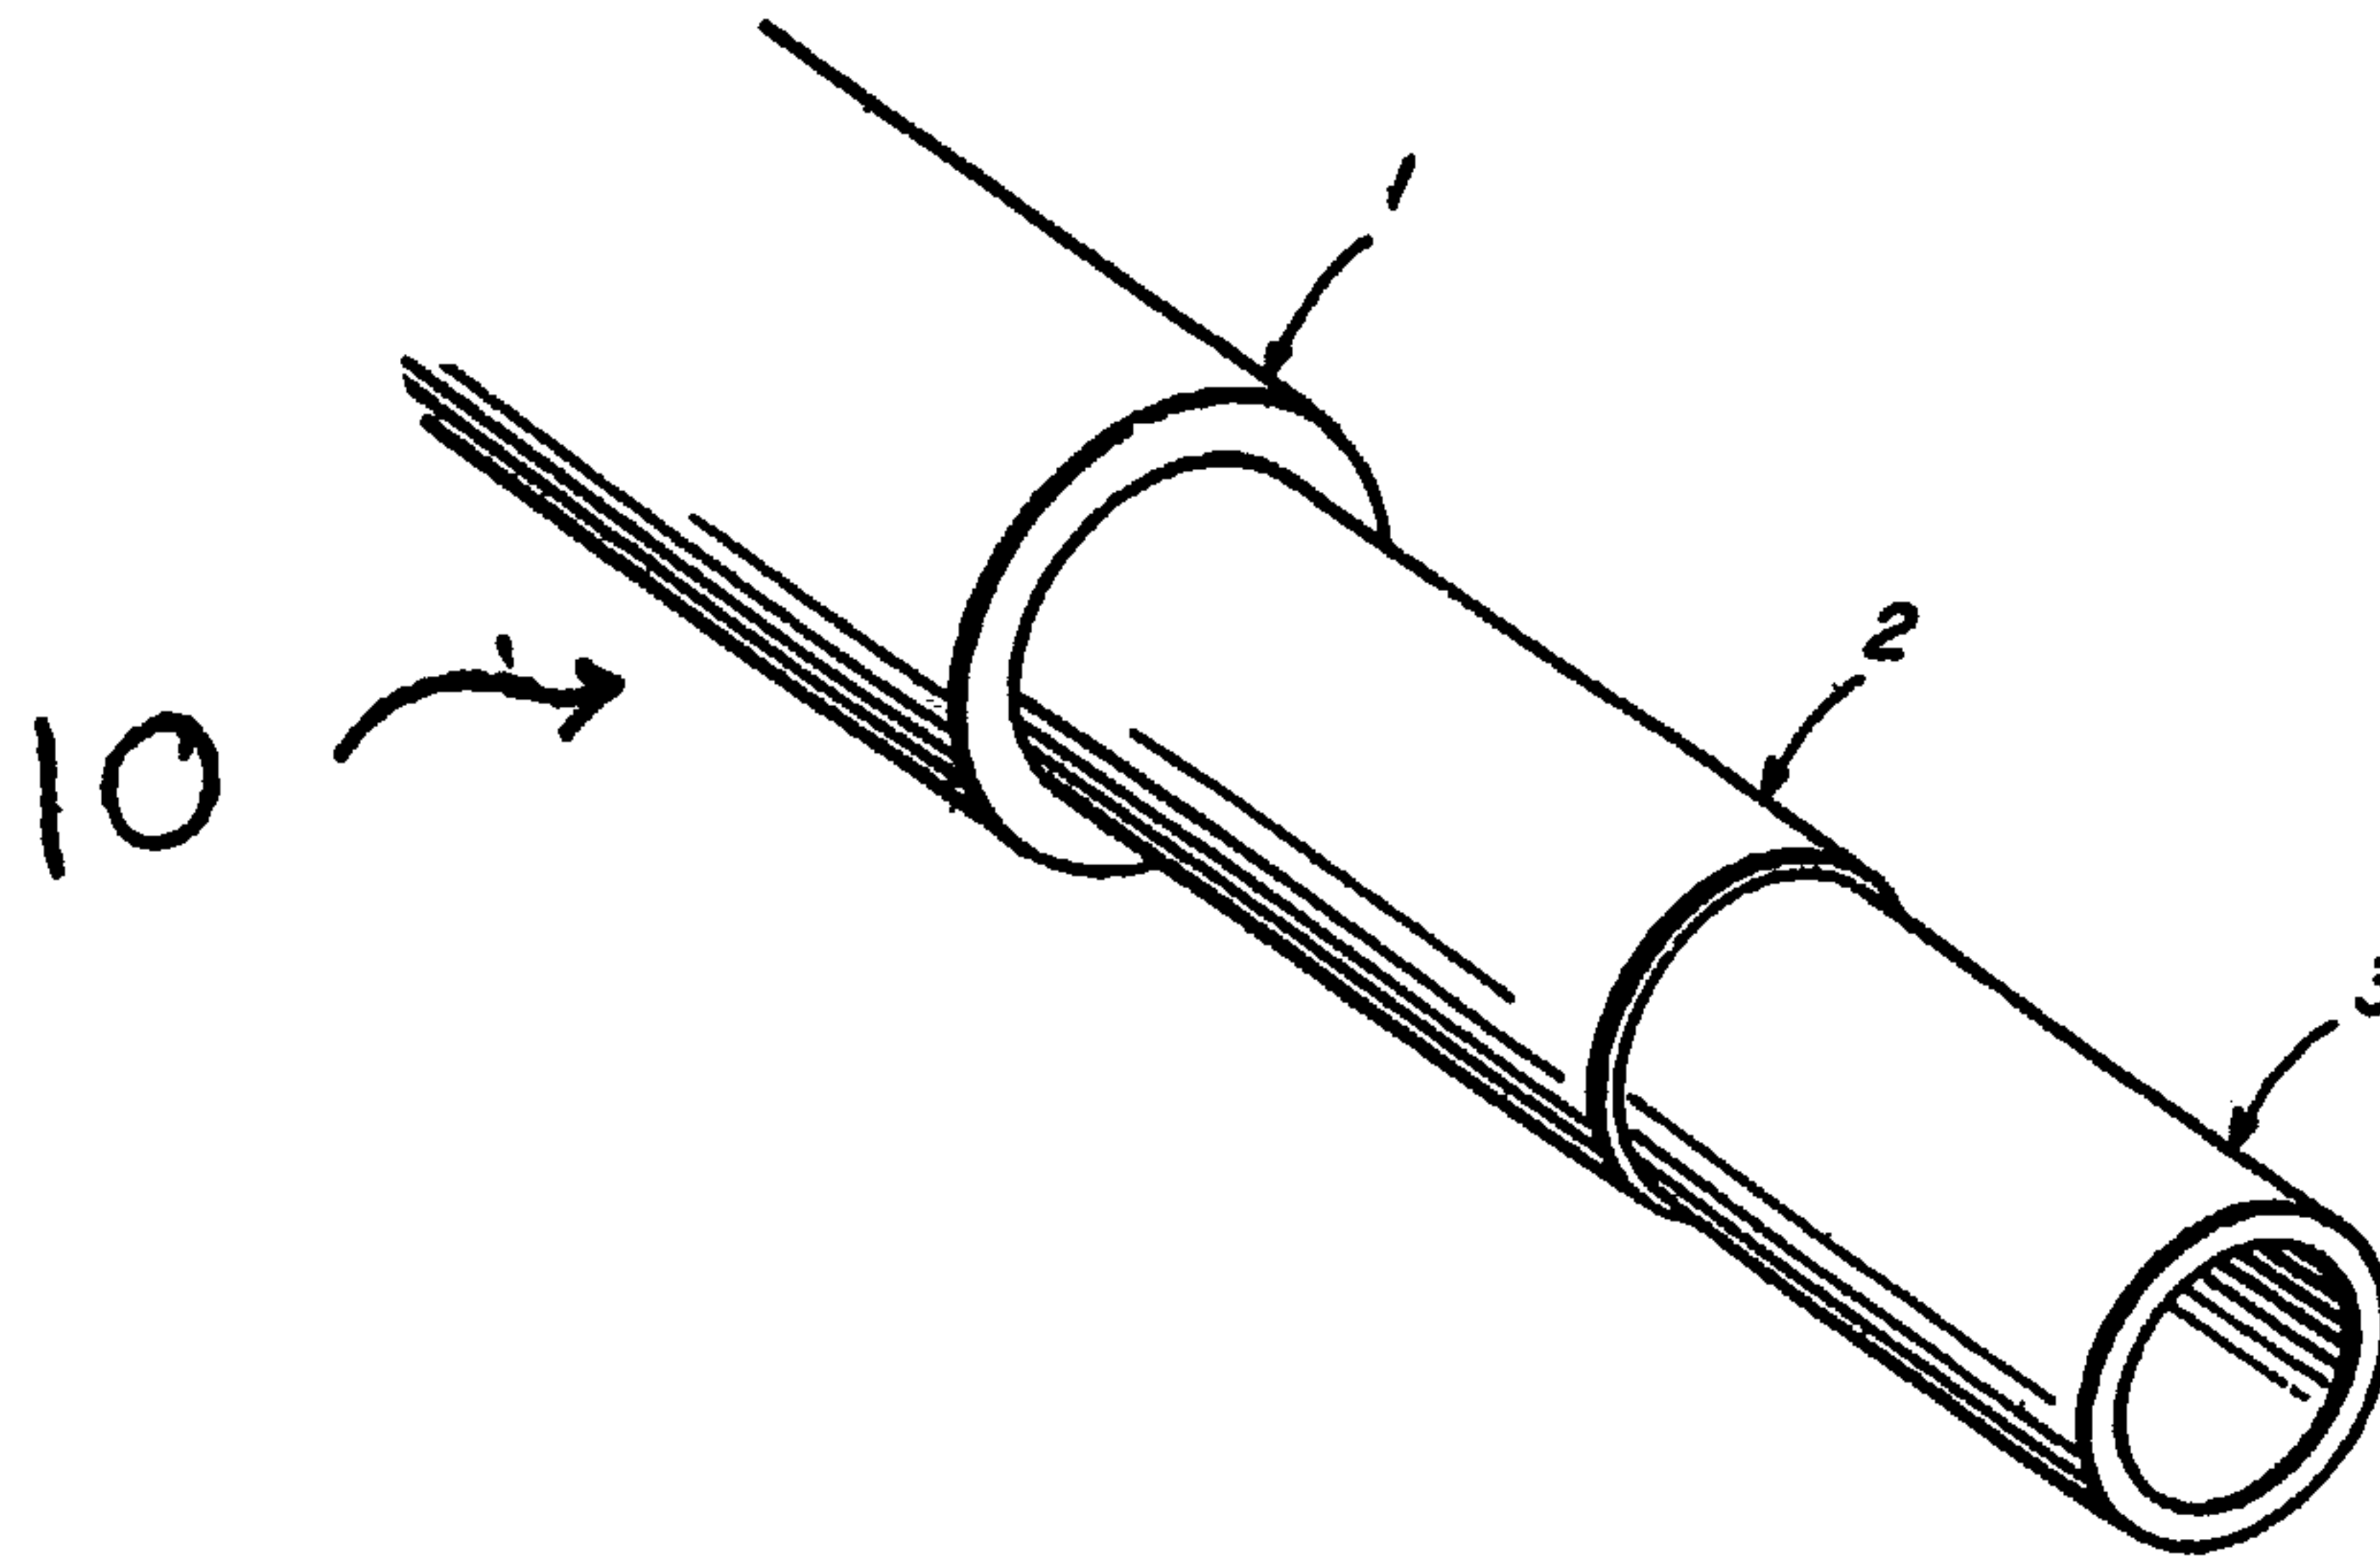

(57) Abrégé/Abstract:

A co-extruded tubing for the administration of intravenous fluids has an outer layer (1) of a polyester. An inner fluid-contact layer (3) may be of a polyethylene or of a thermoplastic polyurethane. Where the inner fluid-contact layer is of polyethylene, an intermediate tie layer (2) of ethylene-vinyl acetate copolymer may be included to prevent delamination.



## ABSTRACT

A co-extruded tubing for the administration of intravenous fluids has an outer layer (1) of a polyester. An inner fluid-contact layer (3) may be of a polyethylene or of a thermoplastic polyurethane. Where the inner fluid-contact layer is of polyethylene, an intermediate tie layer (2) of ethylene-vinyl acetate copolymer may be included to prevent delamination.

## CO-EXTRUDED TUBING

## FIELD OF THE INVENTION

[0001] The present invention is directed toward a co-  
5 extruded tubing for the administration of intravenous  
fluids that eliminates the need for the inclusion of  
polyvinyl chloride and plasticizers.

## BACKGROUND OF RELATED TECHNOLOGY

10 [0002] Plastic tubings are extensively employed in the  
medical field, particularly for patient analysis and  
treatment procedures. Various FDA-approved plastics and  
combinations thereof are used, depending upon the specific  
properties the intended application demands. The  
15 selection of desired plastic materials is further limited  
by the use of the tubing in the *in vivo* treatment of human  
patients, as the tubing may be used in the administration  
of intravenous fluids or itself may be introduced into the  
body. Thus, numerous factors must be considered in  
20 ascertaining which materials to choose.

[0003] Polyvinyl chloride (PVC) is a material  
previously used to make tubing, made with suitable  
plasticizers necessary to enhance flexibility and other  
properties. However, such plasticizers or similar  
25 additives have a tendency to migrate, causing hazardous  
contamination with the fluid being transferred through the  
tubing. The contamination becomes more serious where the  
fluid is introduced into the body, as contamination of the  
blood may result. Moreover, plasticized PVC tubings have  
30 been shown to absorb nitroglycerin and insulin, and are  
thus unsatisfactory for the administration of these

medicines. Much effort has been directed towards finding an alternative that does not suffer from the limitations of the plasticized PVC tubing.

[0004] Polyurethane has been used as an alternative to  
5 PVC in medical tubing, as in U.S. Patent No. 4,211,741 to Ostoich. Polyurethane may be used without plasticizers and other additives, because it is a relatively soft, flexible plastic. Therefore, the possibility of the migration of additives and subsequent contamination are  
10 eliminated. In addition, polyurethane exhibits good fluid-flow characteristics. However, the high cost of polyurethane has limited its use to only extraordinary applications.

[0005] Some grades of ethylene-vinyl acetate copolymer  
15 (EVA) are currently being used as an outer layer, together with low-density polyethylene (LDPE) as an inner layer in forming composite tubing. Although this composite exhibits excellent peel strength, it lacks flexibility, clarity, and is easily scuffed or roughened. In addition,  
20 it cannot be solvent bonded. Since the tubing is the connecting link between a reservoir of fluid (nitroglycerin, insulin, etc.) and the patient, the method of connecting the tubing is an important consideration. Where, as here, solvent bonding cannot be utilized, an  
25 expensive, less reliable mechanical means of assembly is required, whereby a PVC layer must be pressure fit over the EVA-LDPE tubing to utilize the solvent-bondable characteristics of PVC. For these reasons, the EVA-LDPE product has proven to be unsatisfactory.

30 [0006] U.S. Patent No. 4,627,844 to Schmitt ("Schmitt") provides a well-received alternative that includes a tri-



layer tube. A commercially successful embodiment of U.S. Patent No. 4,627,844 is sold under the trademark "SUREPATH 151" by the Plastron/Natvar Division of Tekni-Plex, Inc. As disclosed in Schmitt, an outer layer of PVC and an inner fluid-contact layer of LDPE are co-extruded with an intermediate tie layer of EVA. However, while Schmitt greatly reduces the possibility for the migration of additives from the PVC to the fluid by providing an LDPE fluid-contact layer, the elimination of the PVC is preferred.

[0007] In addition to the potential migration problem of PVC additives into a fluid being transferred within a PVC tube, PVC production, use, and disposal are the subject of many regulatory concerns, particularly in Europe. For example, steps must be taken to reduce introduction of vinyl chloride and additives into wastewater during production, and PVC must frequently be incinerated prior to introduction to a landfill. These steps are recommended to prevent introduction of PVC and other additives to the environment due to possible carcinogenic properties demonstrated by these compositions.

[0008] Therefore, there is a need for a co-extruded tubing that excludes PVC while providing the advantages of being solvent-bondable, EtO- and gamma-stable, and water-clear that may be used in the administration of nitroglycerin and insulin.

#### SUMMARY OF THE INVENTION

[0009] Accordingly, the present invention is a co-extruded tubing which does not include PVC. In a first

embodiment, the co-extruded tubing has three layers which include an outer layer of a polyester. It also includes an inner fluid-contact layer, and an intermediate bonding layer of EVA. The inner fluid-contact layer may be of a polyethylene.

[0010] The second embodiment is a co-extruded tubing having two layers. As in the first embodiment, the co-extruded tubing includes an outer layer of a polyester, but it lacks an intermediate bonding layer. The co-extruded tubing of the second embodiment also includes an inner fluid-contact layer of a thermoplastic polyurethane.

[0011] The present invention will now be described in more complete detail with frequent reference being made to the following figures.

15

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Figure 1 is an isometric view of a tri-layered tubing of the invention with the outer layer and middle layer broken away in order to show the construction.

20 [0013] Figure 2 is an isometric view of a dual-layered tubing of the invention with the outer layer broken away in order to show the construction.

#### DETAILED DESCRIPTION OF THE INVENTION

25 [0014] Referring to Figure 1, one aspect of the present invention provides a co-extruded tri-layer tubing 10 that includes an outer layer 1 of a polyester, such as a copolyester thermoplastic elastomer (TPE), an inner fluid-contact layer 3, and an intermediate bonding layer 2 of  
30 EVA.



[0015] Referring to Figure 2, another aspect of the present invention provides a dual-layer tubing 20 that eliminates the need for an intermediate bonding layer. This dual-layer tubing 20 includes an outer layer 1 of a polyester, such as a copolyester thermoplastic elastomer (TPE), and an inner fluid-contact layer 3 of a thermoplastic polyurethane (TPU), such as an aromatic or aliphatic polyether-based TPU.

[0016] The polyester outer layer 1 has unexpectedly provided a tubing that is water-clear and flexible without the addition of plasticizers and other additives. The polyester may be a copolyester ether TPE such as Ecdel Elastomer 9966, Ecdel Elastomer 9965, Ecdel Elastomer 9967, and Ecdel development polymer 24569 available from Eastman Chemical. These are copolyesters of alternating hard poly-1,4-butanediol terephthalate and soft long-chain polyalkylene ether terephthalate block copolymers connected by ester and ether linkages. The thickness of the polyester outer layer 1 may be from about 0.001 in. (0.025 mm) to about 0.006 in. (0.152 mm).

[0017] The inner layer 3 provides a fluid-contact surface. The inner layer 3 may be either a polyethylene or a thermoplastic polyurethane elastomer (TPU). The thickness of the inner layer 3 may be from about 0.001 in. (0.025 mm) to about 0.030 in. (0.762 mm).

[0018] If the inner layer 3 is chosen to be a polyethylene, a variety of polyethylene materials are suitable. For example, polyethylene may be either a branched low-density polyethylene (LDPE), such as 808 Eastman LDPE, available from Eastman Chemical, or a linear high-density polyethylene (HDPE), such as 9506 Chevron

HDPE, 9406 Chevron HDPE, and 9503 Chevron HDPE, available from Chevron Corporation.

[0019] Alternatively, a thermoplastic polyurethane elastomer (TPU) may be used as the inner fluid-contact  
5 layer 3. Generally, a TPU is the reaction product of a polyol and isocyanate and usually includes a combination of hard and soft segment domains. An aromatic polyether-based TPU or an aliphatic polyether-based TPU is desirable for use with the present invention. Useful TPU's include  
10 the Pellethane 2363-80 AE series available from Dow Chemical Company and the Tecothane series and the Tecoflex series available from Thermedics Polymer Products, a division of VIASYS Healthcare.

[0020] If a polyethylene is selected as the inner  
15 fluid-contact layer 3, it is desirable to include an intermediate tie layer 2 to prevent delamination. The tie layer or bonding layer 2 is not necessary if the inner layer 3 is chosen to be a TPU. The intermediate bonding layer 2 may be ethylene-vinyl acetate copolymer (EVA). A  
20 vinyl acetate content of the EVA of approximately 28% allows for maximum flexibility without losing the desired extrusion characteristics. One suitable EVA copolymer available from Equistar Chemical is UE 634-006. The thickness of the bonding layer 2 may be from about 0.001  
25 in. (0.025 mm) to about 0.006 in. (0.152 mm).

[0021] The respective thickness of each layer of tubing  
10,20 can be controlled by the extrusion tooling utilized, such as the "Tri Die" extrusion apparatus manufactured by the Genca Division of General Cable Company, Clearwater,  
30 FL. This provides a uniform thickness of the layers both of the tri-layer tubing, including three layers 1,2,3, and



of the dual-layer tubing including two layers 1,2, which are co-extruded as is well-known in the art, resulting in the tri-layer tubing 10 and/or the dual-layer tubing 20 of the present invention.

5 [0022] The tubing of the subject invention has the advantages of not only being water-clear and flexible in the absence of PVC, but also is EtO- and gamma-stable. The tubing maintains its integrity (delamination does not occur) and clarity upon ethylene oxide (EtO) and gamma  
10 irradiation sterilization processes. Another major advantage is that the tubing demonstrates solvent-bonding capability similar to that of PVC.

[0023] While there have been described what are presently believed to be the preferred embodiments of the  
15 invention, those skilled in the art will realize that changes and modifications may be made thereto without departing from the spirit of the invention, and it is intended to include all such changes and modifications as fall within the true scope of the invention.

20

IPEAUS 13 AUG 2003

WHAT IS CLAIMED IS:

1. A co-extruded tubing for the transfer of fluids, said tubing having at least two layers comprising:  
an outer layer, said outer layer being of a polyester; and  
5 an inner fluid-contacting layer.
2. A co-extruded tubing as claimed in claim 1 wherein said polyester is a copolyester thermoplastic elastomer (TPE).
3. A co-extruded tubing as claimed in claim 2 wherein said copolyester thermoplastic elastomer (TPE) is a copolyester ether TPE.
4. A co-extruded tubing as claimed in claim 3 wherein said copolyester ether TPE is a copolyester of alternating hard poly-1,4-butanediol terephthalate and soft long-chain polyalkylene ether terephthalate block  
5 copolymers connected by ester and ether linkages.
5. A co-extruded tubing as claimed in claim 1 wherein said outer layer has a thickness in a range from about 0.001 in (0.025 mm) to about 0.006 in (0.152 mm).
6. A co-extruded tubing as claimed in claim 1 wherein said inner fluid-contacting layer is of a polyethylene.

IPERUS 13 AUG 2003

7. A co-extruded tubing as claimed in claim 6 wherein said polyethylene is a branched low-density polyethylene (LDPE).
8. A co-extruded tubing as claimed in claim 6 wherein said polyethylene is a linear high-density polyethylene (HDPE).
9. A co-extruded tubing as claimed in claim 1 wherein said inner fluid-contacting layer is of a thermoplastic polyurethane elastomer (TPU).
10. A co-extruded tubing as claimed in claim 9 wherein said thermoplastic polyurethane elastomer (TPU) is an aromatic polyether-based TPU.
11. A co-extruded tubing as claimed in claim 9 wherein said thermoplastic polyurethane elastomer (TPU) is an aliphatic polyether-based TPU.
12. A co-extruded tubing as claimed in claim 1 wherein said inner fluid-contacting layer has a thickness in a range from about 0.001 in (0.025 mm) to about 0.030 in (0.762 mm).
13. A co-extruded tubing as claimed in claim 6 further comprising an intermediate bonding layer between said outer layer and said inner fluid-contacting layer.



\*\*\*\*\*

**IPAVUS 13 AUG 2003**

14. A co-extruded tubing as claimed in claim 13 wherein said intermediate bonding layer is of an ethylene-vinyl acetate (EVA) copolymer.

15. A co-extruded tubing as claimed in claim 13 wherein said intermediate bonding layer has a thickness in a range from about 0.001 in (0.025 mm) to about 0.006 in (0.152 mm).

1/1

