



US 20050036920A1

(19) **United States**

(12) **Patent Application Publication**
Gilbert

(10) **Pub. No.: US 2005/0036920 A1**

(43) **Pub. Date: Feb. 17, 2005**

(54) **DROPLET DISPENSING SYSTEM**

(60) Provisional application No. 60/325,040, filed on Sep. 25, 2001.

(75) Inventor: **John Gilbert**, Brookline, MA (US)

Publication Classification

Correspondence Address:
LAHIVE & COCKFIELD, LLP.
28 STATE STREET
BOSTON, MA 02109 (US)

(51) **Int. Cl.⁷** **B01L 3/02**
(52) **U.S. Cl.** **422/100**

(73) Assignee: **Cytonome, Inc.**, Watertown, MA

(57) **ABSTRACT**


(21) Appl. No.: **10/948,014**

A droplet dispensing system for forming and dispensing droplets of a liquid sample is provided. The droplet dispensing system is fabricated on the tip of a dispensing pin. The tip of the dispensing pin includes a droplet ejection nozzle, a filling channel, a chamber and an actuator for ejecting droplets on demand. The system further includes a holder for mounting the dispensing pin. The holder also contains a control circuit for activating the actuator.

(22) Filed: **Sep. 23, 2004**

Related U.S. Application Data

(62) Division of application No. 10/029,108, filed on Dec. 21, 2001, now Pat. No. 6,808,683.

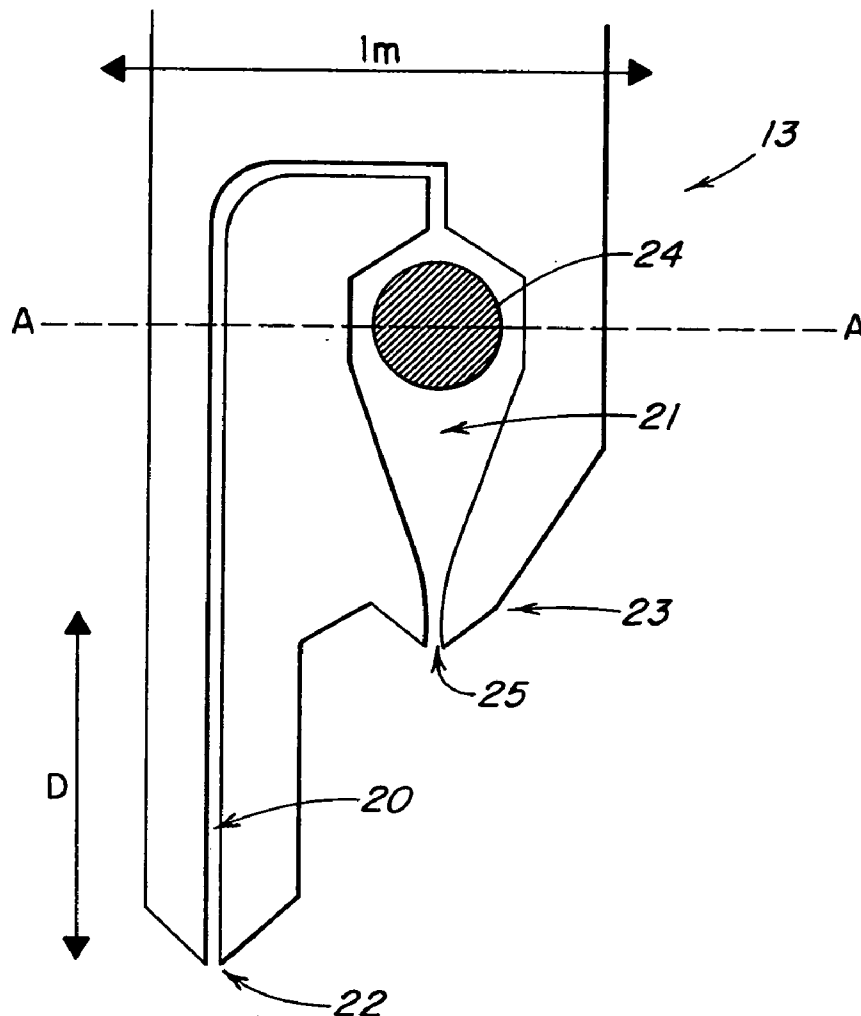

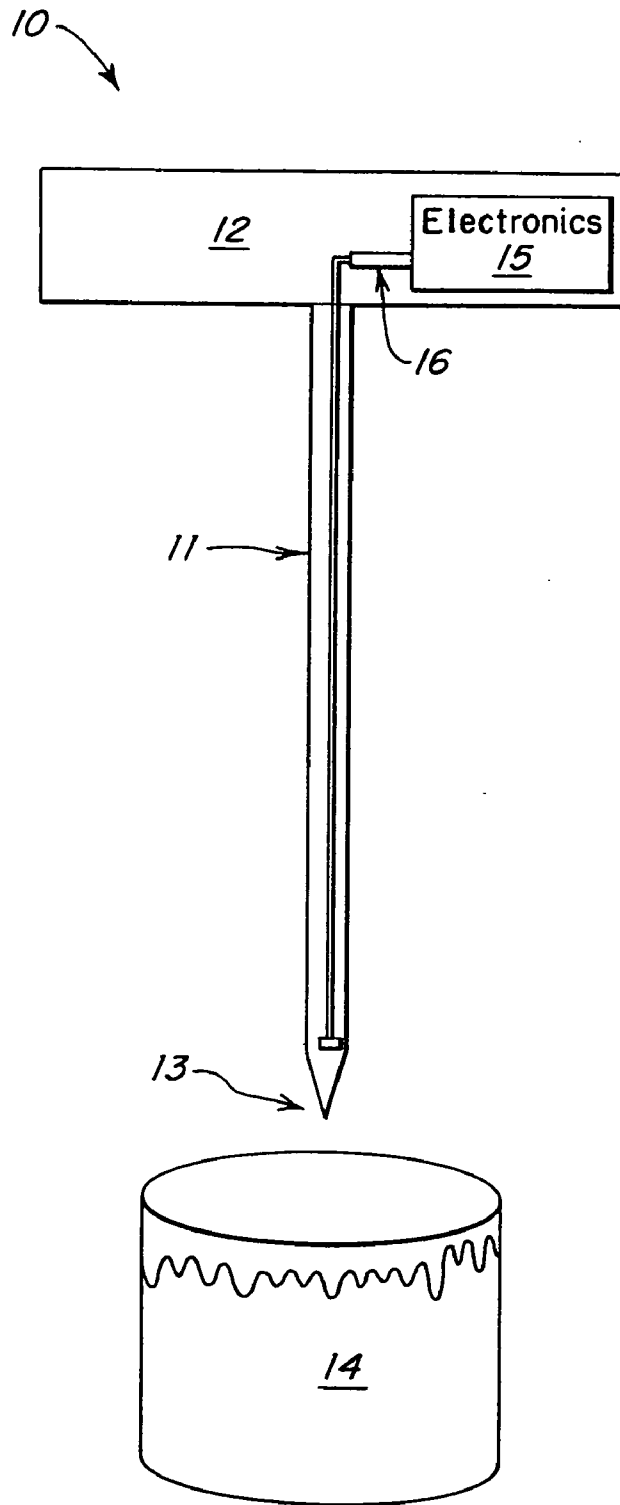


FIG. 1

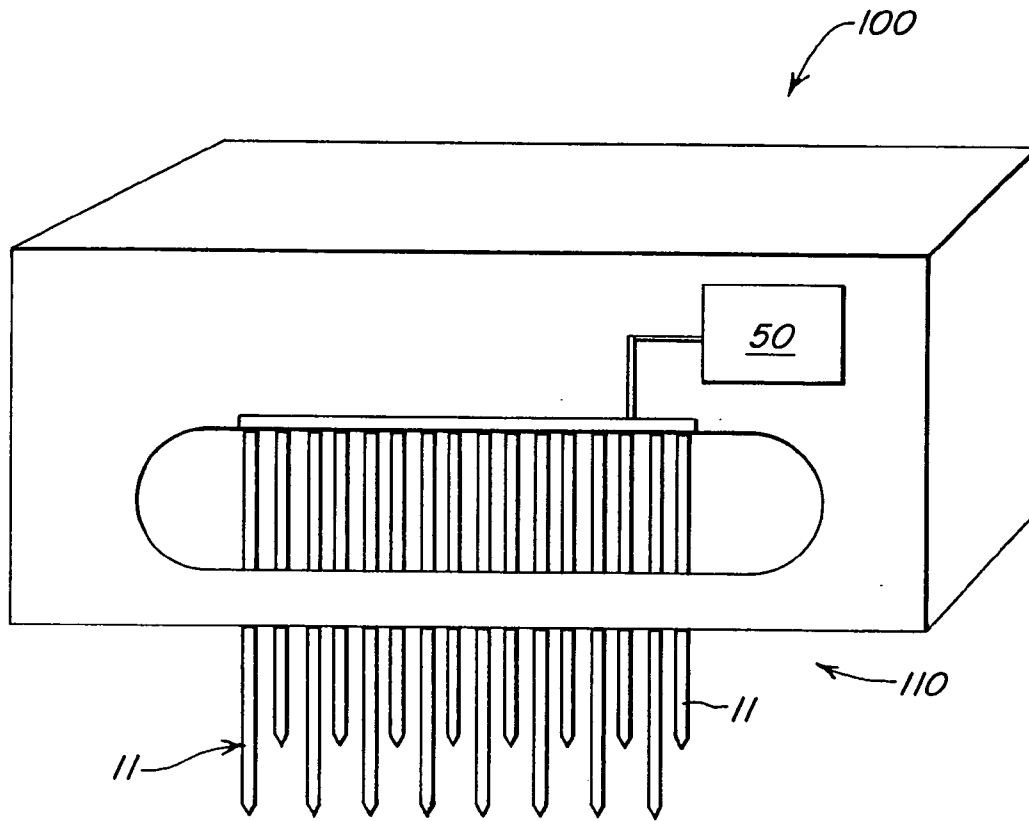
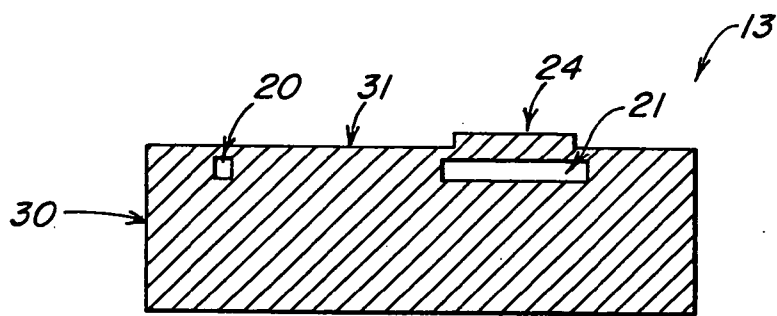
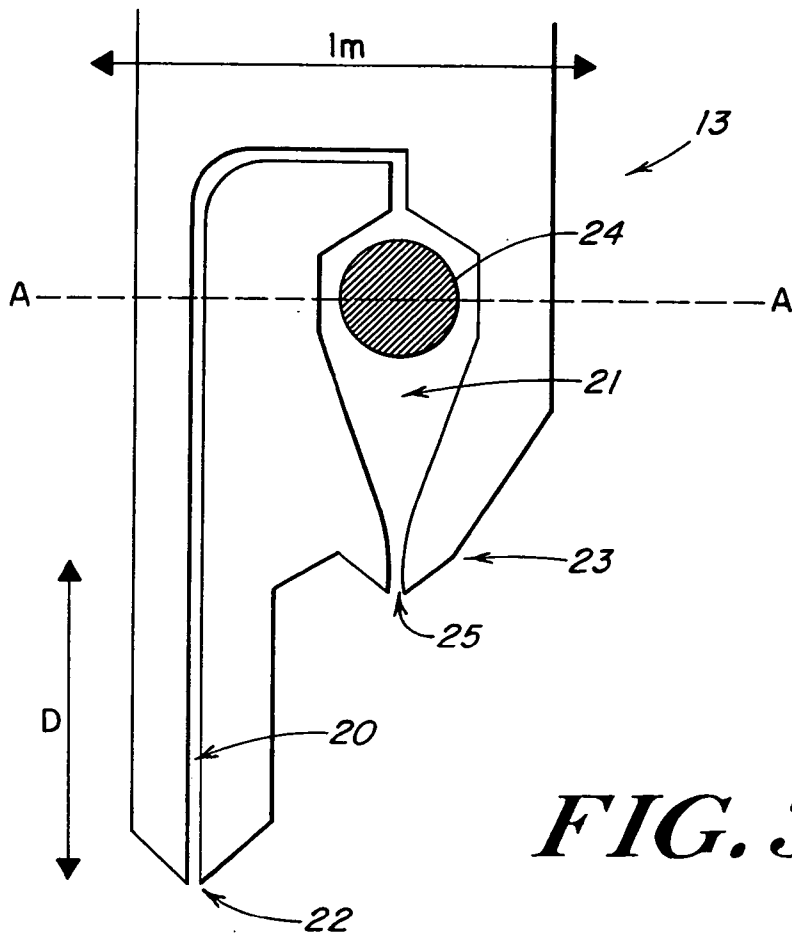


FIG. 2



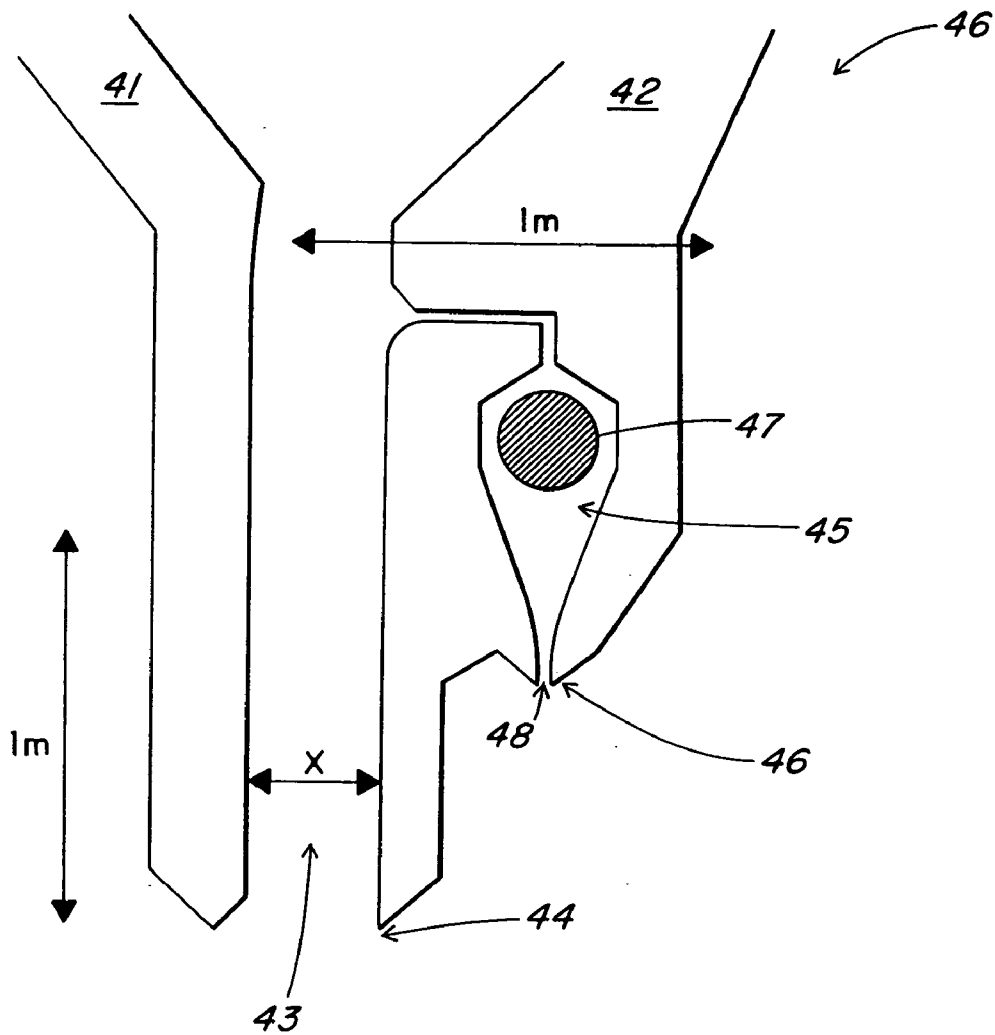


FIG. 5

DROPLET DISPENSING SYSTEM

REFERENCE TO RELATED APPLICATIONS

[0001] This application is a divisional application of U.S. application Ser. No. 10/029,108, which claims priority to U.S. Provisional Patent Application No. 60/325,040, entitled "Droplet Dispensing System" filed Sep. 25, 2001, and is related to U.S. patent application Ser. No. 10/028,852, entitled "Microfluidic System Including a Virtual Wall Fluid Interface Port for Interfacing Fluids with the Microfluidic System", filed Jun. 20, 2002, U.S. patent application Ser. No. 10/027,484, entitled "Microfluidic System Including a Virtual Wall Fluid Interface Port for Interfacing Fluids with the Microfluidic System", filed Jun. 20, 2002, U.S. patent application Ser. No. 10/027,516, entitled "Microfluidic System Including a Virtual Wall Fluid Interface Port for Interfacing Fluids with the Microfluidic System", filed Jun. 20, 2002; U.S. patent application Ser. No. 10/027,171, entitled "Microfabricated Two-Pin Liquid Sample Dispensing System", filed Jun. 20, 2002; and U.S. patent application Ser. No. 10/027,922, entitled "Small Molecule Substrate Based Enzyme Activity Assays", filed Jun. 20, 2002. The contents of the foregoing patent applications are herein incorporated by reference. The contents of all references, issued patents, or published patent applications cited herein are expressly incorporated by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to a liquid dispensing system for forming and dispensing droplets of a liquid sample.

BACKGROUND OF THE INVENTION

[0003] Many chemical, biomedical, bioscience and pharmaceutical industries require chemical operations, such as reactions, separations and subsequent detection steps, to be performed on samples. It is generally desirable to introduce these samples into a sample handling system, such as a microfluidic system capable of handling and analyzing chemical and biological specimens, quickly, efficiently and in a highly controllable manner.

[0004] Many methods have been described for the interfacing of fluids, e.g., samples, analytes, reagents, precursors for synthesis and buffers, towards, within or between microfluidic systems. Generally, introduction of a liquid sample to a microfluidic system is accomplished through sample channels or sample wells. To introduce a liquid sample to the microfluidic system, a capillary tube may be provided, which dispenses a liquid sample to a sample well, sample channel or other sample introduction port. A significant drawback of using a capillary tube concerns the low injection efficiency inherent to capillary tubes, that is, the ratio between the volume of liquid required for a particular chemical operation in a part of the microfluidic system, and the total volume of liquid required for the introductory operation. Moreover, it is generally difficult to control the precise volume of dispensed sample using capillary tubes. Furthermore, capillary tubes are subject to contamination, because the same port used to fill the tube is also used to eject the liquid sample.

[0005] U.S. Pat. No. 6,101,946 of Martinsky describes a pin-based system for printing microarrays of biochemical

substances. The microarray printing system comprises a printing pin having a sample channel and a flat tip. The pin applies a biochemical substance by filling the sample channel and subsequently directly contacting a printing substrate, to deliver the sample from the sample channel to the printing substrate. A drawback of the pin-based system described in the '946 patent concerns the ability to control the amount of delivered sample. The pin-based system is subject to contamination and breakage, because it requires direct contact between the pin tip and the printing substrate. Another drawback concerns the difficulty of precisely positioning the tip of the pin to provide sufficient contact to result in delivery of a sample.

[0006] U.S. Pat. No. 6,110,426 of Shalon et al., the contents of which are herein incorporated by reference, describes a capillary dispenser for forming microarrays of biological samples. The capillary dispenser comprises an elongate open capillary channel adapted to hold a liquid sample. The channel is formed by a pair of spaced-apart, coextensive, elongate members, which are tapered toward one another and converge at a tip region at the lower end of the channel. The elongate members are fixed relative to each other and the capillary channel is limited to a fixed volume. Furthermore, it is difficult to control the amount of sample that is acquired and dispensed from the capillary dispenser of the '246 patent.

SUMMARY OF THE INVENTION

[0007] The present invention provides a droplet dispensing system which forms and dispenses droplets of a liquid sample on demand. The droplet dispensing system comprises a holder and one or more dispensing pins. Each dispensing pin has a tip for forming and ejecting droplets of a liquid sample from a supply of liquid sample stored in the tip. The tip of each dispensing pin includes a droplet ejection nozzle for controllably and selectively ejecting a droplet of liquid from the tip of the dispensing pin. Each dispensing pin tip includes a sample chamber in fluid communication with the ejection nozzle for holding a supply of a liquid sample. The tip further includes a filling channel in fluid communication with the sample chamber for filling the tip with a predetermined volume of liquid sample from a reservoir. An actuator is located on the tip adjacent to the ejection nozzle and communicates with the sample chamber. The droplet dispensing system forms and ejects droplets through the ejection nozzle by activating the actuator.

[0008] A method of manufacturing a dispensing system is also provided. According to the illustrative embodiment, the droplet dispensing system is fabricated from a silicon wafer. A photolithography process is utilized to etch the filling channel, sample chamber and ejection nozzle in the tip of a dispensing pin. A suitable actuator is attached to the tip to provide for formation and ejection of droplets from the ejection nozzle.

[0009] The droplet dispensing system provides fast and flexible filling of a predetermined amount of liquid sample in the dispensing system via the tip of a dispensing pin. The droplet dispensing system provides efficient and rapid dispensing of the liquid sample from the tip of a dispensing pin in the form of droplets having a precisely controlled volume. The droplet dispensing system enhances liquid sample application by improving efficiency, speed and controllability, while reducing waste and contamination.

[0010] According to one aspect a droplet dispensing system comprising a dispensing pin is provided. The sample dispensing system comprises a dispensing pin having a tip. The tip includes a sample chamber, a sample filling channel formed in the tip and in fluid communication with the sample chamber for loading a liquid sample into the sample chamber, a droplet ejection nozzle in fluid communication with the sample chamber for ejecting a droplet of the liquid sample from the sample chamber and an actuator located adjacent to the sample chamber for forming the droplet.

[0011] According to another aspect, a droplet dispensing system comprises two interacting pins is provided. The two-pin droplet dispensing system comprises a first pin and a dispensing pin positioned in proximity to each other to form a filling channel therebetween. The dispensing pin has a tip further comprising a sample chamber located in fluid communication with the sample filling channel, an ejection nozzle for ejecting a droplet from the sample chamber and an actuator for triggering formation and ejection of a droplet from the ejection nozzle.

[0012] According to yet another aspect, a method of dispensing a liquid sample is provided. The method of dispensing a liquid sample comprises providing a droplet dispensing system comprising a pin having a tip including filling channel for filling the tip with a predetermined volume of liquid sample, a sample chamber, an ejection nozzle and an actuator for effecting formation of a droplet. The method further comprises the step of activating the actuator to produce a droplet of liquid sample at the sample ejection nozzle.

[0013] According to another aspect, a liquid sample dispensing system, comprising a holder and an array of dispensing pins connected to the holder is provided. Each dispensing pin in the array has a tip and a sample chamber formed in the tip for holding a predetermined volume of sample, a sample filling channel formed in the tip and in fluid communication with the sample chamber for loading a liquid sample into the sample chamber and a droplet ejection nozzle in fluid communication with the sample chamber for ejecting a droplet of the liquid sample from the sample chamber. The liquid sample dispensing system further includes an actuator coupled to the sample chamber of one or more of the dispensing pins for forming one or more droplets upon activation of the actuator.

BRIEF DESCRIPTION OF THE FIGURES

[0014] FIG. 1 is a schematic view of a droplet dispensing system according to the teachings of the present invention.

[0015] FIG. 2 is a perspective view of a droplet dispensing system according to the teachings of the present invention, comprising an array of dispensing pins connected to a holder.

[0016] FIG. 3 is an exploded perspective view of the tip of the dispensing pin employed in the droplet dispensing system of FIG. 1.

[0017] FIG. 4 is a cross-sectional view of tip of the dispensing pin of FIG. 3.

[0018] FIG. 5 is an exploded detailed view of an alternate embodiment of the droplet dispensing system, where the filling channel is formed by two interacting pin structures.

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENT

[0019] The present invention provides a droplet dispensing system for forming and dispensing liquid droplets of a sample for fluidic systems. The droplet dispensing system of the present invention provides precise sample uptake and delivery of a liquid sample to a sample handling system in the form of sub-micron-sized droplets. The droplet dispensing system is suitable for use in a basic research or a commercial environment. The droplet dispensing system significantly improves sample introduction into a sample handling system by increasing the efficiency, speed and controllability of forming and dispensing droplets while significantly reducing waste and contamination. Those skilled in the art will appreciate that the present invention may be implemented in a number of different applications and embodiments and is not specifically limited in its application to the particular embodiment depicted herein.

[0020] The droplet dispensing system of the present invention provides significant improvements over prior pin-based dispensing systems, which require direct contact to dispense a sample, and capillary-based dispensing systems. Capillary-based dispensing that produce droplets by means of air pressure or a remote actuator are limited to formation of large-sized droplets in the range of ten nanoliters to one microliter. Other capillary-based systems that include actuators near the tips are filled from behind the tip and generally take a long time, between ten and thirty minutes, to fill. In contrast, the droplet dispensing system of the present invention includes a filling channel and a droplet ejection actuator co-located on the end of a dispensing pin. In this manner, filling of the dispensing system is accomplished rapidly. Furthermore, the dispensing system of the present invention is capable of forming small, sub-nanoliter sized droplets.

[0021] FIG. 1 illustrates the droplet dispensing system 10 of the illustrative embodiment. The droplet dispensing system comprises a dispensing pin 11 mounted in a holder 12. The droplet dispensing system 10 forms and dispenses droplets of a selected liquid sample to allow a controlled introduction of a fluid sample to a sample handling system. The sample droplets are formed and propelled ballistically from the tip 13 of the dispensing pin 11, the details of which are described below. The holder 12 can include electronics 15 comprising a control circuit for supplying a droplet ejection signal to an actuator for triggering formation and ejection of a droplet of a liquid sample from the tip 13. An electrical connector 16 provides an electrical connection between the electronics 15 and the actuator for transmitting the droplet ejection signal between the control circuit and the actuator. The details regarding the formation and ejection of droplets from the tip 13 under the control of the electronics 15 are described below. As used herein, the term holder is intended to include any structure suitable for holding or retaining in a fixed or removable and replaceable manner one or more dispensing pins.

[0022] The pin 11 of the illustrative embodiment comprises an elongated structure having a tip 13 with a diameter of about one millimeter. According to the illustrative embodiment, sample loading is accomplished by immersing the tip 13 of the dispensing pin 11 into a reservoir 14 containing the desired liquid sample. One skilled in the art will recognize that the tip 13 may have any diameter, for

example, up to several millimeters, suitable for dipping into a reservoir of liquid and for holding liquid there within.

[0023] The tip **13** of the dispensing pin **11** contains a sample chamber that holds a predetermined volume of biological or chemical sample, a filling channel for filling the sample chamber, an actuator and an ejection nozzle. The tip **13** is immersed in a biochemical sample such that a predefined volume of sample fills the filling channel and the sample chamber of each pin. The droplet dispensing system **10** is then moved in proximity to a fluid interface port of a sample handling system, such as a microfluidic system or a printing substrate. An actuator disposed within the chamber is selectively activated to form and dispense droplets of the sample from the pin tip, which forms an ejection nozzle. The droplet dispensing system **10** propels droplets at a predetermined and if desired controllable velocity, and along a selected path, to introduce the liquid sample into a microfluidic system.

[0024] According to an alternate embodiment of the invention, shown in **FIG. 2**, the pin dispensing system **100** can comprise an array **110** of dispensing pins **11** arranged in a holder **120** for allowing simultaneous formation and dispensing of a plurality of samples. In a pin dispensing system **100** having an array of dispensing pins **11**, each dispensing pin may be individually controlled by a corresponding control circuit **150**. Alternatively, a group of dispensing pins may be simultaneously controlled by common control circuit. The droplet dispensing system may comprise any suitable number of dispensing pins **11** arranged in any suitable configuration, depending on the particular application. The array of pin dispensing systems of an illustrative embodiment of the present invention may be manufactured from a substrate, such as a silicon wafer, using any suitable microfabrication technique, such as photolithography.

[0025] The droplet dispensing system **10** of the illustrative embodiment of the present invention may be utilized as a spotting system for printing or discharging arrays of biochemicals, such as nucleic acid molecules or proteins, or other suitable liquid samples to a sample handling system, such as a printing substrate, titre plate, microfluidic system or device, and the like for use in proteomics, genomics, screening, diagnostics and other applications. After the pin tip **13** acquires a droplet, the pin tip **13** is moved in close proximity to a surface. The surface may comprise a solid surface or a liquid. The surface may comprise a porous structure, such as a porous membrane, or a non-porous structure, such as a microscope slide. The loaded pin or pins deposit a spot on the surface having a selected spot volume by direct contact between the pin tip **13** and the surface. According to the illustrative embodiment, the volume of the dispensed spot is significantly smaller than the volume of the acquired liquid sample, and is generally sub-nanoliter in volume, though one skilled in the art will recognize that the invention is not limited to this range.

[0026] **FIG. 3** is a detailed view of the tip **13** of the dispensing pin **11** of the droplet dispensing system **10** according to a first embodiment of the invention. The tip **13** includes both a filling structure for loading the droplet dispensing system with a liquid sample and a separate droplet actuation structure for forming and ejecting droplets of the liquid sample from the tip of the dispensing pin. As

shown in **FIG. 3**, a filling channel **20** is formed in the tip **13** for uptaking sample through an intake port **22**, illustrated as a filling nozzle, from a reservoir containing a selected liquid sample. The filling channel preferably uptakes sample by employing capillary forces. The filling channel **20** communicates with a sample chamber **21** formed in the tip **13**. The sample chamber **21** has a tapered end forming a droplet ejection nozzle **23**. The ejection nozzle **23** includes an ejection port **25** sized and dimensioned to form droplets from a liquid sample in the sample chamber. As shown, the ejection nozzle is positioned in close proximity to and in fluid communication with the sample chamber **21**. The tip further includes an actuator **24** adjacent to and contacting the sample chamber. The actuator applies a force to the sample chamber sufficient to cause formation and ejection of a liquid droplet through the ejection nozzle **23**. The actuator **24** is selectively activated by the electronics in the pin holder and dispenses droplets from the ejection nozzle on demand. As illustrated, the tip **13** forms a continuous fluid path between the intake port **22**, formed at the tip of the filling channel **20**, and the ejection port **25**, formed in the droplet ejection nozzle **23**. Those of ordinary skill will readily recognize that the chamber can have any selected shape, and can be sited and dimensioned according to the particular application. Furthermore, the dispensing pin **11** may also include a plurality of sample chamber **21** formed in the tip of the pin.

[0027] Filling of the pin tip with a liquid sample is accomplished easily, flexibly and rapidly by submerging the filling nozzle **22** in a liquid sample supply. Liquid sample is drawn up the filling channel **20** and passes into the connected sample chamber **21**. According to the illustrative embodiment, the filling channel **20** is sized and dimensioned so that capillary forces automatically draw the liquid sample through the filling channel **20** and into the sample chamber **21**. According to an alternate embodiment, filling is effected by a pumping action provided by the actuator **24**. The volume of sample that is loaded depends on the length of time that the tip is submerged in the reservoir, the size of the filling channel and chamber, and the force applied to the channel. The internal volume of the filling channel **20** and the sample chamber **21** define the maximum volume of sample that can be loaded into the tip. Those of ordinary skill will readily recognize that the intake port **20** can be formed at a number of different locations.

[0028] The droplet dispensing system **10** is capable of dispensing and discharging or propelling droplets rapidly and efficiently to a sample handling system. After the tip is filled with a liquid sample, the droplet dispensing system **10** forms and dispenses droplet of a sample liquid from the sample chamber **21** on demand by activating the actuator **24**. According to the illustrative embodiment, the actuator **24** comprises a piezoelectric film affixed to a side wall of the sample chamber **21** directly adjacent to the ejection nozzle **23**. The control circuit in the holder electronics produces a droplet ejection signal, which is applied through the electrical connector **16** to energize the actuator **24**. When a voltage is applied to the piezoelectric film, the piezoelectric film deflects. The deflection of the piezoelectric film generates a force on the sample chamber **21**, which produces and ejects a droplet from the ejection nozzle **23** through the ejection port **25**. One skilled in the art will recognize that the actuator **24** is not limited to a piezoelectric actuator and that any suitable actuator for ejecting a droplet from a nozzle

may be utilized, such as the variety of actuators used in ink jet printing systems. For example, the actuator may comprise an electromechanical actuator, a magnetic actuator, a thermoelectric actuator or any suitable actuator for forming and ejecting a droplet from an ejection nozzle.

[0029] According to the illustrative embodiment, the shape of the ejection nozzle **23** and sample chamber **21**, including the size and shape of the nozzle outlet port **25**, determine the size and velocity of the formed droplet. The combined volume of the filling channel **20** and the sample chamber **21** determine the supply of liquid sample stored in the dispensing system with each complete filling. According to the illustrative embodiment, the interior volume of the filling channel **20** and the sample chamber **21** is between about one and about ten nanoliters. One skilled in the art will recognize that the filling channel, including the intake port, and sample chamber are not limited to the illustrated configuration and that alterations and variations may be made without departing from the scope of the present invention.

[0030] The tapered droplet ejection nozzle **23** formed at the end of the sample chamber **21** is designed to accelerate and direct the flow of liquid from the sample chamber, such that droplets are propelled ballistically from the tip **13** of the dispensing pin **11**. The ejection nozzle **23** and ejection port are sized and dimensioned so that liquid is generally held in by capillary forces and forced out only on demand, by calculatingly activating the actuator **24**. According to the illustrative embodiment, the nozzle ejection port **25** has a diameter between about thirty and about fifty microns, resulting in a droplet having a diameter of about forty-five microns and a volume between of about thirty-five picoliters. One skilled in the art will recognize that variations of these dimensions are within the scope of the invention and that the volumes and dimensions may be varied to suit a particular application. The sample chamber **21** and filling channel **20** may be sized and dimensioned to produce between 10 and 10,000 droplets per filling, of any selected size, depending on the particular application.

[0031] According to the illustrative embodiment, the droplet ejection nozzle **23** and the intake port **22** are co-fabricated on the dispensing tip **13** to form a continuous fluid path through the dispensing pin tip **13** for loading a supply of a liquid sample and dispensing the liquid sample in the form of liquid droplets. The intake port **22** and the ejection nozzle **23** are positioned separately on the tip, such that the intake port **22** is capable of being immersed in a sample reservoir without requiring simultaneous immersion of the ejection nozzle **23**. As shown, both nozzles **22** and **23** are formed in the tip of the dispensing pin, but the filling nozzle **22** extends a predetermined distance beyond the ejection nozzle **23**. In this manner, the tip **13** can be loaded with a predetermined amount of liquid sample by immersing only the filling nozzle, without requiring immersion and possible contamination of the ejection nozzle as well.

[0032] FIG. 4 is a cross-sectional view of the pin tip **13** of FIG. 3 along line A-A. As illustrated, the tip **13** comprises a silicon substrate **30**. According to the illustrative embodiment, the droplet dispensing system is fabricated from a silicon wafer using a standard photolithography process. One skilled in the art will recognize that alternative materials and manufacturing techniques may be utilized. For example, the pin dispensing system may be made out of glass, plastic or any other suitable material.

[0033] To form the droplet dispensing system of the illustrative embodiment, a silicon substrate **30** is provided. The substrate is etched to form the filling channel **20**, the sample chamber **21** and the ejection nozzle **23**. A top layer **31** of silicon is bonded to the substrate after formation of the filling channel **20** and sample chamber **21** to cover and seal the etched channel and chamber. The actuator **24** is deposited on the exterior surface of the top layer **31**, adjacent to the sample chamber **21** and in proximity to the ejection nozzle **23**, such that a force produced by the actuator **24** is translated to the sample chamber **21** to form a droplet and propel the droplet from the ejection nozzle ballistically. As discussed, an electrical connector is provided to electrically connect the actuator **24** to a control circuit to allow transmission of a droplet ejection signal to the actuator **24**. Those of ordinary skill will readily recognize that the tip can be manufactured and configured in a variety of different ways, such as by any conventional microfabrication technique, including photolithography.

[0034] The droplet dispensing system **10** may also be utilized with a variety of applications requiring application of a liquid sample. Once the sample is loaded in the dispensing tip **13**, the dispensing pin **11** or dispensing pins are brought into proximity with a fluid interface port of a sample handling system. The droplet dispensing system of the illustrative embodiment may be utilized to form droplets of a liquid sample and introduce droplets to a microfluidic system. For example, the droplet dispensing system **10** may be utilized to supply droplets to a micro-chip having a virtual wall interface port, as described in U.S. Provisional Patent Application No. 60/299,515, entitled Methods For Forming A Microscale Virtual Wall And Use Of Said Wall In Microfluidic Applications, the contents of which are incorporated by reference herein. Briefly, U.S. Provisional Patent Application No. 60/299,515 describes a microfluidic system having a fluid interface port comprising an aperture sized and dimensioned to form a virtual wall in the sidewall of a microchannel. The droplet dispensing system of the illustrative embodiment may be utilized to form and propel droplets towards the virtual wall in order to introduce a liquid sample to the interior of a microchannel. Alternatively, the droplet dispensing system **10** may be utilized to introduce a liquid sample to a sample reservoir in a microfluidic system, such as a well. According to another application, the droplet dispensing system may be utilized in spotting applications for printing arrays of biochemical substances on a printing substrate, such as described in U.S. Pat. No. 6,101,946.

[0035] FIG. 5 is a detailed exploded view of a droplet dispensing system **40** according to an alternate embodiment of the invention, where the filling and droplet actuation mechanisms are formed in the tips of two interacting pins. As illustrated, the droplet dispensing mechanism is formed using two separately movable pins, a first pin **41** and a dispensing pin **42**. The pins **41** and **42** are positioned relative to each other so as to form a filling channel **43** and filling nozzle **44** between the tips of the pins. The tip of the dispensing pin **42** includes a sample chamber **45** in fluid communication with the filling channel **43** and further includes a droplet ejection nozzle **46** formed in the tip of the pin **42** and an actuator **47** for forming droplets of a liquid sample, which are ejected from the tip of the pin **42** through an ejection port **48** in the droplet ejection nozzle **46**. The separation distance D between the pins **41** and **42** is movable

to increase or decrease the amount of sample acquired during filling. For example, if more sample volume per filling is desired, the separation distance is increased, thereby increasing the volume of the filling channel 43 and allowing a larger volume of liquid sample to be stored and subsequently dispensed.

[0036] The droplet dispensing system 40 of the illustrative embodiment provides significant improvements to the process of introducing a liquid sample to a sample handling system. The illustrative configuration limits dead volume between the filling channel and the sample chamber to more efficiently utilize a sample and reduce waste of the sample. The location of the actuator near the droplet ejection nozzle ensures that small droplets are formed thereby increasing the controllability and efficiency of the sample dispensing process. The flow-through design of the fluid path ensures that sample is not wasted and that the entire loaded liquid sample in the tip is utilized.

[0037] The illustrative embodiment significantly improves and enhances the ability to control the formation of droplets by allowing digital control of the quantity of dispensed sample. The droplet dispensing system forms and ejects droplets on demand having a predetermined and precisely controlled volume. The volume of dispensed sample is easily modified by varying the number of droplets dispensed. For example, if a larger volume of sample is required, the actuator is activated more frequently to produce more droplets. Furthermore, the ability to produce droplets of a liquid sample on demand provides efficient utilization of resources.

[0038] The droplet dispensing system also allows dispensing of a liquid sample without requiring direct contact between the sample dispenser and a substrate or fluid interface port. The droplet dispensing system forms, propels and directs droplets with precision. The droplet dispensing system further provides rapid, easy and efficient filling and ejection of a liquid sample in controlled volumes, without requiring complicated mechanisms or machinery.

[0039] Another advantage of the droplet dispensing system of the present invention concerns the cleaning of the system after use. The flow-through design of the fluid path, including a separate intake port and ejection port, allows for cleaning solution to flush through the system, thereby reducing contaminants significantly. To clean the droplet dispensing system, the pin tip is dipped into a reservoir of cleaning solution. The actuator may be activated continuously to pump cleaning solution through the filling channel and sample chamber and out through the ejection nozzle. By flushing contaminants through the tip of the dispensing pin, the illustrative droplet dispensing system provides significant advantages over prior dispensing systems. Furthermore, the use of silicon to form the interior fluid path allows for more vigorous cleaning solutions to be utilized without degrading the system.

[0040] The present invention has been described relative to an illustrative embodiment. Since certain changes may be made in the above constructions without departing from the scope of the invention, it is intended that all matter contained in the above description or shown in the accompanying drawings be interpreted as illustrative and not in a limiting sense.

[0041] It is also to be understood that the following claims are to cover all generic and specific features of the invention

described herein, and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

1. A droplet dispensing system, comprising:

a first pin having a tip; and

a dispensing pin having a tip and spaced adjacent to the first pin so as to form a sample filling channel between the first and second pin, the dispensing pin tip having a sample chamber located in fluid communication with the sample filling channel, an ejection nozzle for ejecting a droplet from the sample chamber, and an actuator for triggering formation and ejection of a droplet from the ejection nozzle.

2. The droplet dispensing system of claim 1, wherein the first pin and the second pin are movable relative to each other, so as to vary the size of the sample filling channel.

3. The sample dispensing system of claim 1, wherein the first pin tip and the dispensing pin tip have a diameter between about 0.5 millimeters and about 5 millimeters.

4. The sample dispensing system of claim 3, wherein the dispensing pin tip diameter is about 1.0 millimeters.

5. The sample dispensing system of claim 1, further comprising a holder for mounting the first pin and the dispensing pin.

6. The sample dispensing system of claim 5, wherein the holder contains a control circuit for activating the actuator.

7. The sample dispensing system of claim 6, further comprising an electrical connector for providing an electrical connection between the control circuit and the actuator.

8. The sample dispensing system of claim 1, wherein the first pin and the dispensing pin are formed from a silicon wafer.

9. The sample dispensing system of claim 1, wherein the filling channel includes a filling nozzle for introducing a liquid sample to the filling channel.

10. The sample dispensing system of claim 9, wherein the filling nozzle extends beyond the ejection nozzle, such that when the first pin tip and the dispensing pin tip are dipped into a reservoir, the filling nozzle is immersed in a liquid supply without immersing the ejection nozzle of the dispensing tip.

11. The sample dispensing system of claim 1, wherein the droplet ejection nozzle has an ejection port, said ejection port having a diameter between about thirty and about fifty microns.

12. The sample dispensing system of claim 1, wherein the actuator comprises a piezoelectric film affixed to a side wall of the sample chamber.

13. The sample dispensing system of claim 1, wherein the actuator comprises an electromechanical assembly for effecting ejection of a droplet from the ejection nozzle.

14. The sample dispensing system of claim 1, wherein the actuator comprises a magnetic assembly for effecting ejection of a droplet from the ejection nozzle.

15. The sample dispensing system of claim 1, wherein the actuator comprises a thermoelectric assembly for effecting ejection of a droplet from the ejection nozzle.

16. The sample dispensing system of claim 1, wherein the filling channel and the sample chamber have a combined volume of between about 1 nanoliter and about 10 nanoliters.

17. A method of forming and dispensing droplets of a liquid sample, comprising:

providing a droplet dispensing system comprising a pin having a tip, said tip forming a filling channel for filling the tip with a predetermined volume of liquid sample, a sample chamber for holding a predetermined volume of liquid sample, an ejection nozzle and an actuator for effecting formation of a droplet from said volume of liquid sample; and

activating the actuator to produce a droplet of liquid sample at the sample ejection nozzle.

18. The method of claim 17, further comprising the step of filling the tip with a liquid sample prior to the step of activating the actuator.

19. The method of claim 18, wherein the step of filling the tip comprises the step of immersing the tip in a reservoir containing a supply of liquid sample.

20. The method of claim 19, wherein the step of immersing comprises immersing an intake port of the filling channel without immersing the ejection nozzle.

21. The method of claim 19, wherein the step of filling comprises activating the actuator to pump a liquid sample into the filling channel.

22. The method of claim 17, wherein the step of activating the actuator comprises transmitting a droplet ejection signal to the actuator from a control circuit.

23. The method of claim 17, further comprising the step of directing the droplet of liquid sample to a fluid interface port.

24. A sample dispensing system, comprising:

a dispensing pin having a tip;

a substantially U-shaped fluid path formed in the tip of the dispensing pin for conveying a liquid sample; and

an actuator coupled to a portion of the fluid path for forming a droplet of the liquid sample upon activation of the actuator.

25. The sample dispensing system of claim 24, wherein said fluid path comprises:

a sample chamber for holding a predetermined volume of sample,

a sample filling channel in fluid communication with the sample chamber for loading a liquid sample into the sample chamber; and

a droplet ejection port in fluid communication with the sample chamber for ejecting a droplet of the liquid sample from the sample chamber.

26. The sample dispensing system of claim 25, wherein the droplet ejection port forms a nozzle.

27. A sample dispensing system, comprising:

a holder; and

a dispensing pin having a first end coupled to the holder and a second end forming a tip, wherein the tip includes a sample chamber formed in the tip for holding a predetermined volume of sample, a sample filling channel in fluid communication with the sample chamber for loading a liquid sample into the sample chamber, and a droplet ejection nozzle in fluid communication with the sample chamber for ejecting a droplet of the liquid sample from the sample chamber.

* * * * *