



(51) International Patent Classification:

H01R 4/50 (2006.01) H01R 43/26 (2006.01)

(21) International Application Number:

PCT/US2018/030439

(22) International Filing Date:

01 May 2018 (01.05.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/503,695 09 May 2017 (09.05.2017) US  
15/961,422 24 April 2018 (24.04.2018) US

(71) Applicants: **TE CONNECTIVITY CORPORATION**  
[US/US]; 1050 Westlakes Drive, Berwyn, PA 19312 (US).

**TYCO ELECTRONICS CANADA ULC** [CA/CA]; 20 Esna Park Drive, Markham, Ontario L3R 1E1 (CA).

(72) Inventors: **MURUGIAH, Sachidanandan**; 97 Greenwood Road, Stouffville, Ontario L4A 0N8 (CA). **JOHNSON, Barry James**; 1 Fraserwood Road, Vaughan, Ontario L4J 9C4 (CA). **MITCHELL, Steve**; 2627 Sherrie Lane, Thompsons Station, TN 37179 (US). **GUPPY, Jonathan**; 45 Armando Drive, Markham, Ontario L6E 2G8 (CA).

(74) Agent: **BEATTY, David D.**; THE WHITAKER, LLC, 4550 Linden Hall Road, Suite 140, Wilmington, DE 19808 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

(54) Title: WEDGE CONNECTOR ASSEMBLY AND METHOD THEREOF

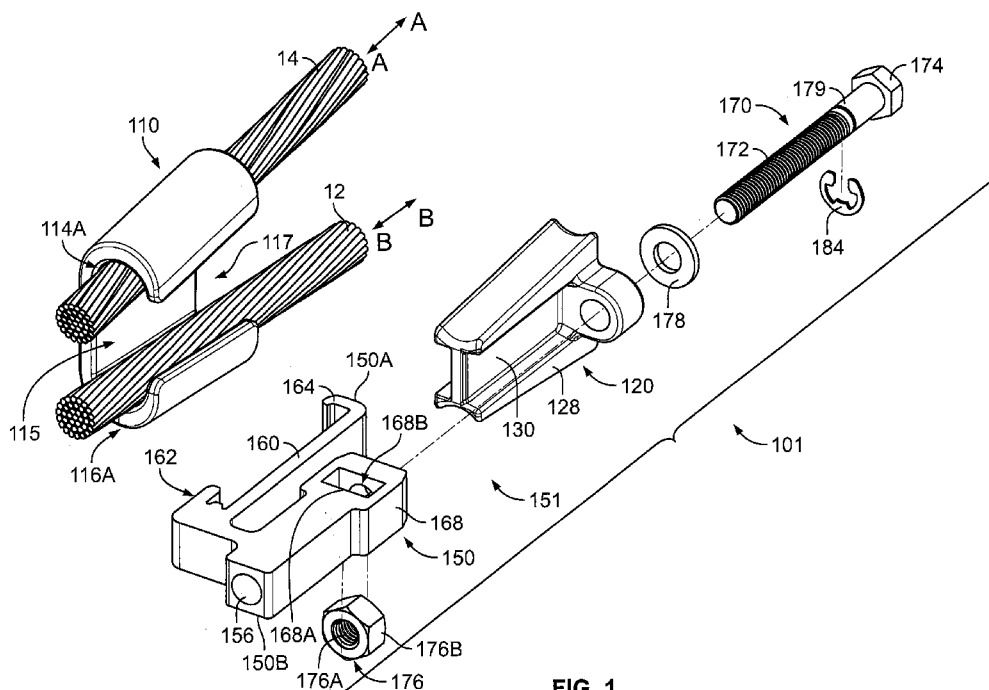


FIG. 1

(57) Abstract: A wedge connector system for connecting first and second elongate electrical conductors includes a C-shaped sleeve member, a wedge member and a locking mechanism. The sleeve member defines a sleeve cavity and opposed first and second sleeve channels on either side of the sleeve cavity. The wedge member includes a wedge body having first and second opposed wedge side walls. The locking mechanism includes a lock member including a sleeve engagement portion, and a clamping mechanism coupled to the wedge member. The sleeve member and the wedge member are configured to capture the first and second conductors such that the first conductor is received in the first sleeve channel between the sleeve member and the first wedge side wall and the second conductor is received in the second sleeve channel between the sleeve member and the second wedge side wall. The locking mechanism is mountable on the sleeve member and the wedge member such that the sleeve engagement portion interlocks with the sleeve member



WO 2018/208540 A1

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## WEDGE CONNECTOR ASSEMBLY AND METHOD THEREOF

## RELATED APPLICATION(S)

**[0001]** The present application claims the benefit of and priority from U.S. Provisional Patent Application No. 62/503,695, filed May 9, 2017, the disclosure of which is incorporated herein by reference in its entirety.

## FIELD OF THE INVENTION

**[0002]** The present invention relates to electrical connectors and, more particularly, to power utility electrical connectors and methods and connections including the same.

## BACKGROUND OF THE INVENTION

**[0003]** Electrical utility firms constructing, operating and maintaining overhead and/or underground power distribution networks and systems utilize connectors to tap main power transmission conductors and feed electrical power to distribution line conductors, sometimes referred to as tap conductors. The main power line conductors and the tap conductors are typically high voltage cables that are relatively large in diameter, and the main power line conductor may be differently sized from the tap conductor, requiring specially designed connector components to adequately connect tap conductors to main power line conductors. Generally speaking, four types of connectors are commonly used for such purposes, namely bolt-on connectors, compression-type connectors, wedge connectors, and transverse wedge connectors.

**[0004]** Bolt-on connectors typically employ die-cast metal connector pieces or connector halves formed as mirror images of one another, sometimes referred to as clam shell connectors. Each of the connector halves defines opposing channels that axially receive the main power conductor and the tap conductor, respectively, and the connector halves are bolted to one another to clamp the metal connector pieces to the conductors.

**[0005]** Compression connectors, instead of utilizing separate connector pieces, may include a single metal piece connector that is bent or deformed around the main power conductor and the tap conductor to clamp them to one another.

**[0006]** Wedge connectors are also known that include a C-shaped channel member that hooks over the main power conductor and the tap conductor, and a wedge member

having channels in its opposing sides is driven through the C-shaped member, deflecting the ends of the C-shaped member and clamping the conductors between the channels in the wedge member and the ends of the C-shaped member. One such wedge connector is commercially available from TE Connectivity and is known as an AMPACT Tap or Stirrup Connector. AMPACT connectors include different sized channel members to accommodate a set range of conductor sizes, and multiple wedge sizes for each channel member. Each wedge accommodates a different conductor size.

[0007] Exemplary transverse wedge connectors are disclosed in U.S. Patent Nos. 8,176,625, 7,997,943, 7,862,390, 7,845,990, 7,686,661, 7,677,933, 7,494,385, 7,387,546, 7,309,263, and 7,182,653.

#### SUMMARY OF THE INVENTION

[0008] According to embodiments of the present invention, a wedge connector system for connecting first and second elongate electrical conductors includes a C-shaped sleeve member, a wedge member and a locking mechanism. The sleeve member defines a sleeve cavity and opposed first and second sleeve channels on either side of the sleeve cavity. The wedge member includes a wedge body having first and second opposed wedge side walls. The locking mechanism includes a lock member including a sleeve engagement portion, and a clamping mechanism coupled to the wedge member. The sleeve member and the wedge member are configured to capture the first and second conductors such that the first conductor is received in the first sleeve channel between the sleeve member and the first wedge side wall and the second conductor is received in the second sleeve channel between the sleeve member and the second wedge side wall. The locking mechanism is mountable on the sleeve member and the wedge member such that the sleeve engagement portion interlocks with the sleeve member and the clamping mechanism can be operated to force the wedge member into the sleeve cavity to apply clamping loads on the first and second conductors.

[0009] According to embodiments of the present invention, a method for connecting first and second elongate electrical conductors includes providing a wedge connector assembly including: a C-shaped sleeve member defining a sleeve cavity and opposed first and second sleeve channels on either side of the sleeve cavity; a wedge member including a wedge body having first and second opposed wedge side walls; and a locking mechanism. The locking mechanism includes a lock member including a sleeve engagement portion, and a clamping mechanism coupled to the wedge member. The method further includes: using the sleeve member and the wedge member, capturing the first and second conductors such

that the first conductor is received in the first sleeve channel between the sleeve member and the first wedge side wall and the second conductor is received in the second sleeve channel between the sleeve member and the second wedge side wall; and mounting the locking mechanism on the sleeve member and the wedge member such that the sleeve engagement portion interlocks with the sleeve member; and thereafter operating the clamping mechanism to force the wedge member into the sleeve cavity to apply clamping loads on the first and second conductors.

**[0010]** According to embodiments of the present invention, an electrical connection includes a wedge connector assembly and first and second elongate electrical conductors. The wedge connector assembly includes: a C-shaped sleeve member defining a sleeve cavity and opposed first and second sleeve channels on either side of the sleeve cavity; a wedge member including a wedge body having first and second opposed wedge side walls; and a locking mechanism. The locking mechanism includes a lock member including a sleeve engagement portion, and a clamping mechanism coupled to the wedge member. The first and second elongate electrical conductors are captured between the sleeve member and the wedge member such that the first conductor is received in the first sleeve channel between the sleeve member and the first wedge side wall and the second conductor is received in the second sleeve channel between the sleeve member and the second wedge side wall. The locking mechanism is mounted on the sleeve member and the wedge member such that the sleeve engagement portion interlocks with the sleeve member. The clamping mechanism secures the wedge member in the sleeve cavity to apply clamping loads on the first and second conductors.

**[0011]** Further features, advantages and details of the present invention will be appreciated by those of ordinary skill in the art from a reading of the figures and the detailed description of the preferred embodiments that follow, such description being merely illustrative of the present invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0012]** **FIG. 1** is an exploded, front perspective view of a wedge connector system according to embodiments of the invention and a pair of conductors.

**[0013]** **FIG. 2** is a front perspective view of the wedge connector system of **FIG. 1** illustrating installation of the wedge connector system on the conductors.

**[0014]** **FIG. 3** is a front perspective view of a connection including a wedge connector assembly formed from the wedge connector system of **FIG. 1**.

[0015] FIG. 4 is a front perspective view of the wedge connector assembly of FIG. 3 from an opposing side of the wedge connector assembly.

[0016] FIG. 5 is a cross-sectional view of the wedge connector assembly of FIG. 3 taken along the line 5-5 of FIG. 3.

[0017] FIG. 6 is a cross-sectional view of the wedge connector assembly of FIG. 3 taken along the line 6-6 of FIG. 5.

[0018] FIG. 7 is a side view of a sleeve member forming a part of the wedge connector system of FIG. 1.

[0019] FIG. 8 is rear perspective view of a wedge member forming a part of the wedge connector system of FIG. 1.

[0020] FIG. 9 is an exploded, front perspective view of a wedge connector system according to further embodiments of the invention and a pair of conductors.

[0021] FIG. 10 is a cross-sectional view of the wedge connector assembly of FIG. 9 taken along the line 10-10 of FIG. 9.

[0022] FIG. 11 is an exploded, front perspective view of a wedge connector system according to further embodiments of the invention and a pair of conductors.

[0023] FIG. 12 is a cross-sectional view of the wedge connector assembly of FIG. 11 taken along the line 12-12 of FIG. 11.

[0024] FIG. 13 is an exploded, front perspective view of a wedge connector system according to further embodiments of the invention and a pair of conductors.

[0025] FIG. 14 is a cross-sectional view of the wedge connector assembly of FIG. 13 taken along the line 14-14 of FIG. 13.

[0026] FIG. 15 is a front perspective view of a wedge connector system and wedge connector assembly according to further embodiments of the invention.

[0027] FIG. 16 is an exploded, front perspective view of the wedge connector system of FIG. 15.

[0028] FIG. 17 is an exploded, rear perspective view of the wedge connector system of FIG. 15.

[0029] FIG. 18 is a side view of a lock member forming a part of the wedge connector system of FIG. 15.

[0030] FIG. 19 is a side view of a drive bolt and a retainer clip forming a part of the wedge connector system of FIG. 15.

[0031] FIG. 20 is side view of the wedge connector system of FIG. 15 mounted on a pair of conductors, wherein the wedge connector system is in an open position.

[0032] FIG. 21 is a side view, from a side opposite the view of FIG. 20, of a connection including the wedge connector assembly formed from the wedge connector system of FIG. 15.

[0033] FIG. 22 is a cross-sectional view of the connection of FIG. 21 taken along the line 22-22 of FIG. 21.

[0034] FIG. 23 is a front perspective view of a wedge connector system and wedge connector assembly according to further embodiments of the invention.

[0035] FIG. 24 is an exploded, rear perspective view of the wedge connector system of FIG. 23.

[0036] FIG. 25 is an exploded, front perspective view of the wedge connector system of FIG. 23.

[0037] FIG. 26 is a side view of a lock member forming a part of the wedge connector system of FIG. 23.

[0038] FIG. 27 is side view of the wedge connector system of FIG. 23 mounted on a pair of conductors, wherein the wedge connector system is in an open position.

[0039] FIG. 28 is a side view, from a side opposite the view of FIG. 27, of a connection including the wedge connector assembly of FIG. 23.

[0040] FIG. 29 is a cross-sectional view of the connection of FIG. 28 taken along the line 29-29 of FIG. 28.

[0041] FIG. 30 is an exploded, rear perspective view of a wedge connector system according to further embodiments of the invention.

[0042] FIG. 31 is a side view of a lock member forming a part of the wedge connector system of FIG. 30.

[0043] FIG. 32 is a cross-sectional view of a connection including the wedge connector system of FIG. 30 taken along the line 32-32 of FIG. 30.

#### DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0044] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which illustrative embodiments of the invention are shown. In the drawings, the relative sizes of regions or features may be exaggerated for clarity. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

**[0045]** It will be understood that when an element is referred to as being "coupled" or "connected" to another element, it can be directly coupled or connected to the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly coupled" or "directly connected" to another element, there are no intervening elements present. Like numbers refer to like elements throughout.

**[0046]** In addition, spatially relative terms, such as "under", "below", "lower", "over", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "under" or "beneath" other elements or features would then be oriented "over" the other elements or features. Thus, the exemplary term "under" can encompass both an orientation of over and under. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

**[0047]** The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. As used herein the expression "and/or" includes any and all combinations of one or more of the associated listed items.

**[0048]** Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of this disclosure and the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

**[0049]** As used herein, "monolithic" means an object that is a single, unitary piece formed or composed of a material without joints or seams.

**[0050]** With reference to **FIGS. 1-8**, a wedge connector system or kit **101** and a wedge connector assembly **100** according to embodiments of the present invention is shown



therein. The wedge connector system **101** can be used to form a connection **5** (**FIGS. 3-6**) including a pair of elongate electrical conductors **12, 14** (*e.g.*, electrical power lines) mechanically and electrically coupled by the wedge connector assembly **100**. The connector assembly **100** may be adapted for use as a tap connector for connecting an elongate tap conductor **12** to an elongate main conductor **14** of a utility power distribution system, for example.

[0051] The tap conductor **12**, sometimes referred to as a distribution conductor, may be a known electrically conductive metal high voltage cable or line having a generally cylindrical form in an exemplary embodiment. The main conductor **14** may also be a generally cylindrical high voltage cable line. The tap conductor **12** and the main conductor **14** may be of the same wire gage or different wire gage in different applications and the connector assembly **100** is adapted to accommodate a range of wire gages for each of the tap conductor **12** and the main conductor **14**. The conductor **12** has a lengthwise axis **B-B** and the conductor **14** has a lengthwise axis **A-A**.

[0052] When installed to the tap conductor **12** and the main conductor **14**, the connector assembly **100** provides electrical connectivity between the main conductor **14** and the tap conductor **12** to feed electrical power from the main conductor **14** to the tap conductor **12** in, for example, an electrical utility power distribution system. The power distribution system may include a number of main conductors **14** of the same or different wire gage, and a number of tap conductors **12** of the same or different wire gage.

[0053] The conductors **12, 14** each include a plurality of separable elongate strands **12A, 14A**. Alternatively, one of the conductors **12, 14** may be solid.

[0054] With reference to **FIG. 1**, the wedge connector system **101**, and the wedge connector assembly **100** formed therefrom, include a C-shaped channel or sleeve member **110**, a wedge member **120**, a drive/lock mechanism **151**, and a retraction mechanism **181** (**FIG. 5**). The sleeve member **110** and the wedge member **120** are movable relative to one another to cooperatively mechanically capture the conductors **12, 14** therebetween and electrically connect the conductors **12, 14** to one another.

[0055] With reference to **FIG. 3**, the assembled connector assembly **100** has a lengthwise axis **L-L** and a transverse axis **M-M**.

[0056] The sleeve member **110** is C-shaped in cross-section. With reference to **FIG. 7**, the sleeve member **110** tapers inwardly from a rear end **110A** to a front end **110B**. The sleeve member **110** includes an arcuate first side wall or receiver or hook portion **114**, an arcuate second side wall or receiver or hook portion **116**, and a connecting portion or body

**112** extending therebetween. The hook portions **114**, **116** extend longitudinally along opposed side edges of the body **112**. The sleeve member **110** further includes an inner surface **118**. The sleeve member **110** forms a chamber or cavity **115** defined by the inner surface **118**. In some embodiments, the sleeve member **110** is resiliently flexible.

[0057] The first hook portion **114** forms a concave first sleeve member cradle or channel **114A** positioned at an end of the cavity **115**. The first channel **114A** is adapted to receive and make contact with the conductor **14** at an apex of the channel **114A**. The first hook portion **114** forms a radial bend that wraps around the conductor **14** for about 180 circumferential degrees in an exemplary embodiment, such that a distal end **114B** of the first hook portion **114** faces toward the second hook portion **116A**.

[0058] Similarly, the second hook portion **116** forms a concave second sleeve member cradle or channel **116A** positioned at an opposing end of the cavity **115** and opening to oppose the channel **114A**. The second channel **116A** is adapted to receive and make contact with the conductor **12** at an apex of the channel **116**. The second hook portion **116** forms a radial bend that wraps around the conductor **12** for about 180 circumferential degrees in an exemplary embodiment, such that a distal end **116B** of the second hook portion **116** faces toward the first hook portion **114**.

[0059] The distal ends **114B** and **116B** define a longitudinally extending slot **117** therebetween that opens into the chamber **115**.

[0060] With reference to **FIG. 7**, the sleeve member **110** has a lengthwise axis **LS-LS**. The first channel **114A** defines a channel axis **C1-C1**. The second channel **116A** defines a channel axis **C2-C2**. According to some embodiments and as illustrated, the channel axes **C1-C1** and **C2-C2** form an oblique angle relative to one another and, in some embodiments, the oblique angle is in the range of from about 10 to 12 degrees. According to some embodiments and as illustrated, the channel axes **C1-C1** and **C2-C2** form an oblique angle relative to the connector lengthwise axis **L-L**. When the connector assembly **100** is assembled, the channel axes **C1-C1** and **C2-C2** each extend transversely to and intersect the transverse axis **M-M**. According to some embodiments and as illustrated, the transverse axis **M-M** forms an oblique angle with each of the channel axes **C1-C1** and **C2-C2**. The side channels **114A**, **116A** taper inwardly or converge from the rear end **110A** to the front end **110B**.

[0061] With reference to **FIGS. 1** and **8**, the wedge member **120** includes a body **122** having opposed, arcuate clamping side faces or walls **124**, **126**, opposed end faces or walls

**123, 125**, and opposed outer and inner faces or walls **128, 129**. The wedge member **120** tapers inwardly from a relatively wide rear end **120A** to a relatively narrow front end **120B**.

[0062] The clamping side walls **124, 126** define opposed, concave grooves or channels **124A, 126A**. The channels **124A, 126A** taper inwardly or converge from the rear end **120A** to the front end **120B**.

[0063] The wedge member **120** has a lengthwise axis **LW-LW (FIG. 8)**. The channel **124A** defines a channel axis **C3-C3**. The channel **126A** defines a channel axis **C4-C4**. According to some embodiments and as illustrated, the channel axes **C3-C3** and **C4-C4** form an oblique angle relative to one another and, in some embodiments, the oblique angle is in the range of from about 10 to 12 degrees. According to some embodiments and as illustrated, the channel axes **C3-C3** and **C4-C4** form an oblique angle relative to the connector lengthwise axis **L-L**. When the connector assembly **100** is assembled, the channel axes **C3-C3** and **C4-C4** each extend transversely to and intersect the transverse axis **M-M**. According to some embodiments and as illustrated, the transverse axis **M-M** forms an oblique angle with each of the channel axes **C3-C3** and **C4-C4**.

[0064] An axially extending alignment slot **130** is defined in the outer wall **128**.

[0065] An axially extending guide slot **132** is defined in the inner wall **129**. Opposed, axially extending bearing ribs may be located on either side of the slot **132**. An axially extending deflection slot **134** is also defined in the inner wall **129** over and outward beyond the guide slot **132**.

[0066] An integral boss **136** is located proximate the rear end **120A**. The boss **136** projects outwardly from the body **122** in a direction transverse (*e.g.*, perpendicular) to the connector axis **L-L**. A bore **136A** extends through the boss **136** substantially parallel to the axis **L-L**. In some embodiments, the bore **136** is nonthreaded.

[0067] The lock mechanism includes a lock member **150**, a first drive member **170**, a cooperating second drive member **176**, and a split ring washer **178**. In some embodiments and as shown, the first drive member is a drive bolt **170** and the second drive member is a nut **176**. The drive bolt **170** and the nut **176** operate as a clamping mechanism.

[0068] The retraction mechanism **181** includes a rear engagement portion **164** (on the rear end of the lock member **150**), an annular retainer clip mount slot **179** (on the rear end of the drive bolt **170**), and a retainer member, ring or clip **184**.

[0069] With reference to **FIGS. 1** and **5**, the lock member **150** extends from a rear end **150A** to a front end **150B** along a lock member axis **LC-LC**. The lock member **150** includes a body **152**, an integral bolt receiving portion **154**, an integral guide rail **160**, an

integral hook or engagement portion **162**, and an integral nut holder portion **168**. The body **152** is located proximate the front end **150B** and extends transversely to the axis **LC-LC** from an outer end **152A** to an inner end **152B**.

[0070] The bolt receiving portion **154** is located proximate the outer end **152A** of the body **152** and extends rearwardly substantially parallel to the axis **LC-LC**. An extension portion **154A** extends forwardly from the body **152**. A bolt bore **156** extends through the bolt receiving portion **154**. In some embodiments, the bore **156** is nonthreaded.

[0071] The guide rail **160** is located at a midsection of the body **152** and extends rearwardly substantially parallel to the axis **LC-LC**. The guide rail **160** is a substantially flat, elongate plate. An integral, axially extending bearing rib may be located on the outer face of the guide rail.

[0072] The engagement portion **162** includes a sleeve slot **166** (FIG. 5).

[0073] The nut holder portion **168** includes a cavity **168B** and a side opening **168A** communicating with the cavity **168B**. Anti-rotation features in the form of flats **168C** (FIG. 5) are located in the cavity **168B**.

[0074] The bolt **170** (FIG. 1) has an externally threaded cylindrical shank, rod or shaft **172** and an integral driver engagement feature **174** on the rear end of the shaft **172**. The driver engagement feature **174** may be provided in the form of a geometric head (e.g., a hexagonal faceted head) or a geometric socket. The drive head **174** may be a hex head as illustrated, for example.

[0075] The annular retainer clip mount slot **179** is defined in the outer surface of the bolt **170** proximate the head **174**. The retainer clip **184** is seated in the slot **179**. The retainer clip **184** is thereby positioned on rear side of the boss **136**, opposite the bolt head **174**. The retainer clip **184** permits the bolt **170** to rotate about the bolt's lengthwise axis within and relative to the boss **136**, but limits relative forward axial displacement of the bolt **170** relative to the boss **136**. In this way, the retainer clip **184** prevents the bolt from moving forwardly out of the boss **136** beyond a relatively short prescribed distance.

[0076] The nut **176** includes an internally threaded bore **176A** and outer geometric engagement facets or faces **176B**. For example, the nut **176** may be a hex nut, as illustrated.

[0077] The sleeve member **110** may be formed of any suitable electrically conductive material. According to some embodiments, the sleeve member **110** is formed of metal. According to some embodiments, the sleeve member **110** formed of aluminum or steel. The sleeve member **110** may be formed using any suitable technique. According to some embodiments, the sleeve member **110** is monolithic and unitarily formed. According to some

embodiments, the sleeve member 110 is extruded and cut. Alternatively or additionally, the spring sleeve 110 may be stamped (*e.g.*, die-cut), cast and/or machined.

[0078] The wedge member 120 may be formed of any suitable material. According to some embodiments, the wedge member 120 is formed of metal. According to some embodiments, the wedge member 120 is formed of aluminum or copper alloy. The wedge member 120 may be formed using any suitable technique. According to some embodiments, the wedge member 120 is cast and/or machined.

[0079] The lock member 150 may be formed of any suitable material. According to some embodiments, the lock member 150 is formed of metal. According to some embodiments, the lock member 150 is formed of aluminum or copper alloy. The clamping member 150 may be formed using any suitable technique. According to some embodiments, the lock member 150 is cast and/or machined.

[0080] The sleeve member 110, the wedge member 120, and the lock member 150 may be separately fabricated from one another or otherwise formed into discrete connector components and are assembled to one another as explained below. While exemplary shapes of these components have been illustrated herein, it is recognized that they may be alternatively shaped in other embodiments as desired.

[0081] The bolt 170, the nut 176, and the retainer clip 184 may be formed of any suitable material. According to some embodiments, the bolt 170, the nut 176, and the retainer clip 184 are formed of metal. According to some embodiments, the bolt 170, the nut 176, and the retainer clip 184 are formed of aluminum or steel.

[0082] With reference to FIGS. 2-6, exemplary methods for assembling and using the connector assembly 100 in accordance with embodiments of the present invention will now be described.

[0083] The sleeve member 110, the wedge member 120, the lock member 150, the bolt 170, the nut 176, the washer 178, and the retainer clip 184 may each be manufactured as individual, discrete parts from the others, and thereafter assembled together. Each of the assembly steps may be executed in a factory or by an end user or installer.

[0084] The wedge member 120, the lock member 150, the bolt 170, the nut 176 the washer 178, and the retainer clip 184 are assembled together to form a wedge subassembly 153 (FIG. 2). More particularly, the guide rail 160 is slid into the guide slot 132 from the front end 120B. The nut 176 is inserted through the opening 168A and seated in the cavity 168B. The shaft 172 of the bolt 170 is inserted through the bore 136A and threadedly engages with the nut 176. The nut 176 is prevented from rotation with the bolt 170 by the

flats **168C**. The retainer clip **184** is installed in the slot **179** to axially secure or limit the bolt **170** relative to the wedge member **120**. The bolt **170** may be adjusted so that the guide rail **160** is captured in the guide slot **132** and the wedge subassembly **153** will maintain the arrangement as shown in **FIG. 2**.

[0085] In some embodiments, the wedge subassembly **153** is assembled at the factory and provided to the end user or installer assembled. In other embodiments, the wedge subassembly **153** is assembled by the end user and, in some embodiments, is assembled onsite at the location of the tap installation by the installer. The wedge subassembly **153** can assume an open position (as shown in **FIG. 2**) wherein the wedge member **120** is extended and the front end **120B** of the wedge member **120** is spaced a distance **D1** (**FIG. 2**) from the front end **150B** of the lock member **150**. The wedge subassembly **153** can alternatively assume a closed position (as shown in **FIGS. 3-6**) wherein the wedge member **120** is retracted and the front end **120B** of the wedge member **120** is spaced a distance **D2** (**FIG. 5**) from the front end **150B** of the lock member **150**. The distance **D2** is less than the distance **D1**.

[0086] As shown in **FIG. 2**, the C-shaped sleeve member **110** is placed over the conductor **12** such that the conductor **12** is received in the side channel **116A**. The conductor **14** is placed in the other side channel **114A**.

[0087] With the wedge subassembly **153** in the open position, the wedge subassembly **153** is laterally inserted into the sleeve member cavity **115** through the slot **117**. The wedge member **120** is partially inserted into the cavity **115** between the conductors **12, 14** such that the conductors **12, 14** are received in the opposed grooves **124A, 126A**. The wedge member **120** may be forced into the sleeve member **110** by hand or using a hammer or the like to temporarily hold the wedge member **120** and the conductors **12, 14** in position.

[0088] The tool **30** is engaged with the bolt head **174**. Advantageously, the head **174** is accessible for engagement with the tool **30** from the rear side of the wedge assembly **153**. The tool **30** is forcibly driven by the driver **32** to rotate the bolt **170** in a direction **R** relative to the fixed nut **176**. The wedge member **120** and the lock member **150** are thereby linearly displaced and pulled together in opposed converging directions toward the closed position of the wedge subassembly **153**. The wedge member **120** abuts the conductors **12, 14** in the sleeve member **110** and the lock member **150** hooks over and receives the front end **110B** of the sleeve member **110** in the slot **166**.

[0089] The driver **32** and tool **30** are further used to forcibly rotate the bolt **170** so that the wedge member **120** is further forced forwardly (direction **F**, **FIG. 2**) relative to the sleeve

member **110** until the wedge member **120** is in a desired final position to form the connection **10** as shown in **FIGS. 3-6**. The connection **10** may be formed by forming interference fits between the wedge member **120**, the C-shaped sleeve member **110** and the conductors **12, 14**. Moreover, the wedge member **120** is secured in place by the interlocking engagement between the engagement portion **162** and the sleeve member **110**.

[0090] During installation, the engagement portion **162** locks onto the front end **110B** of the sleeve member **110** and maintains proper alignment between the wedge member **120** and the sleeve member **110**. This interlock may also act as a safety feature at the beginning stages of the installation.

[0091] The wedge member **120**, the sleeve member **110** and/or the conductors **12, 14** may be deformed. The C-shaped sleeve member **110** may be elastically deformed so that it applies a bias or spring force against the wedge member **120** and the conductors **12, 14**. The sleeve member **110** may be plastically deformed.

[0092] In some embodiments, the hook portions **114, 116** are deflected outward (in directions **E1** and **E2** (**FIG. 2**), respectively) along the transverse axis **M-M**. The sleeve member **110** is elastically and plastically deflected resulting in a spring back force (*i.e.*, from stored energy in the bent sleeve member **110**) to provide a clamping force on the conductors **12, 14**. As a result of the clamping force, the sleeve member **110** may generally conform to the conductors **12, 14**. According to some embodiments, a large application force, on the order of about 26 to 31 kN of clamping force is provided, and the clamping force ensures adequate electrical contact force and electrical connectivity between the connector assembly **100** and the conductors **12, 14**. Additionally, elastic deflection of the sleeve member **110** provides some tolerance for deformation or compressibility of the conductors **12, 14** over time, such as when the conductors **12, 14** deform due to compression forces. Actual clamping forces may be lessened in such a condition, but not to such an amount as to compromise the integrity of the electrical connection.

[0093] In some embodiments, the elastic deflection of the sleeve member **110** causes the central body **112** to bend or bulge toward the wedge member **120**, where a portion of the body **112** is received in the deflection slot **134**.

[0094] In some embodiments, the outer surface of the bolt receiver portion **154** is lubricated to reduce friction with the wedge member **120** in the alignment slot **130**.

[0095] The tubular bolt receiving portion **154**, including the extension portion **154A**, covers the bolt shaft **172** after termination.

[0096] Once installed, the connector system 101 can be operated as follows to disassemble the connection and connection assembly 100 in accordance with methods of the invention. The bolt 170 is rotated opposite the direction **R** (*i.e.*, counterclockwise) to force the wedge member 120 to move axially rearwardly and away from the bolt head 174. Because the axial position of the retainer clip 184 on the bolt 170 is fixed and the rear engagement portion 164 prevents relative axial displacement between the lock member 150 and the sleeve member 110, the bolt rotation force displaces the wedge member 120 rearwardly (direction **E** in FIG. 5) relative to the sleeve member 110. In this way, the sleeve member 110 and the wedge member 120 are freed from one another and the connection. The lock bar 150 can then be removed from the sleeve member 110.

[0097] Any suitable type or construction of driver 32 may be used to forcibly rotate the bolt 170 in the rotation direction **R**. According to some embodiments, the bolt 170 is rotated using a power tool. The power tool may be an electrically, pneumatically or hydraulically powered tool. According to some embodiments, the power tool is a battery powered tool. According to some embodiments, the tool 30 is rotated using a manual driver.

[0098] A corrosion inhibitor compound may be provided (*i.e.*, applied at the factory) on the conductor contact surfaces of the wedge member 120 and/or the sleeve member 110. The corrosion inhibitor may prevent or inhibit corrosion formation and assist in abrasion cleaning of the conductors 12, 14. The corrosion inhibitor can inhibit corrosion by limiting the presence of oxygen at the electrical contact areas. The corrosion inhibitor material may be a flowable, viscous material. The corrosion inhibitor material may be, for example, a base oil with metal particles suspended therein. In some embodiments, the corrosion inhibitor is a cod oil derivative with aluminum nickel alloy particles. Suitable inhibitor materials are available from TE Connectivity. According to some embodiments, the corrosion inhibitor layer has a thickness in the range of from about 0.02 to 0.03 inch.

[0099] It will be appreciated that the connector assembly 100 can effectively accommodate conductors 12, 14 of a range or different sizes and configurations as a result of the flexibility of the spring member 110. Different connector assemblies 100 can themselves be sized to accommodate different ranges of conductor sizes, from relatively small diameter wires for low current applications to relatively large diameter wires for high voltage energy transmission applications. In some embodiments, the size of the main conductor 14 is 336.4 kcmil or greater and the size of the tap conductor 12 is #6 AWG or greater.

[00100] It is recognized that effective clamping force on the conductors 12, 14 is dependent upon the geometry and dimensions of the members 110, 120 and size of the



conductors used with the connector assembly **100**. Thus, with strategic selections of angles for the engagement surfaces, and the size and positioning of the conductors **12**, **14**, varying degrees of clamping force may be realized when the connector assembly **100** is used as described above.

[00101] As illustrated, the channels **114A**, **116A** are generally arcuate. However, some or all of the channels **114A**, **116A** may have cross-sectional shapes of other configurations.

[00102] Elongate, protruding ribs may be provided in the channels **124A**, **126A** to reduce friction as the wedge member **120** is driven into the sleeve member **110**. The ribs typically will not significantly reduce electrical contact surface with the conductors **12**, **14**. According to some embodiments, each rib has a height in the range of from about 0.008 to 0.012 inch and a width in the range of from about 0.018 to 0.022 inch.

[00103] With reference to **FIGS. 9** and **10**, a wedge connector system **201** and a wedge connector assembly **200** according to further embodiments is shown therein. The connector assembly **200** corresponds to and may be used in the same manner as the connector assembly **100**, except as discussed below. The connector assembly **200** includes a sleeve member **210** and a wedge member **220**, corresponding to the sleeve member **110** and a wedge member **120**, respectively.

[00104] The connector assembly **200** further includes a drive/lock mechanism **251** corresponding to the drive/lock mechanism **151** except as follows. In place of the nut **176** and the nut holder portion **168**, the lock member **250** is provided with an internally threaded bore **256** in its bolt receiver portion **254**. In use, a wedge subassembly **253** is formed by threadedly engaging the bolt **270** with the threaded bore **256**. The wedge subassembly **253** can then be installed on the sleeve member **210** and the conductors **12**, **14**. The wedge subassembly **253** can be contracted by rotating the bolt head **274** to clamp the wedge subassembly **253** onto the sleeve member **210** and force the wedge member **220** into the sleeve member cavity **215** to mechanically capture the conductors **12**, **14** therebetween and electrically connect the conductors **12**, **14** to one another. The rear end of the bolt receiver portion **254** can serve as a stop face to limit wedge member travel.

[00105] The connector assembly **200** also includes a retraction mechanism **281** corresponding to the retraction mechanism **181**. The retraction mechanism **281** includes a rear engagement portion **264** (on the rear end of the lock member **250**), an annular retainer clip mount slot **279** (on the rear end of the drive bolt **270**), and a retainer member, ring or clip

**284.** The connector assembly **200** can be disassembled and removed in the same manner as described above for the connector assembly **100**.

[00106] With reference to **FIGS. 11** and **12**, a wedge connector system **301** and a connector assembly **300** according to further embodiments is shown therein. The connector assembly **300** corresponds to and may be used in the same manner as the connector assembly **100**, except as discussed below. The connector assembly **200** includes a sleeve member **310** corresponding to the sleeve member **110**. The connector assembly **300** further includes a drive/lock mechanism **351** corresponding to the drive/lock mechanism **151** except as discussed below.

[00107] The connector assembly **300** includes a wedge member **320** corresponding to the wedge member **120** except that the wedge member **320** is provided with a boss **336** on its front end **320B**. The boss **336** includes a nut slot **368B** having anti-rotation features **368C**. The nut **376** is seated in the nut slot **368B**.

[00108] The connector assembly **300** further includes a lock member **350** corresponding to the lock member **150** except that the lock member **150** is provided with bolt receiving arm **357** and a bore **357A**.

[00109] In use, a wedge subassembly **353** is formed by inserting the bolt **370** through the bore **357A** and threadedly engaging the bolt **370** with the nut **376**. The wedge subassembly **353** can then be installed on the sleeve member **310** and the conductors **12**, **14**. The wedge subassembly **353** can be contracted by engaging the bolt head **374** and rotating the bolt **370** to clamp the wedge subassembly **353** onto the sleeve member **310** and force the wedge member **320** into the sleeve member cavity **315** to mechanically capture the conductors **12**, **14** therebetween and electrically connect the conductors **12**, **14** to one another. It will be appreciated that in the case of the connector assembly **300**, the bolt head **374** is engaged by the tool **30** from the front end of the wedge subassembly **353**.

[00110] The connector assembly **300** also includes a retraction mechanism **381** corresponding to the retraction mechanism **181**. The retraction mechanism **381** includes a rear engagement portion **364** (on the rear end of the lock member **350**), an annular retainer clip mount slot **379** (on the rear end of the drive bolt **370**), and a retainer member, ring or clip **384**. The connector assembly **300** can be disassembled and removed in the same manner as described above for the connector assembly **100**.

[00111] With reference to **FIGS. 13** and **14**, a wedge connector system **401** and a wedge connector assembly **400** according to further embodiments is shown therein. The connector assembly **400** corresponds to and may be used in the same manner as the connector

assembly **300**, except as discussed below. The connector assembly **400** includes a sleeve member **310** corresponding to the sleeve member **110**.

[00112] The connector assembly **400** further includes a drive/lock mechanism **451** corresponding to the drive/lock mechanism **351** except as follows. In place of the nut **376** and the nut holder slot **368B**, the wedge member **420** is provided with an internally threaded bore **456**. In use, a wedge subassembly **453** is formed by threadedly engaging the bolt **470** with the threaded bore **456**. The wedge subassembly **453** can then be installed on the sleeve member **410** and the conductors **12, 14**. The wedge subassembly **453** can be contracted by engaging the bolt head **474** to rotate the bolt **470** to clamp the wedge subassembly **453** onto the sleeve member **410** and force the wedge member **420** into the sleeve member cavity **415** to mechanically capture the conductors **12, 14** therebetween and electrically connect the conductors **12, 14** to one another.

[00113] The connector assembly **400** also includes a retraction mechanism **481** corresponding to the retraction mechanism **181**. The retraction mechanism **481** includes a rear engagement portion **464** (on the rear end of the lock member **350**), an annular retainer clip mount slot **479** (on the rear end of the drive bolt **470**), and a retainer member, ring or clip **484**. The connector assembly **400** can be disassembled and removed in the same manner as described above for the connector assembly **100**.

[00114] With reference to **FIGS. 15-22**, a wedge connector system **501** and a wedge connector assembly **500** according to further embodiments is shown therein. The connector assembly **500** corresponds to and may be used in the same manner as the connector assembly **100**, except as discussed below. The connector assembly **500** includes a sleeve member **510** and a wedge member **520**, corresponding to the sleeve member **110** and the wedge member **120**, respectively. The connector assembly **500** includes a drive/lock mechanism **551**. The sleeve member **510** and the wedge member **520** are movable relative to one another to cooperatively mechanically capture the conductors **12, 14** therebetween and electrically connect the conductors **12, 14** to one another.

[00115] The wedge member **520** includes a body **522** having opposed, arcuate clamping side faces or walls **524, 526**, opposed end faces or walls **523, 525**, and opposed outer and inner faces or walls **528, 529**. The wedge member **520** tapers inwardly from a relatively wide rear end **520A** to a relatively narrow front end **520B**.

[00116] An axially extending alignment slot **530** is defined in the inner wall **529**.

[00117] An integral boss **536** is located proximate the rear end **520A**. The boss **536** projects outwardly from the body **522** in a direction transverse (*e.g.*, perpendicular) to the

connector axis **L-L** and toward the sleeve member **510**. A bore **536A** extends through the boss **536** substantially parallel to the axis **L-L**. In some embodiments, the bore **536A** is nonthreaded.

[00118] The lock mechanism **551** includes a lock member **550**, a first drive member **570**, a cooperating second drive member **576**, a washer **578**, and a retainer clip **584**. In some embodiments and as shown, the first drive member is a drive bolt **570** and the second drive member is a nut **576**. The drive bolt **570** and the nut **576** operate as a clamping mechanism.

[00119] The lock member **550** extends from a rear end **550A** to a front end **550B** along a lock member axis **LC-LC**. The lock member **550** includes a longitudinally extending body **552**, an integral rear engagement or hook portion **562**, and an integral nut holder portion **568**.

[00120] The hook portion **562** is located on the rear end **550A**. The hook portion **562** defines a slot **562A**.

[00121] The nut holder portion **568** is a boss located on the front end **550B** and projects laterally away from the connecting wall **512** of the sleeve member **510**. The nut holder portion **568** includes a bore **568A**. Anti-rotation features in the form of flats **568C** are located in the bore **568A** and define a hexagonal passage.

[00122] The bolt **570** has an externally threaded cylindrical shank, rod or shaft **572** and an integral driver engagement feature **574** on the rear end of the shaft **572**. The driver engagement feature **574** may be provided in the form of a geometric head (*e.g.*, a hexagonal faceted head) or a geometric socket. The drive head **574** may be a hex head as illustrated, for example.

[00123] An annular retainer ring mount slot **579** is defined in the outer surface of the bolt **570** proximate the head **574**. The retainer clip **584** is seated in the slot **579**. The retainer clip **584** is thereby positioned on front side of the boss **536**, opposite the bolt head **574**. The retainer clip **584** permits the bolt **570** to rotate about the bolt's lengthwise axis relative to the boss **536**, but limits relative rearward axial displacement of the bolt **570** relative to the boss **536**. In this way, the retainer clip **584** prevents the bolt from moving rearwardly out of the boss **536** beyond a relatively short prescribed distance. Other retention devices (*e.g.*, a split pin) or features may be used in addition to or in place of the retainer clip **584** to axially constrain the bolt **570** relative to the wedge member **520** while permitting the bolt **570** to rotate relative to the wedge member **520**.

[00124] The nut **576** is an extended or elongate capped coupling nut. The nut **576** has a nut body **576C** and an internally threaded bore **576A**. The outer surface of the nut body

**576C** has geometric engagement facets or faces **576B** and is hexagonal in cross-section. The nut **576** also has a stop feature **576D** on the capped end of the body **576C** having an outer diameter greater than that of the nut body **576C**. The nut **576** is seated in the bore **568A** of the lock member **550** such that the faceted outer surface of the nut **576** mates with the complementary faceted inner surface of the bore **568A** to prevent or limit rotation of the nut **576** relative to the bore **568A**. The nut body **576C** may fit closely in the bore **568A**, but is permitted to slide axially through the bore **568A**. The stop feature **576D** is sized to prevent it from passing through the bore **568A**.

[00125] The sleeve member **510**, wedge member **520**, lock member **550**, bolt **570**, and nut **576** may be formed of materials and using techniques as described above for the sleeve member **110**, wedge member **120**, lock member **150**, bolt **170**, and nut **176**.

[00126] Exemplary methods for assembling and using the connector assembly **500** in accordance with embodiments of the present invention will now be described.

[00127] In order to assemble the wedge connector assembly **500**, the lock member **550** is mounted on the sleeve member **510** as shown in FIG. 20 such that the rear edge of the sleeve member **510** is received and captured in the slot **562A**. The lock member body **552** extends along the outside of the sleeve member connecting portion **512**. The boss **568** is positioned at the front end **510B** of the sleeve member **510**.

[00128] The nut **576** is inserted through the bore **568A**. The washer **578** is mounted on the shaft **572** of the bolt **570** and the shaft **572** is then inserted through the bore **536A**. The retainer clip **584** is then mounted on the shaft **572** in the slot **579**. The bolt **570** is thereby secured in the wedge member **520** to form a wedge subassembly **553** that is held together by the retainer clip **584** and the bolt head **574**.

[00129] In some embodiments, the wedge subassembly **553** is assembled at the factory and provided to the end user or installer assembled. In other embodiments, the wedge subassembly **553** is assembled by the end user and, in some embodiments, is assembled onsite at the location of the tap installation by the installer.

[00130] As shown in FIG. 20, the C-shaped sleeve member **510** is placed over the conductor **12** such that the conductor **12** is received in the side channel **516A**. The conductor **14** is placed in the other side channel **514A**.

[00131] The wedge subassembly **553** is partially inserted into the cavity between the conductors **12**, **14** such that the conductors **12**, **14** are received in the opposed grooves **524A**, **526A** of the wedge member **520**. The wedge member **520** may be forced into the sleeve member **510** by hand or using a hammer or the like to temporarily hold the wedge member

**520** and the conductors **12, 14** in position. This may cause the nut **576** to slide forwardly in the boss **568** and protrude forwardly beyond the boss **568**. When mated with the C-shaped sleeve member **510**, the lock member **550** has clearances between the lock member body **552** and the rear wall of the C-shaped sleeve member **510** and between the features **562, 568** and the ends of the C-shaped sleeve member **510** to allow relative movement between the lock member **550** and the C-shaped sleeve member **510** during installation of the conductors **12, 14**. This allows the wedge subassembly **553** to be temporarily secured in the sleeve member **510** (e.g., by hand or using a hammer) as described.

[00132] The front end of the bolt **570** is then threadedly engaged with the nut **576**. The nut **576** is prevented from rotation with the bolt **570** by the flats **568C, 576B**. As the bolt **570** is rotated (e.g., using a driver **32** and tool **30** as shown in FIG. 2), the nut **576** is drawn axially further into the bore **568A** until the stop feature **568D** abuts the boss **568**. The bolt **570** is rotated (e.g., using driver **32** and tool **30**) so that the nut **576** is axially anchored and the bolt **570** forcibly pulls the wedge member **520** into the sleeve member **510** until the wedge member **520** is in a desired final position to form the connection as shown in FIGS. 21 and 22. The boss **568** rotationally fixes or locks the nut **576** for torquing the bolt **570** during assembly. The boss **536** can act as a hard stop to limit insertion of the wedge member **520**. The connection **10** may be formed by forming interference fits between the wedge member **520**, the C-shaped sleeve member **510** and the conductors **12, 14**. Moreover, the wedge member **520** is secured in place by the lock member **550**.

[00133] As discussed above with regard to the wedge connector system **101**, the wedge member **520**, the sleeve member **510** and/or the conductors **12, 14** may be deformed. The C-shaped sleeve member **510** may be elastically deformed so that it applies a bias or spring force against the wedge member **520** and the conductors **12, 14**. The sleeve member **510** may be plastically deformed.

[00134] The connector system **501** can be removed and disassembled by rotating the bolt **570** counterclockwise to force the nut **576** to move axially forwardly and away from the bolt head **574**. The retainer clip **584** and the front boss **568** cooperate to prevent or limit relative axial displacement between the bolt **570** and lock member **550** and the sleeve member **510**. As a result, the bolt rotation force displaces the nut **576** forwardly (along the axis LC-LC) relative to the sleeve member **510**. The bolt **570** is rotated in this manner until the stop feature **576D** is spaced a short distance (e.g., about 0.5 inch) from the boss **568** and the threads of the bolt **570** remain threadedly engaged with the threads of the nut **576**. The front end of the nut **576** is then struck (e.g., by a hammer) to drive the bolt **570** rearwardly.

Because the bolt **570** is axially constrained by the retainer clip **584**, the drive force is thereby applied to the wedge member **520** to drive the wedge member **520** rearwardly relative to the sleeve member **510**. In this way, the sleeve member **510** and the wedge member **520** are freed from one another and the connection.

[00135] With reference to **FIGS. 23-29**, a wedge connector system **601** and a wedge connector assembly **600** according to further embodiments is shown therein. The connector assembly **600** corresponds to and may be used in the same manner as the connector assembly **500**, except as discussed below. The connector assembly **600** includes a sleeve member **610** and a wedge member **620**, corresponding to the sleeve member **510** and the wedge member **520**, respectively. The connector assembly **600** includes a drive/lock mechanism **651**. The sleeve member **610** and the wedge member **620** are movable relative to one another to cooperatively mechanically capture the conductors **12, 14** therebetween and electrically connect the conductors **12, 14** to one another.

[00136] The wedge member **620** includes a body **622** having opposed, arcuate clamping side faces or walls **624, 626**, opposed end faces or walls **623, 625**, and opposed outer and inner faces or walls **628, 629**. The wedge member **620** tapers inwardly from a relatively wide rear end **620A** to a relatively narrow front end **620B**.

[00137] An axially extending alignment slot **630** is defined in the inner wall **629**.

[00138] An integral boss **636** is located proximate the front end **620B**. The boss **636** projects outwardly from the body **622** in a direction transverse (*e.g.*, perpendicular) to the connector axis **L-L** and toward the sleeve member **610**. A bore **636A** extends through the boss **636** substantially parallel to the axis **L-L**.

[00139] The lock mechanism **651** includes a lock member **650**, a first drive member **670**, a cooperating second drive member **676**, and a washer **678**. In some embodiments and as shown, the first drive member is a drive bolt **670**. In some embodiments and as shown, the second drive member is an internal screw thread **676** formed in the bore **636A**. In other embodiments, the screw thread **676** may be formed in a nut rotationally and axially secured within the bore **636**. The drive bolt **670** and the threaded bore **636** operate as a clamping mechanism

[00140] The lock member **650** extends from a rear end **650A** to a front end **650B** along a lock member axis **LC-LC**. The lock member **650** includes a longitudinally extending body **652**, an integral rear engagement or hook portion **662**, an integral front hook portion **663**, and an integral front brace portion **668**.

[00141] The rear hook portion **662** is located on the rear end **650A**. The hook portion **662** defines a slot **662A**.

[00142] The integral front brace portion **668** is a boss located on the front end **650B** and projects laterally away from the connecting wall **612** of the sleeve member **610**. The front brace portion **668** includes a bore **668A**. The inner diameter of the bore **668A** is dimensioned to permit the drive bolt **670** to spin freely. The front hook portion **663** projects rearwardly from the brace portion **668**.

[00143] The bolt **670** has an externally threaded cylindrical shank, rod or shaft **672** and an integral driver engagement feature **674** on the front end of the shaft **672**. The driver engagement feature **674** may be provided in the form of a geometric head (*e.g.*, a hexagonal faceted head) or a geometric socket. The drive head **674** may be a hex head as illustrated, for example.

[00144] The sleeve member **610**, wedge member **620**, lock member **650**, and bolt **670** may be formed of materials and using techniques as described above for the sleeve member **110**, wedge member **120**, lock member **150**, bolt **170**, and nut **176**.

[00145] Exemplary methods for assembling and using the connector assembly **600** in accordance with embodiments of the present invention will now be described.

[00146] In order to assemble the wedge connector assembly **600**, the lock member **650** is mounted on the sleeve member **610** as shown in **FIG. 27** such that the rear edge of the sleeve member **610** is received and captured in the slot **662A** and the front edge of the sleeve member **610** is captured by the front hook portion **663**. The lock member body **652** extends along the outside of the sleeve member connecting portion **612**. The brace portion **668** is positioned at the front end **610B** of the sleeve member **610**.

[00147] The washer **678** is mounted on the shaft **672** of the bolt **670** and the shaft **672** is then inserted through the bore **668A**. The bolt **670** is threaded into the threaded bore **636A** of the wedge member **620**. The bolt **670** is thereby secured in the wedge member **620** and the lock member **650** to form a wedge subassembly **653**.

[00148] In some embodiments, the wedge subassembly **653** is assembled at the factory and provided to the end user or installer assembled. In other embodiments, the wedge subassembly **653** is assembled by the end user and, in some embodiments, is assembled onsite at the location of the tap installation by the installer.

[00149] As shown in **FIG. 27**, the C-shaped sleeve member **610** is placed over the conductor **12** such that the conductor **12** is received in the side channel **616A**. The conductor **14** is placed in the other side channel **614A**.



[00150] The wedge subassembly 653 is inserted into the cavity between the conductors 12, 14 such that the conductors 12, 14 are received in the opposed grooves 624A, 626A of the wedge member 620. The wedge member 620 may be forced into the sleeve member 610 by hand or using a hammer or the like to temporarily hold the wedge member 620 and the conductors 12, 14 in position.

[00151] The bolt 670 is then further rotated (*e.g.*, using a driver 32 and tool 30 as shown in FIG. 2), so that the bolt head 674 loads against the brace portion 668 and the bolt 670 forcibly pulls the wedge member 620 forwardly into the sleeve member 610 until the wedge member 620 is in a desired final position to form the connection as shown in FIGS. 28 and 29. The connection 10 may be formed by forming interference fits between the wedge member 620, the C-shaped sleeve member 610 and the conductors 12, 14. Moreover, the wedge member 620 is secured in place by the lock member 650.

[00152] As discussed above with regard to the wedge connector system 101, the wedge member 620, the sleeve member 610 and/or the conductors 12, 14 may be deformed. The C-shaped sleeve member 610 may be elastically deformed so that it applies a bias or spring force against the wedge member 620 and the conductors 12, 14. The sleeve member 610 may be plastically deformed.

[00153] The connector system 601 can be removed and disassembled by rotating the bolt 670 counterclockwise. This forces the bolt 670 to back out or move axially forwardly (along the axis LC-LC) relative to the sleeve member 610 and away from the wedge 610 and the brace portion 668. The bolt 670 is rotated in this manner until the bolt head 674 is spaced a short distance (*e.g.*, about 0.5 inch) from the brace portion 668. The bolt head 674 is then struck (*e.g.*, by a hammer) to drive the bolt 670 rearwardly. Because the bolt 670 is axially constrained with respect to the wedge member 610 by the mated threads of the bolt 670 and the bore 636A, the drive force is thereby applied to the wedge member 620 to drive the wedge member 620 rearwardly relative to the sleeve member 610. In this way, the sleeve member 610 and the wedge member 620 are freed from one another and the connection.

[00154] With reference to FIGS. 30-32, a wedge connector system 701 and a wedge connector assembly 700 according to further embodiments is shown therein. The connector assembly 700 corresponds to and may be used in the same manner as the connector assembly 500, except as discussed below. The connector assembly 700 includes a sleeve member 710 and a wedge member 720, corresponding to the sleeve member 510 and the wedge member 520, respectively. The connector assembly 700 includes a drive/lock mechanism 751. The sleeve member 710 and the wedge member 720 are movable relative to one another to

cooperatively mechanically capture the conductors **12, 14** therebetween and electrically connect the conductors **12, 14** to one another.

[00155] The lock mechanism **751** includes a lock member **750**, a first drive member **770**, a cooperating second drive member **776**, a washer **778**, and a retainer clip **784**. In some embodiments and as shown, the first drive member is a drive bolt **770** and the second drive member is a nut **776**. The drive bolt **770** and the nut **776** operate as a clamping mechanism.

[00156] The lock member **750** extends from a rear end **750A** to a front end **750B** along a lock member axis **LC-LC**. The lock member **750** includes a longitudinally extending body **752**, an integral rear engagement or stop portion **762**, an integral front engagement or hook portion **767**, and an integral nut holder portion **768**.

[00157] The stop portion **762** is located on the rear end **750A**. The hook portion **767** is located on the front end **750A**. The hook portion **767** defines a slot **767A**. The stop portion **762** and the hook portion **767** project laterally toward the connecting wall **712** of the sleeve member **710** when the connector is assembled.

[00158] The nut holder portion **768** is a boss located on the front end **750B** and projects laterally away from the connecting wall **712** of the sleeve member **710** when the connector is assembled. The nut holder portion **768** includes a bore **768A**. Anti-rotation features in the form of flats are located in the bore **768A** and define a hexagonal passage.

[00159] The retainer clip **784** is seated in an annular retainer ring mount slot **779** defined in the outer surface of the bolt **770** proximate the head **774**. The retainer clip **784** is thereby positioned on front side of the boss **736**, opposite the bolt head **774**. The retainer clip **784** permits the bolt **770** to rotate about the bolt's lengthwise axis relative to the boss **736**, but limits relative rearward axial displacement of the bolt **770** relative to the boss **736**. In this way, the retainer clip **784** prevents the bolt from moving rearwardly out of the boss **736** beyond a relatively short prescribed distance. Other retention devices (*e.g.*, a split pin) or features may be used in addition to or in place of the retainer clip **784** to axially constrain the bolt **770** relative to the wedge member **720** while permitting the bolt **770** to rotate relative to the wedge member **720**.

[00160] The nut **776** is constructed in the same manner as the nut **576**, except that the forward end of the bore terminates at an opening **776E** so that the bolt **770** can extend fully through and beyond the front end of the nut **776**. The nut **776** is seated in the bore **768A** and functions in the same manner as described for the nut **576** and the bore **568A**.

[00161] The sleeve member 710, wedge member 720, lock member 750, bolt 770, and nut 776 may be formed of materials and using techniques as described above for the sleeve member 110, wedge member 120, lock member 150, bolt 170, and nut 176.

[00162] The connector assembly 700 can be used in the same manner as the connector assembly 500, except as follows. The longitudinally extending body 752 is interposed laterally between the wedge member 720 and the connecting wall 712 of the sleeve member 710. The stop portion 762 is located adjacent and may abut the rear end 710A of the sleeve member 710. The hook portion 767 is located adjacent and receives the front end 710B of the sleeve member 710 in the slot 767A when the connector is assembled. The construction of the connector assembly 700 may allow for or facilitate use with other accessories such as hot-sticks.

[00163] The connector system 701 can be removed and disassembled by rotating the bolt 770 counterclockwise to force the nut 776 to move axially forwardly and away from the bolt head 774, and then striking (*e.g.*, with a hammer) the front end of the nut 576 to drive the bolt 570 rearwardly, as described above for the connector system 501.

[00164] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention. Therefore, it is to be understood that the foregoing is illustrative of the present invention and is not to be construed as limited to the specific embodiments disclosed, and that modifications to the disclosed embodiments, as well as other embodiments, are intended to be included within the scope of the invention.

## THAT WHICH IS CLAIMED IS:

1. A wedge connector system for connecting first and second elongate electrical conductors, the wedge connector assembly comprising:

a C-shaped sleeve member defining a sleeve cavity and opposed first and second sleeve channels on either side of the sleeve cavity;

a wedge member including a wedge body having first and second opposed wedge side walls; and

a locking mechanism including:

a lock member including a sleeve engagement portion; and

a clamping mechanism coupled to the wedge member;

wherein:

the sleeve member and the wedge member are configured to capture the first and second conductors such that the first conductor is received in the first sleeve channel between the sleeve member and the first wedge side wall and the second conductor is received in the second sleeve channel between the sleeve member and the second wedge side wall; and

the locking mechanism is mountable on the sleeve member and the wedge member such that the sleeve engagement portion interlocks with the sleeve member and the clamping mechanism can be operated to force the wedge member into the sleeve cavity to apply clamping loads on the first and second conductors.

2. The wedge connector system of claim 1 wherein:

the sleeve member has opposed rear and front ends;

the wedge member has opposed front and rear ends;

the first and second sleeve channels taper inwardly in a direction from the rear end of the sleeve member to the front end of the sleeve member; and

the first and second wedge side walls taper inwardly in a direction from the rear end of the wedge member to the front end of the wedge member.

3. The wedge connector system of claim 1 wherein the wedge member includes first and second opposed wedge channels defined in the first and second wedge side walls, respectively.

4. The wedge connector system of claim 1 wherein the sleeve member is a resilient spring member that elastically deflects when the wedge member is forced into the sleeve cavity to apply the clamping loads on the first and second conductors.
5. The wedge connector system of claim 4 wherein the wedge member includes an integral deflection slot defined therein and positioned to receive a deflected portion of the sleeve member when the resilient spring member is elastically deflected by the wedge member.
6. The wedge connector system of claim 1 wherein the engagement portion includes a sleeve receiver slot configured to hold a front end of the sleeve member when the locking mechanism is mounted on the sleeve member.
7. The wedge connector system of claim 1 wherein:
  - the wedge member includes a guide slot;
  - the lock member includes a guide rail slidably received in the guide slot; and
  - the guide slot and the guide rail cooperate to maintain alignment between the sleeve member and the wedge member as the wedge member is forced into the sleeve cavity by the clamping mechanism.
8. The wedge connector system of claim 7 wherein:
  - the sleeve member includes a connecting portion between the first and second sleeve channels; and
  - the guide rail is disposed between the connecting portion and the wedge member when the locking mechanism is mounted on the sleeve member.
9. The wedge connector system of claim 8 wherein the clamping mechanism includes a threaded drive member located on a side of the wedge member opposite the guide rail.
10. The wedge connector system of claim 1 wherein:
  - the sleeve member includes a connecting portion between the first and second sleeve channels; and

the lock member includes a longitudinally extending body disposed between the connecting portion and the wedge member when the locking mechanism is mounted on the sleeve member.

11. The wedge connector system of claim 1 wherein the clamping mechanism includes a bolt having a head and a threaded shaft extending from the head.
12. The wedge connector system of claim 11 wherein:
  - the wedge member has opposed front and rear ends;
  - the front end leads the rear end as the wedge member is advanced into the sleeve cavity by the clamping mechanism; and
  - the bolt head is accessible from the rear end of the wedge member to be engaged by a tool to rotate the bolt and thereby force the wedge member into the sleeve cavity.
13. The wedge connector system of claim 12 wherein:
  - the clamping mechanism further includes:
    - an integral boss formed on the wedge member; and
    - a nut secured on the lock member and threadedly engaged with the shaft of the bolt;
  - the bolt and the nut cooperate to linearly displace the lock member responsive to rotation of the bolt; and
  - the integral boss is configured to transfer a drive force from the bolt to the wedge member to force the wedge member into the sleeve cavity to apply a clamping load on the first and second conductors.
14. The wedge connector system of claim 13 wherein:
  - the lock member includes an integral nut holder portion having a nut cavity defined therein; and
  - the nut is captured in the nut cavity.
15. The wedge connector system of claim 14 wherein:
  - the lock member includes an integral, tubular bolt receiving portion extending forwardly from the nut holder portion; and

the threaded shaft of the bolt advances into the bolt receiving portion as the bolt is rotated to force the wedge member into the sleeve cavity.

16. The wedge connector system of claim 12 wherein:

the clamping mechanism further includes:

an integral boss formed on the wedge member; and

an integral threaded bore in the lock member;

the threaded shaft threadedly engages the threaded bore;

the bolt and the threaded bore cooperate to linearly displace the lock member responsive to rotation of the bolt; and

the integral boss is configured to transfer a drive force from the bolt to the wedge member to force the wedge member into the sleeve cavity to apply a clamping load on the first and second conductors.

17. The wedge connector system of claim 11 wherein:

the wedge member has opposed front and rear ends;

the front end leads the rear end as the wedge member is advanced into the sleeve cavity by the clamping mechanism; and

the bolt head is accessible from the front end of the wedge member to be engaged by a tool to rotate the bolt and thereby force the wedge member into the sleeve cavity.

18. The wedge connector system of claim 17 wherein:

the clamping mechanism further includes:

an integral boss formed on the lock member; and

a nut secured on the wedge member and threadedly engaged with the shaft of the bolt;

the bolt and the nut cooperate to linearly displace the lock member responsive to rotation of the bolt; and

the integral boss is configured to transfer a drive force from the bolt to the wedge member to force the wedge member into the sleeve cavity to apply a clamping load on the first and second conductors.

19. The wedge connector system of claim 17 wherein:  
the clamping mechanism further includes:  
    an integral boss formed on the lock member; and  
    an integral threaded bore in the wedge member;  
the threaded shaft threadedly engages the threaded bore;  
the bolt and the threaded bore cooperate to linearly displace the lock member responsive to rotation of the bolt; and  
the integral boss is configured to transfer a drive force from the bolt to the wedge member to force the wedge member into the sleeve cavity to apply a clamping load on the first and second conductors.
20. A method for connecting first and second elongate electrical conductors, the method comprising:  
    providing a wedge connector assembly including:  
        a C-shaped sleeve member defining a sleeve cavity and opposed first and second sleeve channels on either side of the sleeve cavity;  
        a wedge member including a wedge body having first and second opposed wedge side walls; and  
        a locking mechanism including:  
            a lock member including an sleeve engagement portion; and  
            a clamping mechanism coupled to the wedge member;  
    using the sleeve member and the wedge member, capturing the first and second conductors such that the first conductor is received in the first sleeve channel between the sleeve member and the first wedge side wall and the second conductor is received in the second sleeve channel between the sleeve member and the second wedge side wall;  
    mounting the locking mechanism on the sleeve member and the wedge member such that the sleeve engagement portion interlocks with the sleeve member; and thereafter  
    operating the clamping mechanism to force the wedge member into the sleeve cavity to apply clamping loads on the first and second conductors.



21. An electrical connection comprising:  
a wedge connector assembly including:  
a C-shaped sleeve member defining a sleeve cavity and opposed first and second sleeve channels on either side of the sleeve cavity;  
a wedge member including a wedge body having first and second opposed wedge side walls; and  
a locking mechanism including:  
a lock member including an sleeve engagement portion; and  
a clamping mechanism coupled to the wedge member; and  
first and second elongate electrical conductors captured between the sleeve member and the wedge member such that the first conductor is received in the first sleeve channel between the sleeve member and the first wedge side wall and the second conductor is received in the second sleeve channel between the sleeve member and the second wedge side wall;  
wherein the locking mechanism is mounted on the sleeve member and the wedge member such that the sleeve engagement portion interlocks with the sleeve member; and  
wherein the clamping mechanism secures the wedge member in the sleeve cavity to apply clamping loads on the first and second conductors.

1/32

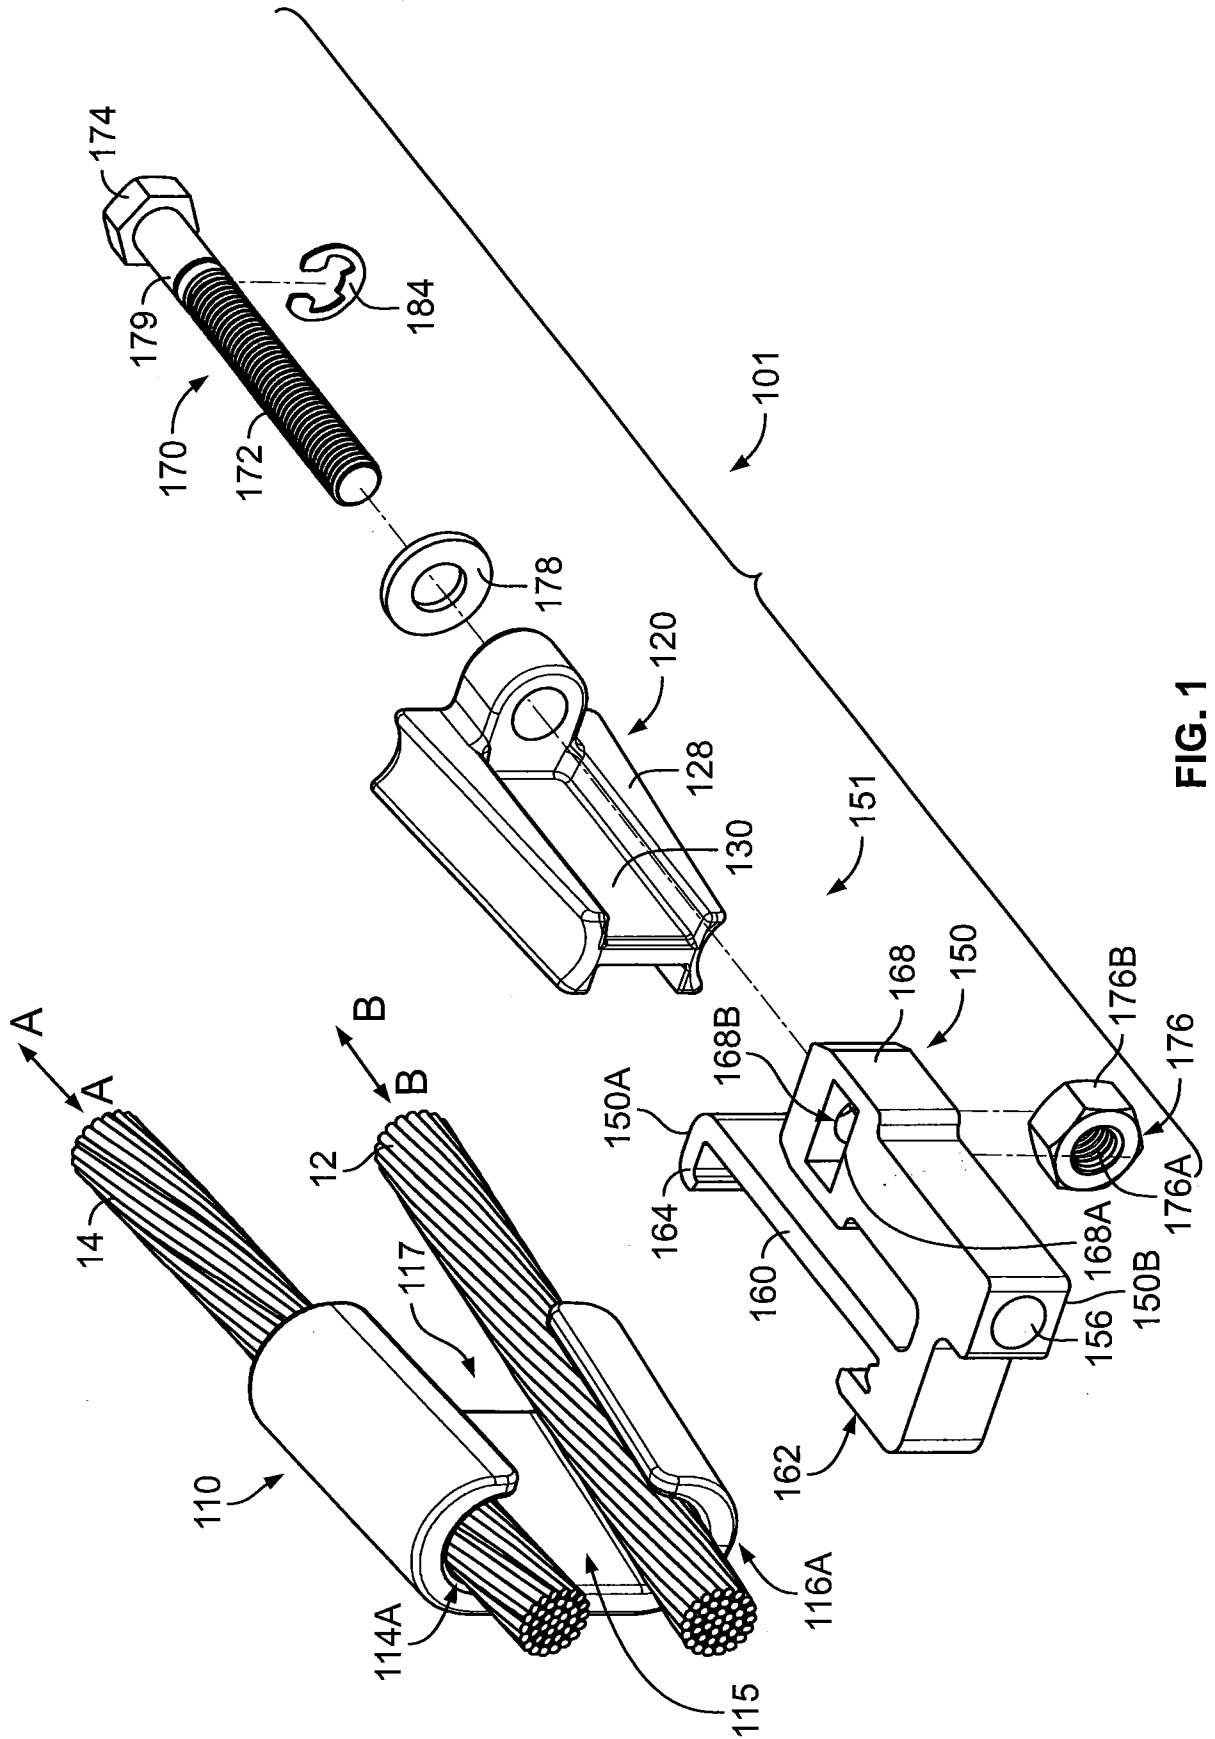


FIG. 1

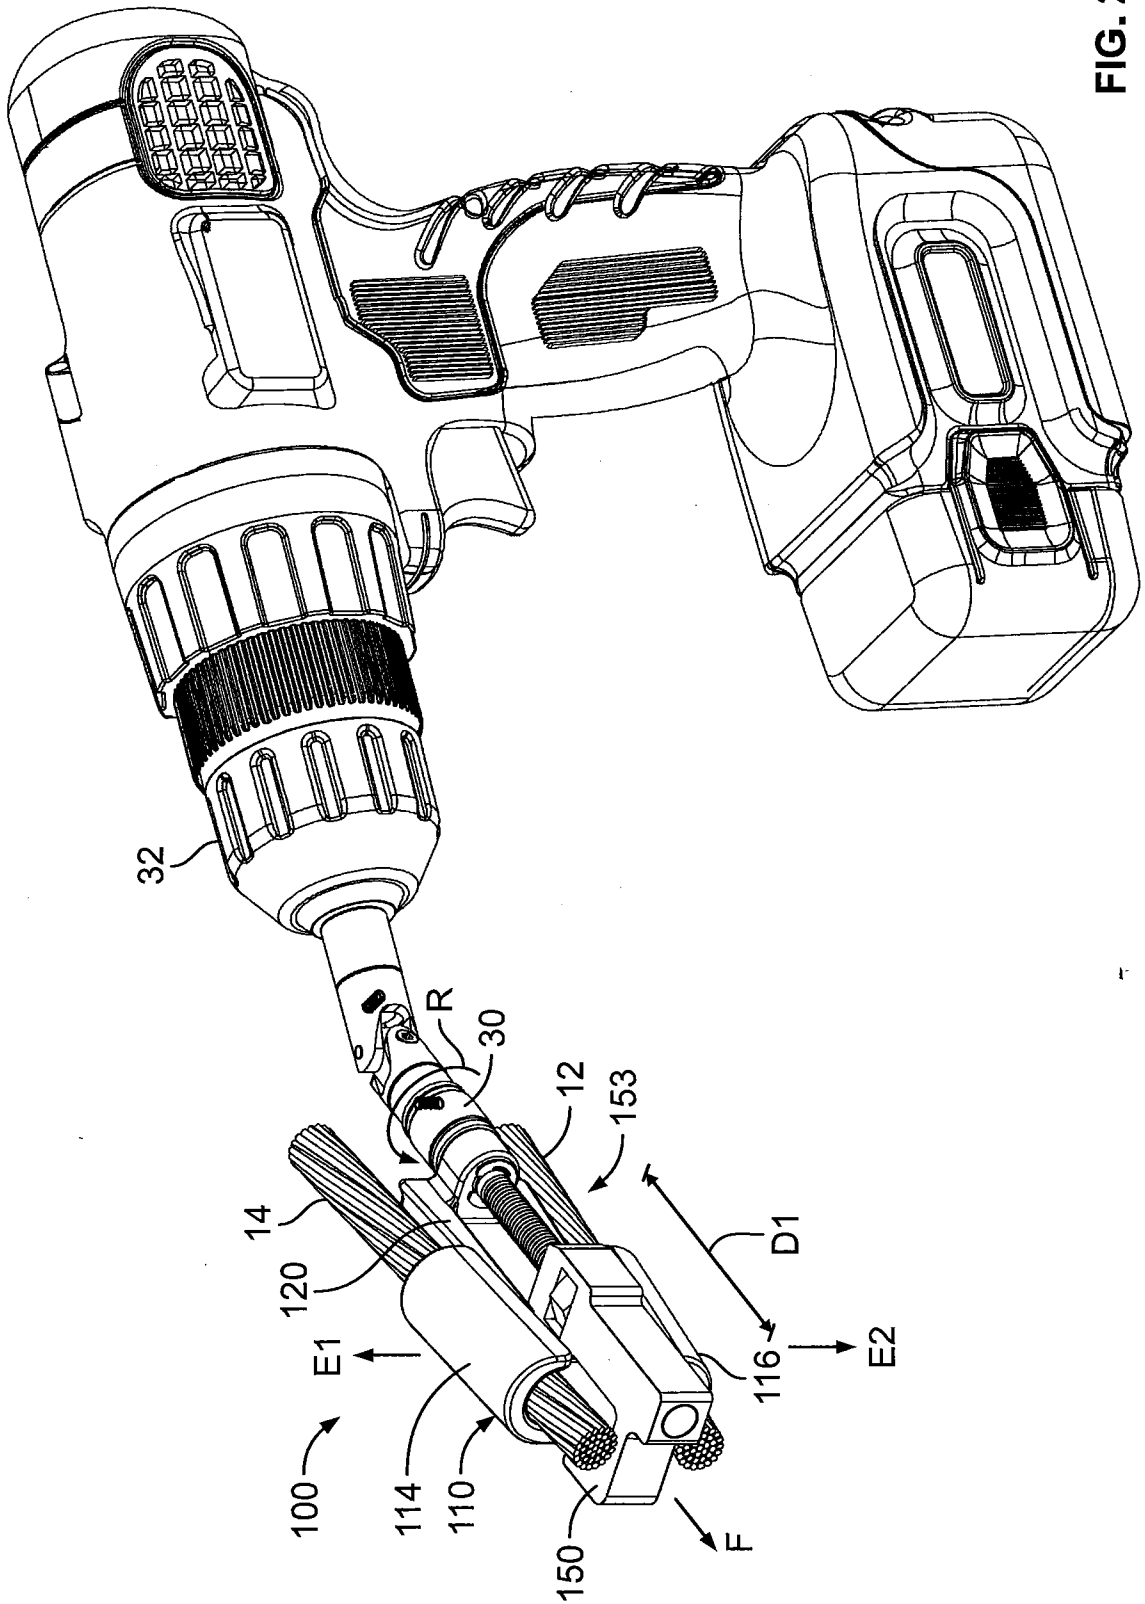


FIG. 2

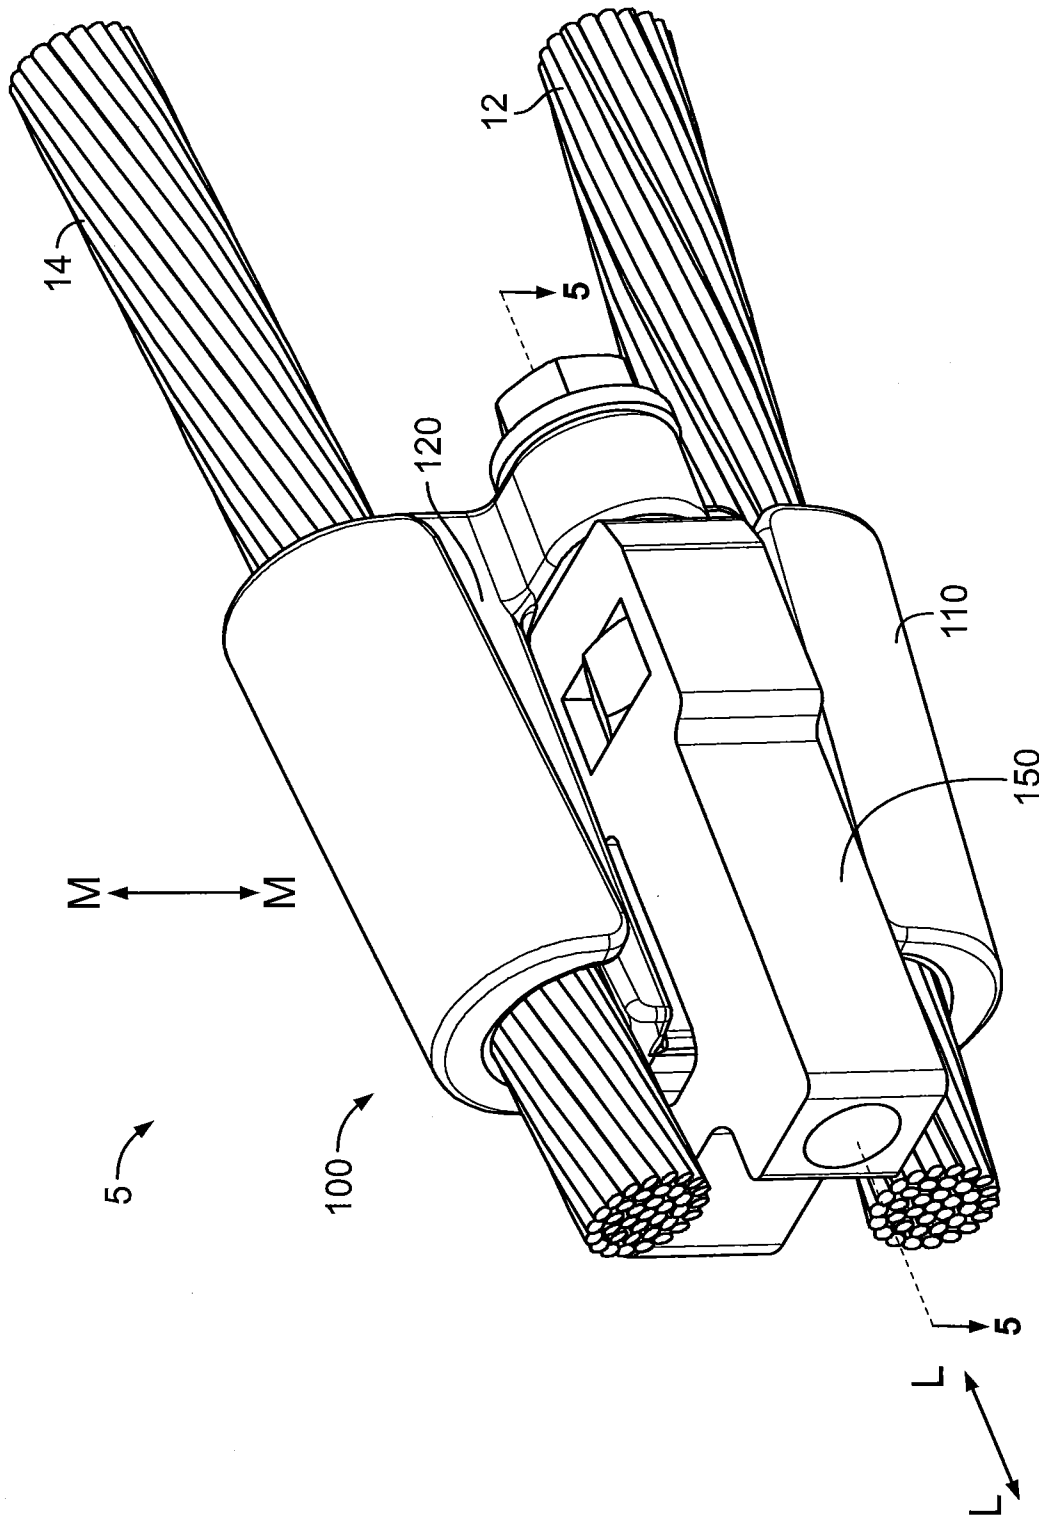


FIG. 3

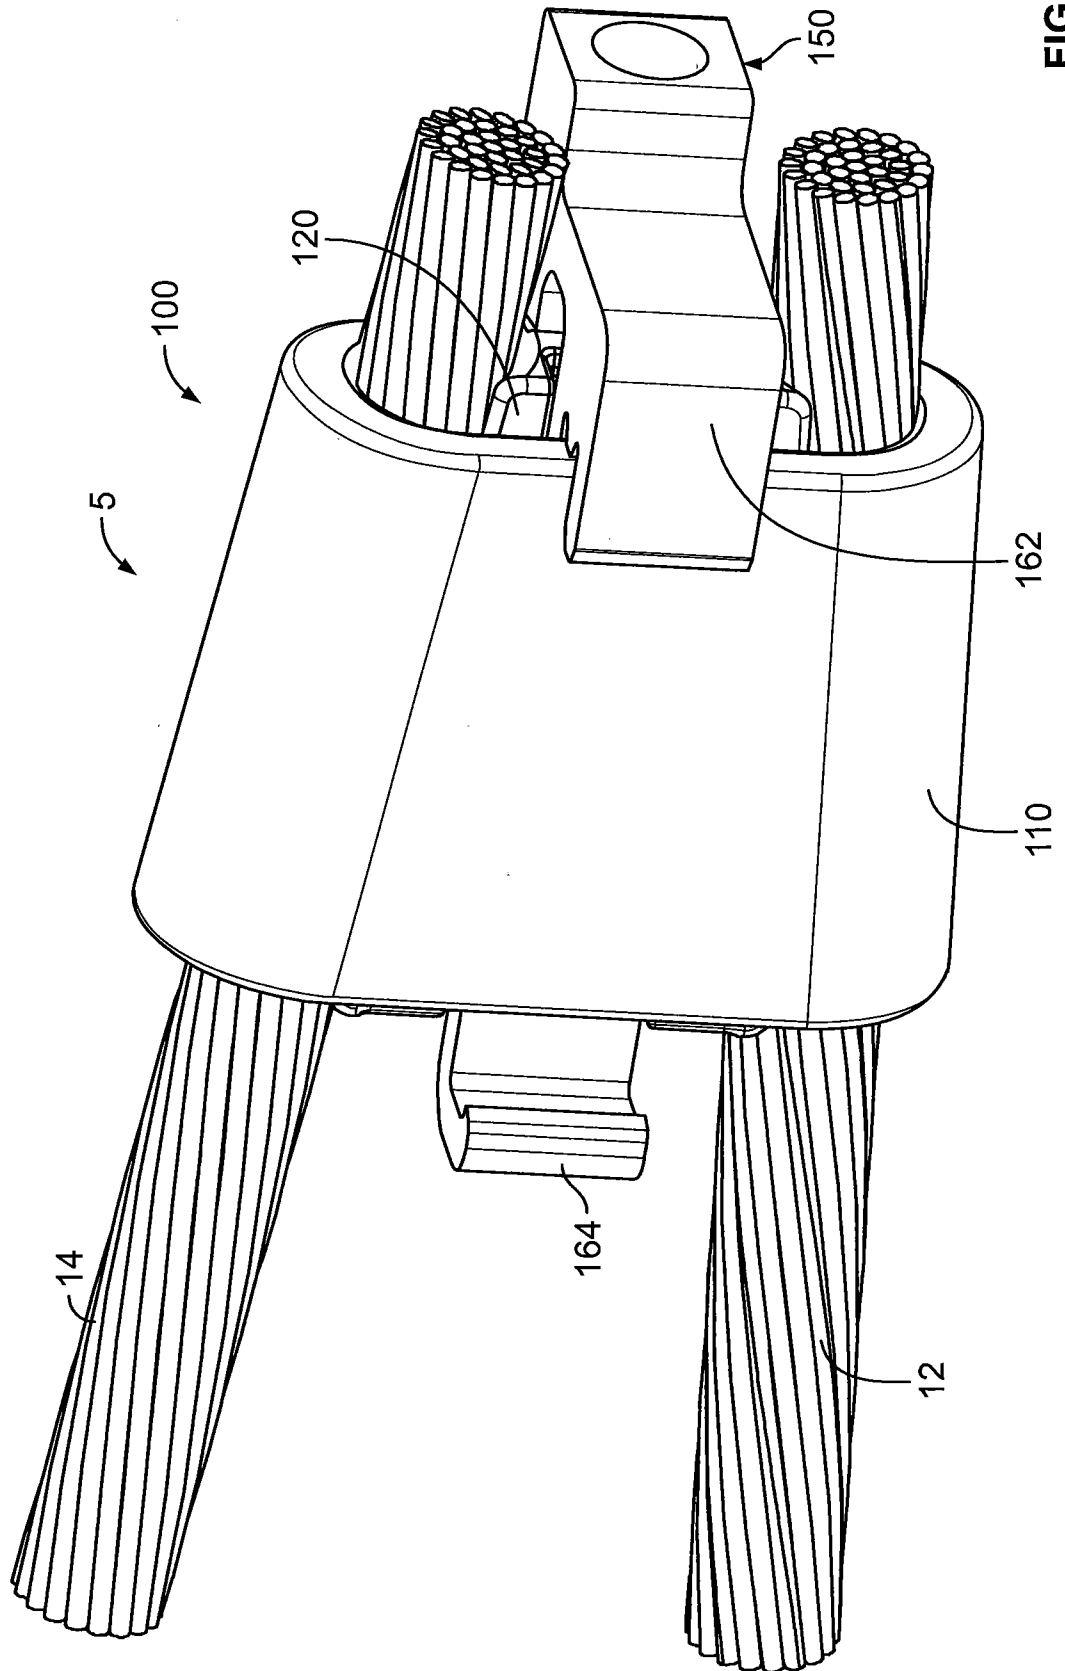


FIG. 4



6/32

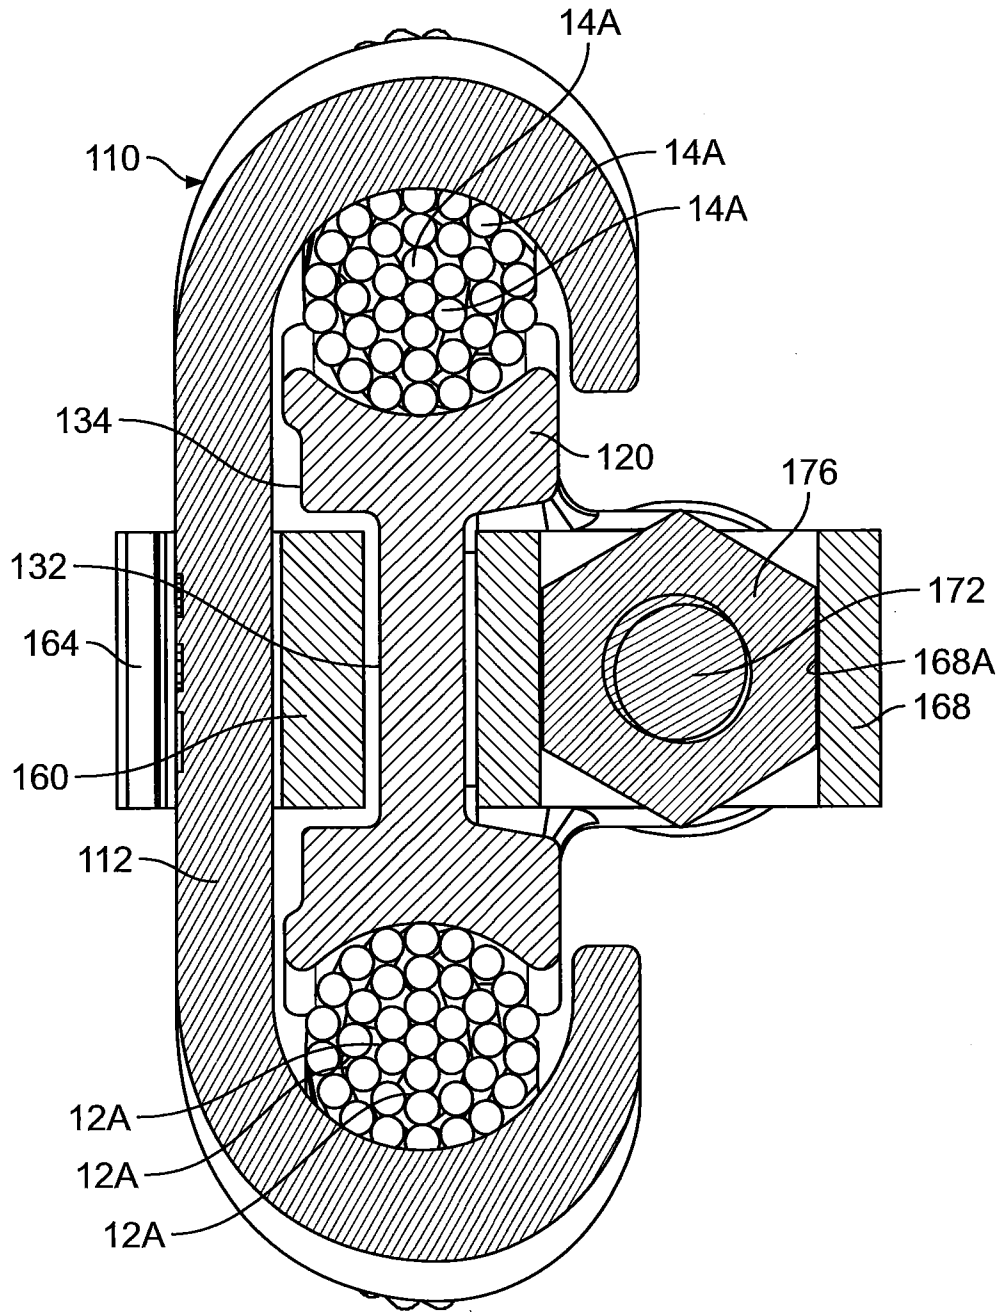


FIG. 6

7/32

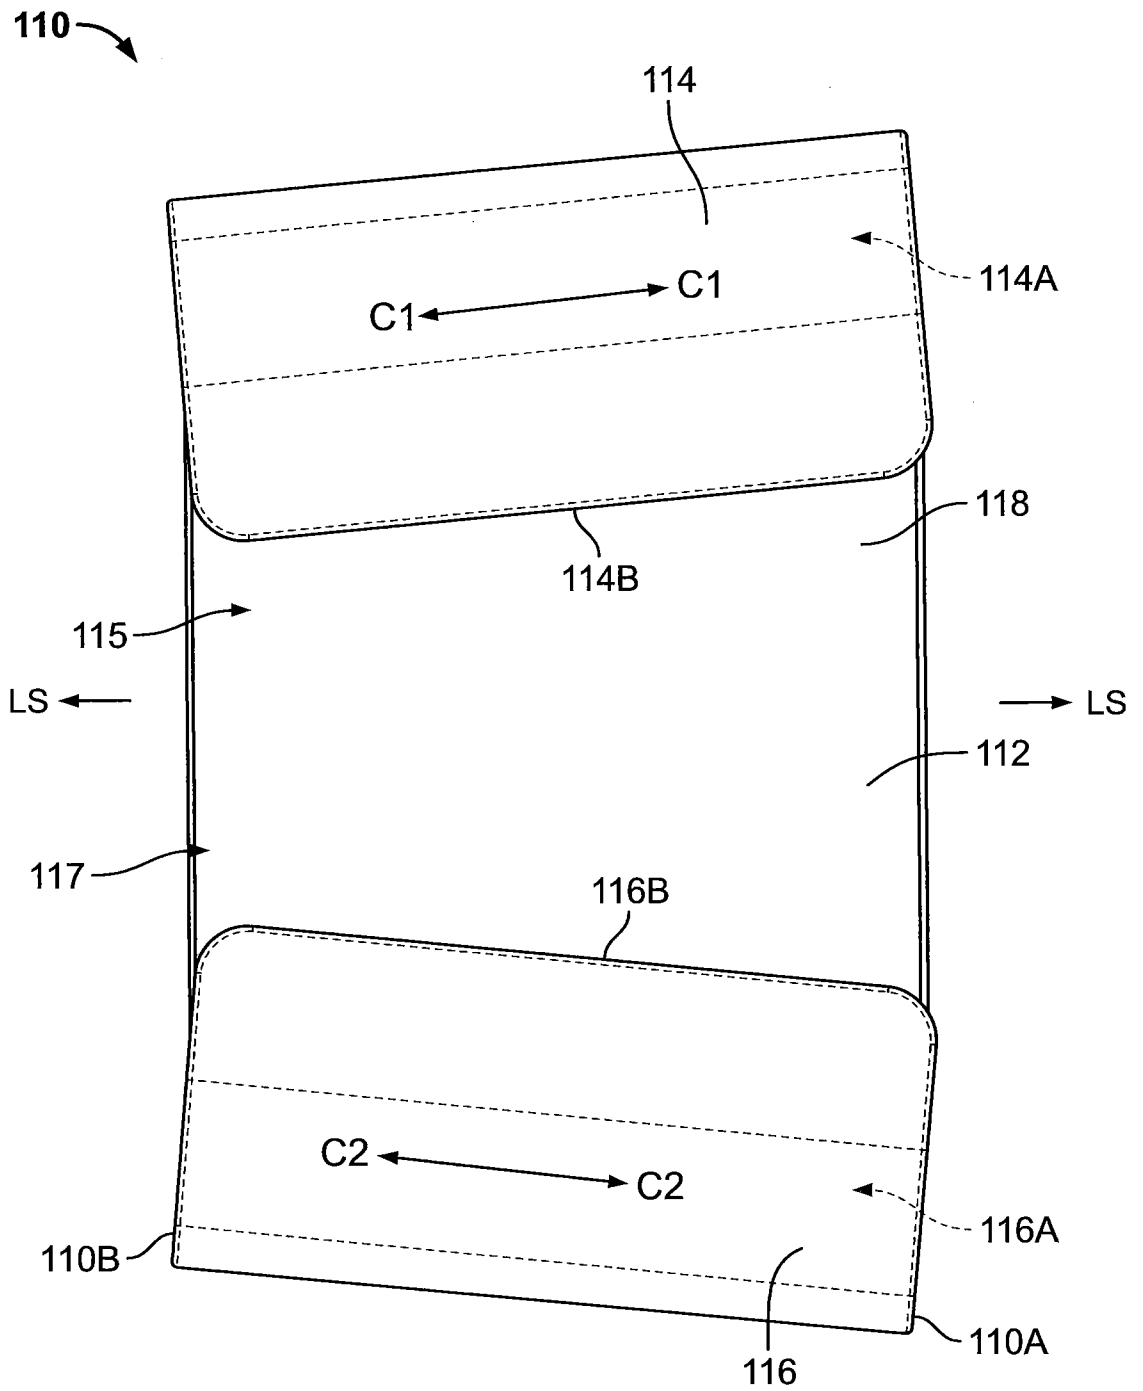


FIG. 7



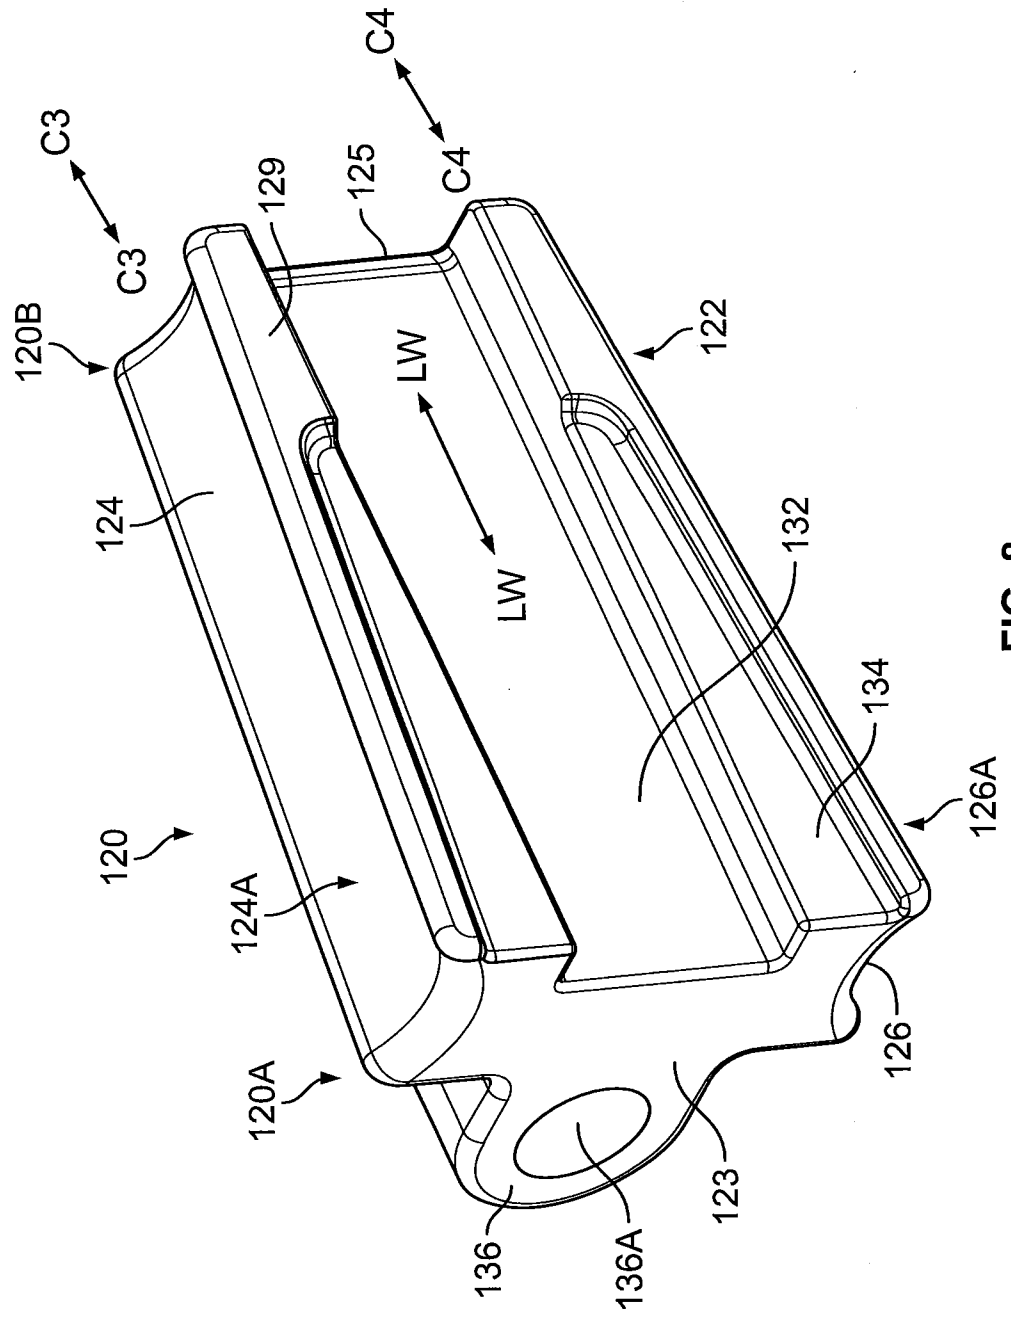


FIG. 8

9/32

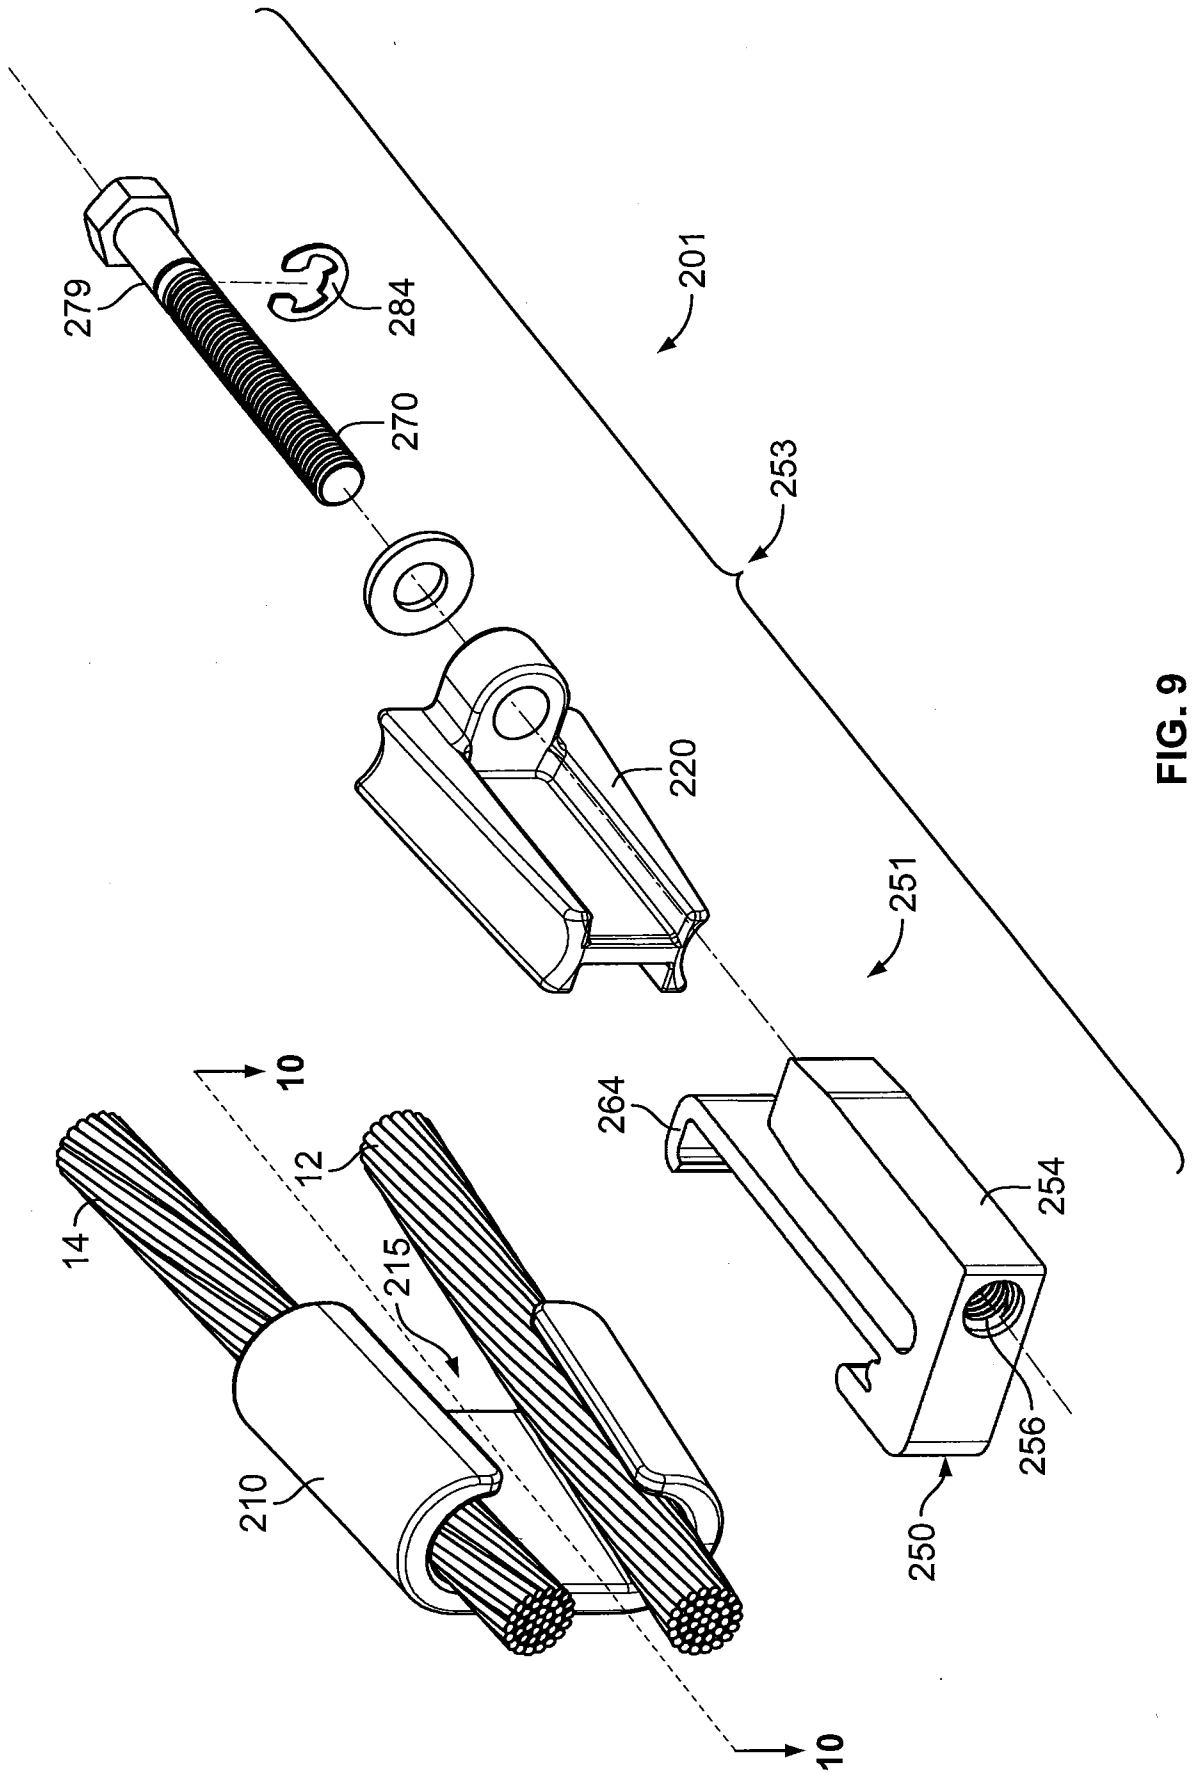


FIG. 9

10/32

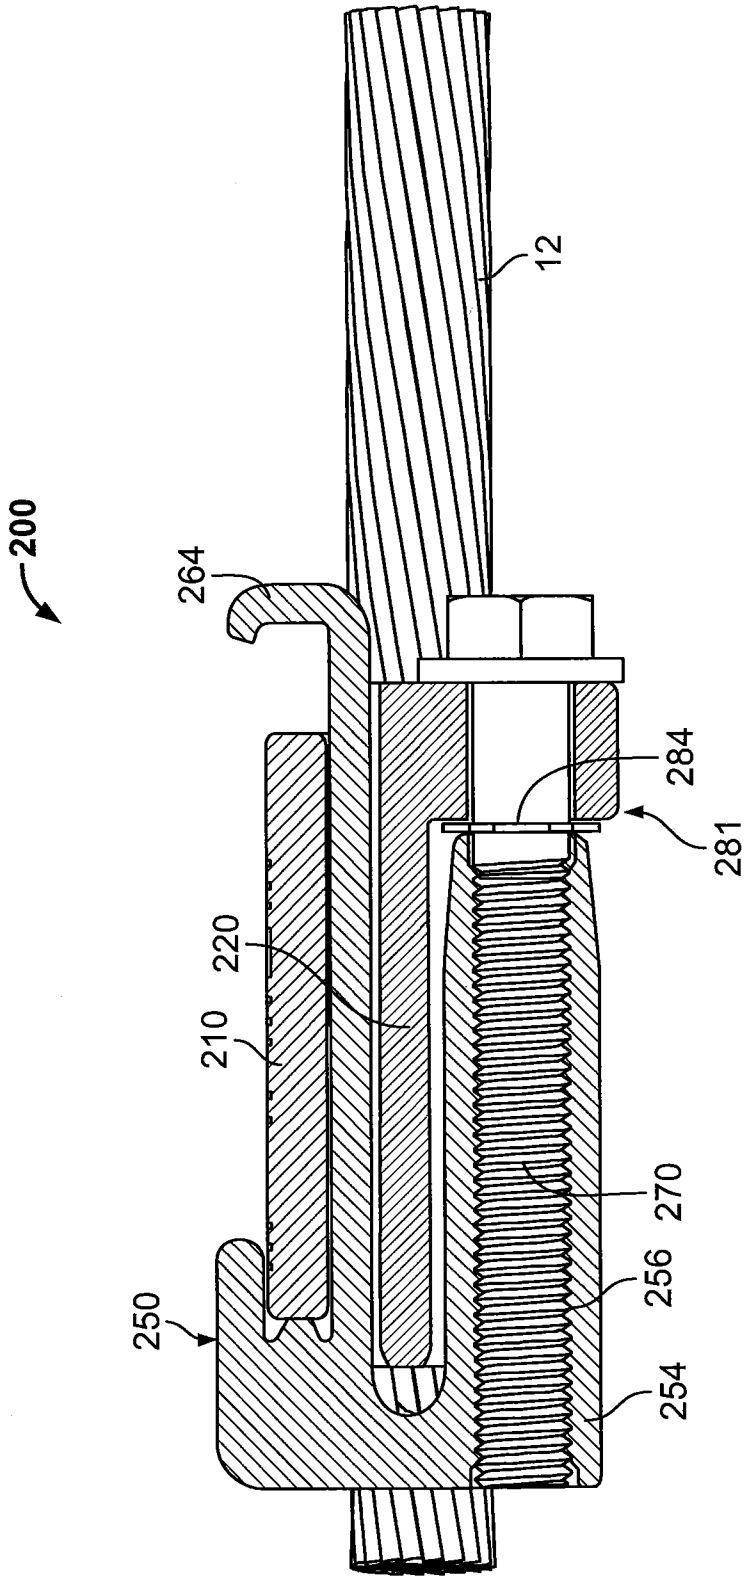


FIG. 10

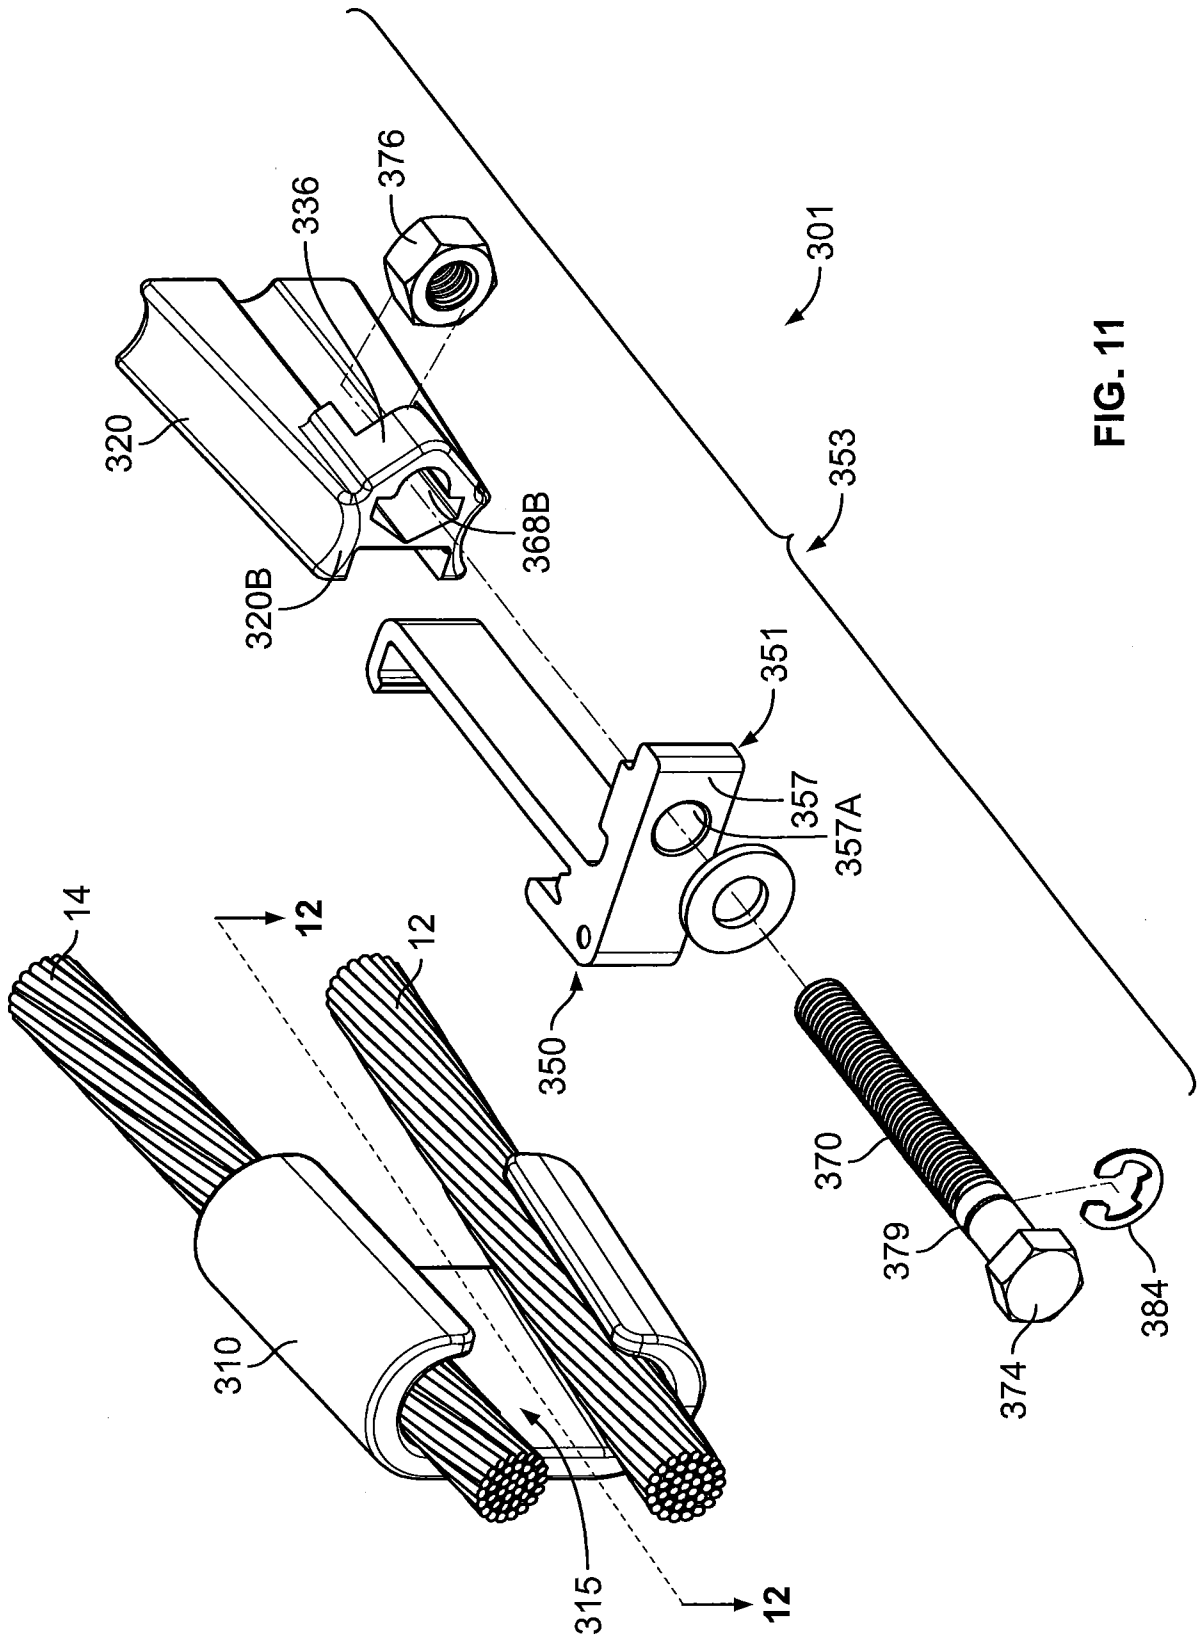


FIG. 11

12/32

300

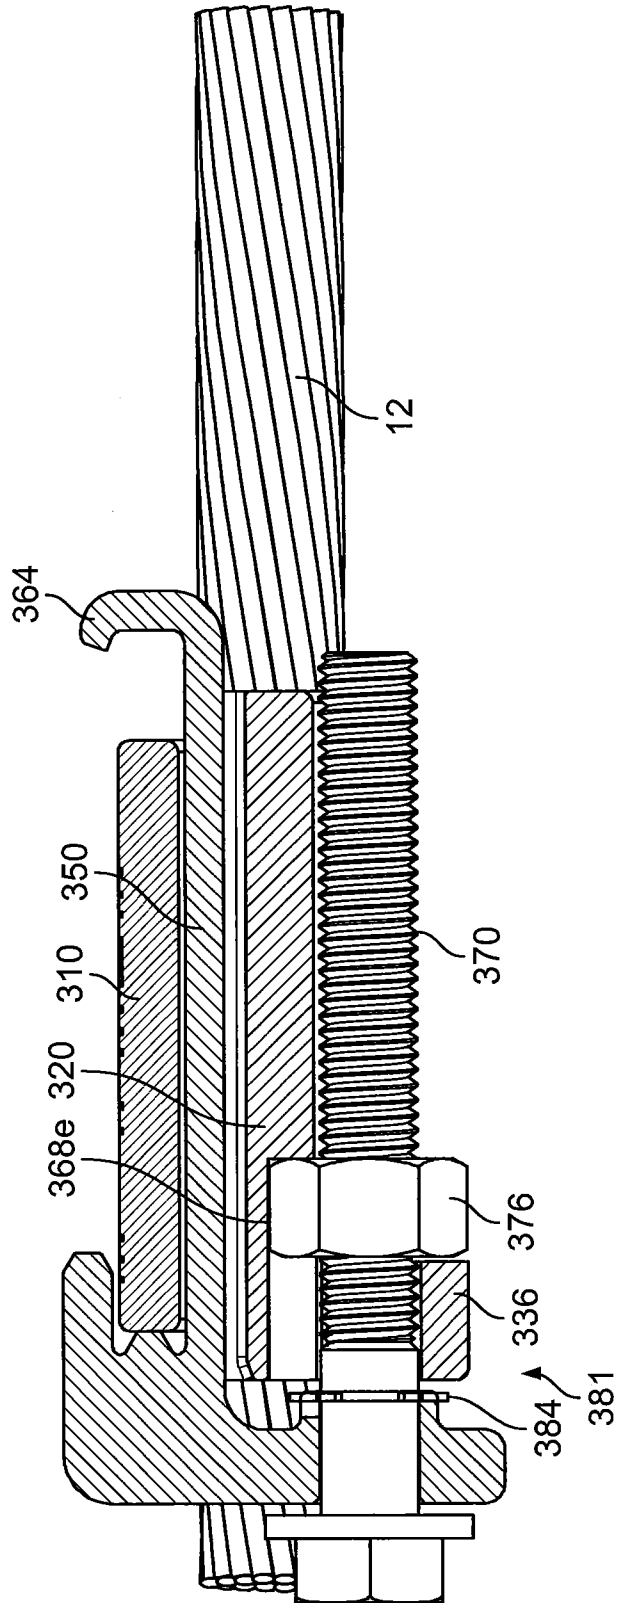


FIG. 12

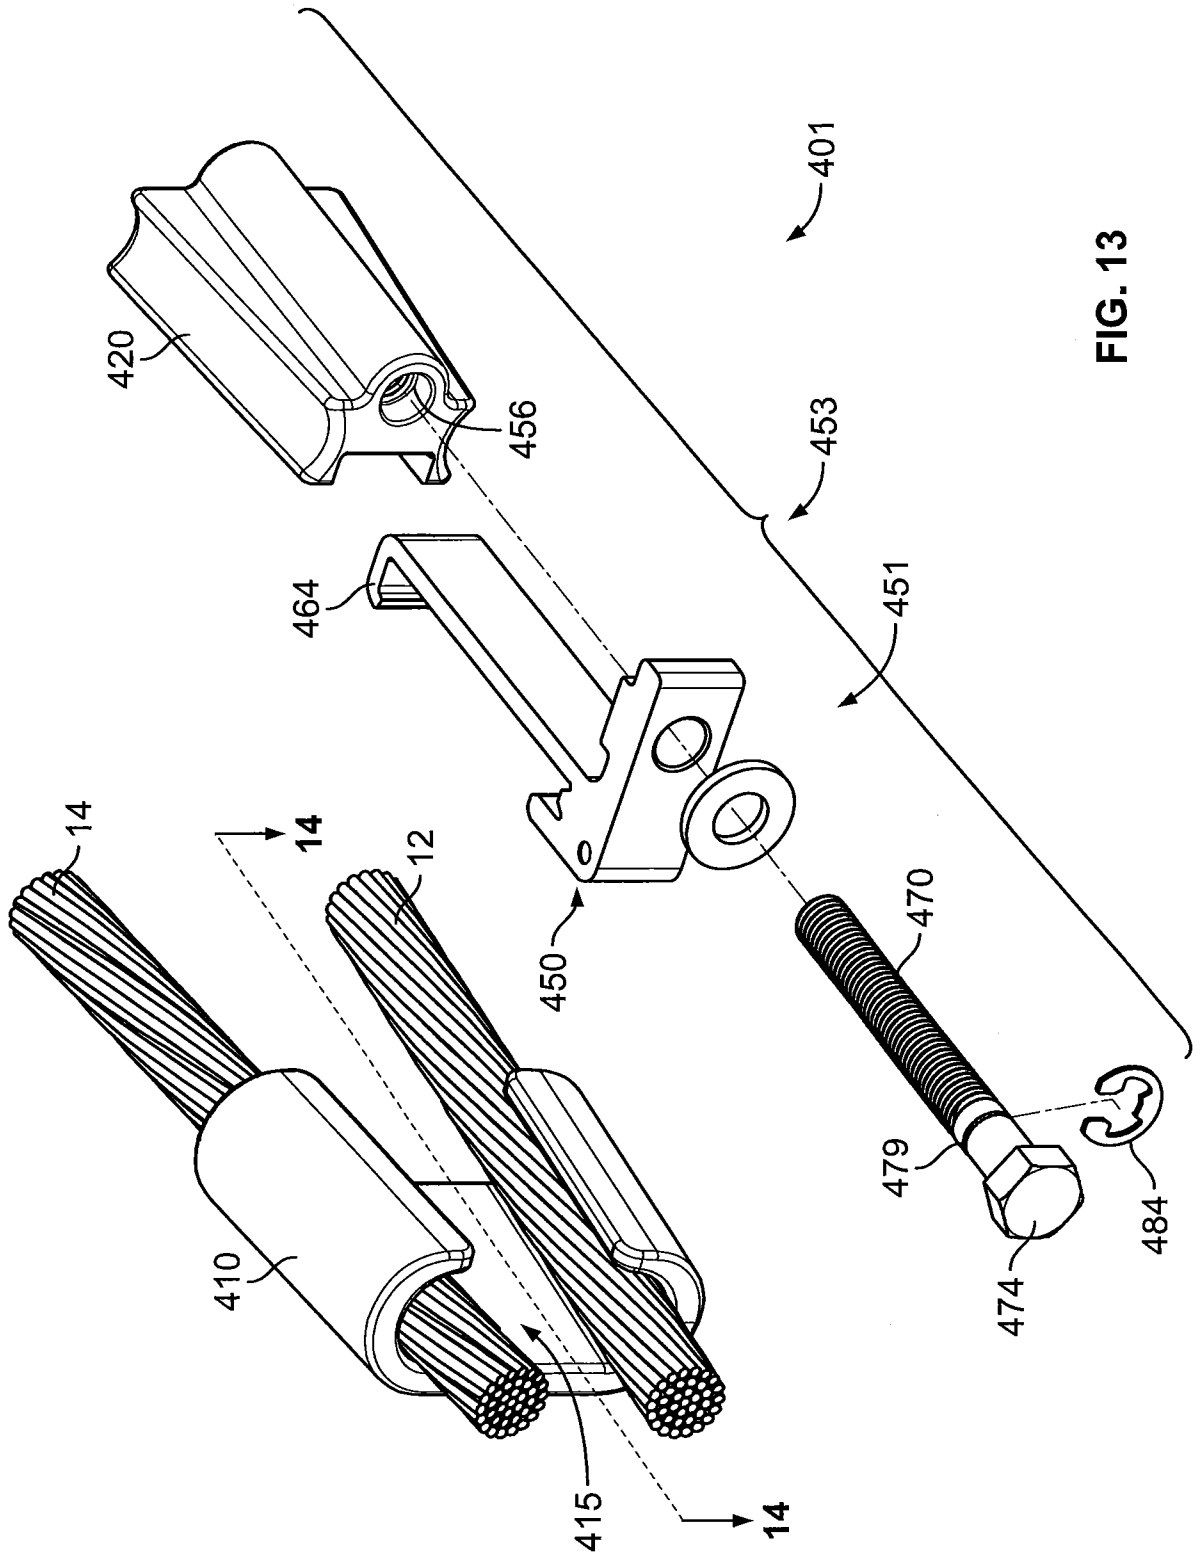


FIG. 13

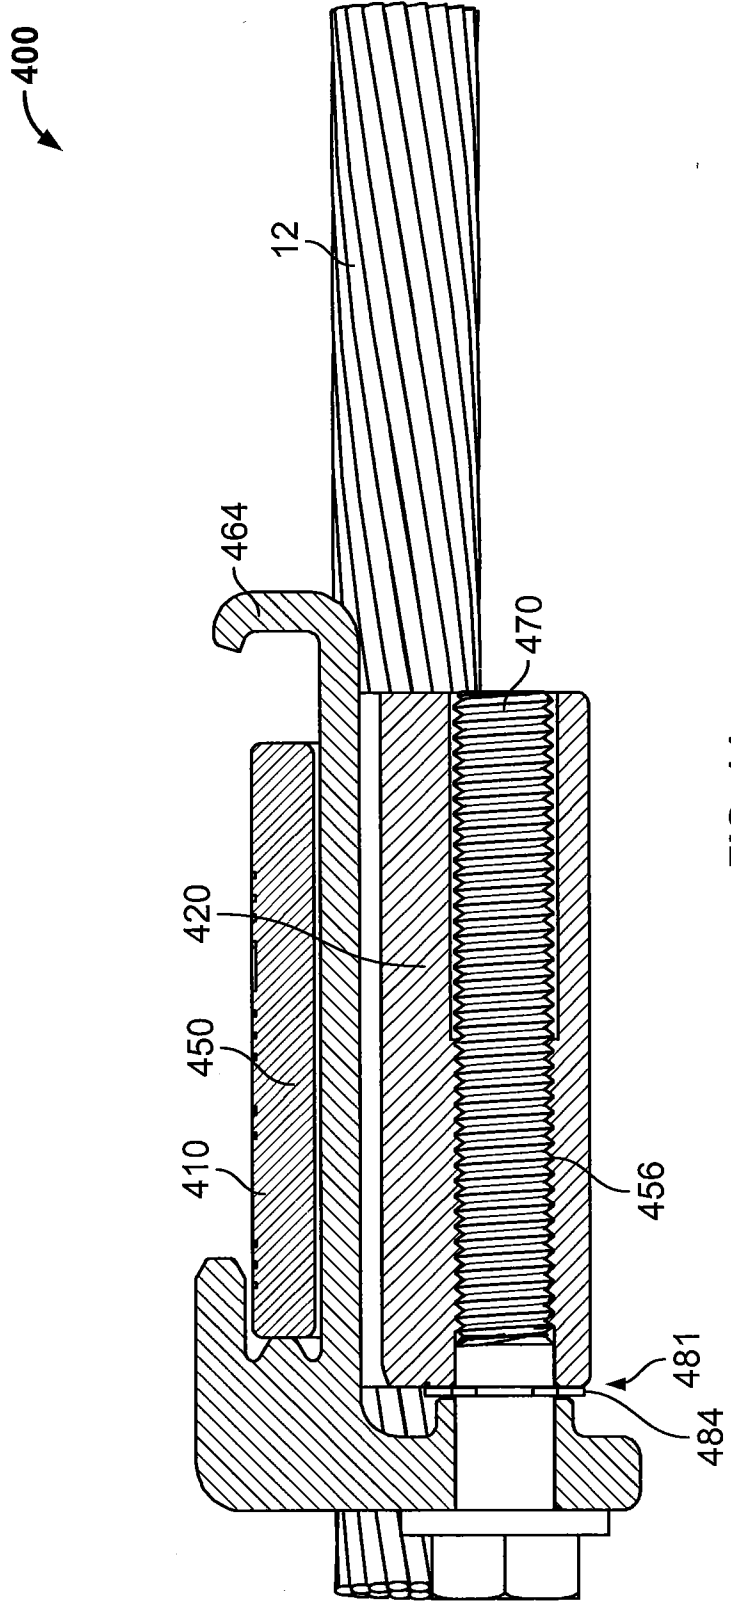


FIG. 14

15/32

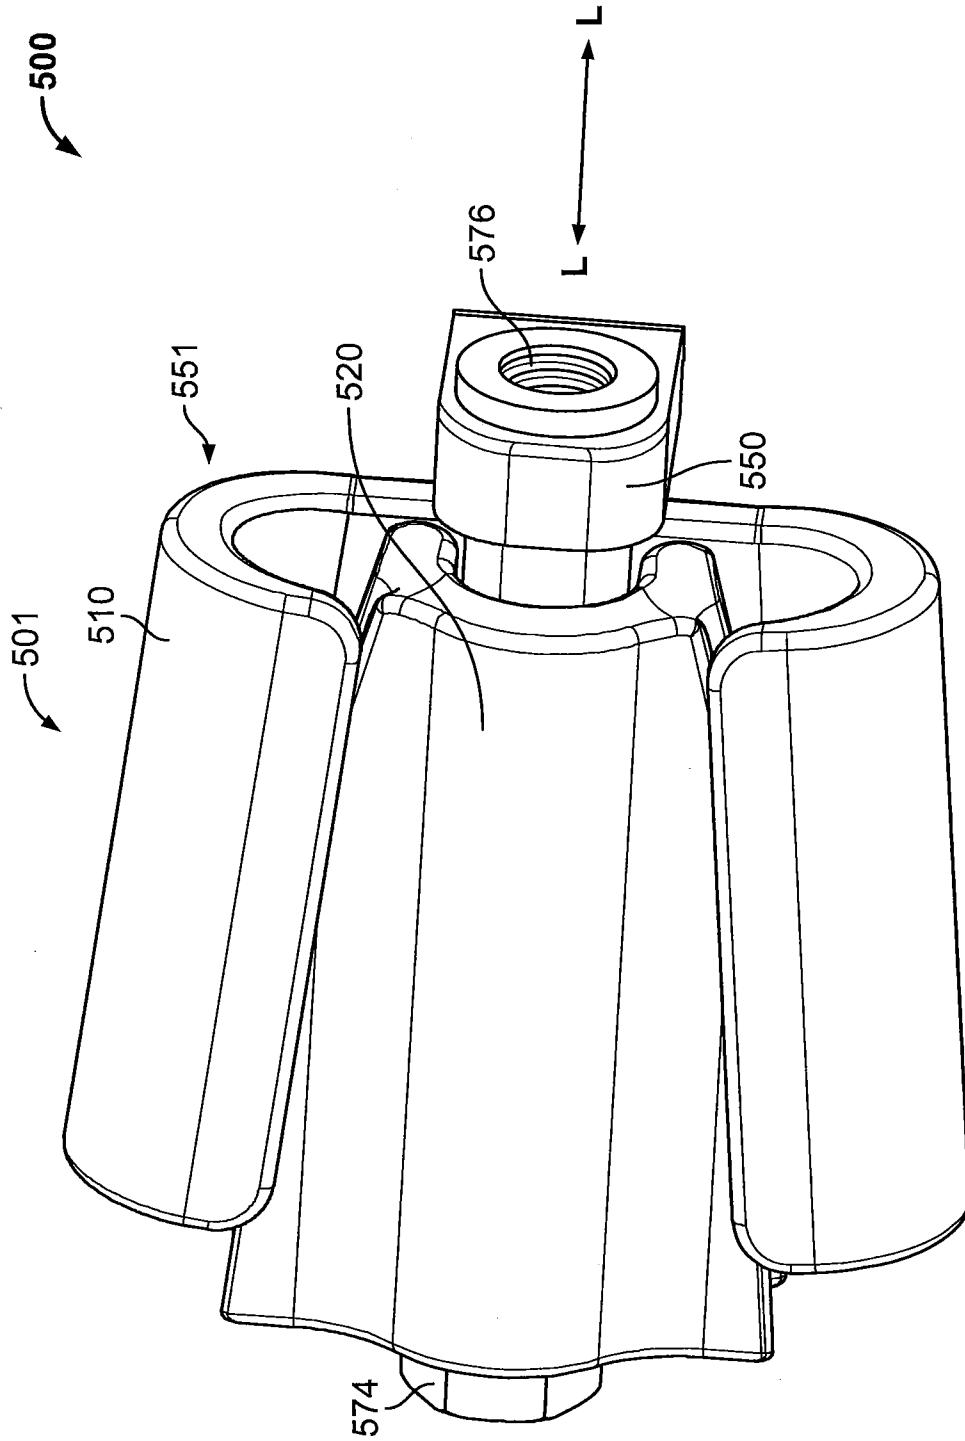


FIG. 15



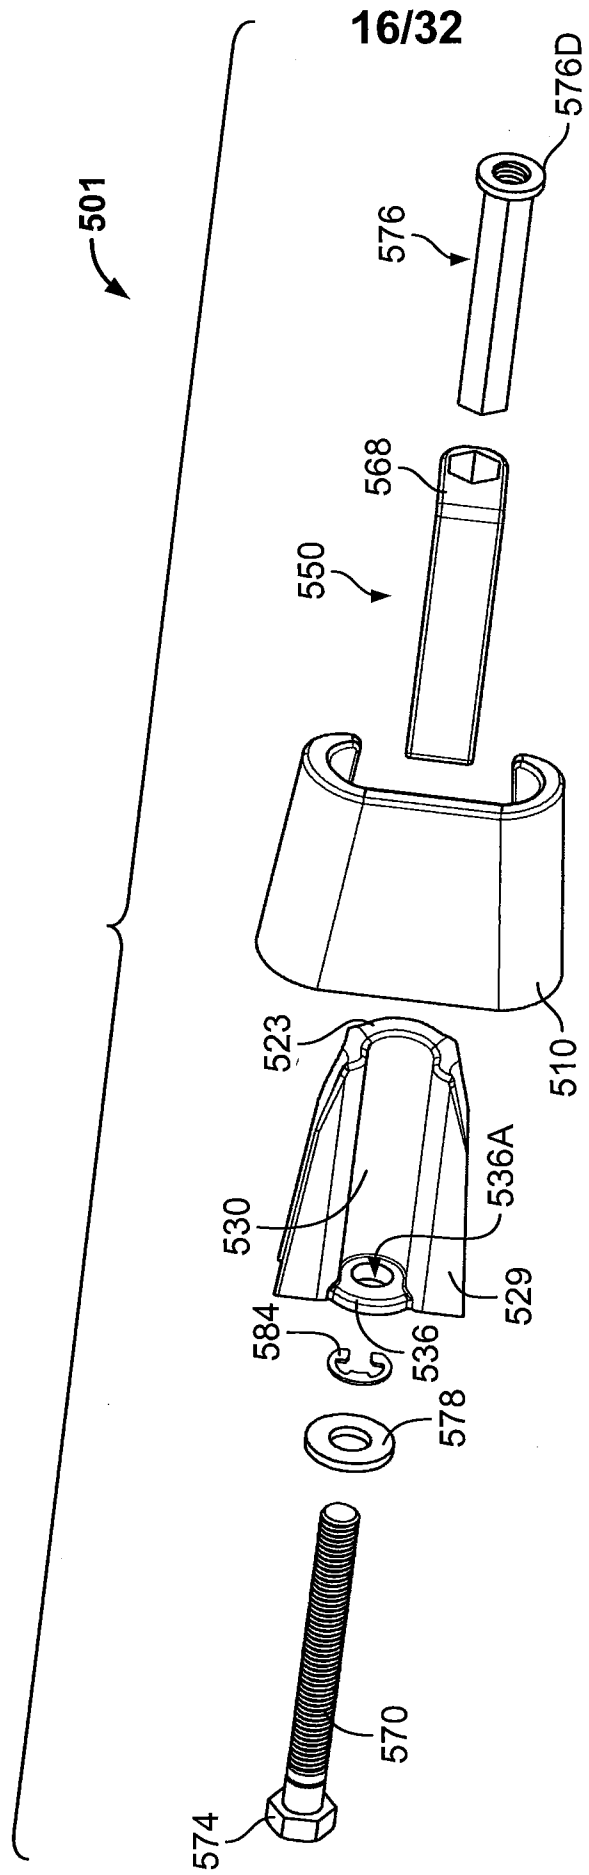


FIG. 16

17/32

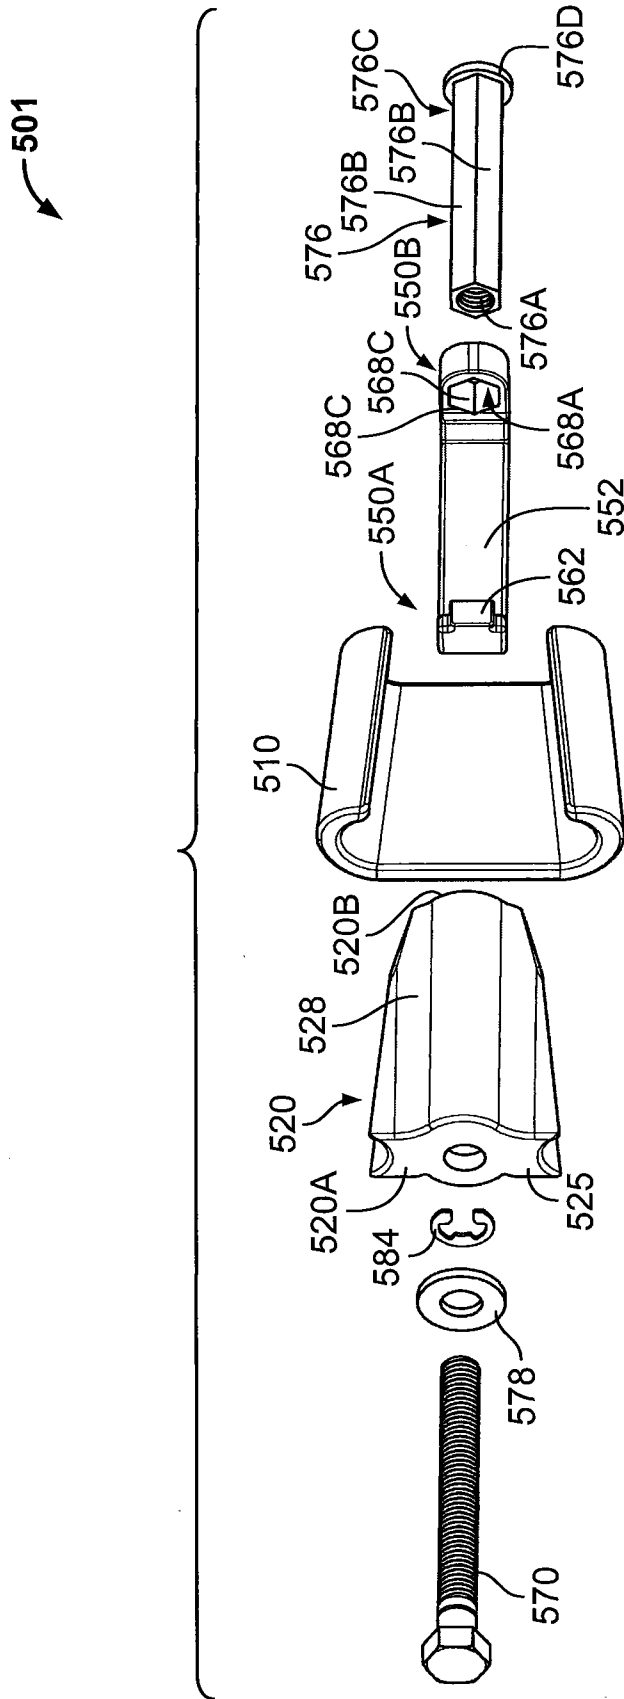


FIG. 17

18/32

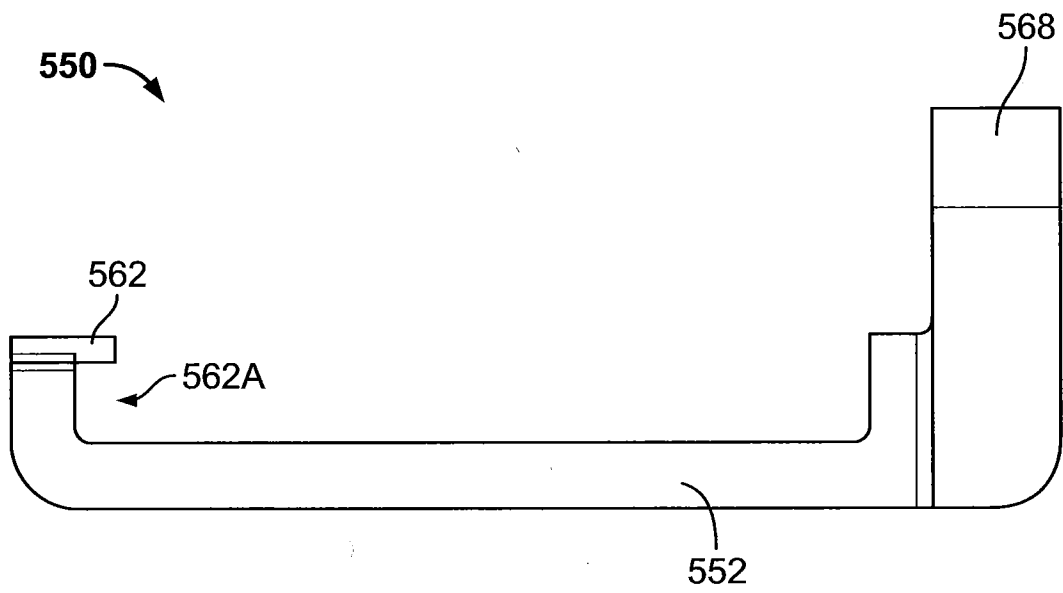


FIG. 18

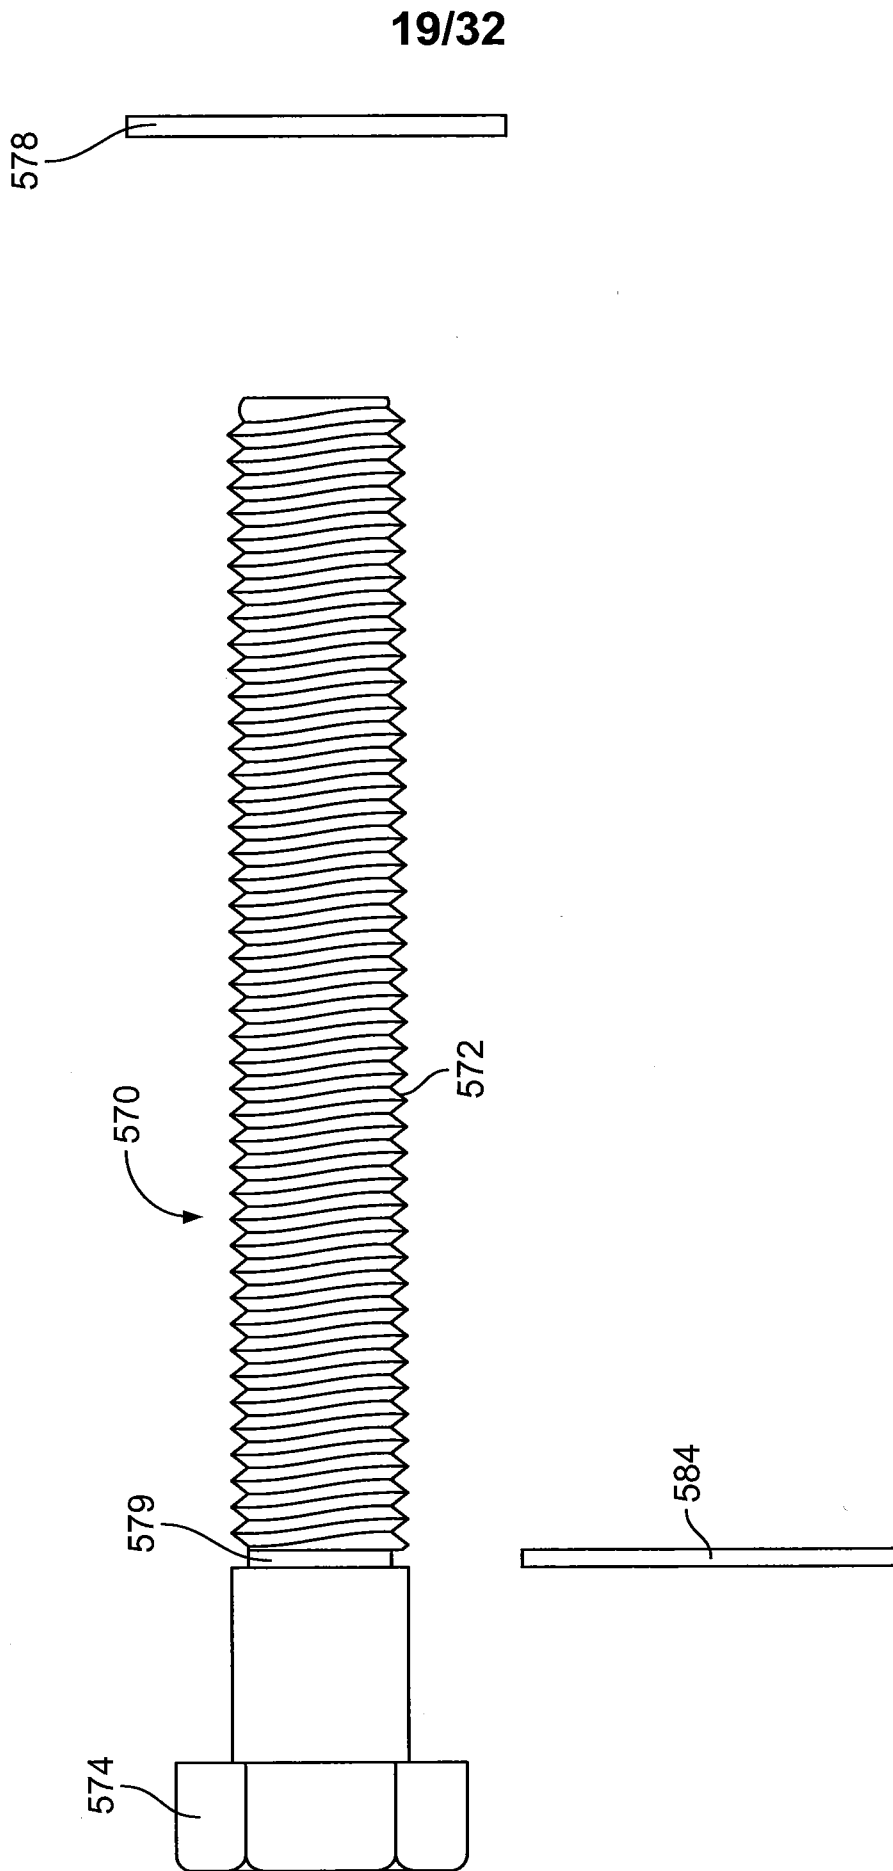
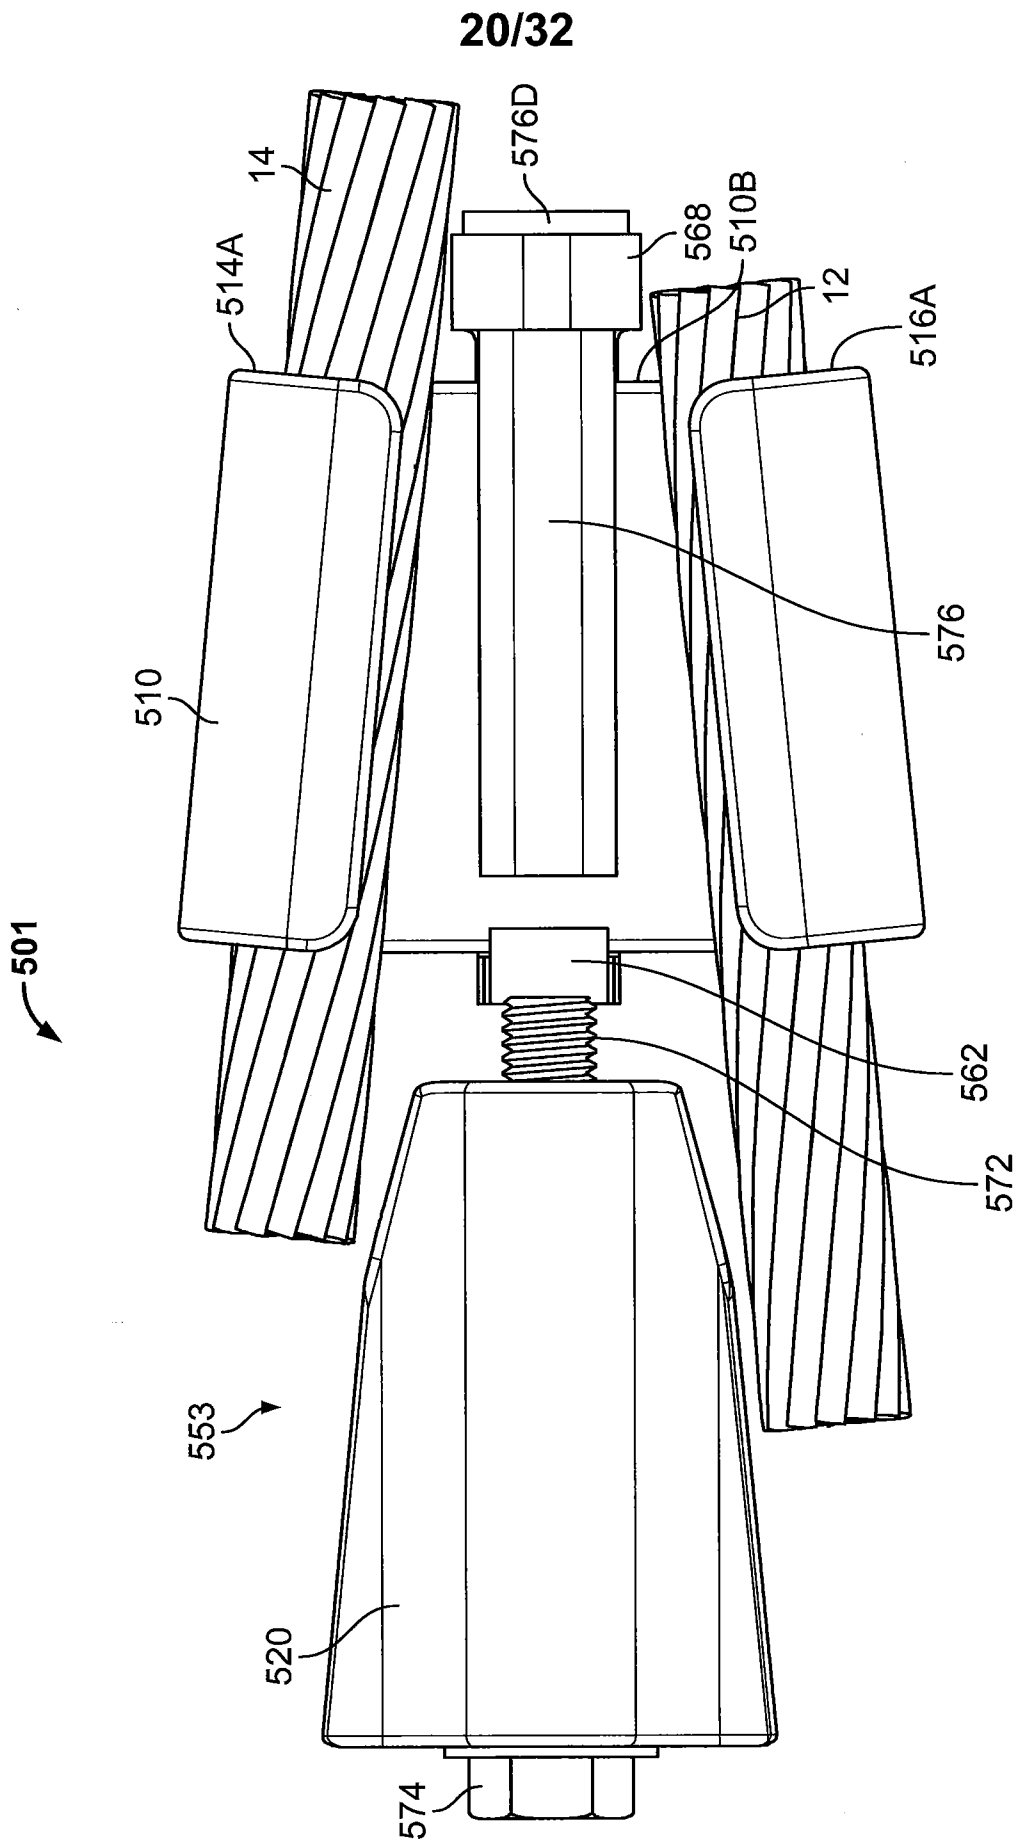


FIG. 19



**FIG. 20**

21/32

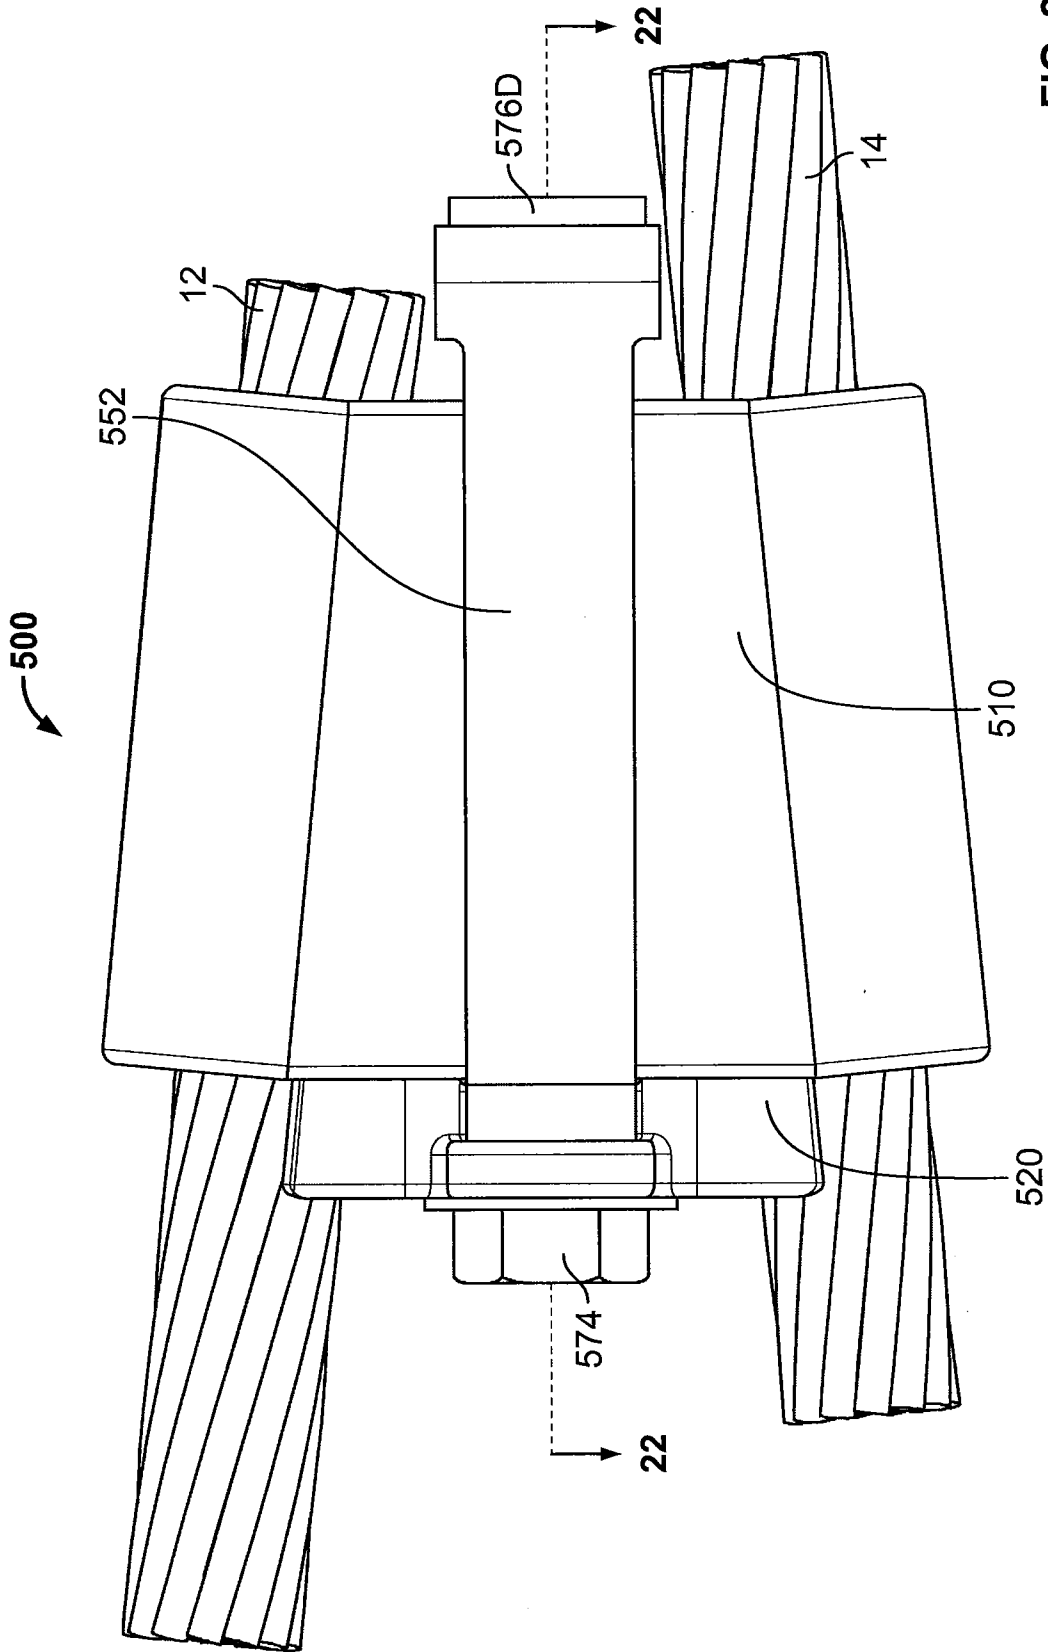


FIG. 21

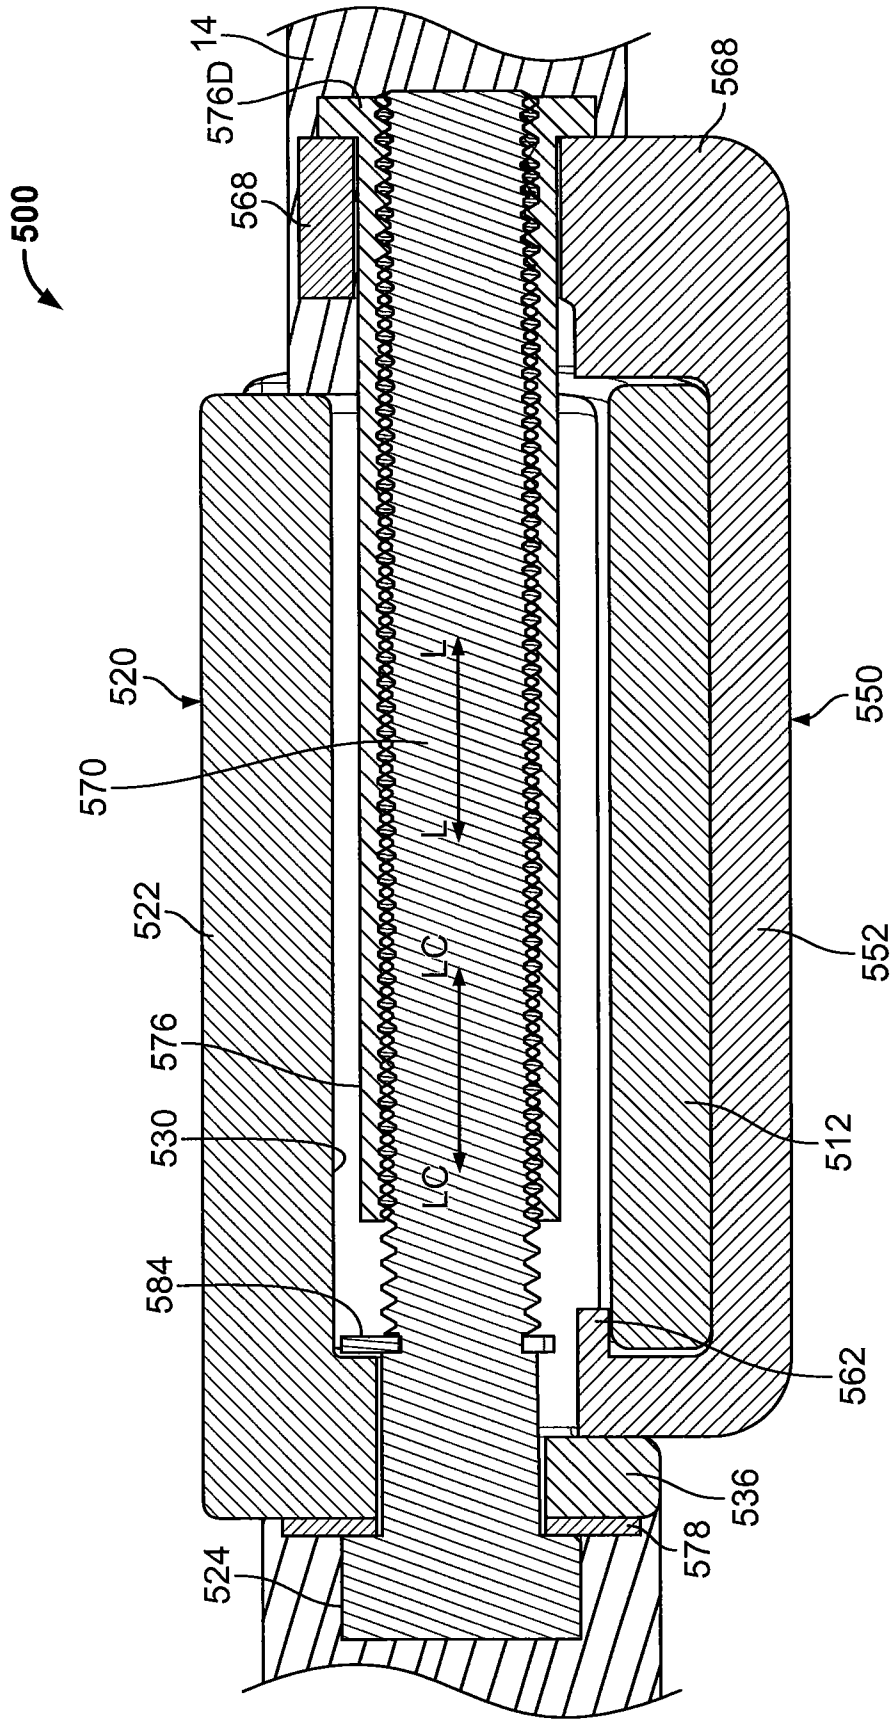


FIG. 22

23/32

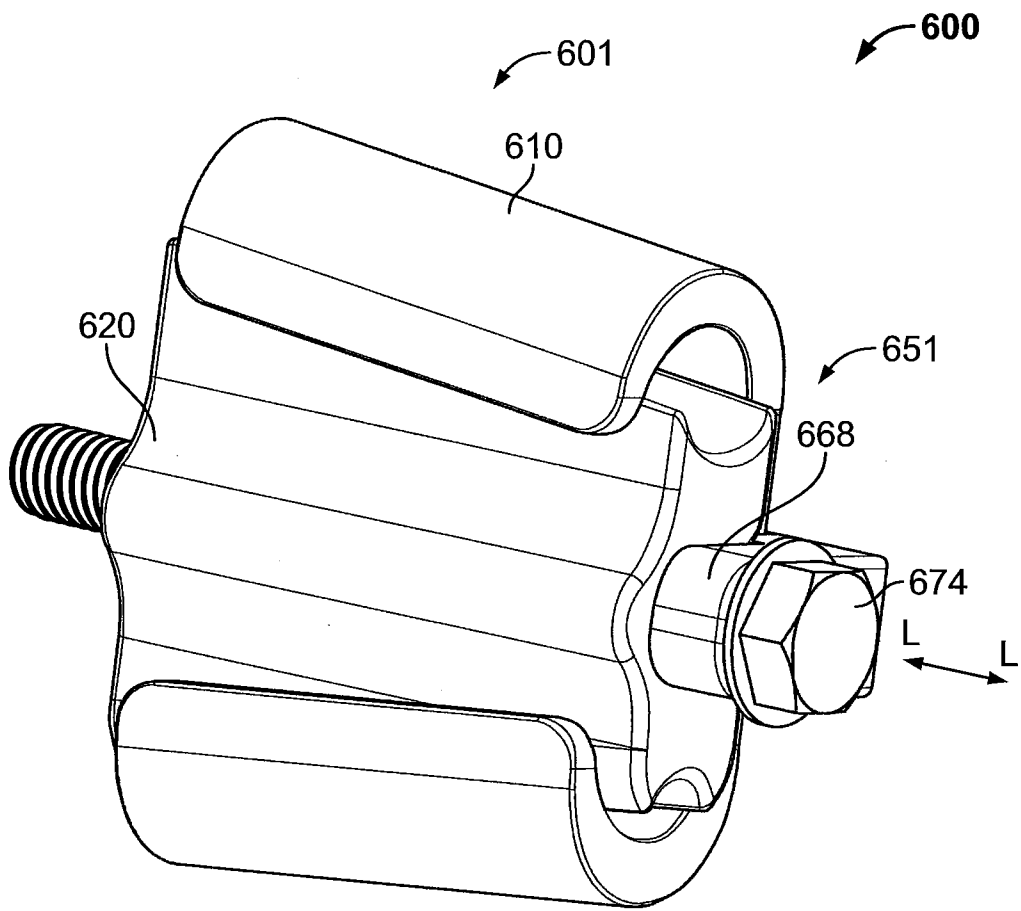


FIG. 23



24/32

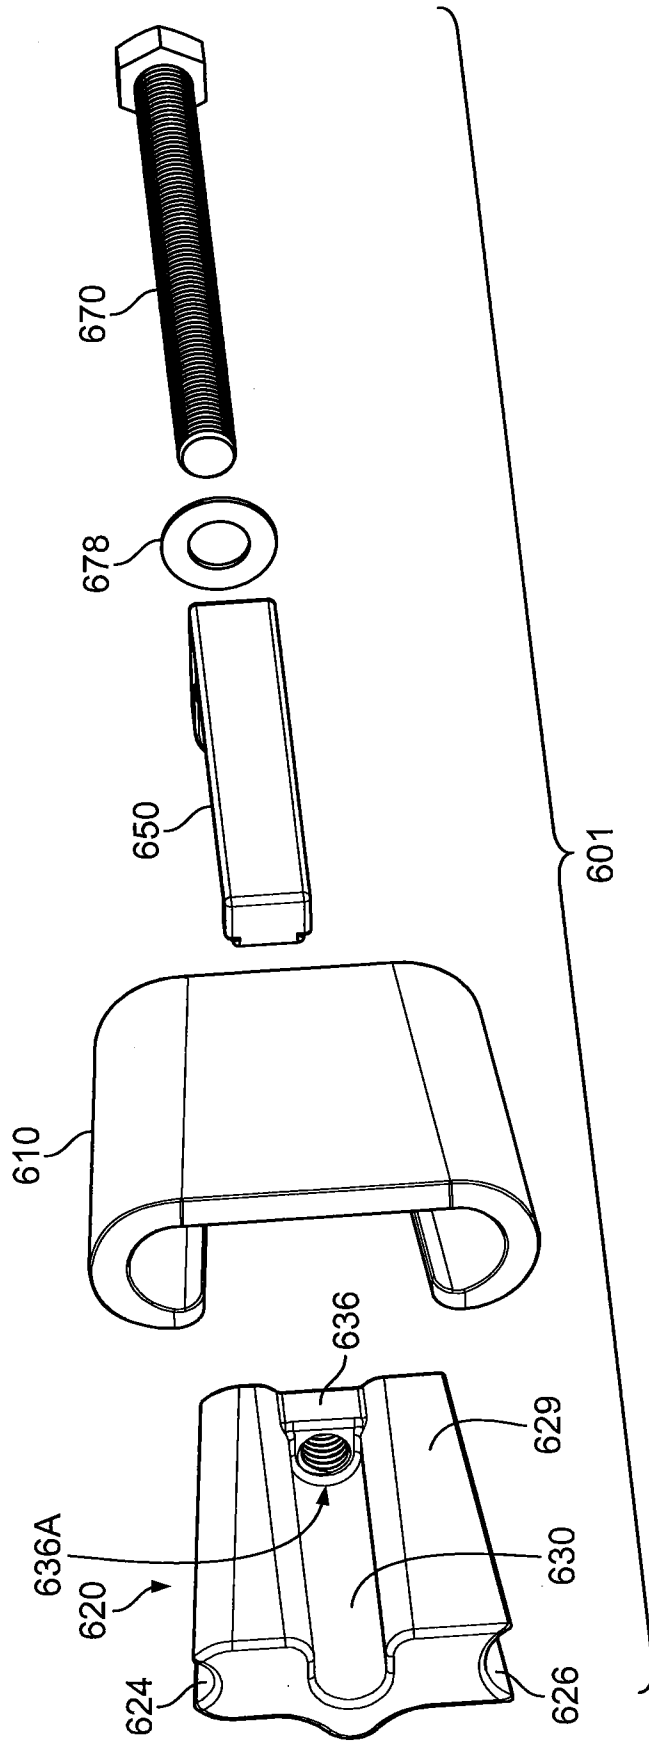


FIG. 24

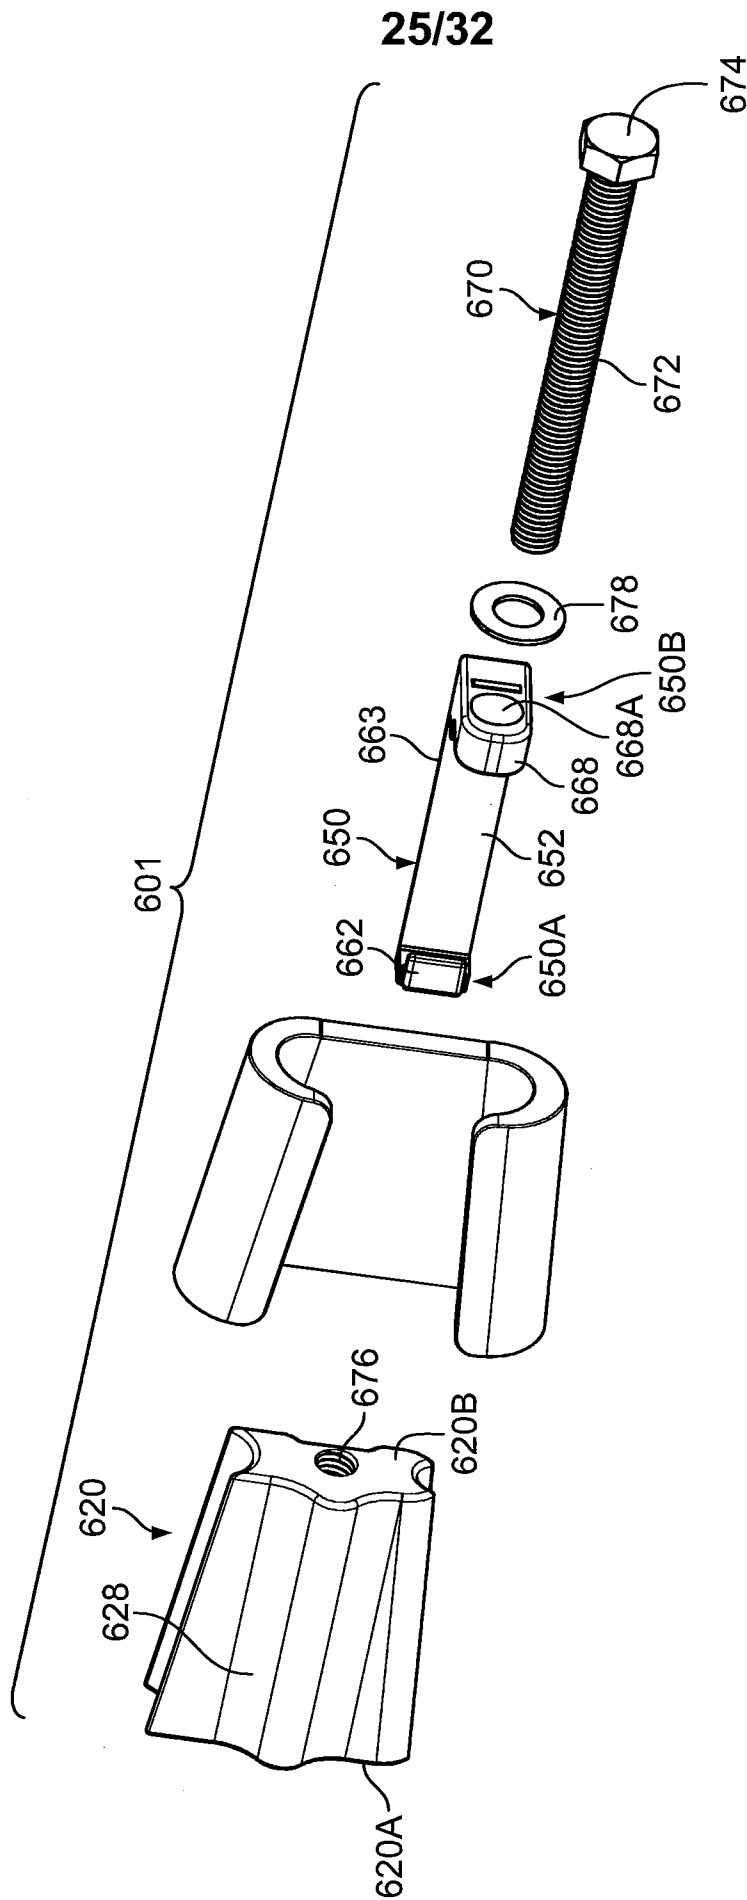


FIG. 25

26/32

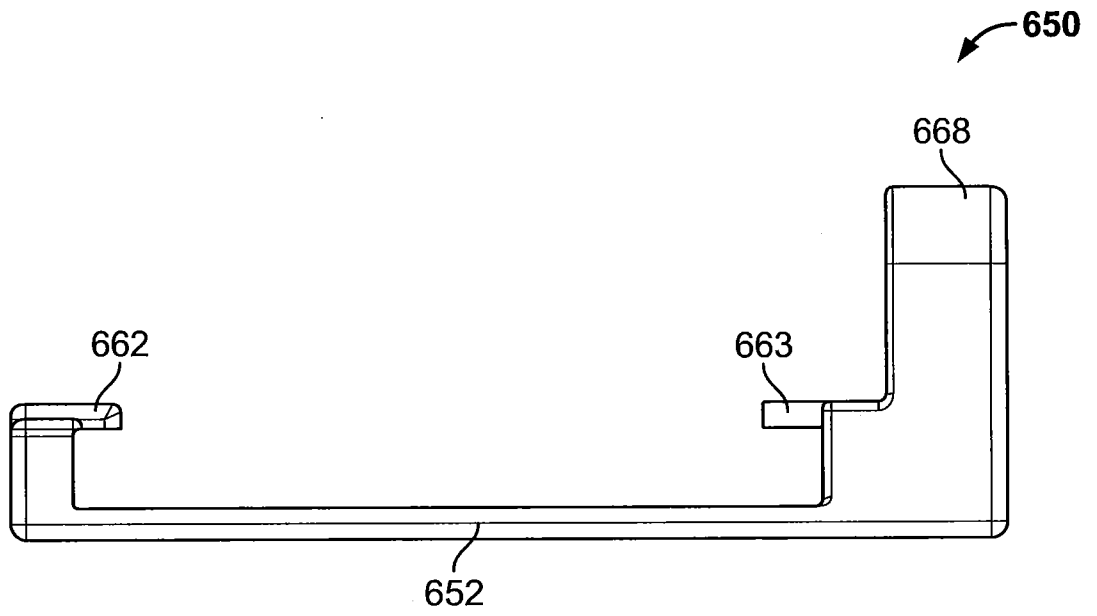


FIG. 26

27/32

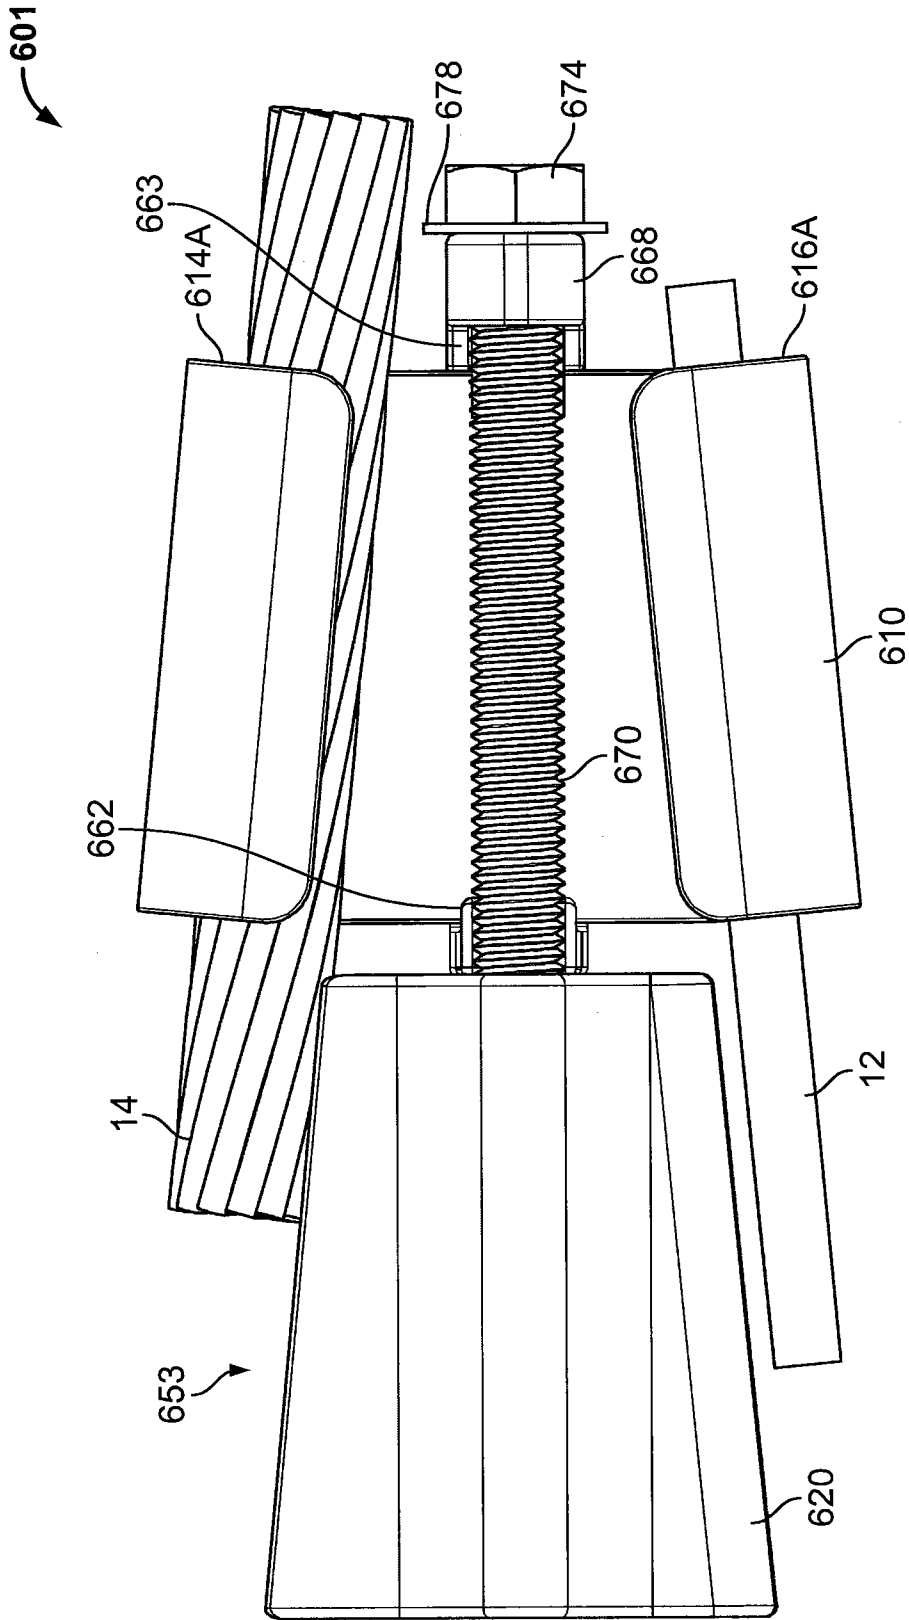


FIG. 27

28/32

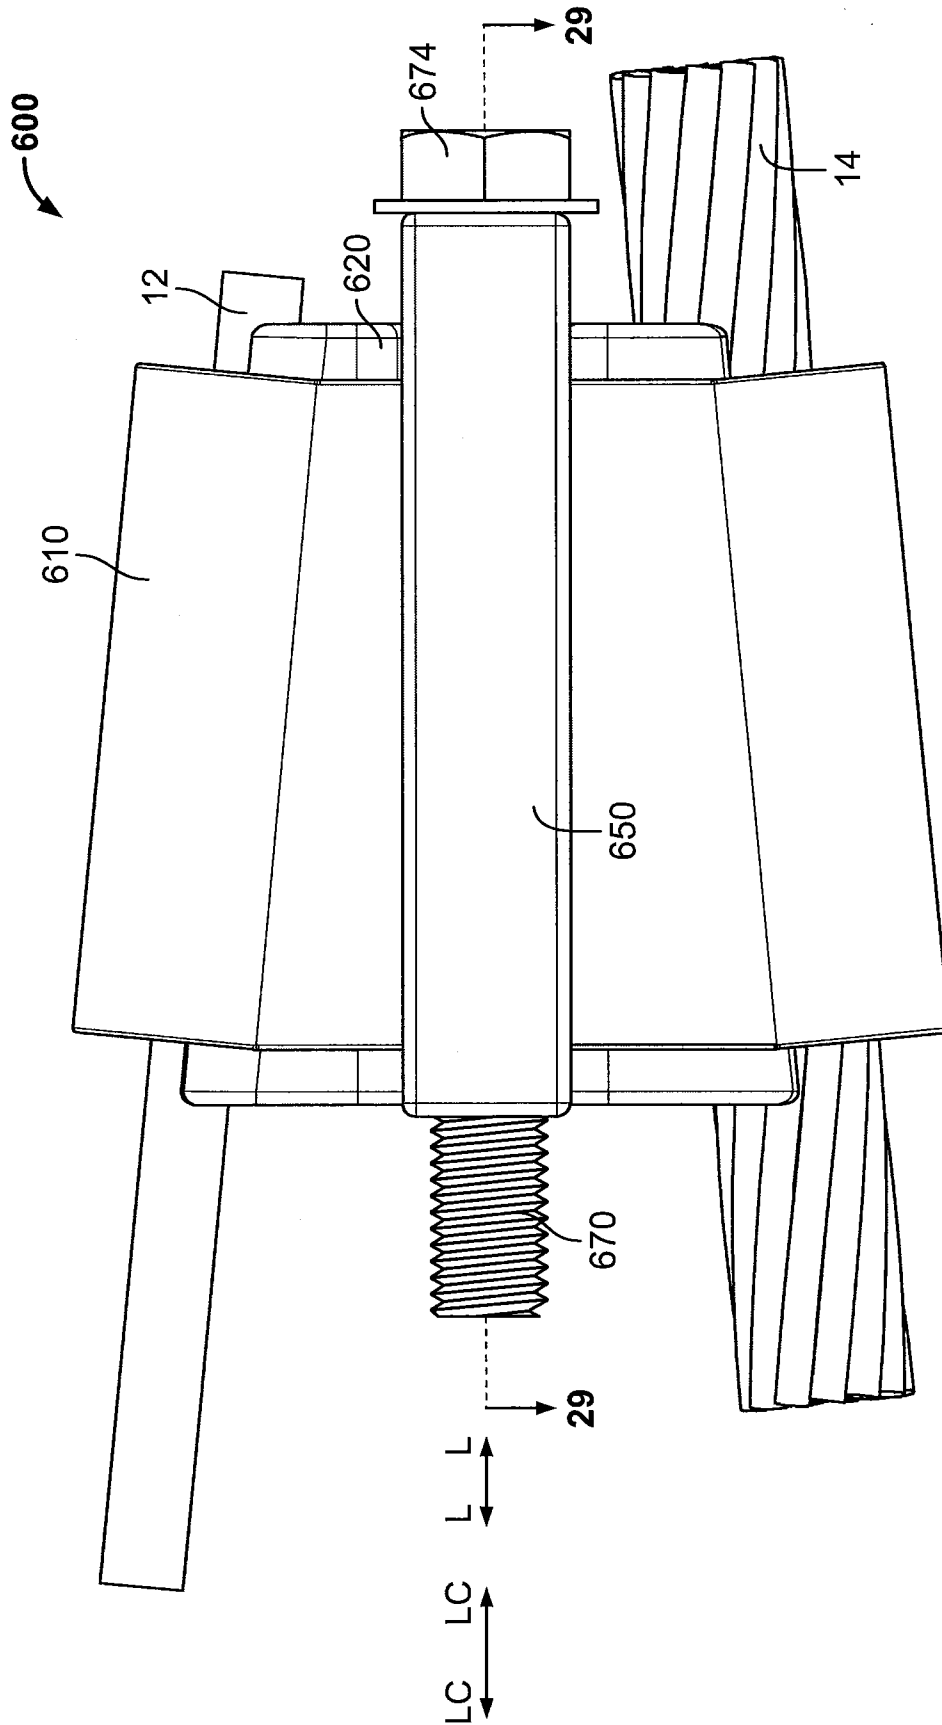


FIG. 28

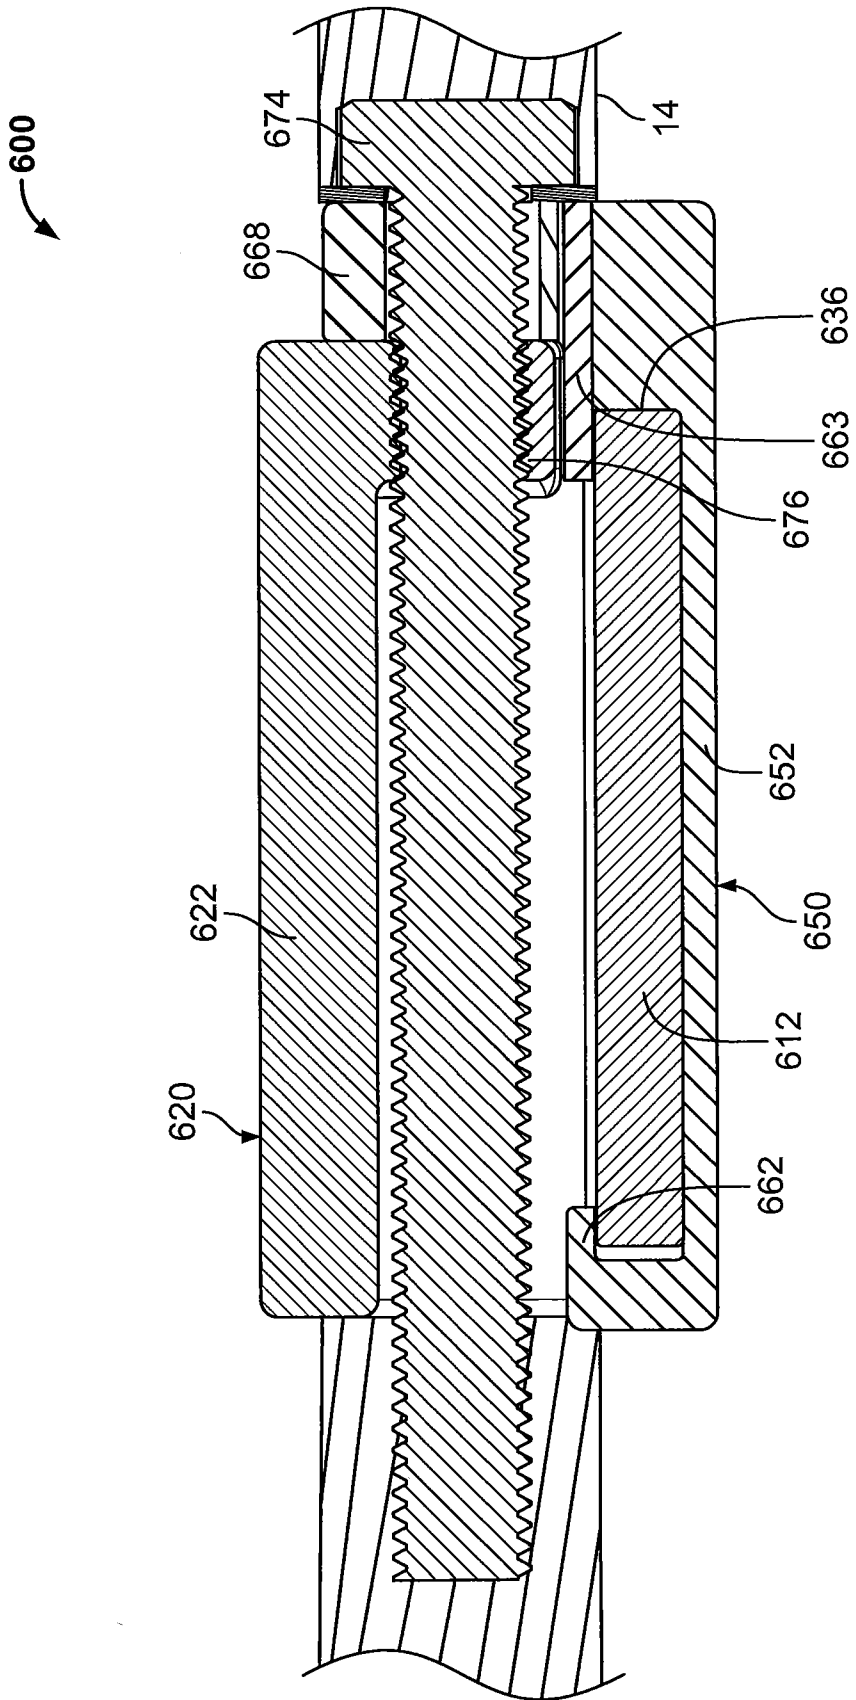


FIG. 29

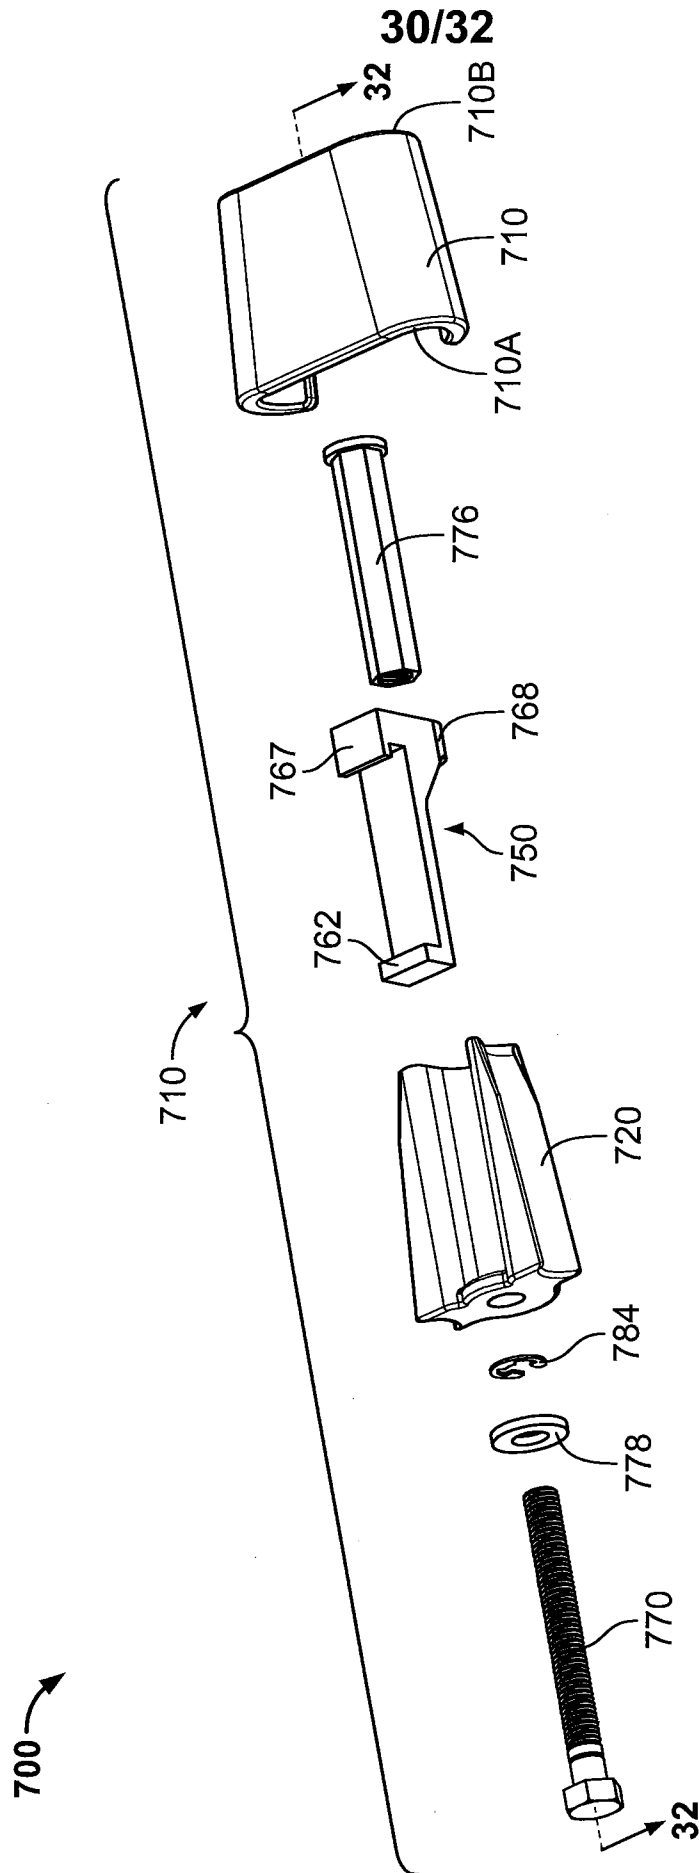


FIG. 30

31/32

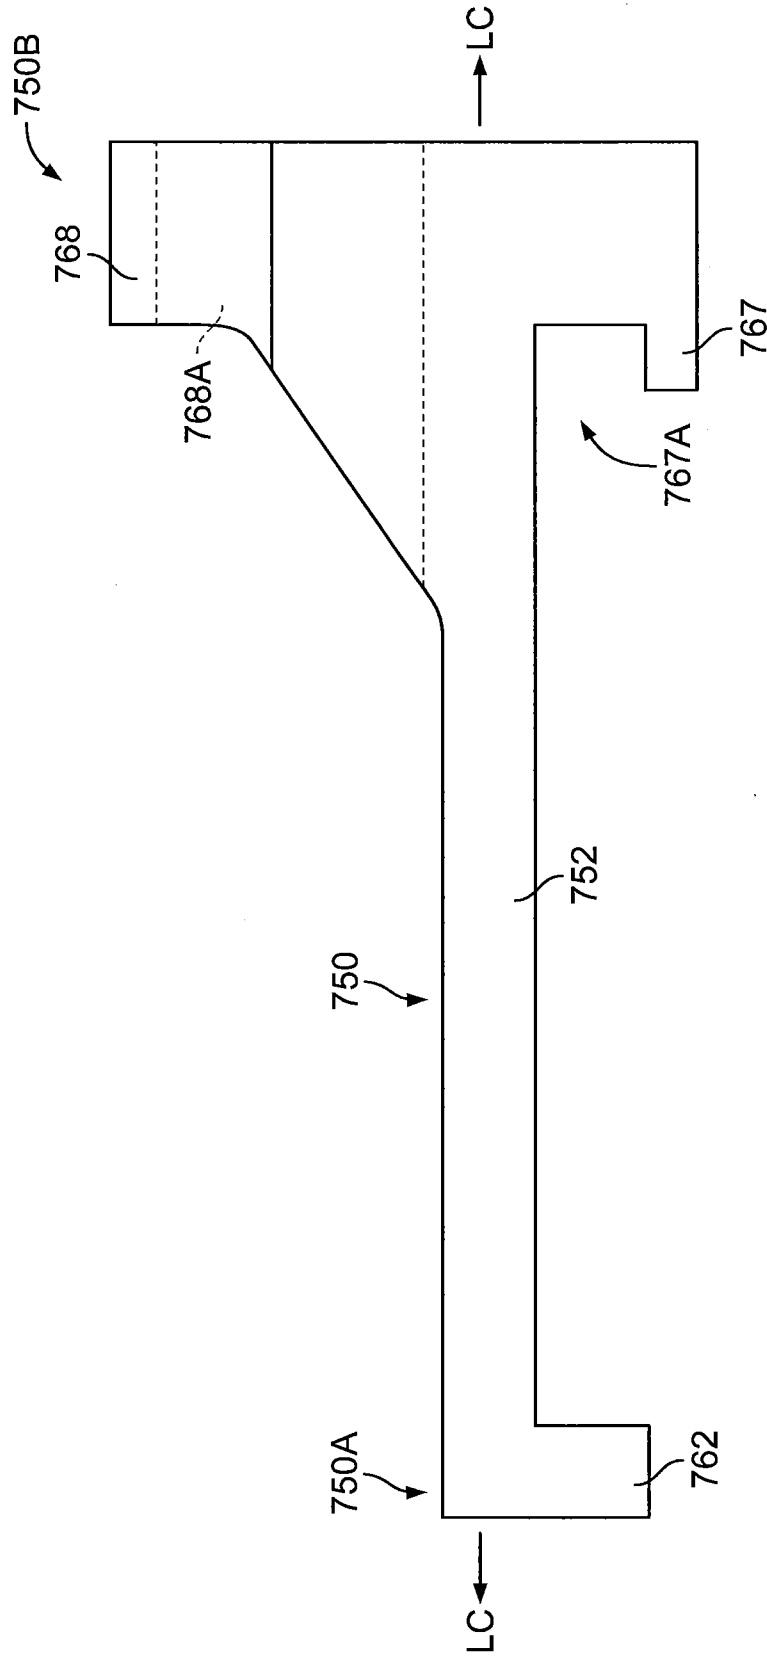


FIG. 31



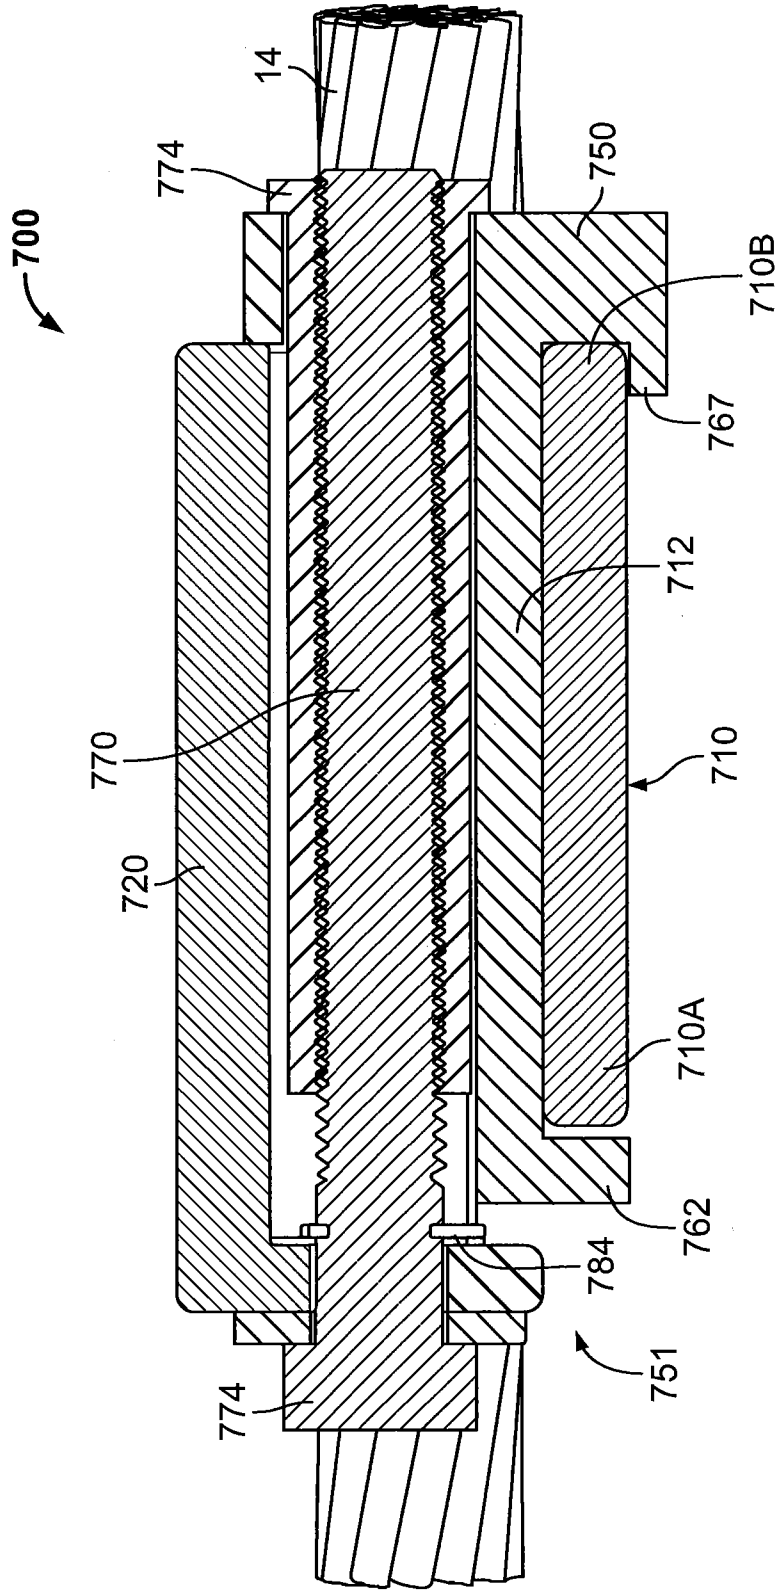


FIG. 32

# INTERNATIONAL SEARCH REPORT

International application No PCT/US2018/030439
---

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> INV. H01R4/50 H01R43/26 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) H01R		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/013891 A2 (FCI AMERICAS TECHNOLOGY INC [US]; FRAMATOME CONNECTORS INT [FR]; DE FR) 31 January 2008 (2008-01-31)  paragraph [0044] - paragraph [0046]; figures 11-14	1-3, 6-12, 16-18, 20,21
X	----- US 5 692 930 A (GARVER WILLIAM JOSEPH [US] ET AL) 2 December 1997 (1997-12-02)  column 2 - column 3; figures 1,6-8	1,3, 10-12, 19-21
X	----- US 4 863 403 A (SHANNON SUEL G [US]) 5 September 1989 (1989-09-05)	1-3, 11-15, 17,18, 20,21
Y	column 3 - column 4; figures 1-3,7-12  ----- -/--	4,5
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <span style="margin-left: 100px;"><input checked="" type="checkbox"/> See patent family annex.</span>		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  "&" document member of the same patent family	
Date of the actual completion of the international search	Date of mailing of the international search report	
13 July 2018	19/07/2018	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Vautrin, Florent	

INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2018/030439

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 423 699 A (JOHNSON BARRY J [CA]) 13 June 1995 (1995-06-13)	4,5
A	column 3 - column 4; figures 4-7 -----	1
A	US 5 340 335 A (HAUN CHRISTOPHER [CA]) 23 August 1994 (1994-08-23)	1-21
	column 3 - column 5; figures 3-12 -----	
A	US 5 092 797 A (COLE RANDY T [CA] ET AL) 3 March 1992 (1992-03-03)	1-21
	column 2 - column 3; figures 1-3 -----	
A	CA 2 334 187 A1 (FCI CANADA INC [CA]) 5 August 2002 (2002-08-05)	1-21
	page 6 - page 10; figures 1-3 -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2018/030439
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008013891	A2	31-01-2008	CA 2654895 A1 US 2008026644 A1 WO 2008013891 A2
			31-01-2008 31-01-2008 31-01-2008
-----			
US 5692930	A	02-12-1997	NONE
-----			
US 4863403	A	05-09-1989	CA 1304803 C US 4863403 A
			07-07-1992 05-09-1989
-----			
US 5423699	A	13-06-1995	AU 680914 B2 BR 9403469 A CA 2128908 A1 CN 1103208 A CZ 9401940 A3 ES 2103650 A1 JP H07201380 A NL 9401252 A PH 30606 A PL 304786 A1 TW 371807 B US 5423699 A
			14-08-1997 16-05-1995 09-03-1995 31-05-1995 15-03-1995 16-09-1997 04-08-1995 03-04-1995 31-07-1997 20-03-1995 11-10-1999 13-06-1995
-----			
US 5340335	A	23-08-1994	NONE
-----			
US 5092797	A	03-03-1992	CA 2070621 A1 US 5092797 A
			09-01-1993 03-03-1992
-----			
CA 2334187	A1	05-08-2002	NONE
-----			