



(51) International Patent Classification:

B65D 3/14 (2006.01) B31F 1/00 (2006.01)
B31B 50/59 (2017.01) B31D 5/00 (2017.01)

(21) International Application Number:

PCT/US2019/028662

(22) International Filing Date:

23 April 2019 (23.04.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/664,404 30 April 2018 (30.04.2018) US

(71) Applicant: WESTROCK MWV, LLC [US/US]; 1000
Abernathy Road NE, Atlanta, Georgia 30328 (US).

(72) Inventors: LINVILL, Eric D.; Harplingegränd 96 lgh
1101, 12573 Älvsjö (SE). PANG, Jiebin; 5116 Amber-
wood Drive, Glen Allen, Virginia 23059 (US). MELTON,
Natasha G.; 4116 Patterson Avenue, Richmond, Vir-
ginia 23221 (US). TAYLOR, James M.; 106 S. Ivy Av-
enue, Highland Springs, Virginia 23075 (US). PARKER,
Steven; 3020 Hunters Bluff Drive, Raleigh, Virginia 27606
(US).

(74) Agent: BOSHINSKI, Thomas A. et al.; WestRock
Company, 501 South 5th Street, Richmond, Virginia
23219-0501 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) Title: COATED PAPERBOARD CONTAINER, METHOD OF MANUFACTURING A COATED PAPERBOARD CONTAIN-
ER, AND CUP BOTTOM FORMING APPARATUS

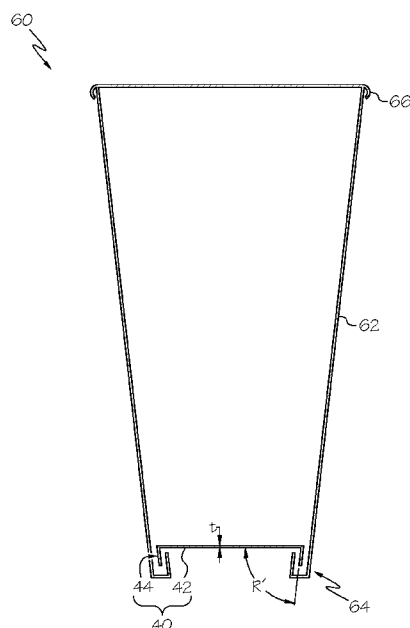


FIG. 6

(57) Abstract: A method of manufacturing a coated paperboard container includes: providing a coated paperboard bottom blank, the coated paperboard bottom blank comprising a paperboard substrate and a first barrier coating layer on a first outermost surface of the paperboard substrate; heating the coated paperboard bottom blank; shaping the heated coated paperboard bottom blank, thereby forming a peripheral skirt portion about a periphery of a bottom wall portion of the coated paperboard bottom blank; and sealing a coated paperboard sidewall to the first barrier coating layer of the peripheral skirt portion.



Published:

— *with international search report (Art. 21(3))*

COATED PAPERBOARD CONTAINER, METHOD OF MANUFACTURING A COATED PAPERBOARD CONTAINER, AND CUP BOTTOM FORMING APPARATUS

PRIORITY

[0001] This application claims priority from U.S. Ser. No. 62/664,404 filed on April 30, 2018, the entire contents of which are incorporated herein by reference.

FIELD

[0002] The present application relates to the field of coated paperboard containers, in particular, coated paperboard cups and tubs.

BACKGROUND

[0003] Coated paperboard is used in various packaging applications. For example, coated paperboard is used to package beverage containers, frozen foods, cereals and a wide variety of other food and non-food consumer goods. Coated paperboard is often required to have enhanced barrier properties, including oil, grease, water, and/or moisture vapor barrier properties. Additionally, many paperboard packages, for example, paperboard cups for food or drink services, also require the paperboard be heat-sealable, making it possible to form cups on a cup machine. Conventional polyethylene extrusion coated paperboard dominates in such applications by providing both barrier and heat-seal properties.

[0004] However, conventional polyethylene extrusion coated paperboard has difficulties in repulping and are not easily recyclable, causing environmental concerns.

[0005] Repulpable aqueous coatings are one of the promising solutions to address this need. However, the use of repulpable aqueous coatings has presented challenges with regards to cracking of the coatings when shaping a coated paperboard bottom blank for use in a paperboard container.

[0006] Accordingly, those skilled in the art continue with research and development efforts in the field of coated paperboard containers.

SUMMARY

[0007] In one embodiment, a method of manufacturing a coated paperboard container includes: providing a paperboard bottom blank, the paperboard bottom blank comprising a paperboard substrate and a first barrier coating layer on a first outermost surface of the paperboard substrate; heating the coated paperboard bottom blank; shaping the heated coated paperboard bottom blank, thereby forming a peripheral skirt portion about a periphery of a bottom wall portion of the coated paperboard bottom blank; and sealing a coated paperboard sidewall to the first barrier coating layer of the peripheral skirt portion.

[0008] In another embodiment, a method of manufacturing a coated paperboard container includes: providing a paperboard bottom blank having a caliper thickness t , the paperboard bottom blank comprising a paperboard substrate and a first barrier coating layer on a first outermost surface of the paperboard substrate; shaping the coated paperboard bottom blank using a punch, thereby forming a peripheral skirt portion about a periphery of a bottom wall portion of the coated paperboard bottom blank, the punch having a leading-edge radius of greater than $3t$; and sealing a coated paperboard sidewall to the first barrier coating layer of the peripheral skirt portion.

[0009] In yet another embodiment, a coated paperboard container includes: a coated paperboard bottom having a caliper thickness t , the coated paperboard bottom comprising a paperboard substrate and a first barrier coating layer on a first outermost surface of the paperboard substrate, the coated paperboard bottom having a peripheral skirt portion formed about a periphery of a bottom wall portion, wherein a radius defining between the peripheral skirt portion and the bottom wall portion is greater than $3t$; and a coated paperboard sidewall sealed to the first barrier coating layer of the peripheral skirt portion.

[0010] In yet another embodiment, a cup bottom forming apparatus includes: a punching assembly for shaping a coated paperboard bottom blank to form a peripheral skirt portion about a periphery of a bottom wall portion of the coated paperboard bottom blank; and a heater positioned to heat the coated paperboard bottom blank prior to and/or during formation of the peripheral skirt portion.

[0011] Other embodiments of the disclosed methods and coated paperboard containers will become apparent from the following detailed description, the accompanying drawings and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Fig. 1 is a flow chart representing an exemplary method of manufacturing a coated paperboard container.

[0013] Figs. 2A and 2B are perspective and sectional side views of exemplary coated paperboard bottom blank.

[0014] Figs. 3A and 3B are perspective and sectional side view of an exemplary punch having a leading-edge radius that may be used in a step of shaping a coated paperboard bottom blank.

[0015] Fig. 4A is a lower perspective view of an exemplary bottom blank after a shaping step having a peripheral skirt portion about a periphery of a bottom wall portion.

[0016] Fig. 4B is an upper perspective view of an exemplary bottom blank after a shaping step having a peripheral skirt portion about a periphery of a bottom wall portion.

[0017] Figs. 5A, 5B and 5C are schematic views of an exemplary cup bottom forming apparatus for shaping a coated paperboard bottom blank.

[0018] Fig. 6 is a sectional schematic view of a representation of a coated paperboard container according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0019] It has now been discovered that cracking of a coating during a shaping process of a coated paperboard bottom blank can be reduced by pre-heating of the coated paperboard bottom blank before the shaping process and by increasing a leading-edge radius of a punch used during the shaping process. Conventional polymer extrusion coatings, such as polyethylene, typically survive the forming process without cracking even without these modifications. These modifications allow for less-flexible, more brittle, or less strong coatings to survive the forming process with less cracking.

[0020] Fig. 1 is a flow chart representing an exemplary method 10 of manufacturing a coated paperboard container. The method includes, at block 12, providing a coated paperboard bottom blank having caliper thickness t , an example of which is illustrated in Figs. 2A and 2B.

[0021] As shown in Figs. 2A and 2B, the coated paperboard bottom blank 20 may include a layered structure that includes a paperboard substrate 22 having a first major side and a second major side, a first barrier coating layer 24 applied to the first major side of the paperboard substrate 22 and a second barrier coating layer 26 applied to the second major side of the paperboard substrate 22. However, the layered structure of the coated paperboard bottom blank 20 is not limited to the illustrated embodiment. In any case, the caliper thickness t of the coated paperboard bottom blank is considered to include the entire thickness of the coated paperboard bottom blank from a first outermost surface to an opposing second outermost surface.

[0022] Referring to the embodiment illustrated in Figs. 2A and 2B, the first barrier coating layer 24 may define a first outermost surface of the coated paperboard bottom blank 20 and the second barrier coating layer 26 may define a second outermost surface of the coated paperboard bottom blank 20.

[0023] At this point, those skilled in the art will appreciate that various additional layers may be incorporated into the coated paperboard bottom blank 20 without departing from the scope of the present disclosure. In one variation, the coated paperboard bottom blank 20 may include a first basecoat between the paperboard substrate 22 and the first barrier coating layer 24, and the coated paperboard bottom blank 20 may include a second basecoat between the paperboard substrate 22 and the second barrier coating layer 26, or a third topcoat on top of the second barrier coating layer 26. In another variation, the coated paperboard bottom blank 20 may only include only a first barrier coating layer 24 on the paperboard substrate 22 without the second barrier coating layer 26.

[0024] The paperboard substrate 22 of the coated paperboard bottom blank 20 may be (or may include) any cellulosic material that is capable of being coated with the barrier coating layers. Those skilled in the art will appreciate that the paperboard substrate 22 may be bleached or unbleached. Examples of appropriate paperboard substrates include corrugating medium, linerboard, solid bleached sulfate (SBS), folding box board (FBB), and coated unbleached kraft (CUK).

[0025] The paperboard substrate 22 may have an uncoated basis weight of at least about 40 pounds per 3000 ft². In one expression the paperboard substrate 22 may have an uncoated basis weight ranging from about 40 pounds per 3000 ft² to about 300 pounds per 3000 ft². In

another expression the paperboard substrate 22 may have an uncoated basis weight ranging from about 85 pounds per 3000 ft² to about 300 pounds per 3000 ft². In another expression the paperboard substrate 22 may have an uncoated basis weight ranging from about 85 pounds per 3000 ft² to about 250 pounds per 3000 ft². In yet another expression the paperboard substrate 22 may have an uncoated basis weight ranging from about 100 pounds per 3000 ft² to about 250 pounds per 3000 ft².

[0026] Furthermore, the paperboard substrate 22 may have a caliper (thickness) ranging, for example, from about 4 points to about 30 points (0.004 inch to 0.030 inch). In one expression, the caliper range is from about 8 points to about 24 points. In another expression, the caliper range is from about 10 points to about 20 points.

[0027] One specific, non-limiting example of a suitable paperboard substrate 22 is a 13-point SBS cupstock manufactured by WestRock Company of Atlanta, Georgia. Another specific, - non-limiting example of a suitable paperboard substrate 22 is a 12.4-point SBS cupstock manufactured by WestRock Company. Yet another specific example of a suitable paperboard substrate 22 is an 18-point SBS cupstock manufactured by WestRock Company.

[0028] The first barrier coating layer 24 and second barrier coating layer 26 may be applied using any suitable method, such as one or more coaters either on a paper machine or as off-machine coater(s) such that the first barrier coating layer 24 and second barrier coating layer 26 are formed on the exposed, outermost surfaces of the paperboard substrate 22. In an aspect, the first barrier coating layer 24 and the second barrier coating layer 26 may be heat-sealable barrier coating layers. When heated, a heat-seal coating provides an adhesion to other regions of a product (e.g. sidewall of a container) with which it contacts.

[0029] The first barrier coating layer 24 and second barrier coating layer 26 may be applied to the paperboard substrate 22 at various coat weights. As one, non-limiting example, the first barrier coating layer 24 and second barrier coating layer 26 may be applied at a coat weight of about 2 to 20 pounds per 3,000 square feet. As another, non-limiting example, the first barrier coating layer 24 and second barrier coating layer 26 may be applied at a coat weight of about 4 to 14 pounds per 3,000 square feet.

[0030] The first barrier coating layer 24 and second barrier coating layer 26 may include a binder and a pigment. In one expression, the ratio of the binder to the pigment can be at least about 1:2 by weight. In another expression, the ratio of the binder to the pigment can be

about 1:2 to about 9:1 by weight. In another expression, the ratio of the binder to the pigment can be about 1:1 to about 4:1 by weight. In yet another expression, the ratio of the binder to the pigment can be at least about 1:1 by weight.

[0031] The binder may be an aqueous binder. As one general, non-limiting example, the binder may be styrene-acrylate (SA) (i.e., the binder “consists of” or “consists essentially of” styrene-acrylate (SA)). As another general, non-limiting example, the binder may be a mixture of binders that includes styrene-acrylate (SA). Other aqueous binders are also contemplated, such as styrene-butadiene rubber (SBR), ethylene acrylic acid (EAA), polyvinyl acrylic, polyvinyl acetate (PVAC), polyester dispersion, and combinations thereof.

[0032] In one variation, the pigment may be a clay pigment. As one example, the clay pigment may be kaolin clay, such as a fine kaolin clay. As another example, the clay pigment may be platy clay, such as a high aspect ratio platy clay (e.g., aspect ratio of at least 40:1). In another variation, the pigment may be a calcium carbonate (CaCO₃) pigment. In yet another variation, the pigment may be a pigment blend that includes both calcium carbonate pigment and clay pigment.

[0033] Returning to Fig. 1, the method includes, at block 14, heating the coated paperboard bottom blank. It has been discovered that cracking of a coating during a shaping process of a coated paperboard bottom blank can be reduced by heating the coated paperboard bottom blank before the shaping process. Although the invention is not limited by theory, it is believed that heating the coated paperboard bottom blank may increase a pliability of a barrier coating layer on a paperboard substrate and/or may increase a pliability of the paperboard substrate to relieve a stress transfer between the barrier coating layer and the paperboard substrate during a forming process. For conventional polyethylene extrusion coated paperboard, heating of the polyethylene coating is typically unnecessary due to excellent flexibility of the polyethylene extrusion coating. Although it has been shown that cracking during a shaping process of an aqueous coated paperboard bottom blank has been reduced by pre-heating, it is projected that pre-heating can be effective for other coatings.

[0034] In an aspect, the heating of the coated paperboard bottom blank includes heating at least a portion of the coated paperboard bottom blank to above 90 °F, preferably above 100 °F, and more preferably above 110 °F. It is expected that the effect of the heating on reduced cracking is enhanced as a function of increasing temperature.

[0035] The heating of the coated paperboard bottom blank is not limited by any particular process.

[0036] In one variation, the heating of the coated paperboard bottom blank may include heating the coated paperboard bottom blank using a non-contact heating, such as a hot air blower or infrared heater.

[0037] In another variation, the heating of the coated paperboard bottom blank may include contacting the coated paperboard bottom blank with a heated die during a process for shaping the heated coated paperboard bottom blank.

[0038] Experimental tests have tested hot air up to 1100 °F and tool heat up to 230 °F (combined as well as separately). It was found that more heat tends to reduce cracking. It is expected that higher temperatures than those tested may further reduce cracking.

[0039] In an aspect, the method may omit the step of heating the coated paperboard bottom blank.

[0040] Returning to Fig. 1, the method includes, at block 16, shaping the coated paperboard bottom blank using a punch, thereby forming a peripheral skirt portion about a periphery of a bottom wall portion of the coated paperboard bottom blank, the punch having a leading-edge radius of greater than $3t$. Figs. 3A and 3B illustrate an exemplary punch 30 having a leading-edge radius 32 that may be used in a step of shaping the coated paperboard bottom blank.

[0041] Figs. 4A and 4B illustrate an exemplary bottom blank 40 after the shaping step having a peripheral skirt portion 44 about a periphery of a bottom wall portion 42.

[0042] It has been discovered that cracking of a coating during a shaping process of a coated paperboard bottom blank can be reduced by increasing a leading-edge radius of a punch used during the shaping process. Although the invention is not limited by theory, it is believed that increasing a leading-edge radius of a punch used during the shaping process may distribute a deformation of a barrier coating layer on a paperboard substrate over a larger area of the barrier coating layer, thus reducing the maximum strains required for the barrier coating layer to survive the forming process without cracking. For conventional polyethylene extrusion coated paperboard, a punch with a smaller leading-edge radius of the punch used during the shaping process is typically utilized.

[0043] In an aspect, the punch preferably has a leading-edge radius of greater than $4t$, more preferably greater than $5t$, even more preferably greater than $6t$, even more preferably greater than $7t$.

[0044] A preferred method includes pre-heating the coated paperboard bottom blank and shaping the heated paperboard bottom blank using a punch having a leading-edge radius of greater than $3t$. It has been discovered that the combined effect of pre-heating and increased a leading-edge radius considerably minimizes cracking of a coating during the shaping process. However, in a variation, the pre-heating may be employed with a conventional leading-edge radius of a punch during a shaping process or the pre-heating may be employed with any other shaping process. In another variation, the punch having a leading-edge radius of greater than $3t$ may be employed without pre-heating.

[0045] In an aspect, the method may be performed by a cup bottom forming apparatus having a built-in heater. The cup bottom forming apparatus includes a punching assembly for shaping the coated paperboard bottom blank to form a peripheral skirt portion about a periphery of a bottom wall portion of the coated paperboard bottom blank and a heater positioned to heat the coated paperboard bottom blank prior to and/or during formation of the peripheral skirt portion.

[0046] In an aspect, the heater includes a non-contact heater positioned to heat the coated paperboard prior to the punching of the coated paperboard bottom blank.

[0047] In another aspect, the heater includes a contact heater positioned to heat a die contacting the coated paperboard within the punching assembly.

[0048] The cup bottom forming apparatus may further include a cutting assembly for cutting the coated paperboard bottom blank from a web of coated paperboard.

[0049] In an aspect, the heater includes a non-contact heater positioned to heat the coated paperboard prior to the cutting of the coated paperboard bottom blank.

[0050] In an aspect, the heater includes a contact heater positioned to heat a die contacting the coated paperboard within the cutting assembly.

[0051] Figs. 5A, 5B and 5C are schematic views of an exemplary cup bottom forming apparatus 50 for shaping a coated paperboard bottom blank cut from a roll of paper that feeds

a strip of paper vertically downward in the illustrated figures. As shown, the cup bottom forming apparatus includes a punch 30 around which the peripheral skirt is formed as the punch draws the cut-out blank through the main die 53. In an aspect, the cup bottom forming apparatus 50 may further include cutters 52 for cutting the coated paperboard into a coated paperboard bottom blank, and casing 54. The punch 30 and cutters 52 may be attached to a piston (not shown) to perform their respective functions.

[0052] In an aspect, the cup bottom forming apparatus 50 may further include a contact heater 55 for heating a die during a process for shaping the heated coated paperboard bottom blank P. It should be understood that the placement of the contact heater is merely illustrative and that any of the dies or tools in the cup bottom forming apparatus 50, including punch 30, contacting the coated paperboard bottom blank P may be heated to affect the heating of the coated paperboard bottom blank P.

[0053] In an aspect, the cup bottom forming apparatus 50 may further include non-contact heaters 56 for heating the coated paperboard P. In an example, the non-contact heaters 56 may include a hot air blower blowing heated air to the frontside and/or backside of the coated paperboard P. In another example, the non-contact heaters 56 may include an infrared heater for heating the frontside and/or backside of the coated paperboard P.

[0054] In an aspect, the cup bottom forming apparatus 50 may further include contact heaters 56 for heating a die in contact with the coated paperboard P. In an example, the contact heaters 56 may include heating tape held onto the respective dies with heat-reflective metallic tape.

[0055] However, it should be understood that the cup bottom forming apparatus of Figs. 5A, 5B and 5C is merely a representation of one exemplary cup bottom forming apparatus for practicing the invention.

[0056] Fig. 6 is a sectional schematic view of a representation of a coated paperboard container according to an embodiment of the present invention.

[0057] As shown in Fig. 6, the coated paperboard container 60 includes a coated paperboard bottom 40 having a caliper thickness t and a coated paperboard sidewall 62. The coated paperboard bottom 40 includes a paperboard substrate and a first barrier coating layer on an outermost surface of the paperboard substrate (see Figs. 2A and 2B) and the coated

paperboard bottom 40 includes peripheral skirt portion 44 formed about a periphery of a bottom wall portion 42, wherein a radius R' defining between the peripheral skirt portion 44 and the bottom wall portion 42 is greater than $3t$. The coated paperboard sidewall 62 is sealed to the first barrier coating layer of the peripheral skirt portion 44.

[0058] In an aspect, the radius R' corresponds to a radius R of a punch used to shape the peripheral skirt portion 44 and the bottom wall portion 42 from a coated paperboard bottom blank.

[0059] In an aspect, the paperboard bottom further includes a second barrier coating layer on another outermost surface of the paperboard substrate, and the coated paperboard sidewall may be sealed to the second barrier coating layer of the peripheral skirt portion. For example, as illustrated, a bottom portion of the paperboard sidewall may be folded over the peripheral skirt and bonded (e.g. heat-sealed) to both sides of the peripheral skirt.

[0060] In an aspect, the interior surface of the coated paperboard sidewall may include a barrier coating at an outermost surface thereof. For example, the barrier coating may be the same as one or both of the barrier coatings on the paperboard bottom. In an aspect, the barrier coating may comprise an aqueous binder, such as styrene-acrylate.

[0061] In an aspect, the radius defining between the peripheral skirt portion and the bottom wall portion is preferably greater than $4t$, more preferably greater than $5t$, even more preferably greater than $6t$, and even more preferably greater than $7t$.

EXAMPLES

Examples 1–4

[0062] The bottom stock used in the cup examples was made on a pilot blade coater using 13pt solid bleached sulfate (SBS) cupstock as substrate, which was manufactured by WestRock Company of Atlanta, Georgia. The felt side of the paperboard was coated with a heat-sealable barrier coating at a coat weight of $10 \text{ lb}/3000 \text{ ft}^2$, and the formulation contained HYDROCARB® 60 (Omya AG of Oftringen, Germany), BARRISURF™ HX (IMERYS Kaolin), ROPAQUE™ AF-1353 (The Dow Chemical Company), and CARTASEAL® SCR (Archroma) at a ratio of 31.4/62.8/5.8/200 by weight. The coated felt side was facing inside of the cup, which had a 30-min water Cobb of $14.1 \text{ g}/\text{m}^2$. The wire side of the paperboard

was coated with two layers of a barrier coating at a coat weight of 8.7 and 2.1 lb/3000 ft², respectively, and the barrier coating formulation contained HYDROCARB® 60, BARRISURF™ HX, ROPAQUE™ AF-1353, and CARTASEAL® SCR at a ratio of 31.4/62.8/5.8/100 by weight. The coated wire side was facing external side of the cup, which had a 30-min water Cobb of 18.0 g/m².

[0063] The side wall blanks used in the examples were die cut from paperboard, which was coated on a pilot coater with a base coat and a heat-sealable barrier top coat on the wire side of 18 pt SBS cupstock manufactured by WestRock Company. The base coat formulation contained 100 parts of CaCO₃ (HYDROCARB® 60, or HYDROCARB® HG, both from Omya AG of Oftringen) or clay (HYDRAFINE® 90W, from KaMin LLC of Macon, Georgia) as pigment and 35 parts of SA binder (ACRONAL® S 504, from BASF Corporation) for a coat weight of about 9–10 lb/3000 ft², and the base coat was applied by a blade coater. The heat-sealable barrier top coat formulation contained 100 percent of SA binder (CARTASEAL® SCR, from Archroma), and the top coat was applied on a rod coater using an IPI #030 rod for an estimated coat weight of about 4 lb/3000 ft². The coated surface exhibited a 30-min water Cobb of 5.2–7.2 g/m².

Examples 5–9

[0064] The bottom stock used in the cup examples was made on a pilot blade coater using 13pt SBS cupstock as substrate and a heat-sealable barrier coating formulation at a coat weight of 9 lb/3000 ft² on the felt side and 11 lb/3000 ft² on the wire side. The barrier coating formulation contained HYDROCARB® 60 (Omya AG of Oftringen), BARRISURF™ HX (IMERYS Kaolin), ROPAQUE™ AF-1353 (The Dow Chemical Company), and CARTASEAL® SCR (Archroma) at a ratio of 62.8/31.4/5.8/300 by weight. The coated felt side was facing inside of the cup, which had a 30-min water Cobb of 4.2 g/m². The coated wire side was facing external side of the cup, which had a 30-min water Cobb of 16.6 g/m².

[0065] The side wall blanks used in the examples were die cut from paperboard that was coated on a pilot blade coater using 18pt SBS cupstock as substrate and the same heat-sealable barrier coating formulation as that used for the bottom stock at a coat weight of 10.6 lb/3000 ft². The coated surface of the heat-sealable sidewall had a 30-min water Cobb of 5.7 g/m².

Results

[0066] The following tables show the penetration of a hot coffee and non-dairy creamer mixture into the cup bottom after 30 minutes (viewed from above after the coffee has been drained and rinsed out) for the current and proposed solutions for cup forming of a barrier coating. Note that the proposed solutions were produced with preliminary heat application and a selection of proposed punch radii, and better results may be achievable with further refinement and optimization of the process parameters. Conditions with a punch leading-edge radius of 3/32” (R=6.7t) and greater show distances between coffee stains sometimes greater than 0.5”.

[0067] The coffee staining in the following pictures relate to a worst-case condition (very hot coffee with a particularly aggressive non-dairy creamer). These cups, with the exception of conventionally produced cups, typically do not show staining for other less aggressive liquids such as standard coffee, Coca-Cola®, etc.

TABLE 1










Staining of cup due to coffee with non-dairy creamer for punch and heating combinations, Examples 1–4		
	No Heating	1100 °F Hot Air & 120 °F Heated Die
Conventional punch		
Punch with 4/32” Leading-Edge Radius (R = 8.9t)		

TABLE 2

Staining of cup due to coffee with non-dairy creamer for various punch conditions and a constant heating condition, Examples 5–9	
	1100 °F Hot Air & 120 °F Heated Die
Conventional punch	
Punch with 1.5/32" Leading-Edge Radius (R = 3.3t)	
Punch with 2/32" Leading-Edge Radius (R = 4.5t)	
Punch with 3/32" Leading-Edge Radius (R = 6.7t)	
Punch with 4/32" Leading-Edge Radius (R = 8.9t)	

[0068] Although various embodiments of the disclosed methods and coated paperboard containers have been shown and described, modifications may occur to those skilled in the art upon reading the specification. The present application includes such modifications and is limited only by the scope of the claims.

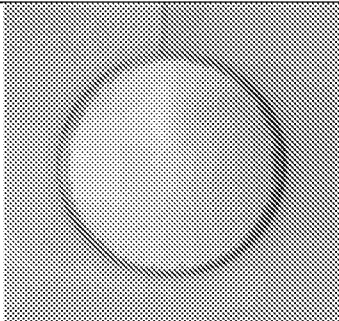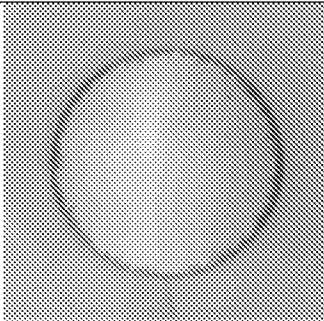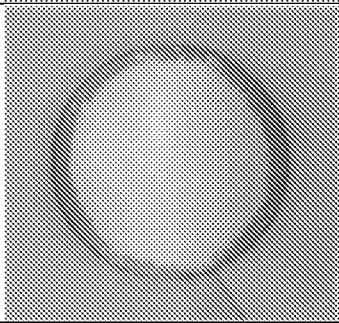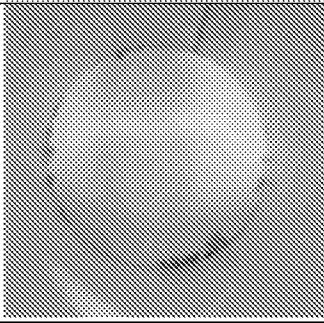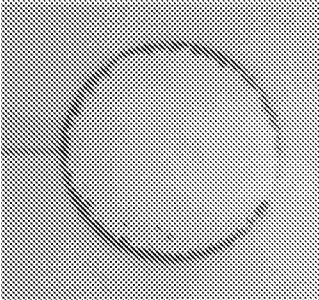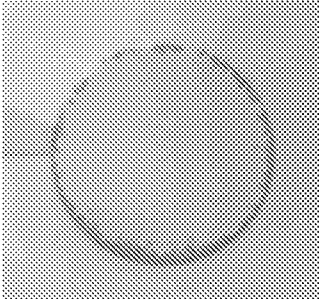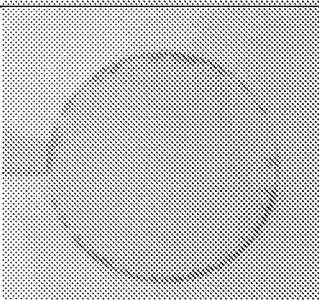What is claimed is:

1. A method 10 of manufacturing a coated paperboard container 60, the method 10 comprising:
 - providing 12 a coated paperboard bottom blank 20, the coated paperboard bottom blank 20 comprising a paperboard substrate 22 and a first barrier coating layer 24 on a first outermost surface of the paperboard substrate 22;
 - heating 14 the coated paperboard bottom blank 20;
 - shaping 16 the heated coated paperboard bottom blank 20, thereby forming a peripheral skirt portion 44 about a periphery of a bottom wall portion 42 of the coated paperboard bottom blank 20; and
 - sealing 18 a coated paperboard sidewall 62 to the first barrier coating layer 24 of the peripheral skirt portion 44.
2. The method 10 according to Claim 1 wherein the paperboard bottom blank 20 further comprises a second barrier coating layer 26 on a second surface of the paperboard substrate 22.
3. The method 10 according to Claim 2 further comprising sealing the coated paperboard sidewall 62 to the second barrier coating layer 26 of the peripheral skirt portion 44.
4. The method 10 according to any one of the preceding claims wherein the paperboard substrate 22 comprises solid bleached sulfate.
5. The method 10 according to any one of the preceding claims wherein the first barrier coating layer 24 comprises at least one of styrene-acrylate, styrene-butadiene rubber, ethylene acrylic acid, polyvinyl acetate, polyvinyl acrylic, and polyester dispersion.
6. The method 10 according to any one of the preceding claims wherein first barrier coating layer 24 comprises styrene-acrylate.
7. The method 10 according to any one of the preceding claims wherein heating the coated paperboard bottom blank 20 comprises heating at least a portion of the coated paperboard bottom blank 20 to above 90 °F.

8. The method 10 according to any one of the preceding claims wherein heating the coated paperboard bottom blank 20 comprises heating at least a portion of the coated paperboard bottom blank 20 to above 100 °F.
9. The method 10 according to any one of the preceding claims wherein heating the coated paperboard bottom blank 20 comprises heating the at least a portion of the coated paperboard bottom blank 20 to above 110 °F.
10. The method 10 according to any one of the preceding claims wherein heating the coated paperboard bottom blank 20 comprises heating the coated paperboard bottom blank 20 using a non-contact heater.
11. The method 10 according to any one of the preceding claims wherein heating the coated paperboard bottom blank 20 comprises contacting the coated paperboard bottom blank 20 with a heated die before and/or during a process for shaping the heated coated paperboard bottom blank 20.
12. A method 10 of manufacturing a coated paperboard container 60, the method 10 comprising:
 - providing 12 a coated paperboard bottom blank 20 having a caliper thickness t , the coated paperboard bottom blank 20 comprising a paperboard substrate 22 and a first barrier coating 24 layer on a first outermost surface of the paperboard substrate 22;
 - shaping 16 the coated paperboard bottom blank 20 using a punch 30, thereby forming a peripheral skirt portion 44 about a periphery of a bottom wall portion 42 of the coated paperboard bottom blank 20, the punch 30 having a leading-edge radius 32 of greater than $3t$; and
 - sealing 18 a coated paperboard sidewall 62 to the first barrier coating layer 24 of the peripheral skirt portion 44.
13. The method 10 according to Claim 12 wherein the paperboard bottom blank 20 further comprises a second barrier coating layer 26 on a second surface of the paperboard substrate 22.

14. The method 10 according to Claim 13 further comprising sealing the coated paperboard sidewall 62 to the second barrier coating layer 26 of the peripheral skirt portion 44.
15. The method 10 according to any one of Claims 12–14 wherein the paperboard substrate 22 comprises solid bleached sulfate.
16. The method 10 according to any one of Claims 12–15 wherein the first barrier coating layer 24 comprises at least one of styrene-acrylate, styrene-butadiene rubber, ethylene acrylic acid, polyvinyl acetate, polyvinyl acrylic, and polyester dispersion.
17. The method 10 according to any one of Claims 12–16 wherein the first barrier coating layer 24 comprises styrene-acrylate.
18. The method 10 according to any one of Claims 12–17 wherein the punch 30 has a leading-edge radius 32 of greater than $4t$.
19. The method 10 according to any one of Claims 12–18 wherein the punch 30 has a leading-edge radius 32 of greater than $5t$.
20. The method 10 according to any one of Claims 12–19 wherein the punch 30 has a leading-edge radius 32 of greater than $6t$.
21. The method 10 according to any one of Claims 12–20 wherein the punch 30 has a leading-edge radius 32 of greater than $7t$.
22. The method 10 according to any one of Claims 12–21 further comprising heating the coated paperboard bottom blank 20 before and/or during the step of shaping the coated paperboard bottom blank 20 such that the heated coated paperboard bottom blank 20 is shaped using the punch 30.
23. A coated paperboard container 60, comprising:
 - a coated paperboard bottom 40 having a caliper thickness t , the coated paperboard bottom 40 comprising a paperboard substrate 22 and a first barrier coating layer 24 on a first outermost surface of the paperboard substrate 22, the coated paperboard bottom 40 having a

peripheral skirt portion 44 formed about a periphery of a bottom wall portion 42, wherein a radius defining between the peripheral skirt portion 44 and the bottom wall portion 42 is greater than $3t$; and

a coated paperboard sidewall 62 sealed to the first barrier coating layer 24 of the peripheral skirt portion 44.

24. The coated paperboard container 60 according to Claim 23 wherein the paperboard bottom 40 further comprises a second barrier coating layer 26 on a second surface of the paperboard substrate 22.

25. The coated paperboard container 60 according to Claim 24 wherein the coated paperboard sidewall 62 is sealed to the second barrier coating layer 26 of the peripheral skirt portion 44.

26. The coated paperboard container 60 according to any one of Claims 23–25 wherein the paperboard substrate 22 comprises solid bleached sulfate.

27. The coated paperboard container 60 according to any one of Claims 23–26 wherein the first barrier coating layer 24 comprises at least one of styrene-acrylate, styrene-butadiene rubber, ethylene acrylic acid, polyvinyl acetate, polyvinyl acrylic, and polyester dispersion.

28. The coated paperboard container 60 according to any one of Claims 23–27 wherein the first barrier coating layer 24 comprises styrene-acrylate.

29. The coated paperboard container 60 according to any one of Claims 23–28 wherein the radius defining between the peripheral skirt portion 44 and the bottom wall portion 42 is greater than $4t$.

30. The coated paperboard container 60 according to any one of Claims 23–29 wherein the radius defining between the peripheral skirt portion 44 and the bottom wall portion 42 is greater than $5t$.

31. The coated paperboard container 60 according to any one of Claims 23–30 wherein the radius defining between the peripheral skirt portion 44 and the bottom wall portion 42 is greater than $6t$.
32. The coated paperboard container 60 according to any one of Claims 23–31 wherein the radius defining between the peripheral skirt portion 44 and the bottom wall portion 42 is greater than $7t$.
33. A cup bottom forming apparatus 50, comprising:
a punching assembly for shaping a coated paperboard bottom blank 20 to form a peripheral skirt portion 44 about a periphery of a bottom wall portion 42 of the coated paperboard bottom blank 20; and
a heater 55, 56 positioned to heat the coated paperboard bottom blank 20 prior to and/or during the formation of the peripheral skirt portion 44.
34. The cup bottom forming apparatus 50 according to Claim 33, wherein the heater 56 comprises a non-contact heater 56 positioned to heat the coated paperboard 20 prior to the punching of the coated paperboard bottom blank 20.
35. The cup bottom forming apparatus 50 according to Claim 33 or Claim 34, wherein the heater 55 comprises a contact heater 55 positioned to heat a die contacting the coated paperboard within the punching assembly.
36. The cup bottom forming apparatus 50 according to any one of Claims 33–35 further comprising a cutting assembly for cutting the coated paperboard bottom blank from a web of coated paperboard.
37. The cup bottom forming apparatus 50 according to Claim 36, wherein the heater 56 comprises a non-contact heater 56 positioned to heat the coated paperboard prior to the cutting of the coated paperboard bottom blank.
38. The cup bottom forming apparatus 50 according to Claim 36, wherein the heater 55 comprises a contact heater 55 positioned to heat a die contacting the coated paperboard within the cutting assembly.

1 / 8

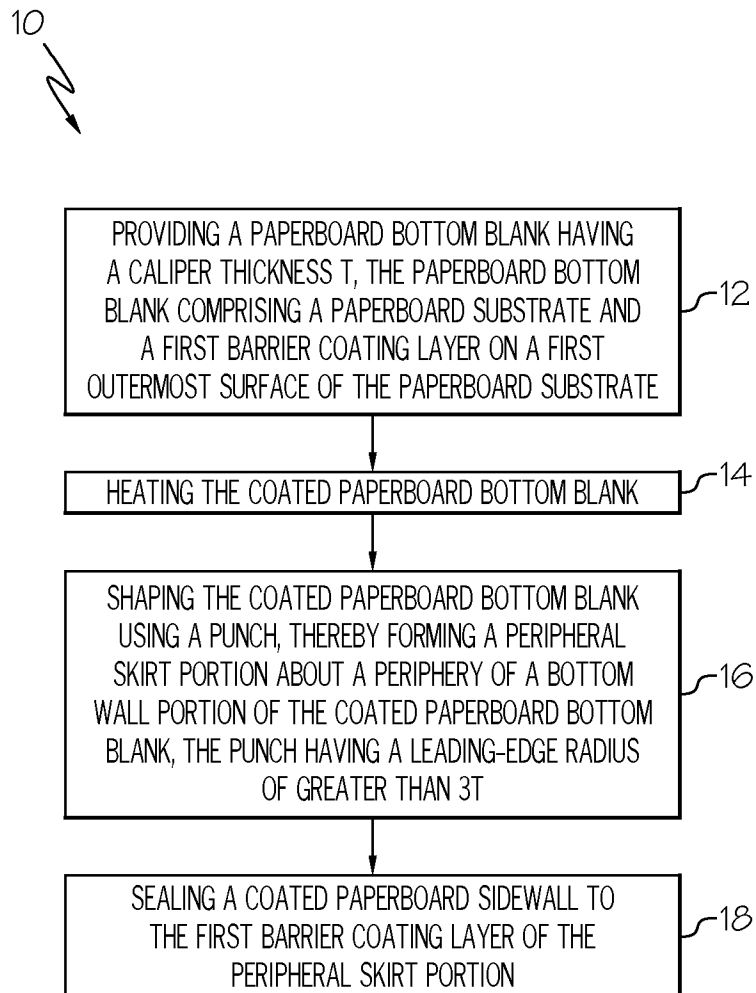


FIG. 1

2 / 8

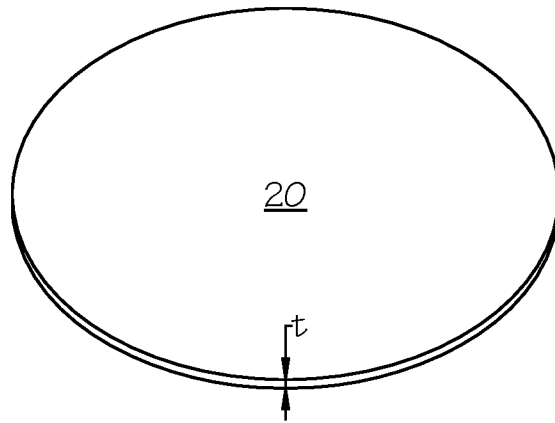


FIG. 2A

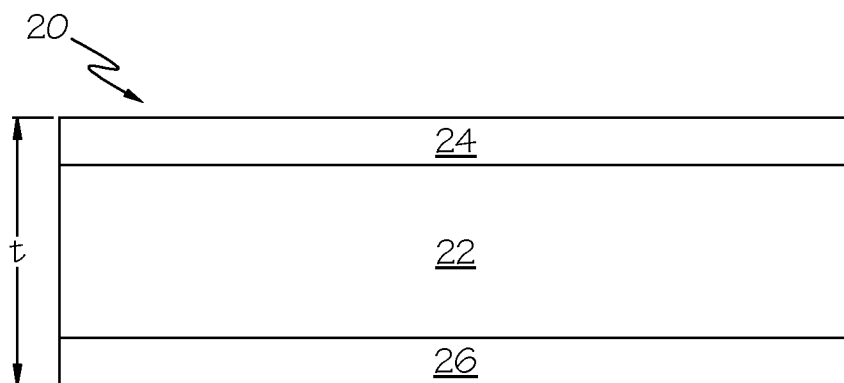


FIG. 2B

3 / 8

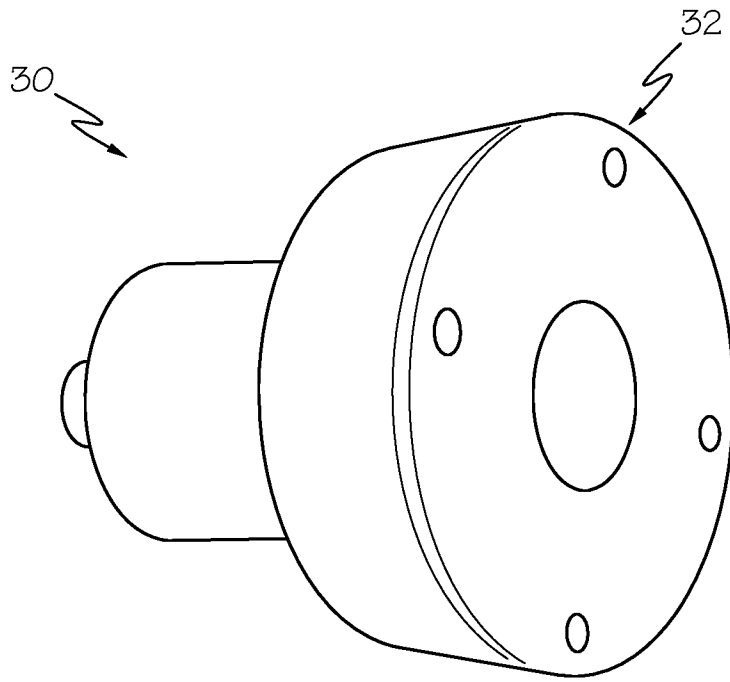


FIG. 3A

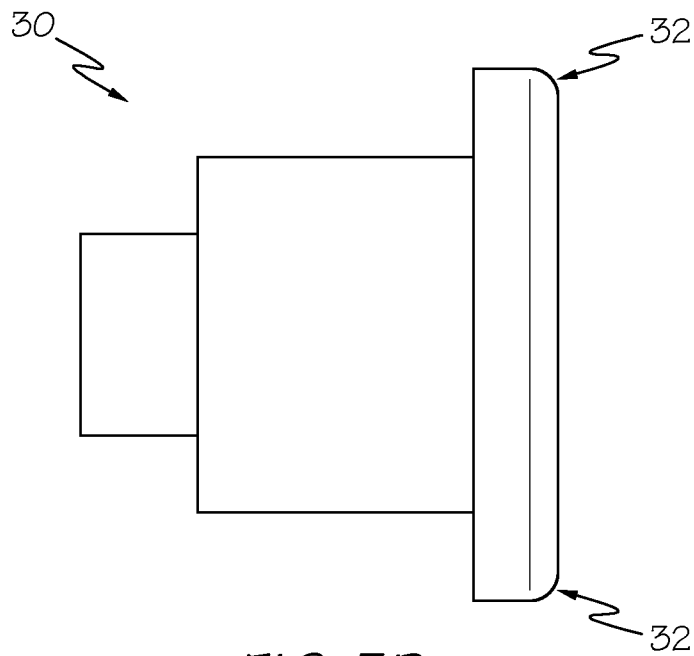


FIG. 3B

4 / 8

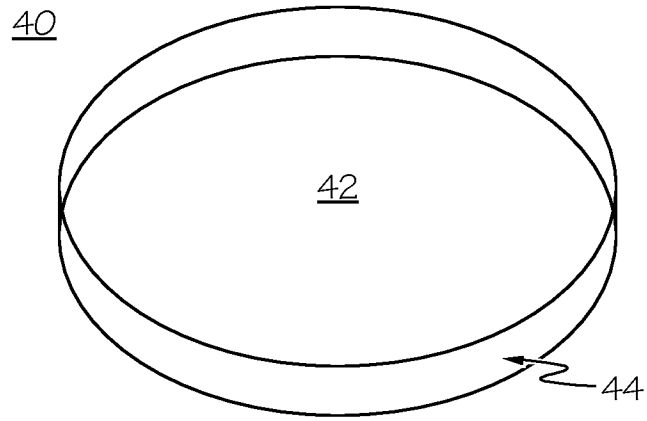


FIG. 4A

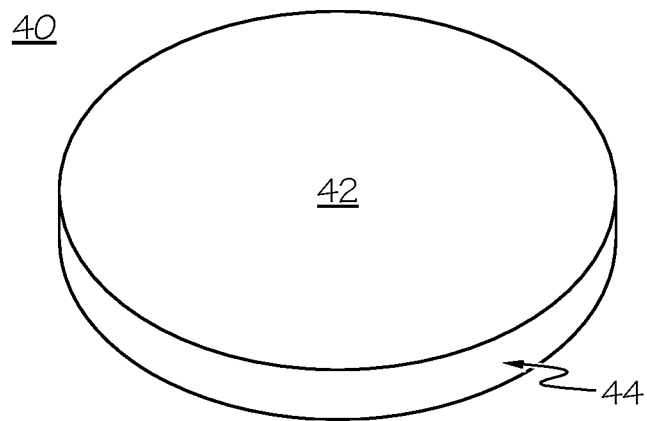


FIG. 4B

5 / 8

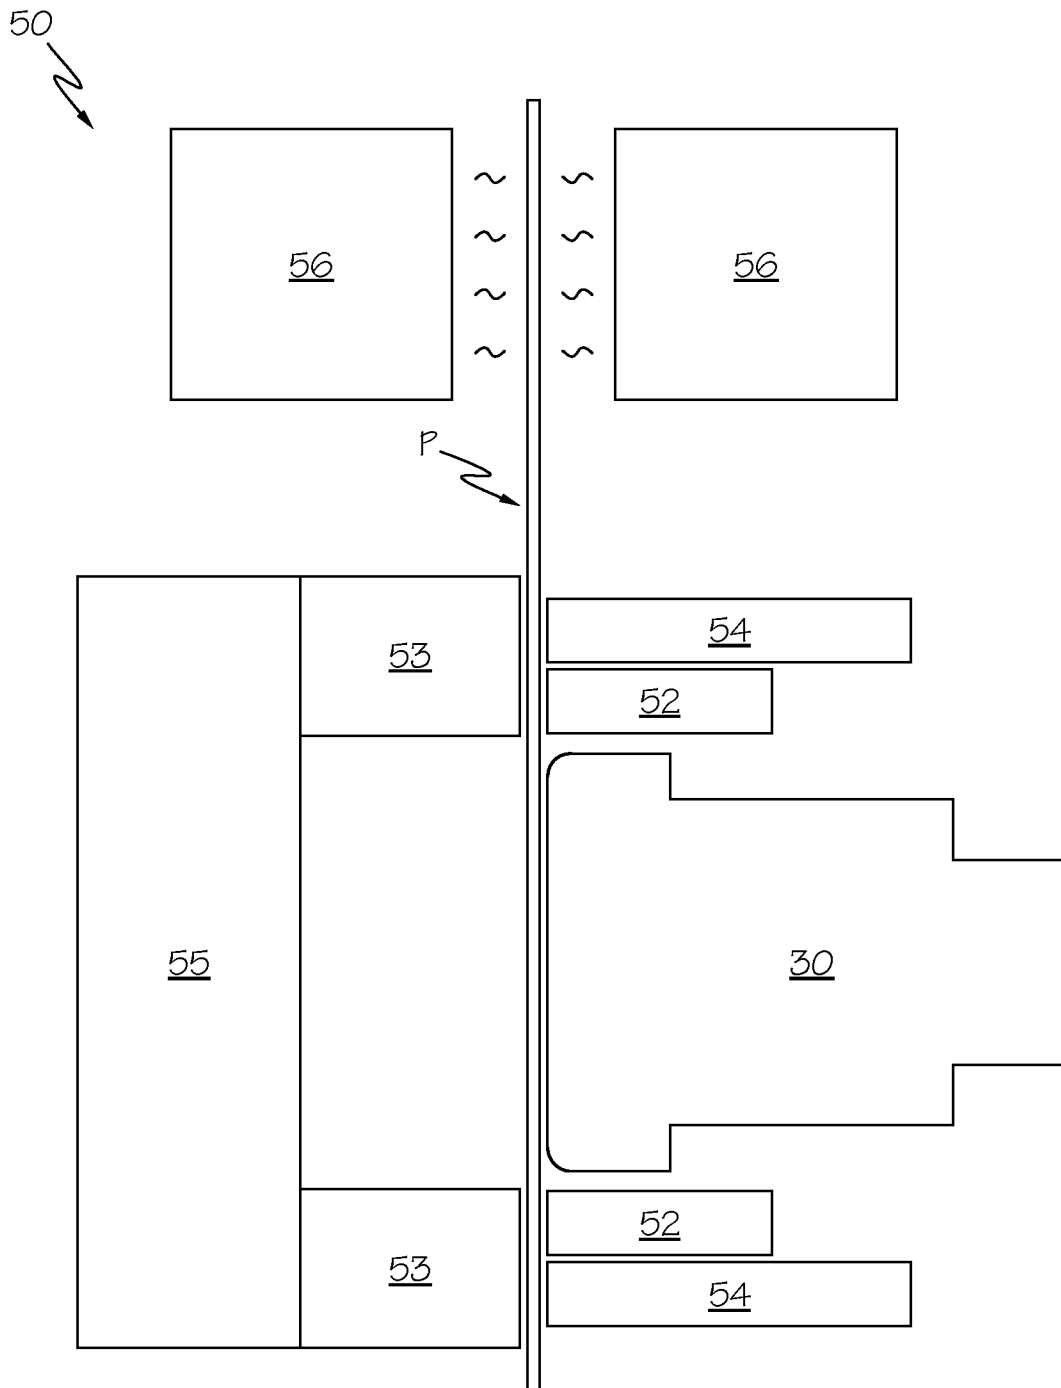


FIG. 5A

6 / 8

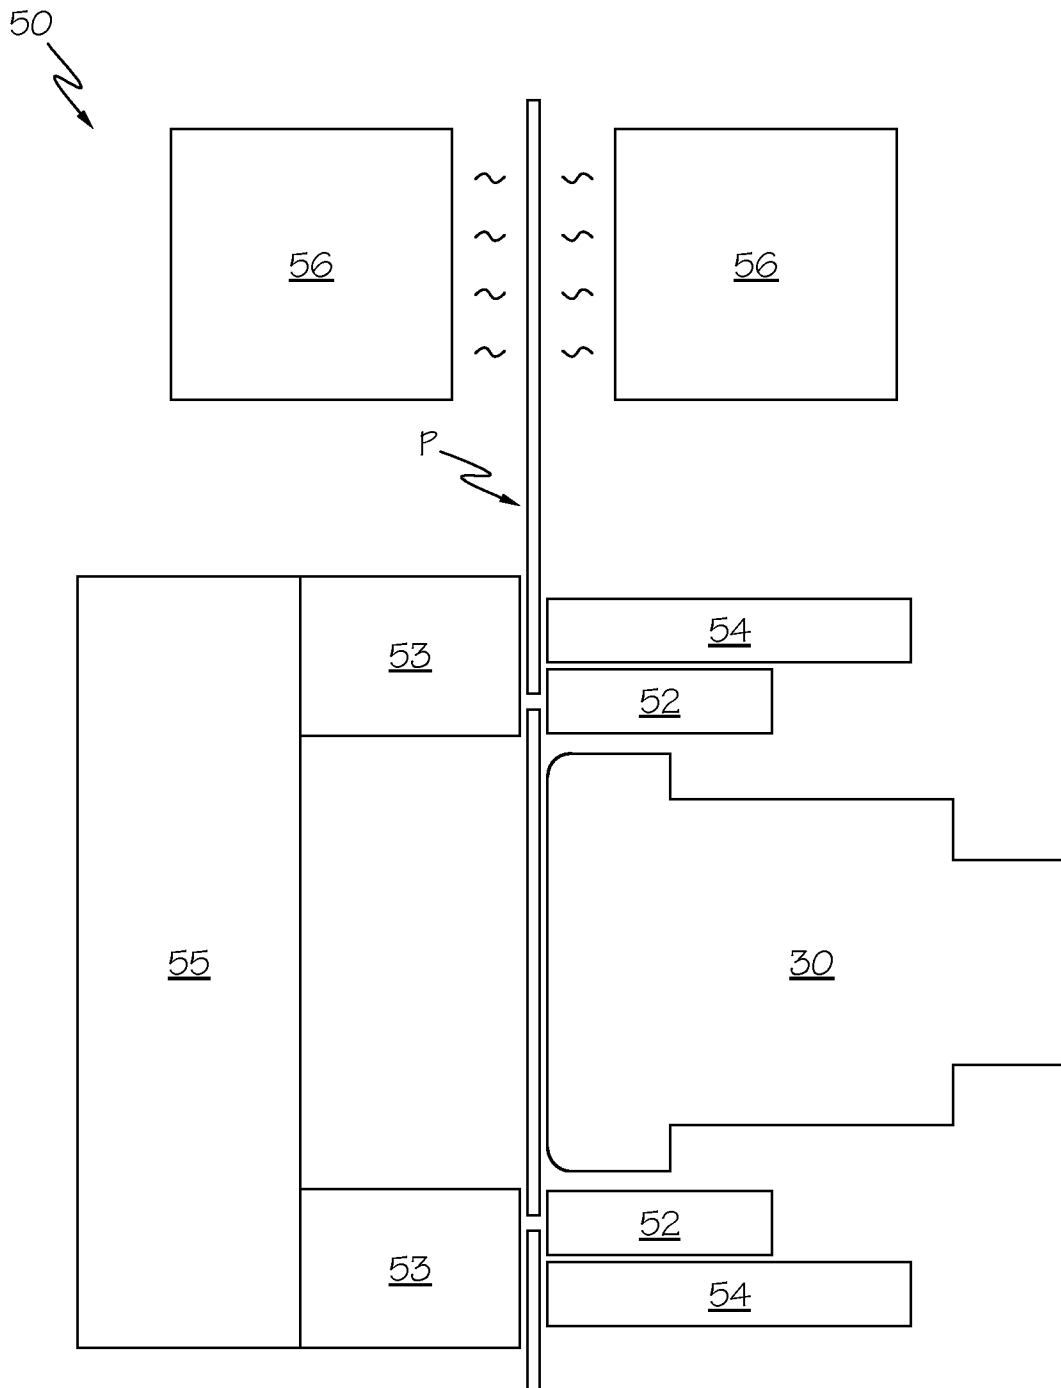


FIG. 5B

7/8

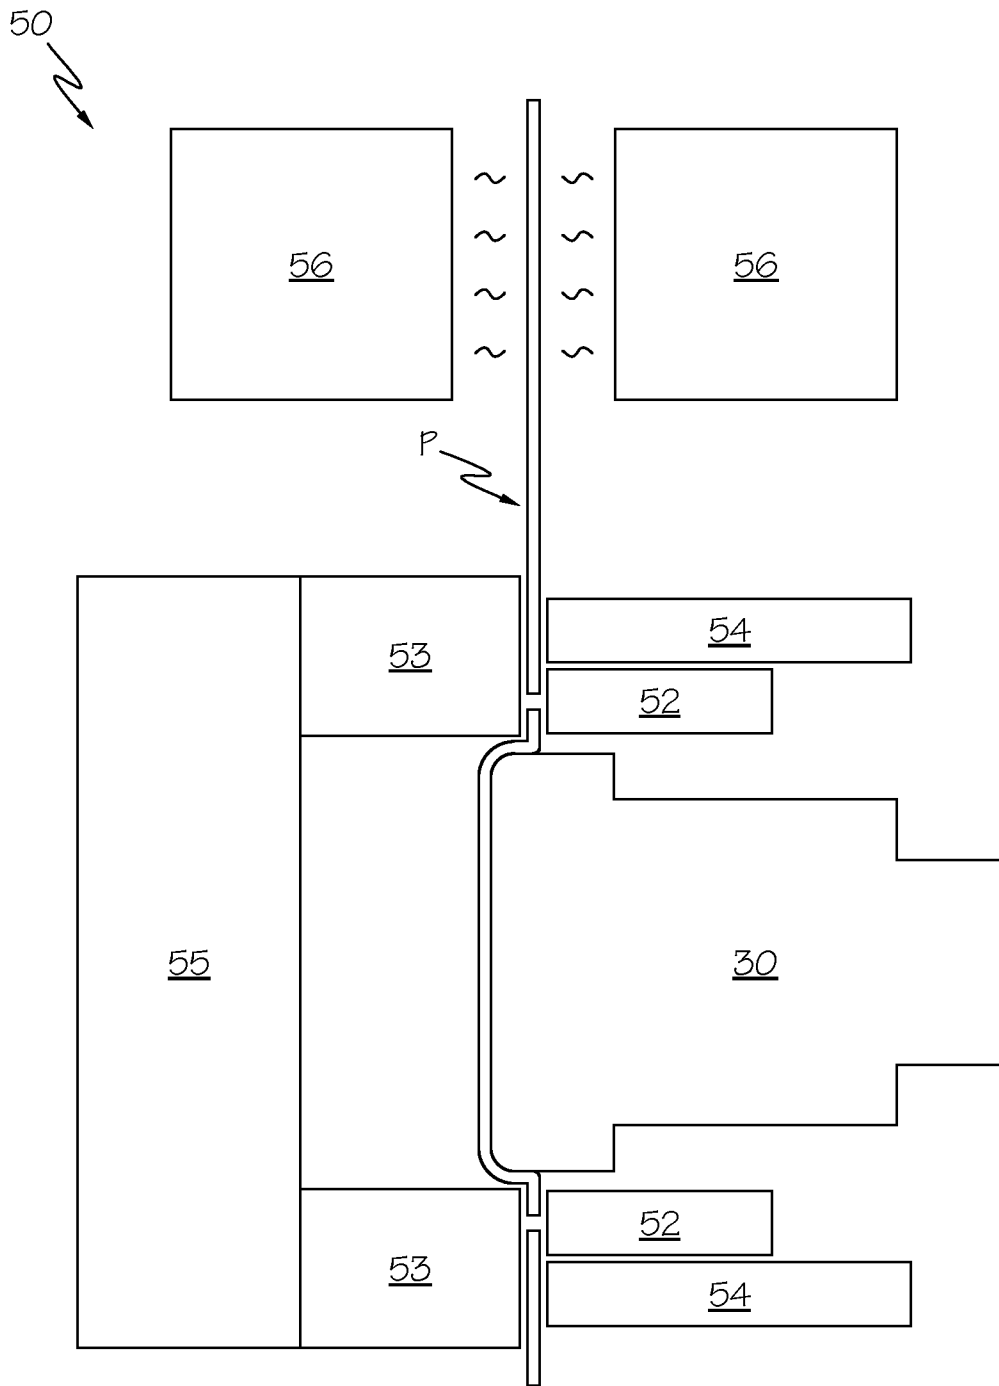


FIG. 5C

8 / 8

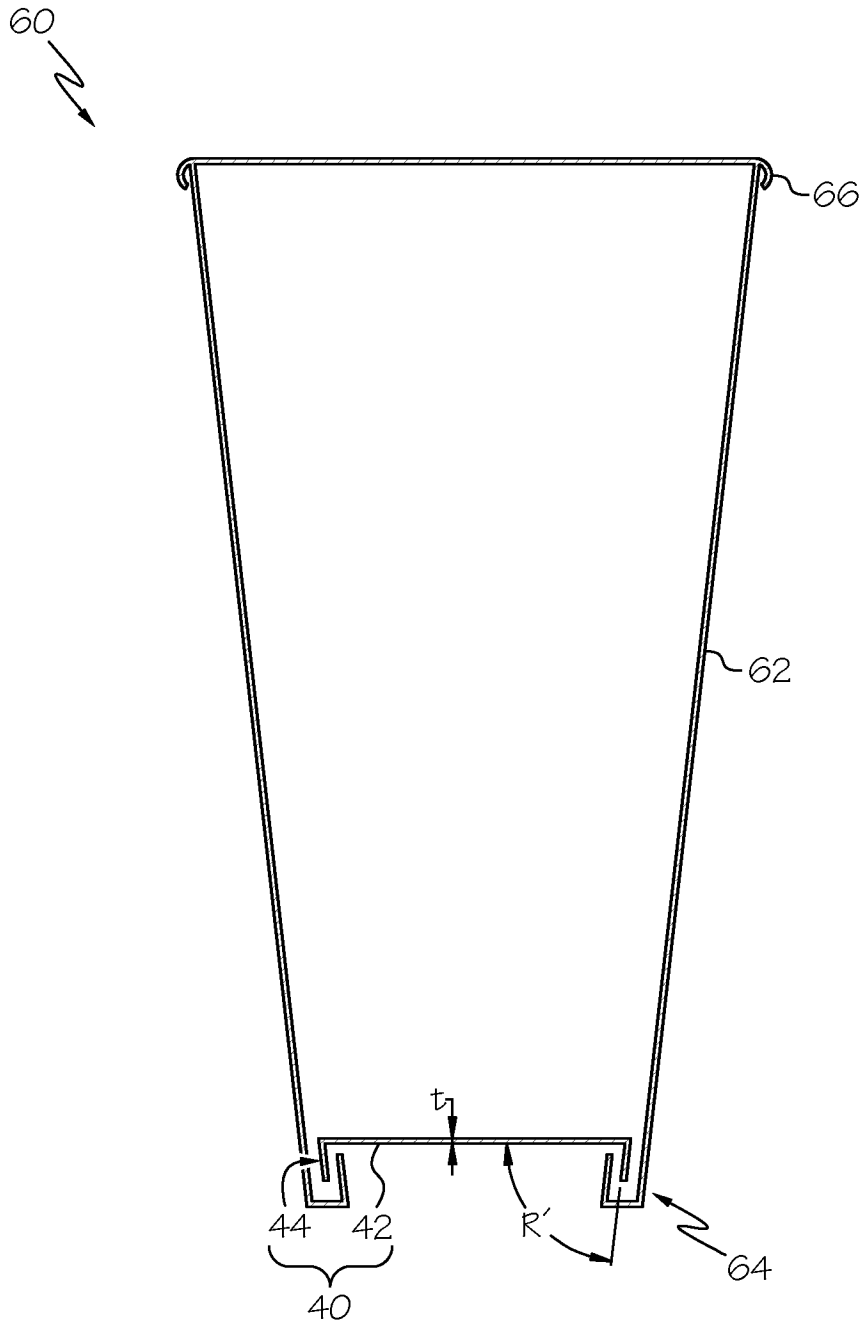


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/028662

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B65D3/14 B31B50/59
 ADD. B31F1/00 B31D5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 B65D B31D B31F B31B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/056205 A2 (KELLOG CO [US]) 18 April 2013 (2013-04-18)	1-3,5, 10,33,34
Y	page 6, line 25 - page 7, line 18; figures 1,2,5-11	4,6-9, 11,22, 35-38
A	page 13, line 12 - line 18 page 14, line 24 - page 15, line 11	12-21, 23-32
X	----- EP 2 764 991 A1 (TOYO SEIKAN GROUP HOLDINGS LTD [JP]; TOKAN KOGYO CO LTD [JP]) 13 August 2014 (2014-08-13)	12-14, 18,19, 23-25, 29,30
Y	paragraph [0029] - paragraph [0037]; figures 1,2,10	15-17, 20-22, 26-28, 31,32, 36-38
	----- -/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 5 August 2019	Date of mailing of the international search report 12/08/2019
---	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Johne, Olaf
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/028662

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2010/135613 A1 (MEADWESTVACO CORP [US]; YAN ZHIQUAN Q [US]) 25 November 2010 (2010-11-25) paragraph [0022] - paragraph [0025]; figures 2,4 -----	4,6, 15-17, 26-28
Y	US 4 026 458 A (MORRIS JERALD A ET AL) 31 May 1977 (1977-05-31) column 5, line 43 - line 51; figures 1-4 column 6, line 33 - line 34 -----	7-9,11, 22,35,38
Y	WO 02/47523 A1 (DAINIPPON PRINTING CO LTD [JP]) 20 June 2002 (2002-06-20) figures 15-17 -----	20,21, 31,32

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2019/028662

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2013056205	A2	18-04-2013	AU 2012323912 A1	29-05-2014
			CA 2851285 A1	18-04-2013
			CN 104136210 A	05-11-2014
			EP 2766178 A2	20-08-2014
			ES 2687148 T3	23-10-2018
			HK 1200772 A1	14-08-2015
			JP 2014528374 A	27-10-2014
			JP 2017226221 A	28-12-2017
			MX 361599 B	11-12-2018
			US 2013092312 A1	18-04-2013
			WO 2013056205 A2	18-04-2013

EP 2764991	A1	13-08-2014	CN 103842167 A	04-06-2014
			EP 2764991 A1	13-08-2014
			JP 2013082109 A	09-05-2013
			RU 2014118472 A	20-11-2015
			US 2014255630 A1	11-09-2014
			WO 2013051573 A1	11-04-2013

WO 2010135613	A1	25-11-2010	AU 2010249435 A1	27-10-2011
			CA 2762818 A1	25-11-2010
			CA 2836549 A1	25-11-2010
			CN 102438909 A	02-05-2012
			EP 2432702 A1	28-03-2012
			EP 2604539 A1	19-06-2013
			JP 2012527386 A	08-11-2012
			RU 2011152101 A	27-06-2013
			US 2011168771 A1	14-07-2011
			US 2011259943 A1	27-10-2011
			US 2012104078 A1	03-05-2012
WO 2010135613 A1	25-11-2010			

US 4026458	A	31-05-1977	CA 1031709 A	23-05-1978
			US 4026458 A	31-05-1977

WO 0247523	A1	20-06-2002	CN 1481225 A	10-03-2004
			HK 1111664 A1	09-11-2012
			HK 1134475 A1	30-06-2011
			KR 20030070053 A	27-08-2003
			WO 0247523 A1	20-06-2002
