

(21) Application No: **1517651.4**
 (22) Date of Filing: **06.10.2015**

(51) INT CL:
G08B 29/14 (2006.01) **B65D 83/30** (2006.01)
B65D 83/38 (2006.01) **G08B 17/10** (2006.01)
G08B 29/24 (2006.01)

(71) Applicant(s):
Thorn Security Limited
(Incorporated in the United Kingdom)
Summit Business Park, Hanworth Road,
SUNBURY-ON-THAMES, TW16 5DB, United Kingdom

(56) Documents Cited:
GB 2459322 A **GB 2409319 A**
GB 1305125 A **EP 1580706 A1**
WO 2006/064190 A1 **CN 101965302 A**
DE 102012215212 A1 **DE 102005060748 B3**
JP 2013127765 A **US 5361623 A**


(72) Inventor(s):
Stephen John Penney

(58) Field of Search:
 INT CL **B65D, G08B**
 Other: **EPODOC, WPI, Internet**

(74) Agent and/or Address for Service:
Withers & Rogers LLP
4 More London Riverside, LONDON, SE1 2AU,
United Kingdom

(54) Title of the Invention: **Smoke detector tester**
 Abstract Title: **Fire Detector Testing by Aerosol Spray**

(57) A fire alarm checking device 1 comprising a liquid reservoir 2 in fluid connection with a vibrating mesh type aerosol generator 3, such that the spray is directed toward a detecting element 5 of the fire detector 6. The liquid 4 may be water with an ionic content. The reservoir 2 may be deformable. There may be a tube 20 from the reservoir 2 to the generator 3, the tube 20 and reservoir 2 supporting the generator 3. Alternatively, the reservoir 2 and the generator 3 may be adjacent, with a tube 20 extending from the generator 3. There may be an intermediary interface between the test device 1 and the detector 6 for activating the checking device 1. Another aspect concerns a self-test fire detector 6 comprising a smoke detecting element 5 and a checking device 1, wherein the liquid reservoir 2 of the device is at least partially inside the smoke detector. The self-test fire detector 6 may have a rotatable base 8. A third aspect concerns a fire detector testing device 1 as above, wherein it includes a power connector for connecting to the electrical supply of the fire detector 6.

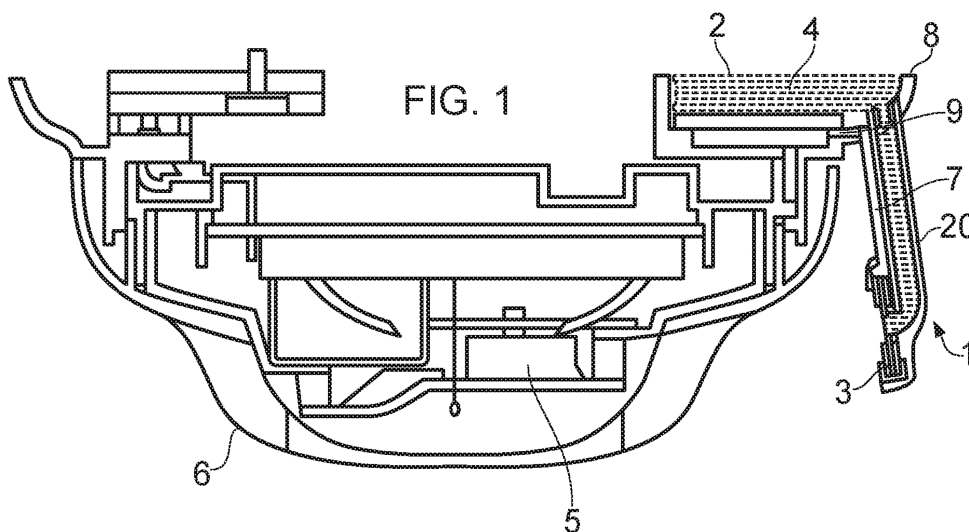

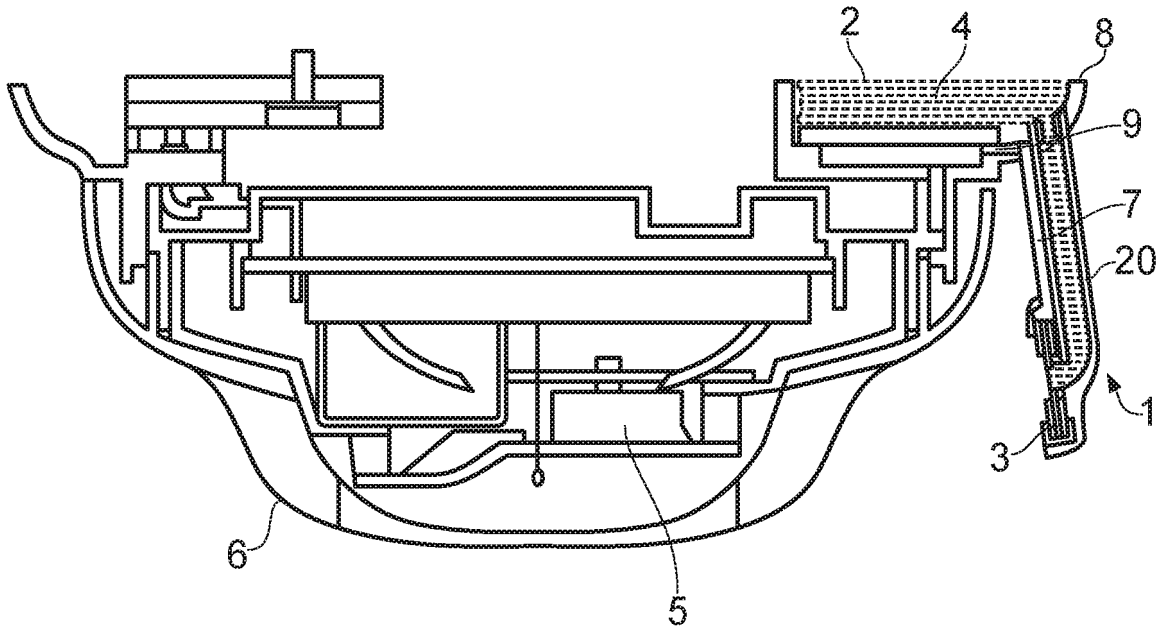


FIG. 1

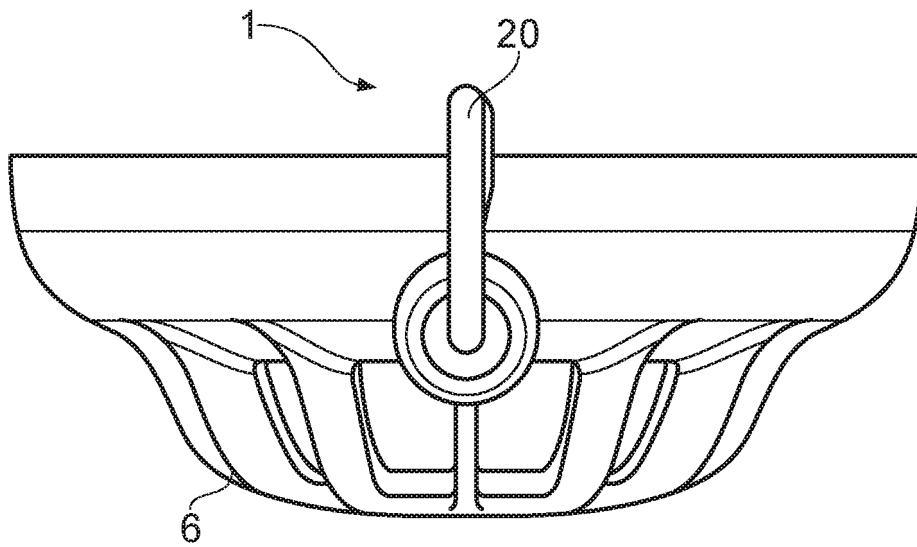


FIG. 2

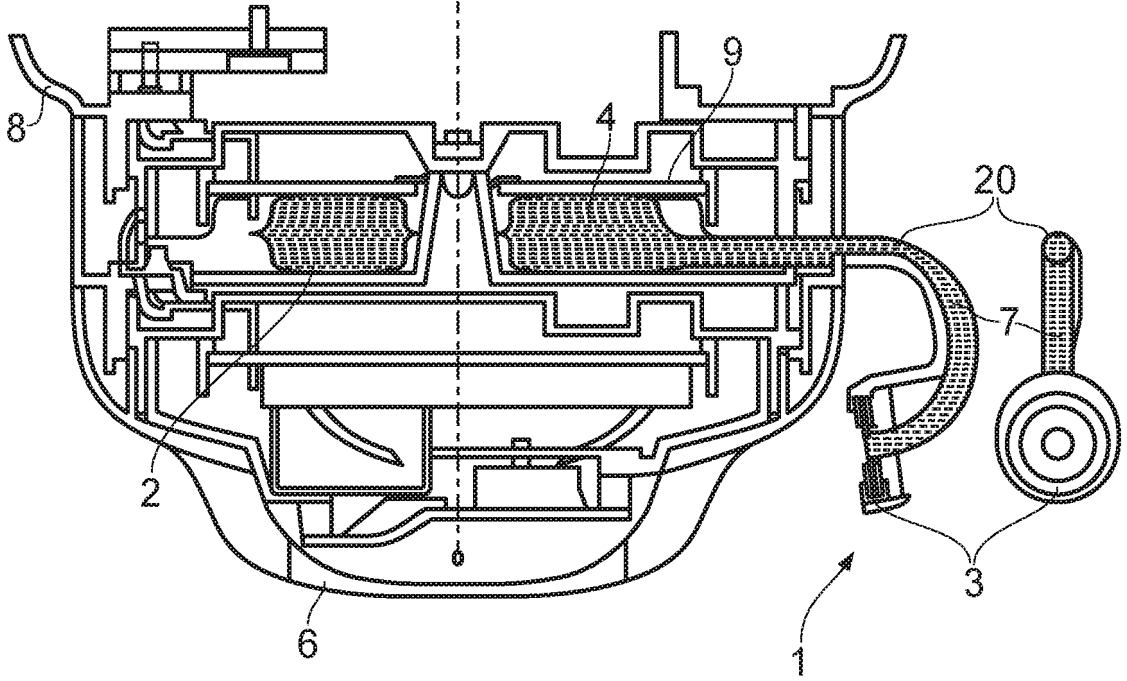


FIG. 3

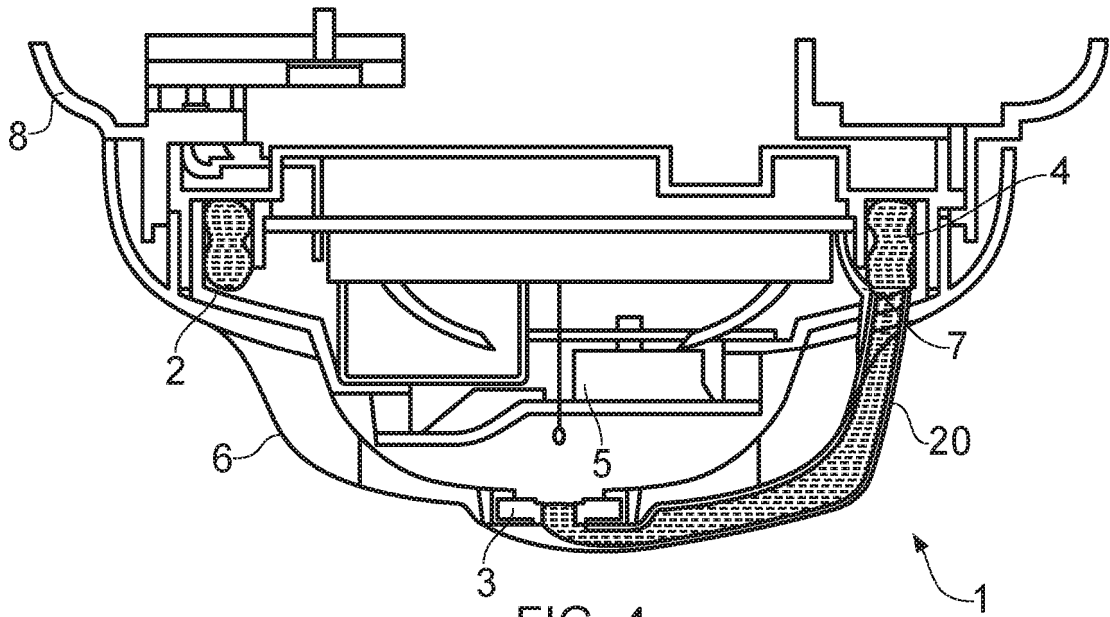


FIG. 4

3/3

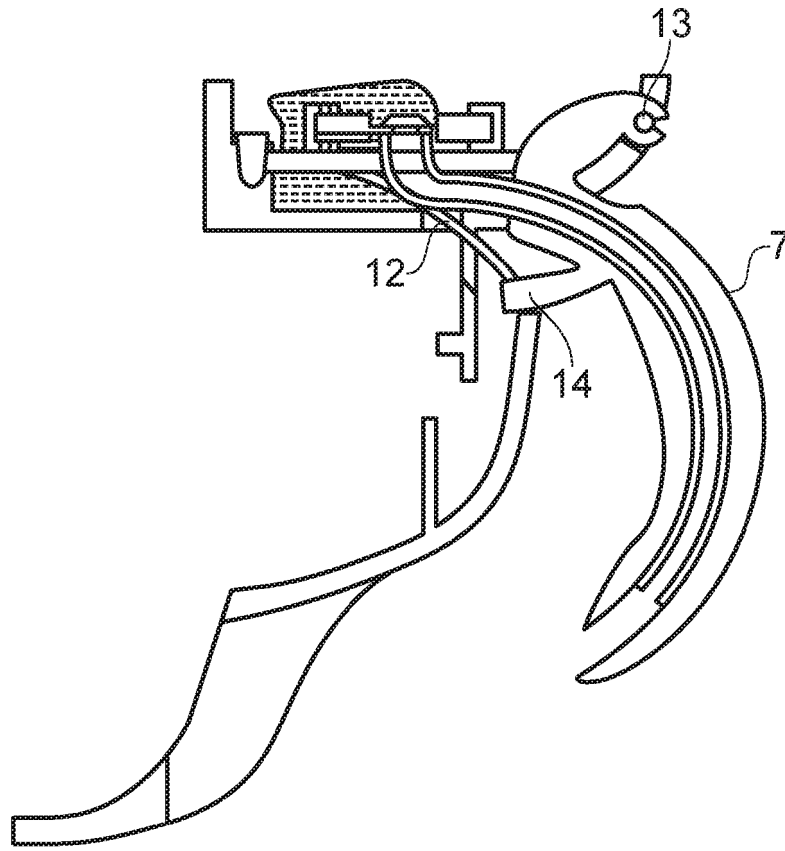


FIG. 5a

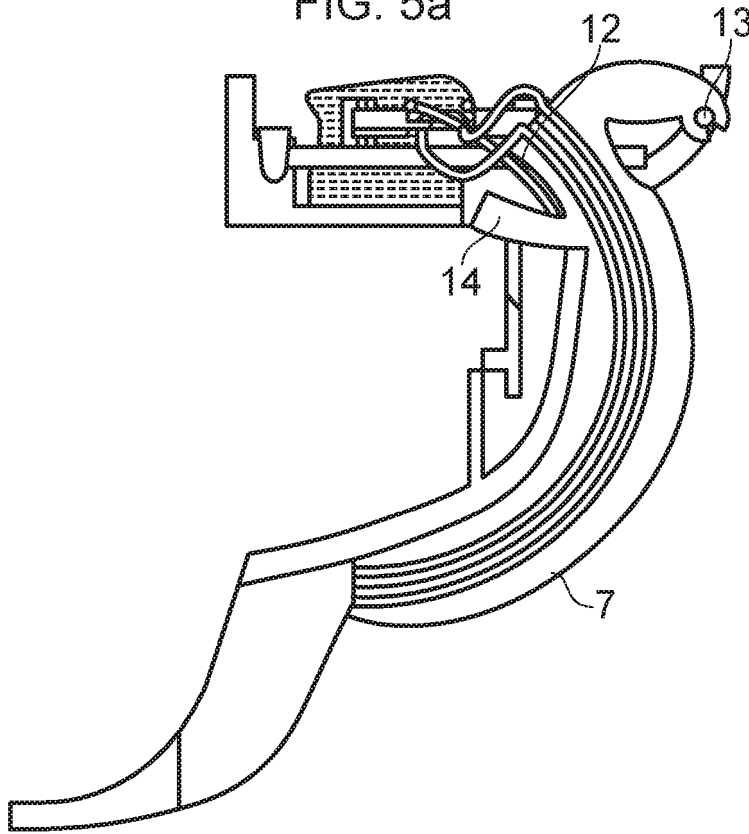


FIG. 5b

SMOKE DETECTOR TESTER

The present invention relates to a smoke detector tester for use in testing smoke detectors in fire alarm systems, and to a method of testing smoke detectors.

Smoke detectors are often sited where it is difficult or inconvenient to use conventional methods to test them. For example, the area in which a smoke detector is placed might have restricted access (such as some research or military establishments), or testing of a smoke detector might be disruptive (such as in a continuously occupied hospital ward), or the detector might be in a location which is hazardous to human health (such as certain areas of a nuclear power station), or the smoke detector might be located in a position which is accessible only with special equipment such as ladders, scaffolding or lifts. In such circumstances, smoke detectors might not be tested as frequently as they should, or the cost of testing is very high.

Many modern smoke detectors currently have the capability of monitoring both electrical and operational aspects of their performance automatically. The only parameter of operation which isn't automatically tested is whether entry of smoke has been compromised, for example by the build-up of dirt on the air inlet leading to a detector element within the smoke detector. To check this parameter, a test needs to establish the ability for smoke to reach the detector element of the smoke detector.

Known detector testers mount smoke simulators on the end of long poles, such as those disclosed in CN 101965302 B, US 6423962 B1 and US 5170148 A. Such detector testers include a hood at one end of the pole which fits over the body of a detector, and an aerosol can containing a paraffin-based liquid which is released into the hood as an aerosol spray to simulate the presence of smoke particles. These detector testers overcome some of the issues regarding difficult to reach detectors (e.g. detectors mounted on high ceilings), however, they fail to overcome the difficulty of testing detectors in many of the inconvenient places described above.

One known tester which seeks to solve these problems is mounted beside a pre-installed detector. The tester includes a support rail which is attached to the detector that is to be tested or to the base on which the detector is mounted, a body which contains an aerosol can, and a tube leading from the body to a nozzle head from which an aerosol spray generated by the tester is directed towards the detection chamber of the smoke detector. This known tester uses its own independent power and

data cables and test control panel, separate from any pre-installed fire alarm system cabling and fire system control panel. Up to 8 tester units may be connected by the cabling to a single test control panel. The test control panel may be located up to a maximum of 100 metres away from a unit, depending on the type of cable used. To carry out a test of a fire detector, an engineer attends the site of the fire alarm system, and moves the system from its active state into a test mode. To test the detector or detectors, he introduces a power source to the control panel. The control panel then causes the tester unit or units to conduct its tests by releasing an aerosol spray from the aerosol can directed at the fire detector. Each fire detector will indicate when it has detected the aerosol. If a fire detector does not detect the aerosol, the engineer will investigate further and rectify any problem. Once complete, the engineer will remove the power source and return the fire alarm system to its active state. Each tester unit remains in an inert state when not in use.

This tester has several disadvantages which can make it impractical to implement. Firstly, we have found that the tester must be kept horizontal in order to operate properly. Secondly, the location of the centre of mass of the tester well away from the centre of the smoke detector can exert an unnecessary strain on the detector to which it is mounted. Thirdly, the orientation of the tester affects the effectiveness of the tests that are carried out. The tester might only fit into position along a certain axis (e.g. along a corridor), but the air flow in that location might oppose the passage of the aerosol to the detector element, reducing the reliability of any test. Fourthly, this tester requires the supply of a relatively large amount of power during operation to generate the aerosol, making it relatively expensive to install with its own control & power cabling. Finally, this tester uses a paraffin based aerosol due to the more stable aerosol that is produced. However, paraffin can leave a residue on a detector, which is undesirable.

The present invention aims to overcome at least some of the above problems.

According to a first aspect of the invention, a fire detector testing device comprises: a liquid reservoir; and a vibrating mesh type aerosol generator in fluid connection with the liquid reservoir for generating an aerosol of a liquid from the liquid reservoir, arranged such that, when generated, the aerosol is directed towards a detector element of a fire detector.

In this specification, the term "vibrating mesh" is used to describe the type of aerosol generator that is used in this application, and includes both the type of generator where, in use, the mesh itself is

vibrated to generate an aerosol and the type of generator where, in use, the mesh is fixed and a vibrating driver element is used to cause a liquid to be aerosolised as it passes through the mesh.

The testing device may advantageously be installed alongside a new fire alarm system or retrofitted. The vibrating mesh type aerosol generator has the great advantages of being both directional and requiring low power. This makes it effective in directing an aerosol towards a detector element of a fire detector, it allows the device to be made more cheaply and using more compact components because of the lower operating power, and opens up the possibility of powering the device from the cabling of a fire alarm system, instead of requiring independent cabling.

It is preferred that the liquid reservoir of the fire detector testing device is deformable. As such, the reservoir requires no venting, reducing liquid loss through processes other than aerosol generator, for example, evaporation, leakage or capillary action, and reducing the likelihood of the liquid becoming contaminated.

In the preferred embodiments, a tube extends from the liquid reservoir to the vibrating mesh type aerosol generator. Advantageously, the reservoir and the tube support the aerosol generator relative to a fire detector such that, when generated, the aerosol is directed towards a detector element of the fire detector. This reduces or removes the need for extra support for the aerosol generator, reducing device complexity and cost.

In another embodiment, the liquid reservoir and the aerosol generator are adjacent, in that the aerosol generator is next to or adjoins the liquid reservoir. In this embodiment, a tube can be arranged to deliver the aerosol from the aerosol generator and direct it towards a detector element of the fire detector. This reduces the likelihood of the aerosol generator becoming damaged.

The fire detector testing device may further comprise an interface device disposed between the fire detector testing device and the fire detector for activating the testing device. This allows the testing of the fire detector to be initiated remotely, and perhaps even automatically. Initiation of a test might typically be controlled from the control panel, or even from a completely separate site. Remote activation provides simplicity in testing detectors in inconvenient or hazardous locations, and testing at lower cost by initiating the test remotely, either from the control panel or from an off-site location, and self-testing by initiating the test automatically from the detector, from the testing device, or remotely. One of the things which makes it possible, in practice, to remotely operate the

testing device is the isolation of each detector being tested in turn while the rest of the system remains active. This might be achieved by an operator going to the control panel and instructing it to carry out a test of the detectors, at which point, the control panel would isolate each detector in turn, perform the test, then de-isolate the detector. Alternatively, the control panel is given a standing instruction to test detectors on a regular basis, and this can be done automatically with no operator involvement.

The liquid in the liquid reservoir may be water with an ionic content, such as a very dilute acid solution. Advantageously, the liquid should not leave a residue on the smoke detector. A very dilute acid solution will aid in preventing static build up on the mesh of the aerosol generator.

The fire detector testing device may further comprise a power storage device, such that the device may be activated even in situations where its normal power supply does not provide enough power.

According to a second aspect of the invention, a self-test fire detector comprises: a smoke detector having a detector element; and a fire detector testing device which includes a liquid reservoir and an aerosol generator, in fluid connection with the liquid reservoir, for generating an aerosol of a liquid from the liquid reservoir, positioned such that, when generated, the aerosol is directed towards the detector element of the smoke detector; wherein the liquid reservoir is at least partially located within the smoke detector.

Locating the liquid reservoir within the smoke detector has the advantage of reducing the footprint of the self-test fire detector. The smaller footprint means that the self-test detector can be located and oriented in areas and positions in which it would have been difficult to place a separate detector and tester combination. Further, locating the liquid reservoir within the detector reduces support requirements and reduces the likelihood of the tester sustaining damage from external sources.

The self-test fire detector might further include a base, in which case, the liquid reservoir can be located in the base. Alternatively, the liquid reservoir can be located between the base and the detector.

The base portion can also rotate relative to the detector in some arrangements. In detector locations where airflow is unknown, or may change, it is advantageous to be able to reposition the aerosol generator such that it remains effective.

As with the first aspect, the liquid reservoir of the self-test fire detector can be deformable to remove the need for venting.

In the preferred embodiments, a tube extends from the liquid reservoir to the vibrating mesh type aerosol generator. Advantageously, the reservoir and the tube support the aerosol generator relative to a fire detector such that, when generated, the aerosol is directed towards a detector element of the fire detector. This reduces or removes the need for extra support for the aerosol generator, reducing device complexity and cost.

In another embodiment, the liquid reservoir and the aerosol generator are adjacent, in that the aerosol generator is next to or adjoins the liquid reservoir. In this embodiment, a tube can be arranged to deliver the aerosol from the aerosol generator and direct it towards a detector element of the fire detector. This reduces the likelihood of the aerosol generator becoming damaged.

The fire detector testing device may further comprise an interface device disposed between the fire detector testing device and the fire detector for activating the testing device. This allows the testing of the fire detector to be initiated remotely, and perhaps even automatically. Initiation of a test might typically be controlled from the control panel, or even from a completely separate site. Remote activation provides simplicity in testing detectors in inconvenient or hazardous locations, and testing at lower cost by initiating the test remotely, either from the control panel or from an off-site location, and self-testing by initiating the test automatically from the detector, from the testing device, or remotely. One of the things which makes it possible, in practice, to remotely operate the testing device is the isolation of each detector being tested in turn while the rest of the system remains active. This might be achieved by an operator going to the control panel and instructing it to carry out a test of the detectors, at which point, the control panel would isolate each detector in turn, perform the test, then de-isolate the detector. Alternatively, the control panel is given a standing instruction to test detectors on a regular basis, and this can be done automatically with no operator involvement.

The liquid in the liquid reservoir is water with an ionic content, such as a weak acid. Advantageously, the water should not leave a residue on the smoke detector. This will aid in preventing static build up on the mesh of the aerosol generator.

The fire detector testing device may further comprise a power storage device, such that the device may be activated even in situations where its normal power supply does not provide enough power.

According to a third aspect of the invention, a fire detector testing device, comprises: a liquid reservoir; an aerosol generator, in fluid connection with the liquid reservoir, arranged such that, when generated, the aerosol is directed towards a detector element of the fire detector; and a power connector for electrically connecting the testing device to the supply of electrical power for the fire detector.

The third embodiment has the advantage that a fire detector testing device would not require extra cabling to be implemented to provide power to the tester. This reduces one of the major costs incurred when installing this kind of detector testing system.

As with the first aspect, the liquid reservoir of the fire detector testing device may be deformable, removing the need for venting.

In the preferred embodiments, a tube extends from the liquid reservoir to the vibrating mesh type aerosol generator. Advantageously, the reservoir and the tube support the aerosol generator relative to a fire detector such that, when generated, the aerosol is directed towards a detector element of the fire detector. This removes or reduces the need for extra support for the aerosol generator, reducing device complexity and cost.

In another embodiment, the liquid reservoir and the aerosol generator are adjacent, in that the aerosol generator is next to or adjoins the liquid reservoir. In this embodiment, a tube can be arranged to deliver the aerosol from the aerosol generator and direct it towards a detector element of the fire detector. This reduces the likelihood of the aerosol generator becoming damaged.

The fire detector testing device may further comprise an interface device disposed between the fire detector testing device and the fire detector for activating the testing device. This allows the testing of the fire detector to be initiated remotely, and perhaps even automatically. Initiation of a test might typically be controlled from the control panel, or even from a completely separate site. Remote activation provides simplicity in testing detectors in inconvenient or hazardous locations, and testing at lower cost by initiating the test remotely, either from the control panel or from an off-site location, and self-testing by initiating the test automatically from the detector, from the testing

device, or remotely. One of the things which makes it possible, in practice, to remotely operate the testing device is the isolation of each detector being tested in turn while the rest of the system remains active. This might be achieved by an operator going to the control panel and instructing it to carry out a test of the detectors, at which point, the control panel would isolate each detector in turn, perform the test, then de-isolate the detector. Alternatively, the control panel is given a standing instruction to test detectors on a regular basis, and this can be done automatically with no operator involvement.

The liquid in the liquid reservoir is water with an ionic content, such as a weak acid. Advantageously, the liquid should not leave a residue on the fire detector. Ionic water will aid in preventing static build up on the mesh of the aerosol generator.

The fire detector testing device may further comprise a power storage device, such that the device may be activated even in situations where its normal power supply does not provide enough power.

Embodiments of the invention are described below by way of example, and with reference to the accompanying drawings in which:

Figure 1 is a sectional view of a fire detector and fire detector testing device according to a first embodiment of the invention;

Figure 2 is a side view of the fire detector and fire detector testing device of the first embodiment;

Figure 3 is a sectional view of a fire detector and fire detector testing device according to a second embodiment of the invention;

Figure 4 is a sectional view of a fire detector and fire detector testing device according to a third embodiment of the invention; and

Figures 5a and 5b are partial sectional views of a fire detector and fire detector testing device in two positions according to a fourth embodiment of the invention.

Figure 1 shows a first embodiment of the present invention in which a fire detector 6 is attached to a detector base 8 and a fire detector testing device 1 is mounted partially within the base to which the

fire detector 6 is mounted. In this case, the fire detector 6 is a smoke detector having a detector element 5 located within the body of the fire detector. The body of the fire detector includes openings through which airborne smoke particles are able to pass which lead to the detector element 5. The detector element 5 might, for example, be an optical smoke detector element. The openings through which the airborne smoke particles are able to pass often include grills to impede the entry of insects or large airborne particles which do not originate from a fire. In very dirty environments, the grills can become blocked with dirt, obstructing the entry of smoke particles, thereby limiting the performance of the smoke detector.

The detector base 8 is attached to the surface of a building, typically a ceiling or wall, and is connected to a fire alarm system via alarm cabling which is typically arranged in a loop, each loop ending at a control panel (known in Europe as 'control and indicating equipment', or CIE). The loop will normally connect a number of components of a fire alarm system, such as detectors, sounders, alarm buttons and the like. The loop will also provide electrical power to the components. Attachment of the fire detector 6 to the base plate connects the fire detector 6 directly to the alarm cabling loop.

The fire detector testing device 1 includes a liquid reservoir 2 containing a liquid 4 to be aerosolised, a wire 7, a tube 20 leading the liquid 4 from the liquid reservoir 2, and an aerosol generator 3 carried at an end of the tube 20 and connected to the end of the wire 7. While the liquid reservoir 2 is located within the base 8, the tube 20 extends out from the base 8 and around the outside of the fire detector 6 to the aerosol generator 3 which is located outside of the fire detector 6 facing the openings into the fire detector 6 through which smoke would pass on its way to the detector element 5. The aerosol generator 3 is held in position by a combination of the liquid reservoir 2, and the tube 20, which extends outwardly from the base so that the aerosol generator 3 faces the detector element 5. The aerosol generator 3 is a vibrating mesh type aerosol generator in which the mesh is supported by piezoelectric elements which can be caused to vibrate, thereby releasing the liquid located immediately behind the mesh through the holes in the mesh and forming an aerosol. The characteristics of the aerosol, such as the amount of liquid which is aerosolised and the droplet size are a function of the size of the holes in the mesh and the characteristics of the vibrations applied to the mesh by the piezoelectric crystal element. The aerosol generator 3 is a low-power device in that it is able to atomise the liquid without drawing much power from the fire alarm system cabling. This is important because the fire alarm cabling is very limited in the amount of power that it can supply.

In this embodiment, the reservoir is located within the base, and is shaped to fit into a suitable space within that base. The reservoir 2 is made of a deformable structure so that it will yield. In this embodiment, this is effected simply by the side walls of the reservoir 2 being deformable and flexible, but in other embodiments it could be effected by a bellows like structure which collapses as the volume of liquid 4 reduces. This ensures that, as liquid is atomised, it is not replaced by ambient air which might contaminate the liquid within the reservoir.

The detector 6 includes a data interface which connects the detector to the fire alarm cabling so that it is able to communicate with a control panel while maintaining a supply of power to the detector element 5. The data interface is also connected to the fire detector testing device 1. The data interface comprises a printed circuit board (9) and might include an antenna (not shown) for receipt of wireless signals.

A power storage device (not shown) may be incorporated into the testing device 1. Should the instantaneous power supplied by the alarm cabling not be enough to drive the aerosol generator 3, the aerosol generator 3 draws power from the power storage device. At other times, the power storage device is charged from the alarm cabling, and might be in the form of a rechargeable battery or supercapacitor.

There are two different ways in which a test might be instigated. The first is automatic where the detector or the testing device or the control panel automatically instigates a self-test of some or all of the detectors. The second is a manually instigated test in which a person causes the control panel to place the detector into a test mode before a test is carried out. That person might instigate the test at the individual detector to be tested, from the control panel, or from a remote location such as a monitoring station. In either case, the fire detector 6 and the fire detector testing device 1 are caused to carry out a test upon receipt of a test signal by the data interface, which might be received from the control panel via the fire alarm cabling or wirelessly if the test signal is a wireless signal.

When a test is carried out, the detector 6 is placed in a test mode so that, if it detects a fire condition during the test, it does not cause a fire alarm signal to be sent to any sounders or other alarm notification devices. The fire detector testing device 1 then generates an aerosol from the aerosol generator 3. This is done by applying an AC signal to the aerosol generator via the wire 7 in order to cause the mesh to be vibrated. The piezoelectric elements cause the mesh to be vibrated and

droplets of the liquid are forced through the mesh in the form of an aerosol which is directed towards the detector element 5 of the fire detector 6. As the liquid 4 is aerosolised, the liquid reservoir collapses as it is emptied. The aerosol has smoke-like properties which cause the detector element 5 to generate an alarm signal. If the detector element 5 does not generate an alarm signal because it has not received the droplets, a notification is generated which is sent to a service engineer who can investigate the reasons why the detector element 5 did not generate an alarm signal. This might simply be because the grill across the opening to the detector element 5 has become clogged with dirt. The grill can be cleaned, and the detector reinstalled. Once the test is complete, the fire detector 6 is returned to its normal operating condition from the test mode.

When the detector 6 is activated, power from the alarm cabling is used to generate a 640 kHz 17.5V (peak to peak) signal with a 128 kHz 10V (peak to peak) signal superimposed to power the aerosol generator 3. The current draw is roughly 100mA. This current draw is quite large compared to the detector, however, in the preferred embodiment, only one detector should be tested at a time as it is undesirable to isolate an entire system for testing at once. Further power may be supplied from the power storage device, where included.

The AC signal causes the mesh in the nebuliser to vibrate, which forces out microscopic droplets.

The liquid 4 in the liquid reservoir 2 is a weak acid, although other types of water with an ionic content can be used. Aerosolised water behaves similarly enough to smoke to cause the detector 6 to go into alarm. The use of a weak acid prevents a static build up on the mesh of the nebuliser. Preferably the water contains a substance to resist bacterial growth, or is sterilised prior to being placed in the liquid reservoir 2.

Figure 3 shows a second embodiment of the present invention in which a fire detector 6 is attached to a detector base 8 and a fire detector testing device 1 is mounted partially between the base 8 and the fire detector 6. In this case, the fire detector 6 is a smoke detector having a detector element 5 located within the body of the fire detector. The body of the fire detector includes openings through which airborne smoke particles are able to pass which lead to the detector element 5. The detector element 5 might, for example, be an optical smoke detector element. The openings through which the airborne smoke particles are able to pass often include grills to impede the entry of insects or large airborne particles which do not originate from a fire. In very dirty environments, the grills can

become blocked with dirt, obstructing the entry of smoke particles, thereby limiting the performance of the smoke detector.

The detector base 8 is attached to the surface of a building, typically a ceiling or wall, and is connected to a fire alarm system via alarm cabling which is typically arranged in a loop, each loop ending at a control panel. The loop will normally connect a number of components of a fire alarm system, such as detectors, sounders, alarm buttons and the like. The loop will also provide electrical power to the components. Attachment of the fire detector 6 to the base plate connects the fire detector 6 directly to the alarm cabling loop.

The fire detector testing device 1 includes a liquid reservoir 2 containing a liquid 4 to be aerosolised, a wire 7, a tube 20 leading the liquid 4 from the liquid reservoir 2, and an aerosol generator 3 carried at an end of the tube 20 and connected to the end of the wire 7. While the liquid reservoir 2 is located between the base 8 and the fire detector 6, the tube 20 extends out from between them and around the outside of the fire detector 6 to the aerosol generator 3 which is located outside of the fire detector 6 facing the openings into the fire detector 6 through which smoke would pass on its way to the detector element 5. The aerosol generator 3 is held in position by a combination of the liquid reservoir 2 and the tube 20, which extends outwardly from between the base and the fire detector so that the aerosol generator 3 faces the detector element 5. The aerosol generator 3 is a vibrating mesh type aerosol generator in which the mesh is supported by piezoelectric elements which can be caused to vibrate, thereby releasing the liquid located immediately behind the mesh through the holes in the mesh and forming an aerosol. The characteristics of the aerosol, such as the amount of liquid which is aerosolised and the droplet size are a function of the size of the holes in the mesh and the characteristics of the vibrations applied to the mesh by the piezoelectric crystal element. The aerosol generator 3 is a low-power device in that it is able to atomise the liquid without drawing much power from the fire alarm system cabling. This is important because the fire alarm cabling is very limited in the amount of power that it can supply.

In this embodiment, the reservoir is located between the base and the fire detector 6, and is shaped to fit into a suitable space. The reservoir 2 is made of a deformable structure so that it will yield. In this embodiment, this is effected simply by the side walls of the reservoir 2 being deformable and flexible, but in other embodiments it could be effected by a bellows like structure which collapses

.as the volume of liquid 4 reduces. This also ensures that, as liquid is atomised, it is not replaced by ambient air which might contaminate the liquid with within the reservoir.

The detector 6 includes a data interface which connects the detector to the fire alarm cabling so that it is able to communicate with a control panel while maintaining a supply of power to the detector element 5. The data interface is also connected to the fire detector testing device 1. The data interface comprises a printed circuit board (9) and might include an antenna (not shown) for receipt of wireless signals;

A power storage device (not shown) may be incorporated into the testing device 1. Should the instantaneous power supplied by the alarm cabling not be enough to drive the aerosol generator 3, the aerosol generator 3 draws power from the power storage device. At other times, the power storage device is charged from the alarm cabling, and might be in the form of a rechargeable battery or supercapacitor;

The ways in which a test may be instigated, and the testing and operation for this embodiment is the same as the first.

Figure 4 shows a third embodiment of the present invention in which a fire detector 6 is attached to a detector base 8 and a fire detector testing device 1 is mounted partially within the fire detector 6. In this case, the fire detector 6 is a smoke detector having a detector element 5 located within the body of the fire detector. The body of the fire detector includes openings through which airborne smoke particles are able to pass which lead to the detector element 5. The detector element 5 might, for example, be an optical smoke detector element. The openings through which the airborne smoke particles are able to pass often include grills to impede the entry of insects or large airborne particles which do not originate from a fire. In very dirty environments, the grills can become blocked with dirt, obstructing the entry of smoke particles, thereby limiting the performance of the smoke detector.

The fire detector 6 also includes an antenna (not shown) for receipt or transmission of wireless signals.

The detector base 8 is attached to the surface of a building, typically a ceiling or wall, and is connected to a fire alarm system via alarm cabling which is typically arranged in a loop, each loop ending at a control panel. The loop will normally connect a number of components of a fire alarm

system, such as detectors, sounders, alarm buttons and the like. The loop will also provide electrical power to the components. Attachment of the fire detector 6 to the base plate connects the fire detector 6 directly to the alarm cabling loop.

The fire detector testing device 1 includes a liquid reservoir 2 containing a liquid 4 to be aerosolised, a wire 7, a tube 20 leading the liquid 4 from the liquid reservoir 2, and an aerosol generator 3 carried at an end of the tube 20 and connected to the end of the wire 7. While the liquid reservoir 2 is located within the fire detector 6, the tube 20 extends out from the fire detector 6 and around the outside of the fire detector 6 to the aerosol generator 3 which is located outside of the fire detector 6 facing the openings into the fire detector 6 through which smoke would pass on its way to the detector element 5. The aerosol generator 3 is held in position by a combination of the liquid reservoir 2, and the tube 20, which extends outwardly from the fire detector so that the aerosol generator 3 faces the detector element 5. The aerosol generator 3 is a vibrating mesh type aerosol generator in which the mesh is supported by piezoelectric elements which can be caused to vibrate, thereby releasing the liquid located immediately behind the mesh through the holes in the mesh and forming an aerosol. The characteristics of the aerosol, such as the amount of liquid which is aerosolised and the droplet size are a function of the size of the holes in the mesh and the characteristics of the vibrations applied to the mesh by the piezoelectric crystal element. The aerosol generator 3 is a low-power device in that it is able to atomise the liquid without drawing much power from the fire alarm system cabling. This is important because the fire alarm cabling is very limited in the amount of power that it can supply.

In this embodiment, the reservoir is located within the fire detector, and is shaped to fit into a suitable space within that detector. The reservoir 2 is made of a deformable structure so that it will yield. In this embodiment, this is effected simply by the side walls of the reservoir 2 being deformable and flexible, but in other embodiments it could be effected by a bellows like structure which collapses as the liquid within the liquid reservoir 2 is depleted during use. This also ensures that, as liquid is atomised, it is not replaced by ambient air which might contaminate the liquid within the reservoir.

The detector 6 includes a data interface which connects the detector to the fire alarm cabling so that it is able to communicate with a control panel while maintaining a supply of power to the detector element 5. The data interface is also connected to the fire detector testing device 1. The data

interface comprises a printed circuit board (9) and might include an antenna (not shown) for receipt of wireless signals;

A power storage device (not shown) may be incorporated into the testing device 1. Should the instantaneous power supplied by the alarm cabling not be enough to drive the aerosol generator 3, the aerosol generator 3 draws power from the power storage device. At other times, the power storage device is charged from the alarm cabling, and might be in the form of a rechargeable battery or supercapacitor.

The ways in which a test may be instigated, and the testing and operation for this embodiment is the same as the first.

Figures 5a and 5b show a way of positioning the tube 20 against the casing of the detector 6, in order to increase accuracy of the aerosol generator 3. The tube 20 is mounted about a pivot point 13. In this example, the pivot point 13 is attached to the base unit. A biasing means 12 holds the tube 20 away from the detector 6 during installation of the detector, as shown in Figure 5a. Upon attachment of the fire detector to the base 8, the case of the detector 6 presses against a flange 14, displacing the tube about the pivot point 13 against the bias of the biasing means 12, so that the tube is held in position against the case of the detector 6.

The embodiments described above use a vibrating mesh type aerosol generator in which the mesh itself is vibrated in order to aerosolise the liquid. In other embodiments, a different type of vibrating mesh type aerosol generator is used in which the mesh is fixed and a vibrating driver element is located behind the mesh for driving the liquid through the mesh to cause atomisation.

The embodiments described above also describe the liquid reservoir and the aerosol generator being located at differing ends of the tube. In other embodiments, the liquid reservoir and the aerosol generator may be adjacent, such that the liquid in the liquid reservoir is aerosolised and the tube directs the aerosol towards the detector element of the fire detector.

The above embodiments are based on a cabled alarm system. However, wireless embodiments are also envisaged. In such a system, it is particularly advantageous if the test device is not powered by the detector causing the detector's power supply to be more rapidly depleted.

CLAIMS

1. A fire detector testing device, comprising:
 - a liquid reservoir; and
 - a vibrating mesh type aerosol generator, in fluid connection with the liquid reservoir, for generating an aerosol of a liquid from the liquid reservoir, arranged such that, when generated, the aerosol is directed towards a detector element of a fire detector.
2. A fire detector testing device according to claim 1 wherein the liquid reservoir is deformable.
3. A fire detector testing device according to claim 1 or 2, further comprising a tube extending from the liquid reservoir to the aerosol generator.
4. A fire detector testing device according to claim 3, wherein the liquid reservoir and the tube support the aerosol generator.
5. A fire detector testing device according to claim 1 or 2, wherein the liquid reservoir and the aerosol generator are adjacent.
6. A fire detector testing device according to claim 5, further comprising a tube extending from the aerosol generator.
7. A fire detector testing device according to any one of claims 1 to 6, further comprising an interface device disposed between the fire detector testing device and the fire detector for activating the testing device.
8. A fire detector testing device according to any one of claims 1 to 7 wherein the liquid in the liquid reservoir is water with an ionic content.
9. A fire detector testing device according to any one of claims 1 to 8 wherein the fire detector testing device further comprises a power storage device.
10. A self-test fire detector, comprising:
 - a smoke detector having a detector element; and

a fire detector testing device which includes a liquid reservoir and an aerosol generator, in fluid connection with the liquid reservoir, for generating an aerosol of liquid from the liquid reservoir, positioned such that, when generated, the aerosol is directed towards the detector element of the smoke detector;

wherein the liquid reservoir is at least partially located within the smoke detector.

11. A self-test fire detector testing according to claim 10 wherein the fire detector includes a base, and the liquid reservoir is located within the base.
12. A self-test fire detector according to claim 10 wherein the fire detector includes a base, and the liquid reservoir is located between the base and the detector.
13. A self-test fire detector according to claim 11 or 12 wherein the base portion can rotate with respect to the detector.
14. A self-test fire detector according to any one of claims 10 to 13 wherein the liquid reservoir is deformable.
15. A self-test fire detector according to any one of claims 9 to 13, further comprising a tube extending from the liquid reservoir to the aerosol generator.
16. A self-test fire detector according to claim 15, wherein the liquid reservoir and the tube support the aerosol generator.
17. A self-test fire detector according to any one of claims 10 to 14, wherein the liquid reservoir and the aerosol generator are adjacent.
18. A self-test fire detector according to claim 17, further comprising a tube extending from the aerosol generator.
19. A self-test fire detector according to any one of claims 10 to 17, further comprising an interface device disposed between the fire detector testing device and the fire detector for activating the testing device.

20. A self-test fire detector according to any one of claims 10 to 19 wherein the liquid in the liquid reservoir is water with an ionic content.
21. A self-test fire detector according to any one of claims 10 to 20 wherein the fire detector testing device further comprises a power storage device.
22. A fire detector testing device, comprising:
 - a liquid reservoir;
 - an aerosol generator, in fluid connection with the liquid reservoir, arranged such that, when generated, the aerosol is directed towards a detector element of a fire detector;
 - and
 - a power connector for electrically connecting the testing device to the supply of electrical power for the fire detector.
23. A fire detector testing device according to claim 22 wherein the liquid reservoir is deformable.
24. A fire detector testing device according to claim 22 or 23, further comprising a tube extending from the liquid reservoir to the aerosol generator.
25. A fire detector testing device according to claim 24, wherein the liquid reservoir and the tube support the aerosol generator.
26. A fire detector testing device according to claim 22 or 23, wherein the liquid reservoir and the aerosol generator are adjacent.
27. A fire detector testing device according to claim 26, further comprising a tube extending from the aerosol generator.
28. A fire detector testing device according to any one of claims 22 to 27, further comprising an interface device disposed between the fire detector testing device and the fire detector for activating the testing device.

29. A fire detector testing device according to any one of claims 22 to 28 wherein the liquid in the liquid reservoir is water with an ionic content.
- 30 A fire detector testing device according to any one of claims 22 to 29 wherein the fire detector testing device further comprises a power storage device.



Application No: GB1517651.4

Examiner: Mr Peter Herbert

Claims searched: 1-30

Date of search: 22 March 2016

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	1-3, 9	WO2006/064190 A1 (SATA LTD) See from line 4, page 2 to line 22, page 3 and figure 1.
X	1-3, 9	GB2409319 A (SATA LTD) See from line 13, page 3 to line 10, page 4; from line 22, page 4, to line 6, page 5 and figure 1.
X	1, 3	GB1305125 A (CERBERUS) See EPODOC abstract, lines 55-80, page 1 and figures 1-2.
X	1, 9	JP2013127765 A (HOCHIKI CO) See paragraphs 11, 14-16, 19 and figures 1-9.
X	1	US5361623 A (WANTZ) See lines 11-43, column 4 and figures 1-4.
X	1	CN101965302 A (NO CLIMB PRODUCTS LTD) See EPODOC abstract and paragraphs 2-4, 43-46.
A	-	DE102005060748 B3 (TECHEM ENERGY SERVICES GMBH) See EPODOC abstract and figure 1.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

--

Worldwide search of patent documents classified in the following areas of the IPC

B65D; G08B

The following online and other databases have been used in the preparation of this search report



EPODOC, WPI, Internet

International Classification:

Subclass	Subgroup	Valid From
G08B	0029/14	01/01/2006
B65D	0083/30	01/01/2006
B65D	0083/38	01/01/2006
G08B	0017/10	01/01/2006
G08B	0029/24	01/01/2006



Application No: GB1517651.4

Examiner: Mr Peter Herbert

Claims searched: 10-21

Date of search: 30 June 2016

**Patents Act 1977
Further Search Report under Section 17**

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	10-21	DE102012215212 A1 (BOSCH) See Paragraphs 30, 42, 45; EPODOC abstract; figure 1
X	10-21	GB2459322 A (MANHAR) See EPODOC abstract; figure 1; from line 18 on page 4 to line 7 on page 5.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

--

Worldwide search of patent documents classified in the following areas of the IPC

B65D; G08B

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI

International Classification:

Subclass	Subgroup	Valid From
G08B	0029/14	01/01/2006
B65D	0083/30	01/01/2006
B65D	0083/38	01/01/2006
G08B	0017/10	01/01/2006
G08B	0029/24	01/01/2006



Application No: GB1517651.4

Examiner: Mr Peter Herbert

Claims searched: 22-30

Date of search: 30 June 2016

**Patents Act 1977
Further Search Report under Section 17**

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	22-30	EP1580706 A1 (BOSCH) See paragraphs 2-4, 17 and figure 1
X	22-30	GB2459322 A (MANHAR) See EPODOC abstract; figure 1; from line 18 on page 4 to line 7 on page 5.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

--

Worldwide search of patent documents classified in the following areas of the IPC

B65D; G08B

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI

International Classification:

Subclass	Subgroup	Valid From
G08B	0029/14	01/01/2006
B65D	0083/30	01/01/2006
B65D	0083/38	01/01/2006
G08B	0017/10	01/01/2006
G08B	0029/24	01/01/2006