

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2020/242280 A1

(43) International Publication Date
03 December 2020 (03.12.2020)

(51) International Patent Classification:

F28F 9/02 (2006.01) *F28D 1/053* (2006.01)
F28F 21/08 (2006.01)

(21) International Application Number:

PCT/KR2020/095066

(22) International Filing Date:

13 April 2020 (13.04.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10 2019 207 905.9

29 May 2019 (29.05.2019) DE

(71) Applicant: **HANON SYSTEMS** [KR/KR]; 95, Similseo-ro, Daedeok-gu, Daejeon 34325 (KR).

(72) Inventors: **BILEK, Martin**; Hutnik 1426, 69801 Veseli nad Moravou (CZ). **KOLOMAZNIK, Milan**; Ctvrte 1175, 68725 Hluk (CZ). **PROCHAZKA, Lukas**; Mojmirova 822, 68603 Stare Mesto u UH (CZ).

(74) Agent: **HONESTY & JR PARTNERS INTELLECTUAL PROPERTY LAW GROUP**; 5F, 615 Sunreung-ro, Gangnam-gu, Seoul 06103 (KR).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A PROFILE FOR A HEADER OF A COOLER, A HEADER HAVING SUCH A PROFILE AND A COOLER HAVING A HEADER

(57) Abstract: The invention relates to a profile (10) for a header of a cooler which also comprises numerous parallel tubes, having a cross-sectional shape between slots for the tubes which comprises at least two wave troughs (12), and to a header having such a profile and a cooler having such a header.



WO 2020/242280 A1

Description

Title of Invention: A PROFILE FOR A HEADER OF A COOLER, A HEADER HAVING SUCH A PROFILE AND A COOLER HAVING A HEADER

Technical Field

- [1] The invention relates to a profile for a header of a cooler, a header having such a profile and a cooler, in particular for a motor vehicle, having at least one header.

Background Art

- [2] Coolers for motor vehicles typically comprise numerous parallel tubes, in particular flat tubes, in which a coolant flows. This flow occurs in particular between two so-called headers which comprise suitable slots into which the numerous tubes that are soldered to the header are inserted.
- [3] These joints are subject to considerable strain, particularly when the temperature of the coolant changes quickly. In this case, there are considerable temperature differences between individual tubes, such that the tubes expand differently, which results in considerable strain on the joints between the tubes and the header. Damage in these areas is therefore the result of so-called thermal shocks.

Disclosure of Invention

Technical Problem

- [4] In view of the above, the object of the invention is to provide a profile, a header and a cooler that are more resistant to thermal shocks.

Solution to Problem

- [5] The object is firstly achieved by the profile described in claim 1. According thereto, this has a cross-sectional shape between the slots for the tubes which comprises at least two wave troughs. In the event of the strain described above, this results in a better distribution of the tension, so that resistance to thermal shocks is considerably improved. Initial tests show that resistance to thermal shocks is improved by a factor of 2-3.
- [6] Preferred embodiments are described in the other claims.
- [7] Although it is sufficient for what is effectively a “double” fixing of the tubes by way of two wave troughs for two wave troughs with a crest between them to be provided, and for the slots for the tubes to extend between the two wave troughs, it is preferred that at least three wave crests are provided. In other words, this means that each wave trough is followed by a further wave crest. It should be noted in this regard that the wave troughs extend in the direction of the tubes, and the wave crests extend in the direction of the interior of the header or the water tank provided therewith. For the

event that three wave crests are provided, the slots for the tubes extend from the two outer sides at least to the highest point of the outer wave crests.

[8] Extensive tests have shown that what is important is the configuration of the individual radiuses of the waves. The values set out below apply to widths of the flat tubes of between 14 and 37 mm and/or a material thickness of the profile according to the invention of between 1 and 2 mm, in particular approximately 1.5 mm, and/or a spacing between the tangents to the wave troughs and crests of approximately 4 to 6 mm. Thus, the values according to claims 3 and 4 are preferred for the radiuses, as it has been found that these values result in a particularly resistant joint between a header having the profile according to the invention and the flat tubes. With regard to the different radiuses, it should be noted that these are always measured on the inner side of the profile, i.e. facing away from the tubes, and an external or outer radius designates a radius that is closer to the outer side of the profile if the outer side is understood to be the point at which a wave running transversely through the profile begins. It should be mentioned in this respect that the cross-sectional shape of a profile is typically symmetrical with respect to a centre in the aforementioned running direction of the wave.

[9] It was also shown within the scope of the tests that it is also advantageous for long-term resistance to thermal shocks for at least one wave crest or trough to have at least one flat portion.

[10] Within the scope of extensive tests the formulae according to claim 6 were determined for the widths of these flat portions. In this regard it should be stressed that only one of the values for W1 to W4 must be realised, and that this also applies to at least one of the radiuses R1 to R5.

[11] As has been proven, the profile according to the invention can consist of aluminium or an aluminium alloy.

[12] This also applies to the numerous tubes, in particular flat tubes, which are preferably soldered to at least one profile.

Brief Description of Drawings

[13] In the following, embodiments of the invention that are shown in the drawings will be described in more detail. In the drawings:

[14] Fig. 1 shows a perspective view of a profile according to the invention in a first embodiment;

[15] Fig. 2 shows a sectional view of the profile shown in Fig. 1 with a detail enlargement;

[16] Fig. 3 shows a view of a further embodiment of the profile according to the invention that corresponds to Fig. 2;

- [17] Fig. 4 shows a view of a further embodiment of the profile according to the invention that corresponds to Fig. 2;
- [18] Fig. 5 shows a view of a further embodiment of the profile according to the invention that corresponds to Fig. 2;
- [19] Fig. 6 shows a further sectional view of the profile shown in Fig. 2;
- [20] Fig. 7 shows a partial sectional view of the profile shown in Fig. 2; and
- [21] Fig. 8 shows a partial sectional view of the profile shown in Fig. 4.

Mode for the Invention

- [22] As can be seen from Fig. 1, the profile 10 according to the invention for a header of a cooler has the form of a shallow dish with an elongated rectangular shape and rounded corners and edges. According to Fig. 1, the profile 10 shown is closed on the upper side by a further profile, such that a header is formed, which is typically vertically oriented during operation. According to the orientation in Fig. 1, underneath the profile 10 shown and when installed, typically in a horizontal direction, numerous flat tubes are inserted in slots 16 which are formed in the “base” of the profile 10. The invention relates to the cross-sectional shape of the base, which effectively remains between the slots 16. The dimensions of the remaining base portions in a direction from bottom left to top right according to Fig. 1 are slightly larger, in particular 1.5 to 2.5 times as large as the dimensions of the slots 16 in the same direction.
- [23] Fig. 2 shows the wave shape of the base, and also the circumferential web 18 which surrounds each slot 16 and which essentially has a shape that corresponds to the flat tube to be inserted therein. As can be seen more clearly in Fig. 6, the web 18 has a considerable height H which preferably remains the same over the circumference and which ensures a secure soldered connection to the flat tubes to be inserted. The slots 16 and the webs 18 are typically formed by burring.
- [24] Fig. 2 shows the wave shape according to the invention of the profile 10 between the slots 16, which in the case shown has two wave troughs 12, which are aligned with the flat tubes that are not shown, and three wave crests 14. The slots 16 extend approximately to the highest point of the two outer wave crests 14.
- [25] Fig. 2 shows the profile for flat tubes having a width (measured in Fig. 2 from left to right) of 18.5 mm, and Fig. 3 shows a profile for a width of 14 mm, Fig. 4 for a width of the flat tubes of 25.2 mm and Fig. 5 for a width of the flat tubes of 36.4 mm. As can be seen from Fig. 3, the waves here are slightly flatter, and in the embodiments according to Fig. 4 the wave crests are slightly drawn apart, as will be explained in more detail below with reference to Fig. 7 and Fig. 8.
- [26] In Fig. 6 the radiuses R1 to R5 are marked out, wherein it should first of all be stressed that these are always to be measured on the side facing away from the flat

tubes (that are not shown). An exterior or outer radius is therefore to be understood to be a radius measured on the (lateral) outer side, in other words in Fig. 6 for the first wave crest 14.1 to the left. In contrast, an internal or inner radius, such as R2 in the case of the first wave crest 14.1 and R4 in the case of the first wave trough 12.1, is measured at a point further inwards (further to the right in Fig. 6). It should also be noted that the cross-sectional shape of the profile according to the invention, which can be seen in Fig. 6, is typically symmetrical to the centre of the second, middle wave crest 14.2, such that the directions described (left/right) can be reversed for the right-hand half of the profile according to Fig. 6. The presently preferred values for a header profile for flat tubes having a width of 18.5 mm are: R1 = 2.3 mm, R2 = 2.6 mm, R3 = 1.9 mm, R4 = 1.9 mm and R5 = 4 mm.

[27] The flat portions specified in claim 6 are labelled in Fig. 7 and are shown for the profile in Fig. 6.

[28] The profile in Fig. 8 corresponds to that in Fig. 4, in which there is a wider flat portion W3 corresponding to the preferred configuration.

Industrial Applicability

[29] The invention relates to a profile for a header of a cooler, a header having such a profile and a cooler, in particular for a motor vehicle, having at least one header.

[30]

Claims


- [Claim 1] A profile (10) for a header of a cooler which also comprises numerous parallel tubes, having a cross-sectional shape between slots for the tubes which comprises at least two wave troughs (12).
- [Claim 2] The profile (10) according to claim 1, characterised in that at least three wave crests (14) are also provided.
- [Claim 3] The profile (10) according to claim 1 or claim 2, characterised in that radiuses (R1 - R5) in the region of the waves are between 1.5 and 50 mm, in particular 1.9 to 40 mm, preferably between 1.9 and 5 mm, and particularly preferably between 2 and 4 mm and/or 1.5 and 3 mm.
- [Claim 4] The profile (10) according to claim 2, characterised in that from outside to inside the outer radius (R1) of a first wave crest (14.1), the inner radius (R2) of the first wave crest (14.1), the outer radius (R3) of a first wave trough (12.1), the inner radius (R4) of the first wave trough (12.1) and/or the radius (R5) of a second wave crest (12.2) is measured as follows:
 $R1 = 1.5 - 3.5 \text{ mm,}$
 $R2 = 2 - 4 \text{ mm,}$
 $R3 = 1.9 - 5 \text{ mm,}$
 $R4 = 1.9 - 40 \text{ mm,}$
 $R5 = 3 - 50 \text{ mm}$
- [Claim 5] The profile (10) according to at least one of the preceding claims, characterised in that at least one wave crest (14) or wave trough (12) has at least one flat portion.
- [Claim 6] The profile (10) according to claim 5, characterised in that the following applies to at least one flat portion (W1) on a first wave crest (14.1) from outside to inside, to at least one flat portion (W2) between the first wave crest (14.1) and a first wave trough (12.1), to at least one flat portion (W3) in the first wave trough (12.1) and/or to at least one flat portion (W4) between the first wave trough (12.1) and a second wave crest (14.2):
 $S = 2,15 + R1 + W1$
 $2,2 = (R2 - \cos 45 * R2) + \cos 45 * W2 + (R3 - \cos 45 * R3)$
 $2,6 = (R5 - \cos \alpha * R5) + \cos(90 - \alpha) * W4 + (R4 - \cos \alpha * R4)$
 $4,77 + \frac{T_{width}}{2} = 2,15 + R1 + W1 + \cos 45 * R2 + \cos 45 * W2 + \cos 45 * R3 + W3 + \sin \alpha * R4 + \sin(90 - \alpha) * W4 + \sin \alpha * R5$
 where alpha is an angle between a first wave trough (12.1) and the

second wave crest (14.2) with respect to a tangent to the first wave trough (12.1), and


T_{width} is the width of a tube.

- [Claim 7] The profile (10) according to any one of the preceding claims, characterised in that it consists of aluminium or an aluminium alloy.
- [Claim 8] A header having at least one profile according to any one of the preceding claims.
- [Claim 9] A cooler, in particular for a motor vehicle and particularly preferably for an air-conditioning system of a motor vehicle, having at least one header according to claim 8.
- [Claim 10] The cooler according to claim 9, characterised in that the tubes consist of aluminium or an aluminium alloy and are soldered to at least one profile.


[Fig. 1]

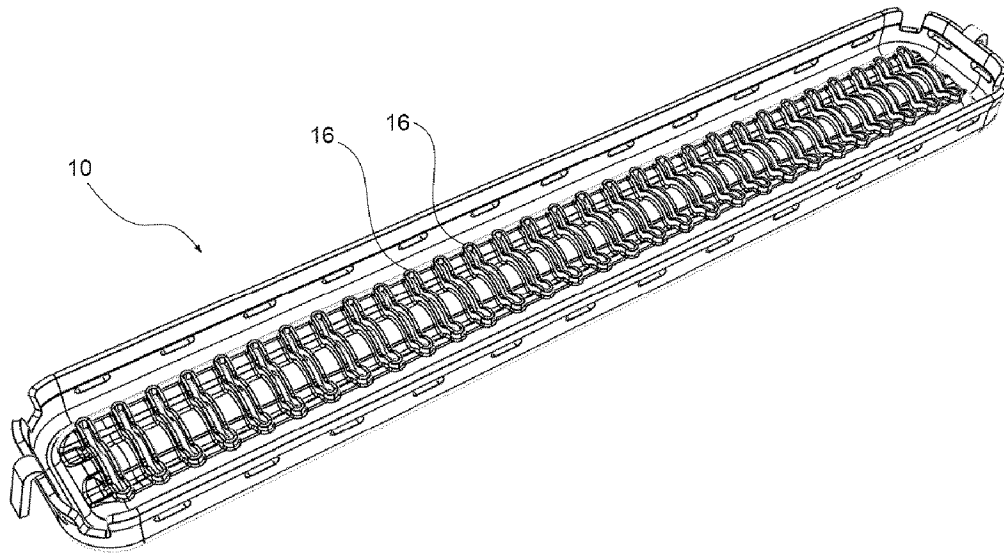


[Fig. 2]

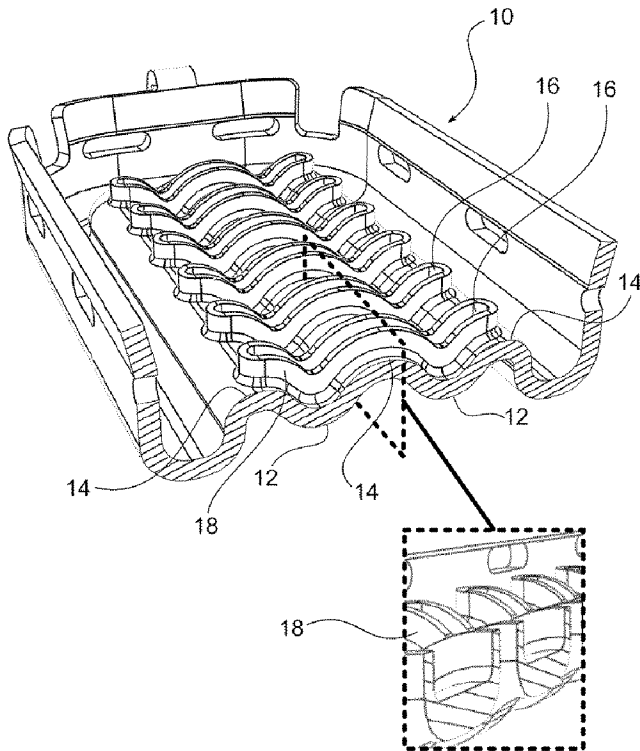


[Fig. 3]

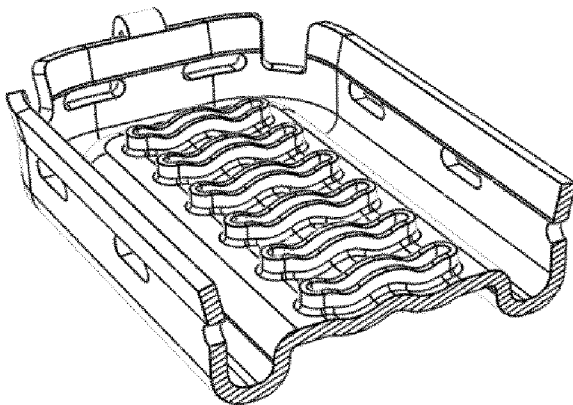


[Fig. 4]

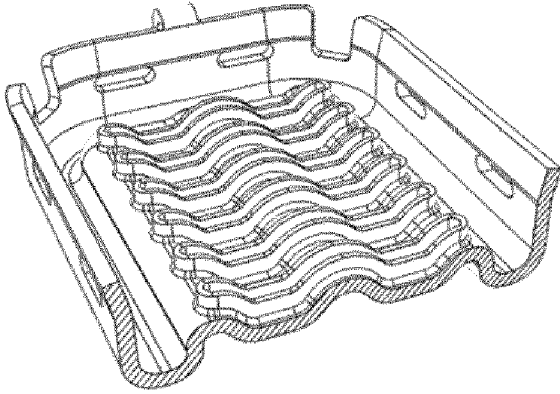


[Fig. 5]

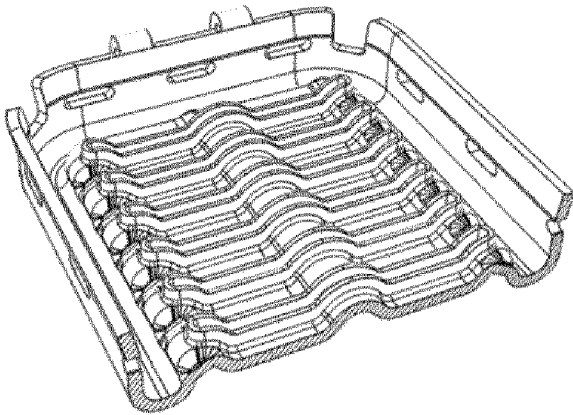


[Fig. 6]

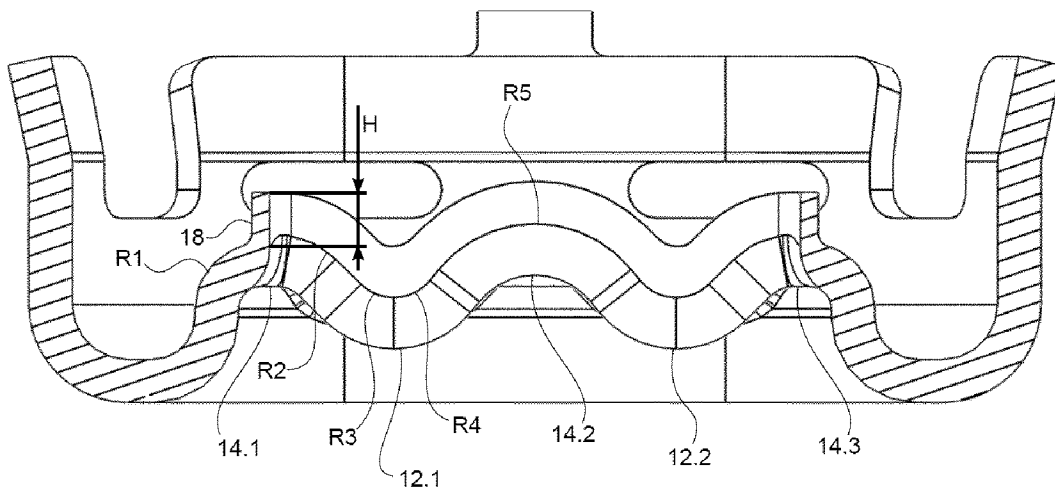

[Fig. 7]

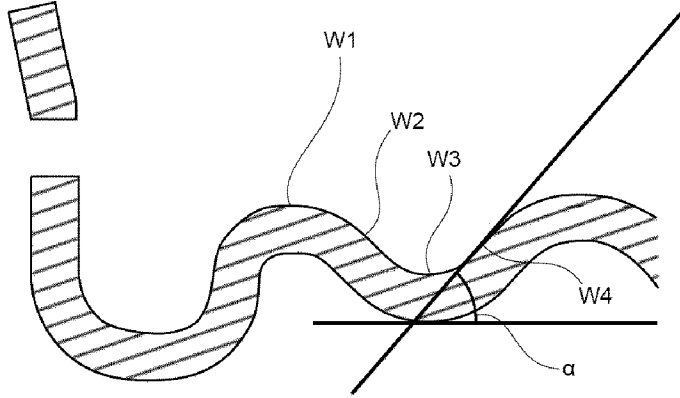

[Fig. 8]

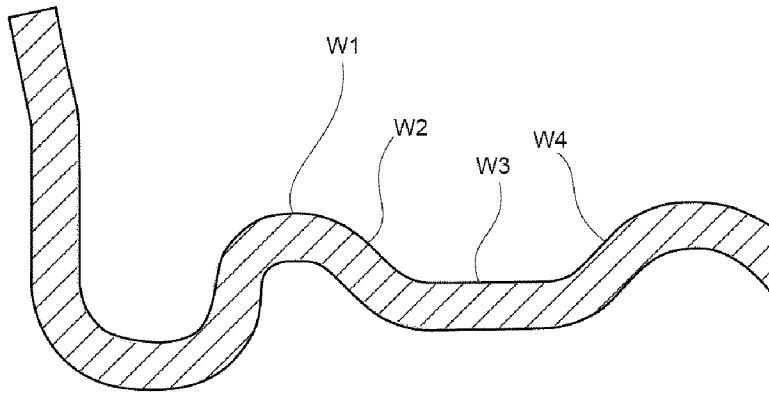

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2020/095066**A. CLASSIFICATION OF SUBJECT MATTER****F28F 9/02(2006.01)i, F28F 21/08(2006.01)i, F28D 1/053(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
F28F 9/02; B23P 15/26; F28D 1/053; F28F 1/04; F28F 1/10; F28F 9/26; F28F 21/08Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: profile, header, cooler, slot, wave trough, wave crest, radius, flat portion, aluminium, motor vehicle, air-conditioning system**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006-0151158 A1 (OZAKI, TATSUO) 13 July 2006 paragraphs [0012]-[0013], [0032]-[0036], [0061]-[0072] and figures 1-5	1-10
X	US 2006-0144579 A1 (OZAKI, TATSUO) 06 July 2006 paragraphs [0012], [0018], [0048]-[0055], [0095]-[0100] and figures 1-3, 5	1-10
A	US 2015-0168080 A1 (DENSO CORPORATION) 18 June 2015 paragraphs [0052]-[0066] and figure 4	1-10
A	US 2014-0174702 A1 (KURZ et al.) 26 June 2014 paragraphs [0023]-[0030] and figures 1-3	1-10
A	US 2018-0320995 A1 (DENSO CORPORATION) 08 November 2018 paragraphs [0045]-[0064] and figures 5-6	1-10

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 July 2020 (20.07.2020)

Date of mailing of the international search report

21 July 2020 (21.07.2020)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

BAHNG SEUNG HOON

Telephone No. +82-42-481-5560



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2020/095066

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006-0151158 A1	13/07/2006	JP 2006-189205 A US 7255158 B2	20/07/2006 14/08/2007
US 2006-0144579 A1	06/07/2006	JP 2006-189206 A US 7237605 B2	20/07/2006 03/07/2007
US 2015-0168080 A1	18/06/2015	CN 104508418 A CN 104508418 B JP 2014-020669 A JP 5821795 B2 US 10101096 B2 WO 2014-013725 A1	08/04/2015 02/11/2016 03/02/2014 24/11/2015 16/10/2018 23/01/2014
US 2014-0174702 A1	26/06/2014	BR 112013029735 A2 CN 203595444 U DE 102011076225 A1 EP 2710319 A1 EP 2710319 B1 JP 2014-519005 A JP 6197239 B2 KR 10-2002964 B1 KR 10-2014-0035427 A RU 2013156557 A RU 2602660 C2 US 10393450 B2 WO 2012-159971 A1	17/01/2017 14/05/2014 22/11/2012 26/03/2014 31/10/2018 07/08/2014 20/09/2017 23/07/2019 21/03/2014 27/06/2015 20/11/2016 27/08/2019 29/11/2012
US 2018-0320995 A1	08/11/2018	CN 108139183 A CN 108139183 B DE 112016004697 T5 JP 2017-075741 A JP 6547576 B2 WO 2017-064940 A1	08/06/2018 06/12/2019 19/07/2018 20/04/2017 24/07/2019 20/04/2017