

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number  
WO 00/75432 A1

(51) International Patent Classification<sup>7</sup>: E01F 9/012, 9/013, 13/02

(21) International Application Number: PCT/AU00/00640

(22) International Filing Date: 7 June 2000 (07.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PQ 0818 7 June 1999 (07.06.1999) AU

(71) Applicant and

(72) Inventor: EVANS, Peter, Eric [AU/AU]; Unit 10, 121 Crisp Circuit, Bruce, Australian Capital Territory 2617 (AU).

(74) Agent: H.R. HODGKINSON & CO.; Level 3, 20 Alfred Street, Milsons Point, New South Wales 2061 (AU).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:  
— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANCHORING OR WEIGHTING SYSTEM FOR PORTABLE ROAD SIGNS AND BARRICADES

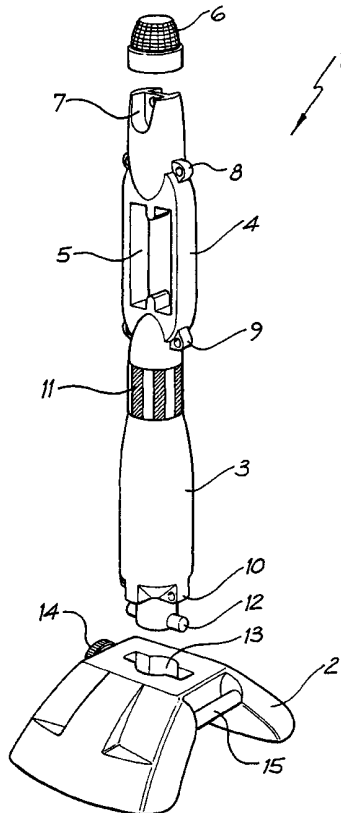

(57) Abstract: An anchoring system (1) for portable barricades or barriers, comprising a base (2) having a cavity space therein to contain water, a vertical post or bollard (3) adapted for attachment to the upper end of the base by a bayonet type fit between the base and the lower end of the post (12, 13), and wherein the upper end of the post includes a horizontal extending slot (5) adapted to receive either a single or two overlapping barricade barrier boards. The upper end (7) of the post (3, 4) may incorporate a warning light (6). The base (2) may incorporate a carry handle (15).



WO 00/75432 A1

**ANCHORING OR WEIGHTING SYSTEM FOR PORTABLE ROAD SIGNS AND BARRICADES****TECHNICAL FIELD**

The present invention relates to a traffic safety device and anchoring system for portable barricades or barriers, portable delineators, road bollards and the like.

**BACKGROUND**

A conventional portable barricade or barrier comprises an elongate board or plank, horizontally disposed on one elongate side edge thereof, supported at either end by a trestle or other support frame at a pre-determined height above ground level. Often there is a need to anchor the support frames to the ground to provide stability in windy or gusty conditions, or to make the barrier more stable against accidental movement or the like. Traditionally this has been achieved by the use of sand bags or concrete blocks to hold the support frames in place, but such usage can be inconvenient or cause occupational health and safety issues resulting from road maintenance personnel being required to lift heavy sand bags or concrete blocks from a central storage area to the intended barrier site, or their acting as a solid projectile when impacted by a vehicle.

**DISCLOSURE OF THE INVENTION**

It is an object of the present invention to provide an improved anchoring system for portable barricades or barriers or the like, which goes at least some way towards overcoming or at least minimising the prior art problems or limitations outlined above or for providing a clear alternative choice for potential users.

It is another object of this invention to provide an improved anchoring system for portable bollards, barricades or barriers, or the like, which incorporates a water reservoir as an anchoring means, which can be emptied or filled in situ.

It is a further object of this invention to provide an improved anchoring system of the type described above, which can be adapted for use as a guide post, marker post, bollard or the like, and which can be used as a hazard marker.

It is yet another object of this invention to provide an improved anchoring system of the type described above which is environmentally friendly and which avoids potential environmental pollution from decomposing sand-filled hessian (or burlap) bags.

It is yet a further object of this invention to provide a versatile anchoring system for portable barricades or barriers, or the like, which is relatively simple in construction and relatively inexpensive to manufacture.

These and other objects of this invention will become more apparent from the following descriptions and the drawings.

According to one aspect of the present invention there is provided an anchoring system for portable barricades or barriers or the like, comprising a base portion having an outer housing defining a fluid-filled cavity space therein, said base portion being adapted to be attachable to or to straddle a part of a conventional portable barricade support frame or trestle to prevent or to restrict relative movement of solid support frame or trestle. Optionally, the base portion is adapted to receive and to retain a vertical post member at its upper end for use as a bollard or stanchion, or the like.

#### **BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS**

The invention provides a water-filled vessel to anchor or weigh down barricade trestles, such as "A" frames and barrier boards, thus preventing them from turning over in wind, traffic generated wind gusts or traffic. An addition to this concept is the ability to fit a bollard to the vessel to make it a stanchion in its own right.

The invention will now be further described with reference to the accompanying drawings relating to one possible non-limiting embodiment of the invention. In the drawings:-

FIG.1 is an exploded perspective view of an anchoring device with a built-in water reservoir and incorporating a guide post or bollard which can be used as a hazard marker or the like;

FIG.2 is a perspective view illustrating a plurality of guide posts or bollards of the type illustrated in FIG.1 marking or defining the outer edge of a roadway or pavement;

FIG.3 is a perspective view of a plurality of guide posts or bollards of the type illustrated in FIG.1 comprising part of a portable barricade; and

FIG.4 is a perspective view of an anchoring device of the type illustrated in FIG.1, anchoring a trestle or barricade support frame.

According to the embodiment illustrated in FIG.1, the anchoring system comprises a truncated inverted V-shaped vessel 2 having a cavity space therein to contain a quantity of water to provide anchorage weight to the device. Ideally, the vessel is made from UPVC material with a volume of up to 20 litres. It includes a cap 14 for the inlet and outlet of water or other fluid. The inverted V-shape is adapted to straddle the lower horizontal cross bar of an A-shaped barricade trestle, as shown in FIG.4. A carry handle is provided at 15.

A vertical post or bollard member 3 is adapted for attachment to the upper truncated end of the vessel 2, preferably by means of a bayonet type fit between the vessel 12 and the lower end of the vertical post 12. The post 3 may include reflective tape 11 as a safety measure for night-time use, and include an identifying logo or other indicia (not shown). The upper end 4 of the post includes a horizontally-extending slot 5 adapted to receive either a single or dual barrier board (16 in FIGS 3 and 4) or the adjacent overlapping ends of horizontally extending barrier boards.

Preferably, the bottom, middle and upper end of the post (3, 4 and 7) is adapted to receive a rope or chain (as at 8, 9 and 10) when same is used as a barrier. Optionally, the upper end 7 of the post may incorporate a warning light, preferably a solar rechargeable light with the post incorporating rechargeable battery means, and photoelectric cell means for automatic on/off switching between day and night. The preferred form of lighting is a LED light or other low energy light means.

This product has many advantages over these traditional methods, the most important being weight and occupational health and safety issues. The anchor can be filled up on site by a water truck negating the need for heavy bags or blocks to be carted from a central storage point to the site. This will have substantial benefits on the employees, eliminating lifting and back pain. It also eliminates the need to fill bags with sand on site, and the need for manual labour for this purpose.

The anchor 1 also has an added advantage over sand bags or concrete blocks in that a guide post, marker post or bollard 3 can be inserted in the bayonet cavity 13 moulded into the top end of the vessel or base 2, thus the anchor can also become a hazard marker.

Once the anchor's duties have ceased, it can easily be emptied by removing the cap and letting the water run onto the ground or into the gutter for disposal. This presents many advantages over traditional methods in that no sand or decomposing bags pollute the environment.

Ideally, the components of the anchor means are moulded from UV stable plastics materials, including UPVC, HDPE and polycarbonates, in any colour according to end-user or safety requirements.

Although an exemplary embodiment of the present invention has been shown and described, it will be apparent to those having ordinary skill in the art that a number of changes, modifications or alternations to the invention described herein may be made, none of which depart from the spirit of the present invention. All such changes, modifications, and alternations should therefore be seen as being within the scope of the present invention.

It should be appreciated that the present invention provides a substantial advance in anchoring means for portable barriers or barricades, or the like, providing all of the herein-described advantages without incurring any relative disadvantages.

CLAIMS

1. An anchoring system for portable barricades or barriers, comprising of a base portion having an outer housing defining a fluid-fillable cavity space therein, said base portion having a raised central region adapted to straddle a part of a conventional portable barricade support frame or trestle cross-bar to prevent or to restrict relative movement if said support frame or trestle.
2. An anchoring system for portable barricades or barriers according to claim 1, wherein the base portion comprises a truncated inverted v-shaped vessel having a fluid-fillable cavity space therein adapted to contain a quantity of a fluid material to provide variable anchorage weight to said anchoring system.
3. An anchoring system according to claim 1 or claim 2, further comprising an upwardly vertically extending post member attachable to said base portion.
4. An anchoring system according to claim 3, wherein the post member is attachable to the base portion by means of an interlocking bayonet coupling between component parts of the base portion and the post member.
5. A portable bollard or stanchion, comprising a base portion having an outer housing defining a fluid-fillable cavity space therein, and an upwardly vertically extending post member attachable to said base portion.
6. A portable bollard or stanchion according to claim 5, wherein said base portion includes a raised central region adapted to straddle a part of a conventional portable barricade support frame or trestle cross-bar to prevent or to restrict relative movement of said support frame or trestle.
7. A portable bollard or stanchion according to Claim 6, wherein said base portion comprises a truncated inverted v-shaped vessel having a fluid-fillable cavity-space therein adapted to contain a quantity of a fluid material to provide variable anchorage weight to said portable bollard or stanchion.

8. A portable bollard or stanchion according to any one of claims 5 to 7, wherein the post member is attachable to the base portion by means of an interlocking bayonet coupling between components parts of the base portion and the post member.
9. A portable bollard or stanchion according to any one of claims 5 to 8, wherein the upper end of the post member incorporates or includes light emitting means.
10. A portable bollard or stanchion according to claim 9, wherein the light emitting means is a solar powered rechargeable light source, optionally including photoelectric cell means for automatic on/off switching between day and night.
11. A portable bollard or stanchion according to any one of claims 5 to 10, including light reflecting means.
12. A portable bollard or stanchion according to any one of claims 5 to 11, adapted to support rigid or flexible barrier or barricade means.
13. A portable bollard or stanchion according to claim 12, wherein an upper end of the post member is slotted to receive and support one or more elongated barrier boards.

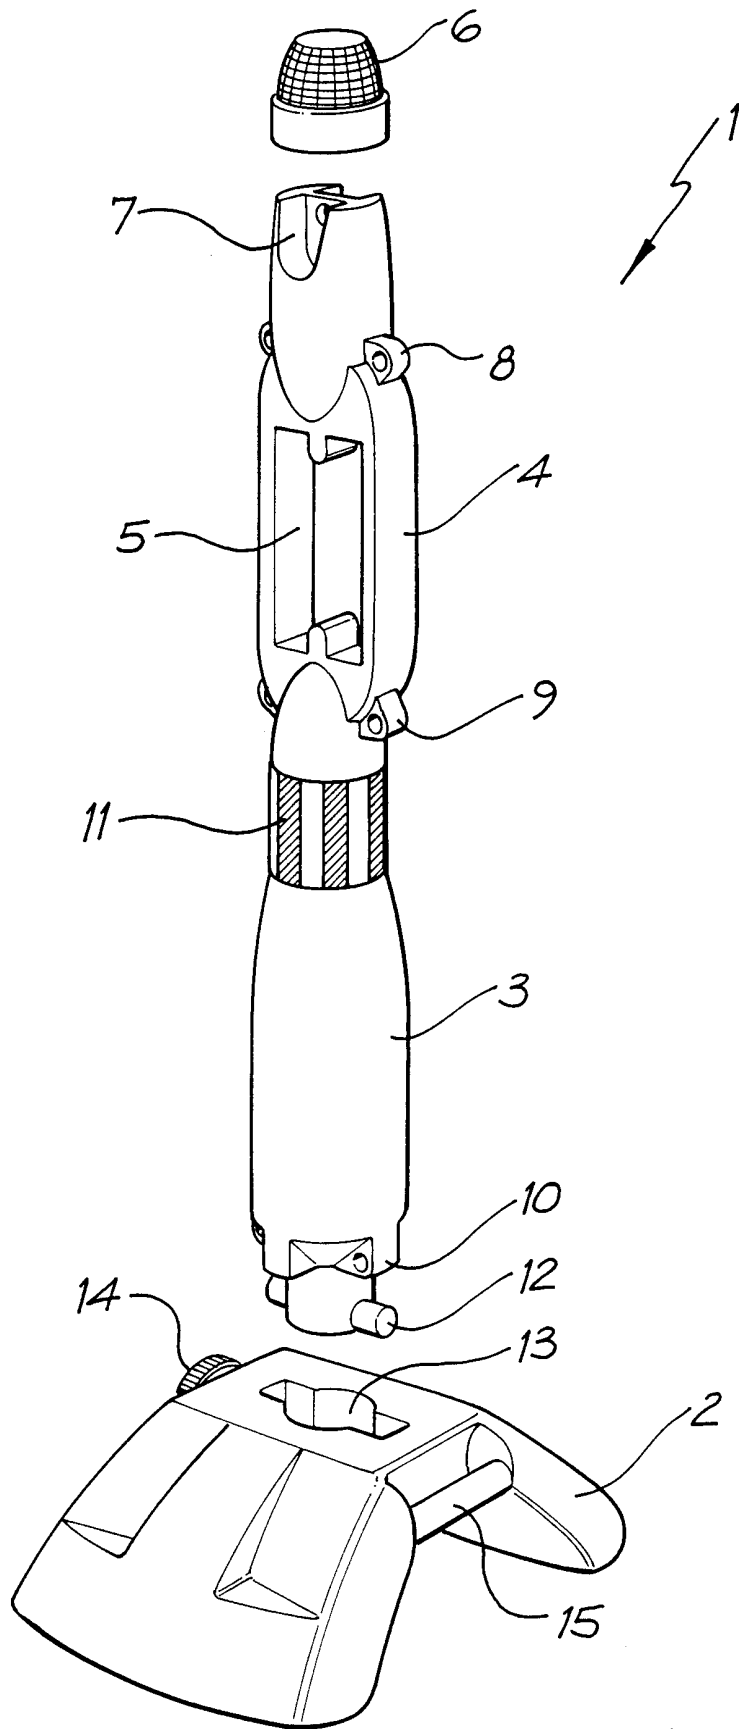


FIG. 1



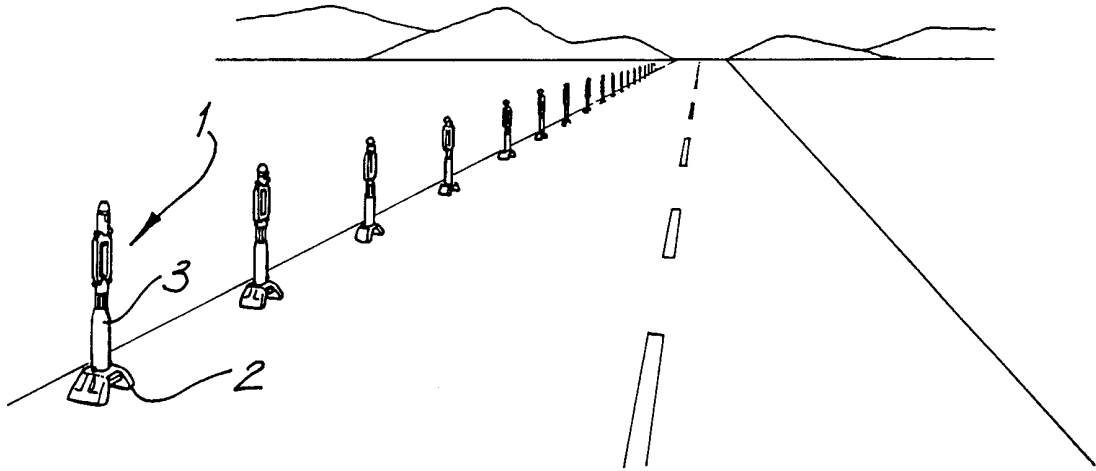


FIG. 2

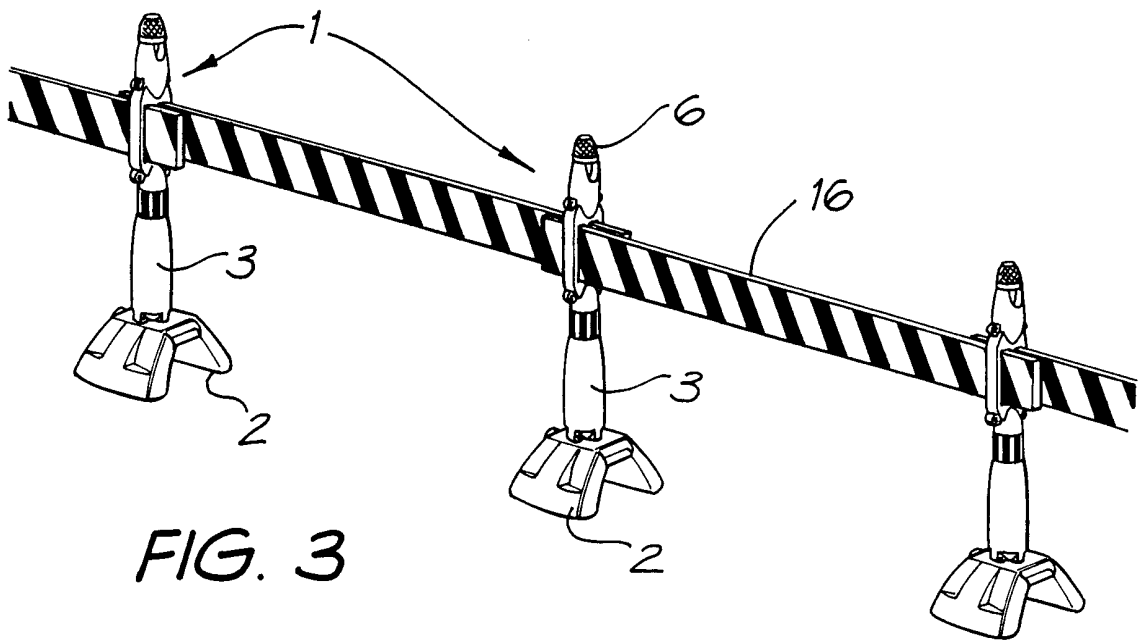


FIG. 3

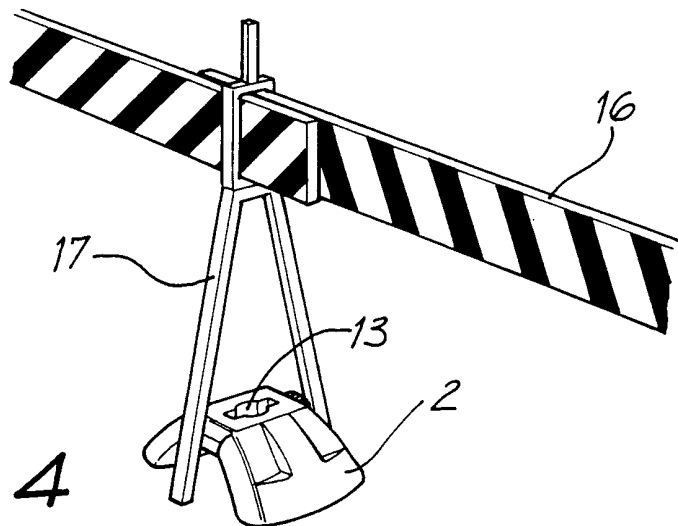



FIG. 4

# INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/AU00/00640**

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>					
Int. Cl. <sup>7</sup> : E01F 9/012, 9/013, 13/02					
According to International Patent Classification (IPC) or to both national classification and IPC					
<b>B. FIELDS SEARCHED</b>					
Minimum documentation searched (classification system followed by classification symbols) IPC(7) : E01F 9/012, 9/013, 13/02, 9/016, 13/00 IPC (5) : E01F 9/01					
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU : IPC AS ABOVE					
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)					
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.			
A	US 4852511 A (LOOK) 1 August 1989	1			
A,P	JP 11241321 A (TEKKEN KENSETSU KK) 7 September 1999	1,5			
X	EP 141564 A2 (GLASDON Ltd) 15 May 1985	5			
X	EP 380272 A1 (YAMAMOTO Co.) 1 August 1990	5			
X	US 5860386 A (SCHWAB) 19 January 1999	5			
+++++					
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex					
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;">           * Special categories of cited documents:            "A" document defining the general state of the art which is not considered to be of particular relevance            "E" earlier application or patent but published on or after the international filing date            "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)            "O" document referring to an oral disclosure, use, exhibition or other means            "P" document published prior to the international filing date but later than the priority date claimed         </td> <td style="width: 33%; vertical-align: top;">           "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention            "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone            "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art            "&amp;" document member of the same patent family         </td> <td style="width: 33%;"></td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family				
Date of the actual completion of the international search 11 August 2000		Date of mailing of the international search report 18 AUGUST 2000			
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustralia.gov.au Facsimile No. (02) 6285 3929		Authorized officer  DAVID LEE  Telephone No : (02) 6283 2107			

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.  
**PCT/AU00/00640**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	4852511	NONE			
JP	11241321	NONE			
EP	141564	GB	2148359		
EP	380272	JP	2194282	US	5020764
US	5860386	NONE			
END OF ANNEX					