




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁵ : B29D 11/00, G02C 7/02, 7/06 G02C 7/10	A1	(11) International Publication Number: WO 91/08104 (43) International Publication Date: 13 June 1991 (13.06.91)
(21) International Application Number: PCT/US90/02153 (22) International Filing Date: 20 April 1990 (20.04.90) (30) Priority data: 446,151 5 December 1989 (05.12.89) US (71) Applicant: VISION SCIENCE, INC. [US/US]; 140 E. Duarte Road, Monrovia, CA 91016 (US). (72) Inventor: BLUM, Ronald, D. ; 5320 Silver Fox Road, Roanoke, VA 24014 (US). (74) Agent: WELLS, William, K., Jr.; Kenyon & Kenyon, 1025 Connecticut Avenue, N.W., Washington, DC 20036 (US).	(81) Designated States: AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent)*, DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent). Published <i>With international search report.</i>	

(54) Title: METHOD FOR FORMING PLASTIC OPTICAL QUALITY SPECTACLE

(57) Abstract

Plastic multifocal or progressive lenses are formed from preformed lenses (11) with predetermined lens corrections at the optical centers. A preformed lens is placed against a mold (13) such that the surfaces of the preformed lens and the mold form a cavity (14). A resin composition fills the cavity and is curved to form an optical segment (12). The cavity (14) is shaped to correspond to a desired change in curvature such that the correction at the optical center is the same as the predetermined lens correction at the optical center of the preformed lens (11). The preformed lens (11) may be cast with a thin non-prescription carrier layer (16) for the multifocal or progressive region of the finished lens. The methods allow casting of lenses without the use of conventional gaskets.

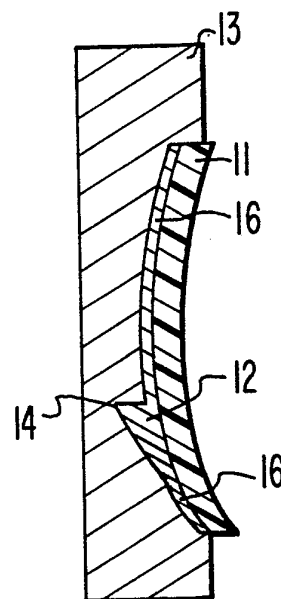

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CI	Côte d'Ivoire	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

METHOD FOR FORMING PLASTIC OPTICAL QUALITY SPECTACLE

This application is a continuation in part of application Serial No. 07/422,399, filed October 12, 1989, application Serial No. 07/339,217, filed April 17, 1989, and application Serial No. 07/190,856 filed May 6, 1988.

Field of the Invention

The present invention relates to methods for quickly and inexpensively producing multifocal and progressive plastic optical quality spectacle lenses from preformed lenses of a given prescription.

Background of the Invention

In manufacturing lenses, and particularly lenses for eyeglasses, the use of plastics is often desirable due to their light weight and durability. Plastic lenses also provide relatively economic vision correction. Methods for producing plastic lenses of various prescriptions are well known. Applicant's U.S. Patent 4,873,029 and co-pending applications Serial Nos. 190,856 (filed May 6, 1988) and 339,217 (filed April 17, 1989), which are incorporated herein by reference as if fully set forth, disclose methods for

making plastic lenses of ophthalmic quality for eye glasses.

Prior methods of others have, however, failed to provide fast and economic means for manufacturing high-quality, reliable multifocal (e.g., bifocal, trifocal, etc.) or progressive plastic lenses. U.S. Patent 3,248,460 (the "'460 patent") discloses means for casting plastic lenses from thermosetting or thermoplastic materials wherein a plastic blank having significantly less curvature than required for the full intended prescription of the lens is used as a base onto which an additional layer of material is cast. The '460 patent employs a conventional optical gasket to provide space between the plastic blank and the mold and to hold the resin material in the cavity created thereby. The additional layer of material changes the curvature of the resulting lens over the vast majority of its surface, thereby changing the prescription of the resulting finished lens to the power required. The material in the '460 patent is cured by heat. However, such heat curing process requires heating over a period of more than 12 hours, thus making the formation of the lens a long, drawn-out process.

U.S. Patent No. 3,946,982 also discloses methods for casting an entire lens surface with a prescription layer using a conventional optical gasket.

Conventional industrial lens casting techniques require the use of "conventional optical gaskets" which hold together the components used to cast the lens, allow for thickness to be cast into the resultant lens, and create a substantially air-tight environment for the casting process. In most cases these conventional optical gaskets can only be used one time and then are discarded. Therefore, a significant number of different gaskets must be maintained.

In-office lens casting is even more demanding with regard to the number of different conventional optical gaskets needed and the inventory necessary to produce different finished lens prescriptions. In one such system, approximately 737 conventional optical gaskets must be maintained in inventory and constantly replaced (after one use) to allow production of all prescriptions. Approximately 200 "optical center movers" (OCMs) must also be inventoried to relocate or decenter the optical center. These OCMs are also not reusable and must be constantly replaced. The need to maintain and replace this varied inventory of conventional optical gaskets and OCMs contributes significantly to the cost of lens casting. In the case of in-office lens casting these components can account for approximately 32% of the materials cost of casting a lens using such a system.

Others have tried to manufacture multifocal or progressive plastic lens, using a lamination technique. Such a technique joins a preformed plastic section to another cured plastic prescription lens. A portion of the preformed section defining a multifocal or progressive region of the finished lens is joined to the prescription lens by adhesive. Such methods have proved to be technologically cumbersome and uneconomical, however, due to the expense of maintaining a large number of preformed lens portions such that all of the possible permutations of patient primary correction and multifocal correction can be formed. Furthermore, the optical quality of such lenses has been suspect because of the difficulty of matching the surfaces of the preformed lens and the wafer.

In the case of in-office lens casting which casts the finished prescription, and to a lesser extent industrial lens casting which casts primarily semi-finished lens blanks, a prism effect may also need be accommodated in the molding process. Present methods for creating prism in plastic lenses have also proven cumbersome. "Prism" is created in lens designs to shift the optical center of a lens from the geometric center of the lens to some other preferred location. Also in the case of progressive lenses, it is used for

a compensating base-down prism to offset the base-up prism produced by the progressive mold. In multifocal lenses it is advantageous to shift the optical center of the distance portion of lens to more closely align with the multifocal region of the lens, thus easing the wearer's transition from the distance prescription to the prescription of the multifocal region (near region) of the lens.

When casting a finished lens, prism is cast into the lens in ways that are well known in the art. However, in cases of semi-finished lenses, in order to create prism the lenses must be surfaced to produce both the desired prismatic effect and the correct optical prescription. Surfacing requires additional equipment and time which make such methods less than desirable for making lenses quickly and inexpensively from start to finish.

When reviewed from an overall perspective of lens production, starting with liquid resin and ending with a finished lens mounted in the frame, the conventional process is extremely complex, long and arduous. Curing has required 12-14 hours; wholesale lab surfacing of the cured lens semi finished blank, approximately an additional 30 minutes; and finishing the lens, another approximately 30 minutes. Thus, the overall lens manufacturing process can require 13-15 hours, making

it difficult to quickly provide prescription lenses on request, unless one stocks semi-finished blanks and utilizes surfacing equipment, both of which add tremendously to the overall cost of production which is ultimately passed on to the consumer.

It would, therefore, be desirable to provide a faster, more economical method and much simpler for producing multifocal or progressive lenses. It would also be desirable to provide a method for changing the prescription or lens design (i.e., multifocal, progressive, prismatic effects, etc.) of a preformed prescription plastic lens which is both fast and inexpensive. Preferably, such method should produce lenses without employing a conventional optical gasket.

15 Summary of the Invention

The present invention relates to a fast, simpler and relatively inexpensive method for providing a multifocal or progressive region on a preformed plastic optical quality spectacle lens to produce a resulting finished multifocal or progressive lens. The preformed lens has a predetermined lens correction (i.e., curvature or prescription) at its optical center which is unchanged in the finished lens. By casting an optical segment or other multifocal or progressive region on the surface of the preformed lens myriad lens

designs can be achieved quickly and inexpensively.

Such method decreases the large number of different mold combinations usually needed to cast multifocal and progressive lenses. Also, in certain embodiments, it eliminates the large, expensive and cumbersome number of conventional optical gaskets and OCMs customarily used in in-office lens casting. In most instances, the lenses produced according to the invention also do not require additional surfacing to achieve the proper prescription and can eliminate the additional step of surfacing prism into the finished lens to relocate the optical center. The methods of the present invention allow production of bifocal, multifocal and progressive lenses, among others, from previously formed prescription lenses.

The multifocal or progressive region can be cast onto the preformed lens alone or in combination with an additional thin non-prescription layer of resin which acts as a carrier for the resin defining the multifocal or progressive region.

In contrast with traditional lens casting methods, the methods of the present invention provide lenses relatively quickly and at significantly less cost. Using the methods disclosed herein that use ultraviolet light curing, curing requires approximately 5-30 minutes, no surfacing is required, and finishing

requires another approximately 30 minutes. Thus, the present invention provides means for producing optical quality multifocal and progressive lenses in approximately 1 hour or less, starting with liquid resin and ending with the finished lens in the frame. This allows delivery of prescription lenses upon request and without having the patient wait a significant time. Due to the ability to cast without a conventional optical gasket, in some cases, the methods of the present invention even allow the preformed lens to be finished (i.e., edged and tinted) for the exact customer frame before adding the thin non-prescription carrier layer and multifocal or progressive surface.

Various other advantages of the methods of the present invention and lenses made thereby will be evident from the detailed description of certain embodiments below.

Brief Description of the Figures

The relative thickness of various components is greatly exaggerated in the Figures for the purpose of illustration.

Figures 1-5 are cross-sections of assemblies of a mold and a preformed lens in accordance with the present invention.

Figure 6 is a front view of a bifocal lens made in

accordance with the present invention.

Figure 7 is a front view of a mold and preformed lens (in dashed lines) showing physical displacement of the optical center (indicated by "+") of the preformed lens with respect to the mold portion corresponding to an optical segment and also showing the astigmatic axis (indicated by dashed line 31) fixed for a specific prescription.

Figure 8 is a side elevation of an assembly of a preformed lens and a preformed wafer in accordance with the present invention.

Figure 9 is a cross-section of an assembly for casting the convex side of a lens in accordance with the present invention.

Figure 10 is a front view of a preformed lens for use in accordance with the present invention fitted with spacers to increase casting thickness which ultimately become part of the completed lens.

Figure 11 is a cross-section of an assembly for recasting the surface of a lens in accordance with certain methods of the present invention.

Detailed Description of the Invention

The method for making a finished lens having a multifocal or progressive region utilizes a mold; an optical quality resin composition; a preformed plastic

lens having a predetermined lens correction at its optical center. The preformed lens is contacted with the mold to form a cavity for enclosing the resin composition. The resin is then cured and shaped by the cavity which corresponds to the shape of the multifocal or progressive region. The lens correction at the optical center of said resulting lens is substantially the same as the predetermined lens correction at the optical center of the preformed lens.

10 The methods disclosed herein may cast a thin, non-prescription layer of material over some or all of the preformed lens surface in addition to casting the multifocal or progressive region alone. Such additional layer acts as a "carrier" for the multifocal or progressive surface without affecting the predetermined distance prescription of the preformed lens. In such cases, the cavity may also correspond to the shape of such carrier.

20 Figures 1-3 depict the formation of lenses in accordance with the methods disclosed herein. Mold 13 and preformed lens 11 form a cavity 14 which contains a portion of the optical resin composition. In Figures 1 and 3, cavity 14 defines a multifocal (bifocal) segment 12. In Figure 2, cavity 14 defines a segment 12 and a carrier layer 16 (which does not change the distance prescription of the preformed lens). When cured, the

segment and/or carrier harden and bond to the preformed lens to produce the finished lens.

The mold and the preformed lens may be contacted (a) after the resin composition is placed onto the preformed lens, (b) after the resin composition is placed onto the mold, or (c) before the resin composition is applied to either component (i.e., the resin composition is dispensed into the cavity formed by the mold and the preformed lens).

The cavity formed by the preformed lens and the mold is shaped or configured, among other purposes, (1) to correspond to the desired shape of the multifocal or progressive region of the finished lens, and (2) to maintain the lens correction at the optical center of the resulting lens substantially the same (preferably the same) as the predetermined lens correction at the optical center of the preformed lens, even when the surface of the preformed lens is cast within a carrier layer. This is even true, as described herein, when the optical center of the resulting lens has been shifted to achieve the proper alignment with respect to multifocal and progressive prescriptions. In certain embodiments, at least one surface of the preformed lens or mold is masked prior to contacting the lens with the mold. The cavity can also be shaped to correspond to the shape of a resultant prism region which creates

prism in the resulting lens.

The finished optical lenses made in accordance with such methods provide a first lens correction at their optical centers and have a second region removed
5 from the optical center (i.e., the multifocal or progressive region) which provides a second lens correction.

A method is also provided for forming such a multifocal lens in multiple stages. A preformed lens
10 is first cast as described above to provide an intermediate lens having an intermediate lens correction at the second region, the magnitude of which is between the magnitudes of the first lens correction and the second lens correction. The intermediate lens
15 is then cast again as described to provide a lens curvature at the second region corresponding to the second lens correction (and a carrier, if used).

Lenses made in accordance with the present invention are also disclosed in which addition of a
20 multifocal optical segment creates a beneficial positive transition in the finished lens. Such lenses provide at least a third lens correction and a fourth lens correction. The third lens correction is provided by a third region adjacent to the optical segment and
25 is located between the optical center of the preformed lens and the center of the segment. The fourth lens

correction is provided by a fourth region within the segment and is located between the optical center of the preformed lens and the center of the segment. As described further below, the magnitude of the third
5 lens correction is between the magnitudes of the first lens correction and the fourth lens correction; and the magnitude of the fourth lens correction is between the magnitudes of the second lens correction and the third lens correction, such that a gradual discontinuous
10 change in prescription is provided. This phenomenon has been observed mainly in connection with addition of a flat top optical segment.

The methods of the present invention can be used to add a multifocal or progressive region to the front
15 lens surface, the back lens surface or both. Preferably, the curvature of the lens is changed over only a small portion of a surface of the preformed lens to form an "optical segment". The methods of the present invention can be used to form lenses of almost
20 any multifocal or progressive optical configuration including without limitation bifocals, trifocals and progressive lenses. Where a multifocal or progressive lens is produced, the preformed lens can be treated in accordance with the invention to provide an optical
25 segment providing a second lens correction (e.g., bifocal), a third lens correction (e.g., trifocal),

etc., each of which is different from the distance lens correction of the preformed lens (i.e., at its optical center). In such embodiments the mold is fashioned to correspond to the desired shape of the multifocal or progressive region of the resulting lens and any carrier layer, if used. The disclosed methods can also be used to change the power on portions of the preformed lens, to create prism, and to produce multifocal or progressive lenses from preformed lenses.

During the casting and curing process, the mold and preformed lens may be held together by, among other means, peripheral clamping around the extreme periphery of the preformed lens and the mold, a conventional optical gasket which holds the preformed lens and mold together, by the force provided by the weight of the preformed lens when it is placed on top of the mold, capillary attraction resulting from a very thin film of resin material between the mold and preformed lens, or a combination thereof. However, preferred embodiments of the present invention do not require use of a conventional optical gasket, thus allowing more versatile and flexible casting and making such methods significantly more economical than traditional casting methods which employ conventional optical gaskets. The ability to cast lenses without conventional optical gaskets further eliminates a restrictive element which

limits the possibilities of lens construction due to the physical confines of the conventional optical gasket.

In some of such embodiments, molding material is
5 dispensed without the use of conventional optical gaskets into the mold and the preformed lens is placed on top of the resin and slight pressure is applied which presses molding material out of the mold until the surface of the lens is separated from the mold by a
10 thin carrier layer of molding material. The mold and preformed lens are held together by capillary attraction of the resin layer, by weight and/or other means. Thus a thin carrier layer of material is cast over the surface of the preformed lens, in addition to
15 a segment or other optic surface defined by the mold, without the use of a conventional optical gasket. If less resin material is used, such method can also be employed to cast a multifocal or progressive region without also casting a carrier. Alternatively, the
20 mold can be lowered onto the preformed lens containing molding material to achieve a similar effect.

The methods of the present invention are useful with respect to any preformed "plastic" optical lens regardless of the manner in which such lens was formed.
25 As used herein a "plastic" lens is one fashioned from optical quality resin materials. Such materials

include without limitation mixtures containing allyl diglycol carbonates (such as "MasterCast 1" and "MasterCast 2" which are trademarks of Vision Sciences, Monrovia, California; and "CR-39" which is a trademark of PPG Industries), allylic esters such as triallyl cyanurate, triallyl phosphate, triallyl citrate, diallylphenyl phosphonate, acrylic esters, acrylates, methyl, allyl and butyl methacrylates, polycarbonates, styrenics, lexan, polyesters such as those formed of ethylene glycol maleate, and other liquid monomer/polymer materials having high indices of refraction (such as HiRi which is a trademark of PPG Industries).

Any surface of a preformed lens (i.e., front, back or both) can be altered using the methods of the present invention. Convex or concave surfaces can be treated. Only portions of a surface can also be treated.

For example, as shown in Figure 1, the curvature of a lens surface 11 can be changed over a small area by providing an "optical segment" 12 which is substantially smaller than the preformed lens 11. Such optical segments most often serve to provide bifocal or trifocal vision, but can also be used for other purposes.

In other embodiments, an entire surface of a lens

can be altered in accordance with the methods of the present invention for the purpose of, for example, converting the preformed lens into a progressive lens, providing, for example, a seamless multifocal, bifocal
5 or trifocal lens or inducing prismatic effects in the finished lens. In such embodiments, in addition to a segment if desired, as shown in Figure 2, the surface of the preformed lens is recast with an additional non-prescription carrier layer of resin material to
10 produce the desired lens design without changing the prescription or correction at the optical center of the finished lens. Preferably, the additional carrier layer is very thin (preferably 0.025-0.5mm) to promote rapid curing and decrease the probability of developing
15 stress and distortion in the resulting finished lens.

Although optical segments can be placed in any location on the lens, for normal applications, the optical segment should be properly located to avoid adverse prismatic effects. Optimally, an optical
20 segment should be positioned approximately 1.5mm left or right and 3-5mm down from the optical center of the lens for normal eyeglasses. In certain applications, such as workman's glasses for close vision above the wearer's head, the optical segment can be optimally
25 located approximately 1.5mm left or right and 3-5mm above the optical center of the lens. Other locations

of the optical segment can also be used as long as the optical center and the segment are properly aligned.

The methods of the present invention can also be for properly orienting the optical center of the lens with respect to the multifocal or progressive region. Also they can be used to cast compensating base-down prism in conjunction with casting a progressive lens. Appropriate lens designs providing prismatic effects will be apparent to those skilled in the art. Where creating prism is desired, the casting mold is configured and positioned with respect to the preformed lens to provide the required additional thickness in the resulting lens. The mold and the preformed lens may be properly oriented by spacers which provide the desired separation, corresponding to the required thickness for inducing the prismatic effects sought. Such spacers can take any form, including wedges, and can be fashioned from any suitable material. The spacers can be incorporated into a conventional optical gasket, if one is used, or formed on the surface of the mold or preform. Other means for orienting the mold and preformed lens to induce prismatic effects will be apparent to skilled artisans.

The optical center can be moved, as shown in Figure 7, by physically moving the optical center of preformed lens 11 to align with the desired location

just above the edge of the multifocal region in the case of a multifocal lens or to the proper mold position in the case of a progressive lens, then casting the new lens surface. Since some methods of the present invention do not employ a conventional optical gasket, such dislocation of the preformed lens with respect to the mold is possible. Conventional methods employing a conventional optical gasket make such dislocation virtually impossible because the conventional optical gasket will not allow movement of the lens with respect to the mold. It should also be noted that, when dislocating the preformed lens in relation to the mold size as just described, more useful lens area can be produced by increasing the size of the preformed lens such that more of the surface of the mold contacts the preformed lens, thus producing a larger finished lens surface.

In some lens designs adjustments must be made to accommodate astigmatism in the prescription of the finished resulting lens. In such cases, the preformed lens and mold must be rotated with respect to each other to a degree corresponding to the proper astigmatic axis. The preformed lens and mold can either be contacted at the proper angle or can be rotated with respect to each other after contact. The mold, preformed lens or conventional optical gasket (if

used) can optionally be provided with appropriate markings (e.g., protractor lines) for determining the proper astigmatic axis. Alternatively, the mold and preformed lens can be assembled within or on a circular
5 protractor which serves to align the astigmatic axis and to hold the assembly in place.

In multifocal lenses it is important to properly orient the optical center, the multifocal region and the astigmatic axis of the finished lens with respect
10 to each other. This can be achieved, for example as shown in Figure 7, by combining the methods described above for inducing prismatic effects and for aligning the astigmatic axis.

Generally, the preformed lens is transformed by
15 casting a layer of optical quality resin material on at least a portion of the preformed lens surface. As shown in the Figures, the contours of the casting are determined by mold 13. Mold 13 is shaped such that the cavity 14 formed between lens 11 and mold 13
20 corresponds to the desired change in curvature of the lens, including the multifocal or progressive region (e.g., optical segment 12) and non-prescription carrier layer 16, if used. For example as shown in Figure 1, mold 13 is fashioned such that cavity 14 defines an
25 optical segment 12 at the desired location and of the desired thickness and shape to provide a desired lens

design. In Figure 2, cavity 14 defines an optical segment 12 and non-prescription carrier 16. Similarly, as shown in Figure 9, mold 13 can be fashioned such that the cavity 14 defines new structure on the back surface of the preformed lens 11 such that the surface is changed to provide the desired lens design.

Molds can be made from any material which will provide an optical quality surface when used for casting, such as Crown glass or electroformed nickel. Means for making appropriate molds and for fashioning such molds for use in accordance with the present invention are known in the art.

To cast the new lens surface, an optical resin monomer material is dispensed onto the preformed lens, onto the mold or into the cavity, and then cured. In certain embodiments only a portion of cavity may be filled with material to form the desired new surface. Appropriate optical resin materials include those previously discussed among others. Certain materials used to "hardcoat" lenses (such as those described in U.S. Patent Nos. 4,758,448 and 4,544,572, which are incorporated herein by reference) can also be used as the resin material, thus providing a durable surface to the portions of the finished lens cast in accordance with the present invention. Hard coat materials can also be blended with other resins for use in practicing

the present invention. Furthermore, the resultant lens can be a composite of high index plastic materials and more scratch resistant materials. The resin material should, however, be chosen such that upon curing the material will both harden and bond with the material of the preformed surface of the lens. Preferably the resin material will form what is thought to be intermolecular bonds with the material of the preformed lens.

10 In preferred embodiments, both the preformed lens and the resin material used to recast the lens surface are the same or similar material. Use of the same or similar materials prevents separation or "crazing" (i.e., cracking) of the new surface from the preformed lens as a result of different expansion/contraction rates for the preformed lens and recasting materials. Applicant also believes that use of the same or similar materials may allow formation of intermolecular bonds between the new resin and the surface of the preformed lens.

20 The resin material composition may also contain various additives which will alter the resulting lens including without limitation tints, antireflection coatings, antiscratch coatings, and ultraviolet inhibitors. The resulting lens may also be subjected to treatments frequently applied to plastic lenses,

including without limitation tinting and coating with ultraviolet inhibitors and antireflection and antiscratch coatings, according to known methods.

Ultraviolet curing allows use of tinting agents in
5 the resin composition which would be decomposed or volatilized during thermal curing processes. If UV curing is used, in most cases, tinting agents can be added to the resin composition before curing and incorporated relatively uniformly into the resulting
10 finished lens. Since in some cases significant heat does not need to be employed in the UV curing process the tinting agent is retained by the resin material during the curing process. This is accomplished because no peroxide-based thermal initiator is used
15 therein.

In certain embodiments, as shown in Figure 2 for example, the preformed lens is masked with tape 15 or other appropriate materials. The masking can be used on the side of lens which is to be cast in accordance
20 with the present invention, thus preventing casting undesired portions of the lens surface. Alternatively, the mask can be applied to the opposite surface of the lens to limit the area through which UV radiation can reach the resin material, thus limiting the area in
25 which the resin is cured. Masks can also be used on the mold, the preformed lens, or both, and on both

sides of each and any component.

The preformed lens and mold may be separated by spacers which maintain a desired separation between the lens and the mold, thus providing a recast surface of a
5 desired thickness. Spacers can be incorporated as part of a conventional optical gasket used to hold the lens and mold together or can be used independent of a conventional optical gasket. Any suitable material, for example, small pieces of tape can be located
10 between the lens and mold at various points around the periphery of the lens/mold assembly as shown in Figure 10. Using carpet tape provides a surface approximately 0.4mm thick, while use of scotch tape provides a surface 0.2-0.3mm thick. Spacers can also be
15 constructed from material that is the same as or similar to the preformed lens and/or the resin composition. Upon curing, such a spacer could become incorporated into the finished resulting lens. Finally, spacers can be a part of the mold or preformed
20 lens (e.g., raised bumps on the surface which provide the desired separation). In certain embodiments, spacers are not used and the preformed lens and mold are either not separated or are separated by a thin carrier layer of resin composition formed by capillary
25 action when the preformed lens and mold are contacted. Such layers cast in accordance with the present

invention have been measured as thin as 0.025-0.05mm thick. In most cases, such methods do not employ a conventional optical gasket.

In certain embodiments, the resin is not dispensed into the cavity until after the mold and preformed lens are assembled. In such embodiments the resin material is injected into the resulting cavity through a channel in the mold, conventional optical gasket or preformed lens, taking care to prevent formation of air pockets within the cavity. Any burrs or other artifacts resulting from the presence of such a channel or other structure can then be removed during finishing of the resulting lens.

Once the mold and the preformed lens are assembled the resin material in the resulting cavity must be cured to harden and bond with the preformed lens surface. The resin material may be cured in any manner appropriate to the composition of such material. Most materials can be cured by exposure to heat or ultraviolet radiation ("UV"). Other curing methods may include without limitation ultrasound, infrared, microwave and other forms of radiation. Thermal initiators (such as diisopropyl peroxydicarbonate) and/or UV initiators (such as 2-hydroxy-2-methyl-1-phenyl-propan-1-one or 1-hydroxycyclohexylphenyl ketone) are mixed with the optical resin material

before it is used.

Suitable UV light sources include those manufactured by Phillips Corporation and identified as TL/10R/UVA reflector lamps, HPM high pressure halide lamps, HPA medium pressure metal halide lamps and HPR high pressure mercury vapor lamps. In preferred embodiments, the UV source (300-450nm) is applied during the curing process until the resin hardens sufficiently (approximately 5-30 minutes). In some cases, the lenses to be cured are placed onto a turntable for rotating the lenses through the stream of incident radiation in order to achieve more even curing and maximizing the number of lenses which can be cast within a given area. Other appropriate UV light sources and conditions for exposure will depend upon the resin composition employed and will be apparent to those skilled in the art.

Heat or UV, or both, may be applied by any means appropriate to the material from which the mold and preformed lens are made. Unlike thermal curing, UV curing requires at least one UV transparent surface through which the UV radiation can travel to reach the resin monomer material. Although the preformed lens provides one transparent surface, forming the mold from a UV-transmitting material will provide additional transparent surfaces and will promote faster, more even

curing. Upon application of heat, UV or both, the initiators cause the optical resin material to polymerize and to bond to the surface of the preformed lens.

5 Certain embodiments of the present invention use a reflective surface on the surface of the mold to reflect ultraviolet light back through the lens resin material being cured. The mold includes a reflective surface conformed to the casting surface of the mold.

10 The exposed surface of the reflective surface is highly polished to reflect ultraviolet light rays from ultraviolet light source. This surface of the reflective surface may act directly as a casting surface that produces an optical quality lens surface

15 or may be fixed beneath a transparent layer which acts as the actual casting surface of the mold.

 Some materials can be cured by a combination of heat and UV applied sequentially or simultaneously. For example, applicant's co-pending application Serial

20 No. 190,856, filed May 6, 1988, which is incorporated herein by reference, discloses a resin material and means for curing such material using both heat and UV. Such material includes a liquid monomer, a thermal initiator, plus a photosensitive ultraviolet initiator.

25 In this process, the liquid monomer lens resin material is placed into the desired preformed lens/mold

combination and subjected to thermal curing using a heated fluid bath (preferably 150-180°F) for a short period of time, less than ten (10) minutes. The heat activates the thermal initiator and forms the lens material mixture into a gel which freezes the photosensitive initiator in place throughout the lens material. Furthermore, this gelled state preestablishes the optical framework needed for an optical lens relatively free of optical distortion or imperfections. After the lens material mixture has sufficiently gelled, it is then subjected to ultraviolet light to activate the photosensitive initiator and complete the polymerization or curing process to form the finished lens.

Preferred resin compositions for use with such a combined thermal/UV curing process comprises resin monomer (such as CR-39), 0.5-5.0% by weight thermal initiator (such as diisopropyl peroxydicarbonate), and 1-8% by volume photosensitive initiator (such as 2-hydroxy-2-methyl-phenyl-propan-1-one or 1-hydroxycyclohexylphenyl ketone, which are sensitive to ultraviolet light).

Particularly for lens manufacturing processes using UV curing, a yellow tint may remain in the resulting lens or may evolve during aging. This tinting or "yellowing" can be reduced by curing the

lens material with the addition of certain anti-yellowing chemical agents. These include amine hindered amine light stabilizer (HALS); optical brighteners which makes the yellowing or hindered phenol
5 antioxidants. Another method is to use a photosensitive initiator which is not from the amine group and which will not cause yellowing.

It has also been found that inadvertent post curing and additional yellowing or discoloration can
10 occur after a lens has been cured by permitting the lens to be subjected to a UV curing process longer than desired or inadvertently exposing the lenses to sunlight or artificial light, which includes
wavelengths of the UV spectrum, during processing or
15 use. Additional exposure to UV light produces a continued curing effect because of the remaining UV initiator in the formed plastic lens. This can cause the lens to be unduly brittle and cosmetically
discolored, permitting it to be readily fractured and
20 detracting from the normal life or commercial sale of the lens.

The invention described herein can include the use of UV inhibitors coated on the surface of the cured lens or absorbed into the surface of the cured lens to
25 avoid any additional effect on the UV initiators and to substantially prevent or entirely eliminate the

transmission of UV light waves into the lens. Such processes are further described in co-pending U.S. patent application Serial No. 339,217, filed April 17, 1989. This coating can take the form of anti-
5 reflective coating, a scratch-resistant coating, any tinting coatings, or simple wavelength coating which could be basically clear for preventing UV wavelengths from being transmitted. Such UV inhibitors are well known in the art and need not be described in detail
10 herein. It is desirable to have the UV inhibitor eliminate all UV light and other wavelengths having a wavelength of 500 nm or less and more specifically between 300-425 nm.

This treatment process normally involves, after
15 the curing steps, simply dipping the cured lenses into a hot bath having any one of the coatings mentioned above to coat the surfaces sufficiently such that the entire surface of the lens is covered with the inhibitor. This dipping process, as well as other
20 processes for applying the coatings noted above are well known to those skilled in the art. The UV inhibitor can be used in solution or otherwise form a composition with the coatings discussed above, such that the desired coating along with the inhibitor can
25 be applied to the lens in a one step process. Some inhibitor may be absorbed into the lens material.

Other known methods of coating can be used in applying the UV inhibitor in the manner described above.

Prior to lens surface treatment, if any additional hardening is required, the lens can be subjected to "post curing". Although a post cure can be utilized with any of the above noted processes, it is not normally used for bath cures since the mold and other intervening media may affect the ability to achieve maximum hardness. Preferably for post curing, after the thermal and/or UV cure, the lens is separated from the mold and subjected directly to UV or heat. This post cure using UV and or a thermal source will harden the lens material even further should such additional hardness be required. In some cases, post curing with UV is done with a filter mask that allows more UV radiation to strike the thicker surfaces of the lens.

Applying an optical segment in accordance with the present invention may in some instances produce a minor, but beneficial transition in the finished lens near the edge of the segment. This phenomenon has been observed mainly in connection with the formation of multifocal segments having a flat edge. For example, as shown in Figure 6, when applying a conventional flat top +250 bifocal segment to a plano preformed lens, the main prescription of the segment may be +250 while the upper edge of the segment may be only +212. The

optical center of the preformed lens may remain plano, but the area of the lens just above the segment may be, for example, +87. This beneficial transition provides a possible effect in that when the wearer's eye moves
5 from the main prescription to the bifocal prescription the eye is eased from lower to higher power, thus requiring a less drastic change in accommodation.

In effect, a bifocal lens having such a transition provides at least four different lens corrections or
10 prescriptions at different regions of the lens. As shown in Figure 6, the lens has a first correction in the region 17 of its optical center and a second lens correction in a second region 18 at the center of the bifocal segment. The geometric center of the lens is
15 indicated at 30. A third lens correction is provided by a third region 19 located adjacent to the edge of the segment (i.e., adjacent to the second region) approximately along an imaginary line (indicated by a dotted line) extending from the geometric center of the
20 segment to the optical center of the lens. A fourth lens correction is provided by a fourth region 20 located within the segment (i.e., within the second region) and approximately along the same imaginary line. The magnitude of the third lens correction is
25 between the magnitudes of the first and fourth lens corrections and the magnitude of the fourth lens

correction is between the magnitudes of the second and third lens corrections. For example, in the example previously discussed the first, second, third and fourth lens corrections are plano, +250, +87 and +212, respectively. In other multifocal lenses additional lens corrections may also be provided by the segment.

However, in many instances such transition is undesirable and can be prevented or alleviated in several ways. At present, applicants believes that the transition is caused by uneven curing of the segment and the thin carrier layer which are cast on the surface of the preformed lens. Due to the different thicknesses of portions of the newly applied surface, curing occurs at different rates and to different degrees during exposure to UV light or other curing methods. This results in areas of the lens which are harder than others and may result in uneven shrinkage and stress of different lens portions, thus producing the transition. Therefore, any means for promoting even curing of the newly cast surface will serve to prevent or alleviate the transition.

For example, the preformed lens could be provided with a mask which selectively transmits UV light at different levels. Thicker portions of the cast surface are covered with a mask transmitting more light, while thinner portions of the cast surface are covered with a

mask transmitting significantly less light. In the case previously described for the addition of a +250 bifocal segment, for example, the portion of the mask covering the thickest upper edge of the segment would
5 transmit 100% of incident UV light, that covering the rest of the segment would be gradually decreased over a spectrum until the thinnest portion of segment received only 55% of the incident light, and that covering the rest of the surface of the preformed lens would
10 transmit 50%.

Another means for achieving more even curing of the segment and thin layer employs a shutter or aperture in association with the UV light source which is opened and closed such that thicker areas of the
15 recast surface are exposed to more light than thinner surfaces. This can be accomplished by either exposing the entire surface to light and then gradually closing the aperture to expose only the thicker portions of the surface, or by exposing only the thicker portions of
20 the surface and then gradually opening the aperture to expose more of the surface until the entire surface is exposed.

The transition can also be avoided, reduced or removed by modifying the casting procedure in several
25 ways, among others. First, casting carrier layers thicker than 0.8mm decreases the likelihood of the

distortion occurring. Second, the optical segment can be cast in multiple layers of lesser thickness. For example, as shown in Figures 4 and 5, the preformed lens 11 can be cast with a carrier 16 and a segment 21 of one-half the final desired power. This lens is then cast again, as shown in Figure 5, with an additional carrier layer 22 with a mold 23 corresponding to the full desired thickness of the final segment 12, resulting in a finished lens having the desired optical segment. Third, the desired segment can be cast, cured and then recast with an additional layer using a mold of the same shape, for example as shown in Figure 11. Such layer can be a thin film (e.g., 0.025-0.05mm) or can be a thicker layer if spacers are used. Recasting fills in any transitions, distortions or defects which may have arisen during the first casting. Since the recast layer is a very thin film of resin material, it is not as susceptible to transition or other aberation. Approximately 90% of lenses having the distortion were found to be corrected by recasting the surface of the lens with a layer at least approximately 0.2mm thick. Recasting may also be repeated again and again until the desired quality of surface is achieved seeing as almost no resulting thickness is added to the lens with each recasting. The resulting surface is then free of this type of transition. Fourth, the transition can

also be avoided or diminished by forming an optical segment with a thinner edge than a flat top segment. For example, a curved top or round segment can be used. Fifth, reducing incident UV radiation while extending
5 UV curing time can also reduce this effect. Finally, the transition can be avoided or diminished by providing a mold which accommodates for the transition by providing excess resin material which will shrink unevenly to reach the desired transition shape.

10 The recasting method can also be used to correct other defects in rejected or damaged cast lenses. A defective lens can be recast with a thin non-prescription film layer using a mold of the same shape to remove the defects, thus decreasing yield losses
15 during the manufacturing process. Recastings according to this method can be cured in any appropriate manner in far less time than the initial casting due to the thin film layer to be cured. Furthermore, significant savings can be accomplished due to use of less resin
20 material and, in most cases, elimination of the need for a conventional optical gasket.

A preformed lens can also be combined according to the present invention with a second preform providing a multifocal or progressive region. As shown in Figure
25 8, second preform 26 provides a multifocal region 27. Second preform 26 and preformed lens 11 are contacted

to form a cavity 28 corresponding to a thin carrier layer 29 of resin material. Curing of the resin bonds second preform 26 to preformed lens 11. Preferably, the second preform, preformed lens and resin material are of the same material, although different materials may be used. A conventional optical gasket or mold may optionally be used to help hold the second preform and preformed lens in proper orientation and to provide the desired thickness to the carrier layer.

38
Example 1

A mold was fashioned to define the contours of an optical segment which was to provide a bifocal. The mold was made from Crown glass, electroformed nickel, or other material having the ability to cast an optical quality surface.

An optical resin material was then prepared consisting of MasterCast 1 or 2 (which contain a thermal initiator) and an added UV initiator (2-hydroxy-2-methyl-phenyl-propan-1-one, 6.5% by volume). The resin mixture was then dispensed into the mold. The front surface of a preformed lens (made from MasterCast 1 or 2) was masked with tape to cover all of such front surface except for the area where optical segment 12 was to be attached. The mask prevented resin from depositing on the lens surface in undesired locations and acts to block or channel UV radiation only to the area to be cured. The mold and the masked preformed lens were then contacted to form a cavity corresponding to the configuration of the optical segment. The preformed lens was placed on top of the mold filled with resin material and slight pressure was applied to squeeze out excess resin material. The weight of the preformed lens and capillary action of the resin material were sufficient to hold the assembly together without use of a conventional optical gasket.

The resin material was then cured using UV light (300-450nm) until the resin hardened sufficiently (approximately 10-20 minutes) using a UV light source manufactured by Phillips Corporation and identified as
5 a TL/10R/UVA reflector lamp. The mold and preformed lens were then separated. The finished lens was then edged, finished and mounted.

Example 2

A lens was made as described in Example 1 with the
10 exception that the resin material was cured using a combination of heat and UV radiation. The preformed lens/mold assembly containing the monomer resin material was placed in a water bath at approximately 180°F until the resin material gelled (approximately
15 10-15 minutes). The assembly was then exposed to UV as described in Example 1 for 10-20 minutes to complete curing. The resulting lens was then edged, finished and mounted.

Example 3

20 A lens was made and cured as described in Example 1, with the exception that the resin material comprised MasterCast 1 or 2 (without a thermal initiator) and the same UV initiator, and the preformed lens was not masked.

25

Example 4

A lens was made to provide a multifocal optical

surface and to induce appropriate prismatic effects. The lens was made and cured, as described in Example 3, with the exception that the conventional optical gasket used to hold the preformed lens and mold together was
5 fashioned to separate edges of the preformed lens and mold to provide the necessary additional thickness in the resulting lens to provide the desired prismatic effect. Alternatively, a wedge of appropriate thickness was placed between the edge of the preformed
10 lens and the mold to provide the required separation.

Example 5

A lens was made as described in Example 3. The assembled mold and lens were then placed in a plastic or rubber conventional optical gasket which surrounded
15 the periphery of the assembly and held the assembly together. The conventional optical gasket was fashioned such that the lens and mold were separated by a thin space which allowed the formation of a thin layer of resin over the entire surface of the preformed
20 lens. The lens correction at the optic center of the resulting lens was the same as that of the preformed lens.

Example 6

A lens was made as described in Example 3. Three
25 squares of scotch tape (approximately 1-2mm wide) were

evenly spaced around the outer edge of the front surface of the preformed lens. The squares acted as spacers to produce, upon casting, a thin nonprescription carrier layer (approximately 0.2mm 5 thick) over the surface of the preformed lens.

Example 7

A lens was cast by physically relocating the optical center of the preformed lens to be properly aligned with the optical segment of the finished lens. 10 A mold defining an optical segment was filled with a portion of resin composition. A preformed lens was provided which had a diameter significantly larger than the diameter of the mold. To cast the finished lens, the optical center of the preformed lens was marked and 15 was then positioned ("relocated") in proper alignment with the portion of the mold corresponding to the optical segment. When aligned, due to its larger diameter, the preformed lens still covered the entire mold, while a portion of the preformed lens extended 20 beyond the mold. The preformed lens was then lightly pressed against the mold and excess resin was severed out of the resultant cavity. No conventional optical gasket was used and the preformed lens/mold assembly was held together by capillary action of the resin 25 material. After curing, the cast lens was separated

from the mold. That portion of the preformed lens which extended beyond the mold (and was not cast with new resin) was then cut away to leave the useful prescription lens surface for further finishing.

5

Example 8

A lens was made as described in Example 3 to provide a flat top 28 +250 optical segment. The resultant finished lens was observed to contain a minor beneficial distortion as previously described. This "distorted" lens was then used as a preformed lens and was cast again using the same mold according to the same method. The resulting lens was observed to be virtually free of the previously observed distortion.

Example 9

15 A lens was made as described in Example 3, except that the preformed lens was made from a high index plastic (HiRi), a material different from the carrier layer and optical segment casting resin material (MasterCast 1 or 2 which contains CR-39), is softer and 20 has a different index of refraction. The cast layer bonded to the surface of the preformed lens and provided an optical quality product.

The above has been a detailed discussion of

certain embodiments of the present invention. They should not be considered so as to limit the scope of applicant's invention which is defined by the appended claims.

What is claimed is:

1. A method for making a finished lens having a multifocal or progressive region, said method comprising:
 - providing a mold;
 - providing an optical quality resin composition;
 - providing a preformed plastic lens having a predetermined lens correction at its optical center, said lens having a molding surface;
 - contacting said preformed lens with said mold such that the molding surface of said preformed lens and said mold form a cavity enclosing said resin composition; and
 - curing said resin composition;wherein said cavity is shaped to correspond to the shape of said multifocal or progressive region and is shaped such that the lens correction at the optical center of said resulting lens is substantially the same as said predetermined lens correction at the optical center of said preformed lens.

2. The method of claim 1 wherein at least one surface of said preformed lens is masked prior to contacting said preformed lens with said mold.

3. The method of claim 1 or 2 wherein at least one surface of said mold is masked prior to contacting said mold with said preformed lens.
4. The method of claim 2 wherein the surface of said preformed lens opposite the surface of said preformed lens which is contacted with said resin composition is masked.
5. The method of claim 1 wherein said resin is cured using heat.
6. The method of claim 1 wherein said resin is cured using ultraviolet radiation.
7. The method of claim 1 wherein said resin is cured using a combination of ultraviolet radiation and heat.
8. The method of claim 7 wherein said resin composition comprises a thermal initiator and a photosensitive initiator and wherein said resin composition is cured by a process comprising:
 - (a) heating said resin composition sufficiently to activate said thermal initiator and to form said resin composition into a gel; and
 - (b) subjecting said resin composition to

ultraviolet light for a period of time sufficient to completely cure said resin composition to form said resulting plastic lens.

9. The method of claim 8 wherein said resin composition is heated in a liquid bath maintained at a temperature between about 150°F and about 180°F.

10. The method of claim 8 wherein said resin composition comprises CR-39 monomer, between about 1% and about 8% by volume of a photosensitive ultraviolet initiator, and between about 0.5% and about 5% by weight of a thermal initiator.

11. The method of claim 10 wherein said thermal initiator comprises diisopropyl peroxydicarbonate.

12. The method of claim 10 wherein said ultraviolet initiator is selected from the group consisting of 2-hydroxy-2-methyl-1-phenyl-propan-1-one and 1-hydroxycyclohexylphenyl ketone.

13. The method of claim 6 wherein said mold comprises a reflective surface for reflecting ultraviolet radiation passing through said resin composition back

through said resin composition.

14. The method of claim 6 wherein said resin composition comprises a tinting agent.

15. The method of claim 6 wherein said resin composition comprises an anti-yellowing agent.

16. The method of claim 1 wherein said cavity corresponds to an optical segment.

17. The method of claim 1 wherein said resin composition comprises a resin material selected from the group consisting allyl diglycol carbonates, allylic esters, triallyl cyanurate, triallyl phosphate, triallyl citrate, diallyl phenyl phosphonate, acrylic esters, acrylates, methyl methacrylate, allyl methacrylate, butyl methacrylate, polycarbonates, styrenics, lexan, polyesters and high index plastic.

18. The method of claim 17 wherein said resin material is an allyl diglycol carbonate.

19. The method of claim 17 wherein said resin composition further comprises a thermal or ultraviolet initiator.

20. The method of claim 17 wherein said resin composition further comprises a thermal initiator and an ultraviolet initiator.
21. The method of claim 1 wherein said cavity is also shaped to create prism in said resulting lens.
22. The method of claim 1 wherein said resin composition comprises a scratch resistant or hardcoat resin material.
23. The method of claim 1 wherein said preformed lens and said mold are contacted without using a conventional optical gasket.
24. The method of claim 1 wherein said preformed lens and said mold are separated by a spacer.
25. The method of claim 24 wherein said spacer comprises tape placed at various points around the periphery of said preformed lens or said mold.
26. The method of claim 24 wherein said spacer is made from the same or similar material as said preformed lens and said spacer is incorporated into said resulting plastic lens.

27. The method of claim 1 further comprising treating said resulting plastic lens with a UV inhibitor to substantially prevent transmission of UV light into said resulting plastic lens to substantially prevent further curing and discoloring of said resulting plastic lens.

28. The method of claim 27 wherein said step of treating said resulting plastic lens with a UV inhibitor includes coating said resulting plastic lens on its external surfaces with said UV inhibitor.

29. The method of claim 28 wherein said UV inhibitor prevents transmission of light waves of wavelength less than or equal to about 500nm.

30. The method of claim 28 wherein said UV inhibitor prevents transmission of light waves of wavelength between about 300 nm and about 425 nm.

31. The method of claim 28 wherein said UV inhibitor is absorbed at least partially into said resulting plastic lens.

32. The method of claim 1 further comprising post curing said resulting plastic lens.

33. The method of claim 1 wherein said preformed lens and said mold are contacted so as to properly align with a desired astigmatic axis for said resulting plastic lens.

34. The method of claim 1 wherein said preformed lens and said mold are contacted and then rotated with respect to each other so as to properly align with a desired astigmatic axis for said resulting plastic lens.

35. The method of claim 33 or 34 wherein said mold or said preformed lens are provided with markings for aligning with said astigmatic axis.

36. The method of claim 33 or 34 wherein said mold and said preformed lens are held together by a conventional optical gasket or protractor which is provided with markings for aligning with said astigmatic axis.

37. The method of claim 1 wherein further comprising recasting said resulting plastic lens using said mold to remove transition in said resulting plastic lens.

38. The method of claim 1 wherein said finished lens also has a resultant prism region and wherein said

cavity is also shaped to correspond to the shape of said resultant prism region.

39. The method of claim 1 wherein said preformed lens and said mold are contacted such that the optical center of said preformed lens is properly aligned with an area of said mold corresponding to said multifocal or progressive region.

40. The method of claim 39 wherein said preformed lens and said mold are rotated with respect to each other so as to properly align with a desired astigmatic axis of said resulting plastic lens.

41. The method of claim 1 wherein said cavity is shaped to correspond to a carrier layer.

42. The method of claim 41 wherein said carrier layer is less than about 0.4mm thick.

43. The method of claim 42 wherein said carrier layer is about 0.025mm to about 0.05 mm thick.

44. The method of claim 1 wherein said resin composition is dispensed onto said mold prior to contacting said mold and said preformed lens.

45. The method of claim 1 wherein only a portion of said cavity is filled with said resin composition.

46. A finished optical lens providing a first lens correction at its optical center and having a second region removed from said optical center which provides a second lens correction, said finished lens being made according to a method comprising:

providing a mold;

providing an optical quality resin composition;

providing a preformed plastic lens having said first lens correction at its optical center;

contacting said preformed lens with said mold such that the surfaces of said preformed lens and said mold form a cavity enclosing said resin composition; and

curing said resin composition;

wherein said cavity is shaped to correspond to the shape of the surface of said finished lens including said second region.

47. The lens of claim 46 wherein said cavity is shaped to correspond to a carrier layer.

48. The lens of claim 46 wherein only a portion of said cavity is filled with said resin composition.

49. The lens of claim 46 wherein said resin composition is dispensed onto said mold prior to contacting said mold and said preformed lens.

50. The lens of claim 46 or 49 wherein said lens has a third lens correction and a fourth lens correction; wherein said third lens correction is provided by a third region adjacent to said second region and located between the optical center of said preformed lens and the optical center of said second region; wherein said fourth lens correction is provided by a fourth region within said second region and located between the optical center of said preformed and the geometric center of said second region; wherein the magnitude of said third lens correction is between the magnitudes of said first lens correction and said fourth lens correction; and wherein the magnitude of said fourth lens correction is between the magnitudes of said second lens correction and said third lens correction.

51. The lens of claim 50 wherein said second region is a flat top bifocal optical segment; wherein said third region is located adjacent to the edge of said segment; and wherein said fourth region is located between said edge and the geometric center of said segment.

52. A multifocal lens comprising:

a preformed plastic lens providing a first lens correction at its optical center;

an optical segment attached to said preformed lens for providing a second lens correction different than said first lens correction at a point removed from the optical center of said multifocal lens;

said optical segment being formed by a method comprising:

providing a mold;

providing an optical quality resin composition;

contacting said preformed lens with said mold such that the surfaces of said preformed lens and said mold form a cavity enclosing said resin composition; and

curing said resin composition;

wherein said cavity is shaped to correspond to the shape of said optical segment and is shaped such that the lens correction at the optical center of said resulting lens is substantially the same as said first lens correction at the optical center of said preformed lens.

53. The lens of claim 52 further comprising a carrier layer and wherein said cavity is shaped to correspond to said carrier layer.

54. The lens of claim 52 wherein said optical segment is located approximately 1.5mm to the side of the optical center of said preformed lens and approximately 3-5mm above or below said optical center.

55. The lens of claim 52 wherein said resin composition comprises an allyl diglycol carbonate.

56. The lens of claim 52 wherein said optical segment also provides for a third lens correction different from said first lens correction and said second lens correction.

57. The lens of claim 52 wherein said multifocal lens has a resultant prism region and wherein said cavity is also shaped to correspond to the shape of said resultant prism region.

58. The lens of claim 53 wherein said carrier layer is less than about 0.4mm thick.

59. The lens of claim 58 wherein said carrier layer is about 0.025mm to about 0.05mm thick.

60. A method for forming a finished optical lens providing a first lens correction at its optical center

and having a second region removed from said optical center which provides a second lens correction, said method comprising:

providing a first mold;

providing a first portion of an optical quality resin composition;

providing a preformed plastic lens having said first lens correction at its optical center;

contacting said preformed lens with said first mold such that the surfaces of said preformed lens and said first mold form a first cavity enclosing at least some of said first portion of said optical resin composition;

curing said resin composition to produce an intermediate lens having an intermediate lens correction at said second region which is between said first lens correction and said second lens correction;

wherein said first cavity is shaped to provide a lens curvature corresponding to said intermediate lens correction;

providing a second mold;

providing a second portion of an optical quality resin composition;

contacting said intermediate lens with said second mold such that the surfaces of said intermediate lens and said second mold form a second cavity enclosing at

least some of said second portion of said resin composition; and

curing said resin composition;

wherein said second cavity is shaped to provide a lens curvature corresponding to said second lens correction.

61. A lens made according to the method of claim 60.

62. A lens made according to the method of claim 37.

63. A method for forming a finished optical lens having a multifocal or progressive region, said method comprising:

providing a second preform which provides said multifocal or progressive region;

providing an optical quality resin composition;

providing a preformed plastic lens;

contacting said second preform and said preformed lens to form a layer of said resin composition therebetween; and

curing said resin composition.

64. A lens made according to the method of claim 63.

65. A plastic multifocal lens having a discontinuous

prescription transition from the distance prescription of said lens to the multifocal prescription of said lens, wherein said prescription transition includes at least one power different from said distance prescription at a point outside of the multifocal region of said lens and at least one power different from said multifocal prescription inside said multifocal region.

66. A method for forming a finished plastic lens, said method comprising casting (a) a thin non-prescription carrier over the surface of a preformed plastic lens and (b) a multifocal or progressive region, wherein the distance prescription of said finished lens is substantially the same as the distance prescription of said preformed lens.

67. A lens made according to the method of claim 66.

68. A method for repairing the surface of a plastic lens, said method comprising recasting said surface with a thin layer of an optical quality resin composition by contacting said surface and said resin composition with a mold conforming to the prescription of said lens and curing said resin composition, wherein said surface, said resin composition and said mold are

contacted without using a conventional optical gasket.

69. The method of claim 1 wherein said preformed lens and said mold are held together by capillary action of said resin composition.

70. A lens made according to the method of claim 39.

71. The method of claim 1 wherein said preformed lens is at least partially made from a material different from said resin composition.

72. A lens made according to the method of claim 71.

73. The method of claim 1 wherein said preformed lens is at least partially made from a material having an index of refraction different from that of said resin composition.

74. A lens made according to the method of claim 73.

75. The method of claim 39 wherein the optical center of said preformed lens is displaced with respect to said mold and wherein said preformed lens is larger in diameter than said mold.

76. A lens made according to the method of claim 75.

77. A method for making a finished lens having a multifocal or progressive region, said method comprising:

providing a mold;

providing an optical quality resin composition on the surface of said mold;

providing a preformed plastic lens having a predetermined lens correction at its optical center;

contacting said preformed lens with said mold, without using a conventional optical gasket, such that the molding surface of said preformed lens and said mold form a cavity enclosing said resin composition; and

curing said resin composition using ultraviolet radiation;

wherein said cavity is shaped to correspond to the shape of an optical segment defining said multifocal or progressive region is shaped to correspond to a non-prescription carrier layer extending substantially over the entire surface of said preformed lens, and is shaped such that the lens correction at the optical center of said resulting lens is substantially the same as said predetermined lens correction at the optical center of said preformed lens.

78. A method for making a finished lens having a multifocal or progressive region, said method comprising:

providing a mold;

providing an optical quality resin composition on the surface of said mold;

providing a preformed plastic lens having a predetermined lens correction at its optical center;

contacting said preformed lens with said mold, without using a conventional optical gasket, such that the molding surface of said preformed lens and said mold form a cavity enclosing said resin composition, and such that the optical center of said preformed lens is properly aligned with an area of said mold corresponding to said multifocal or progressive region and said preformed lens and said mold are rotated with respect to each other so as to properly align with a desired astigmatic axis of said resulting plastic lens; and

curing said resin composition using ultraviolet radiation;

wherein said cavity is shaped to correspond to the shape of an optical segment defining said multifocal or progressive region is shaped to correspond to a non-prescription carrier layer extending substantially over the entire surface of said preformed lens, and is

shaped such that the lens correction at the optical center of said resulting lens is substantially the same as said predetermined lens correction at the optical center of said preformed lens.

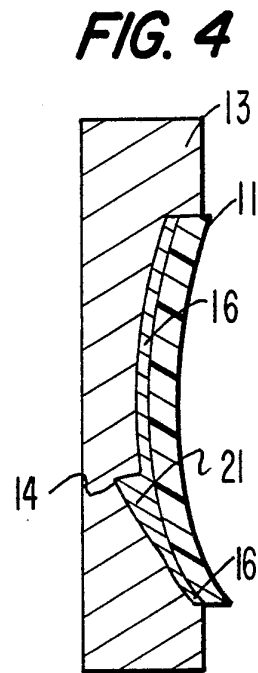
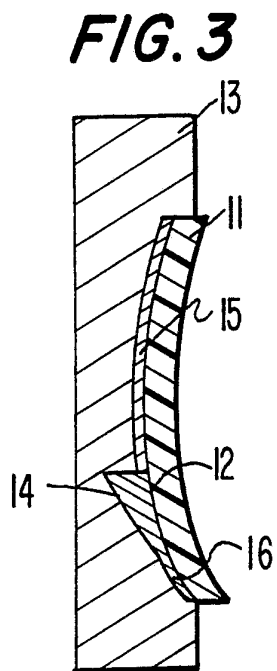
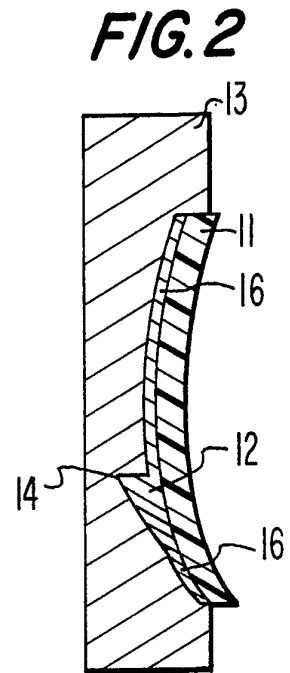
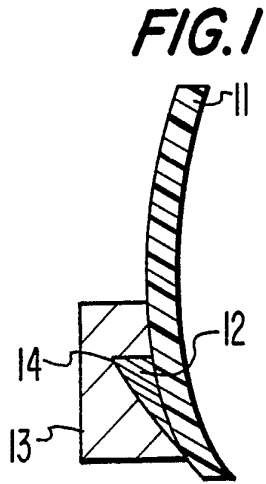


FIG. 5


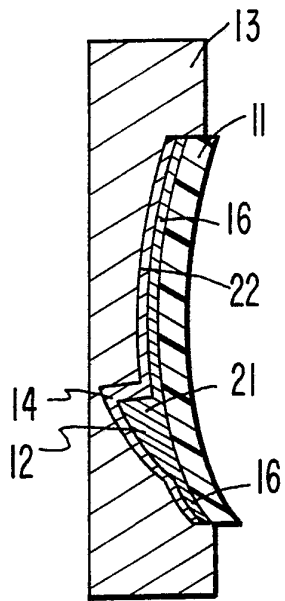


FIG. 8

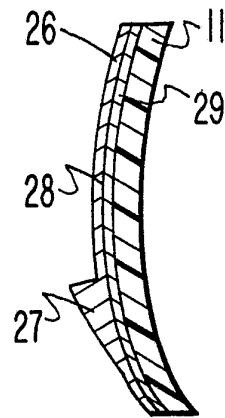

3/4
FIG. 6





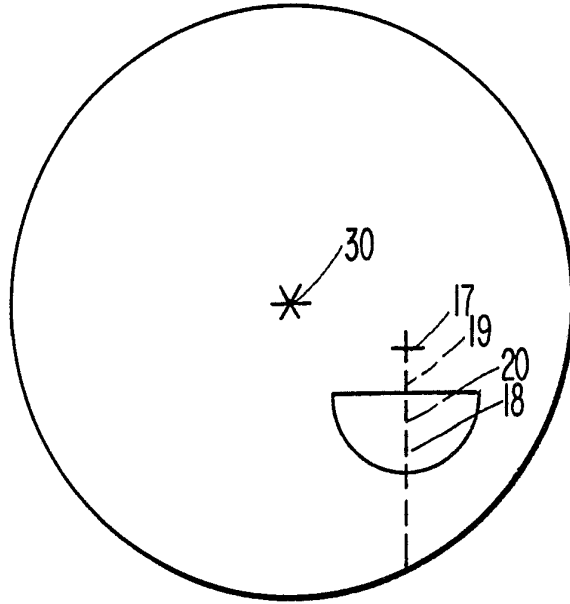


FIG. 7

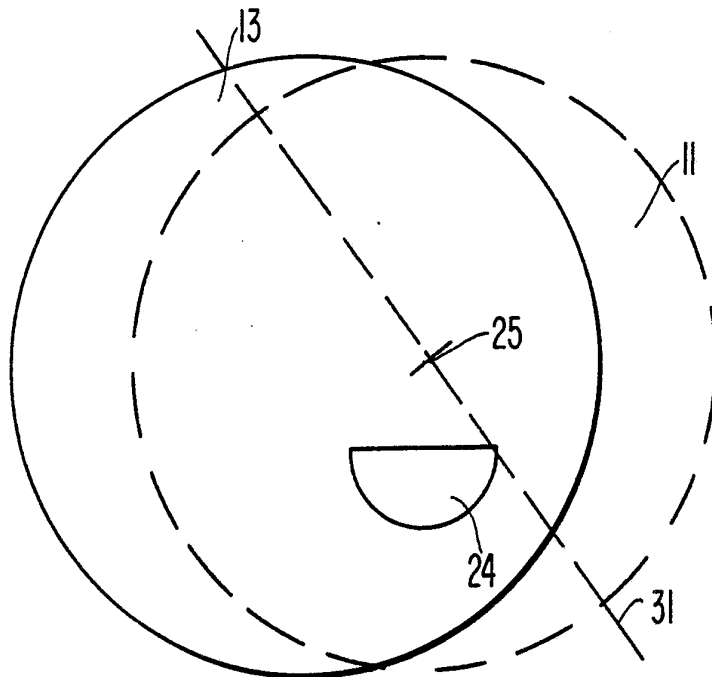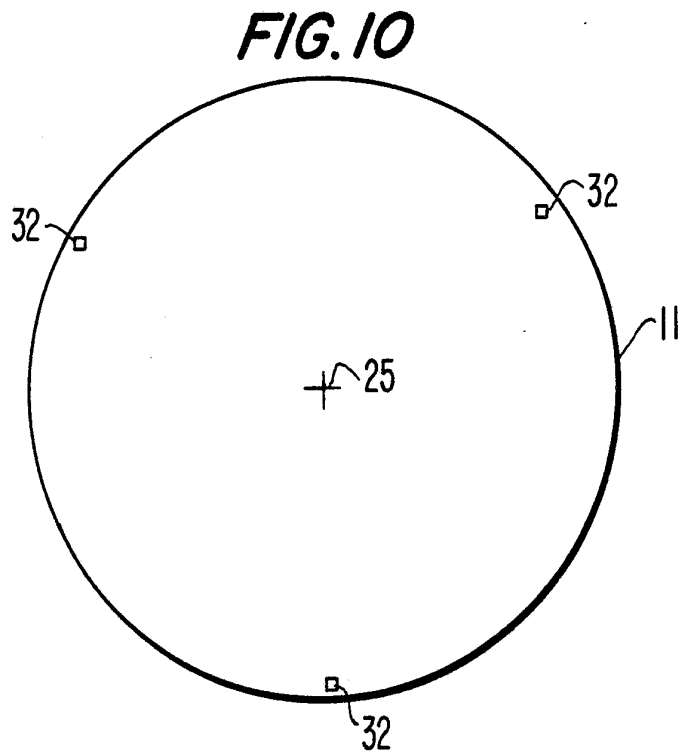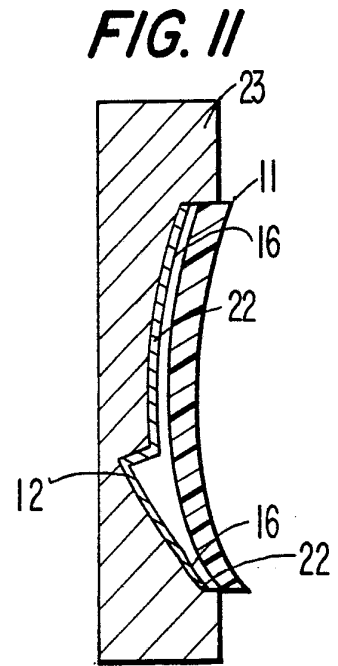


SUBSTITUTE SHEET

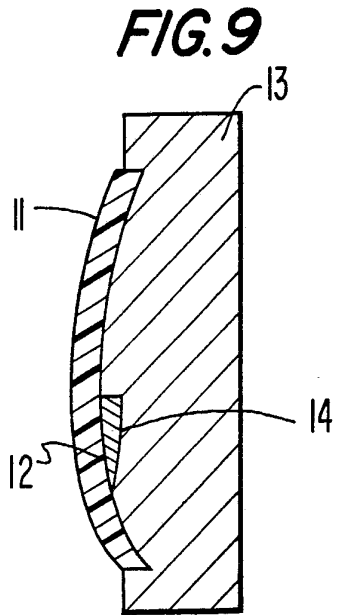

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International Application No **PCT/US90/02153**

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ³			
According to International Patent Classification (IPC) or to both National Classification and IPC			
IPC (5)	:	B29D 11/00; G02C, 7/02, 7/06, 7/10	
U.S. Cl	:	264/1.4, 1.7, 1.8	
II. FIELDS SEARCHED			
Minimum Documentation Searched ⁴			
Classification System	Classification Symbols		
U.S.	264/1.4, 1.7, 1.8; 351/159, 164, 166, 168, 170		
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵			
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴			
Category ⁶	Citation of Document, ¹⁵ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸	
Y	US, A 2,339,433 (STAEHLE) 18 January 1944 See page 1, column 2, lines 14-41 and 48-52.	1-78	
Y	US, A 4,623,496 (VERHOEVEN ET AL) 18 November 1986, See column 2, lines 58-62, and column 3, lines 1-11.	1-78	
Y	US, A 3,248,460 (NAUJOKAS) 26 April 1966 See column 2, lines 58-66.	1-78	
Y	EP, A 2,0226,123 (MATSUO ET AL) 24 June 1987 See page 10, lines 1-26, page 11, lines 25-27, page 12, lines 22-24, page 17, lines 15-26.	5-15, 19-20,	
Y	JP, A 58-167125 (ASAHI) 03 October 1983 See abstract.	5-15, 19-20, 27-31, 77, 78	
(Con't)			
¹⁹ Special categories of cited documents: <ul style="list-style-type: none"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed 		²⁰ <ul style="list-style-type: none"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family 	
IV. CERTIFICATION			
Date of the Actual Completion of the International Search ²¹		Date of Mailing of this International Search Report ²²	
06 July 1990		31 JUL 1990	
International Searching Authority ¹		Signature of Authorized Officer ²⁰	
ISA/US		 James B. Lowe	

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

Y	JP,A	59-39526	(HITACHI)	03 March 1984	5-15,19-20, 27-31,77,78
Y	JP,A	59-71830	(NIPPON)	23 April 1984 See abstract.	2-4
Y	US,A	4,166,088	(NEEFE)	28 August 1979 See column 2, lines 5-9.	13

(CON'T)

V. OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE¹

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. Claim numbers _____, because they relate to subject matter not required to be searched by this Authority, namely:

2. Claim numbers _____, because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out¹, specifically:

3. Claim numbers _____, because they are dependent claims not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING²

This International Searching Authority found multiple inventions in this international application as follows:

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.

2. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

4. As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

The additional search fees were accompanied by applicant's protest.

No protest accompanied the payment of additional search fees.

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, ^{1a} with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ^{1b}
Y	US,A 3,171,869 (WEINBERG) See entire document.	02 March 1965 27-31
Y	US,A 4,863,802 (MOORE ET AL) See entire document.	05 September 1989 27-31
Y	US,A 4,657,354 (KOBAYASHI) See entire document.	14 April 1987 66,67
Y	US,A 3,297,422 (EMERSON ET AL) See entire document.	10 January 1967 46-62,64,65, 67,70,72,74,76
Y	US,A 3,460,928 (CASKO) See column 4, lines 9-22	12 August 1969 46-62,64,65, 67,70,72,74,76
Y	US,A 4,833,548 (ONOKI) See entire document.	28 November 1989 46-62,64,65, 67,70,72,74,76
Y	US,A 3,649,236 (ROSENBAUER) See entire document.	14 March 1972 46-62,64,65, 67,70,72,74, 76
Y	US,A 4,781,452 (ACE) See entire document.	01 November 1988 46-62,64,65, 67,70,72,74, 76