



- (51) **International Patent Classification:**  
D21H 17/55 (2006.01) D21H 17/28 (2006.01)  
D21H 17/33 (2006.01)
- (21) **International Application Number:**  
PCT/US2013/075469
- (22) **International Filing Date:**  
16 December 2013 (16.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
13/729,650 28 December 2012 (28.12.2012) US
- (71) **Applicant:** ECOLAB USA INC. [US/US]; 370 N. Wabasha Street, St. Paul, Minnesota 55102 (US).
- (72) **Inventors:** CASTRO, David J.; 317 Augusta Avenue, DeKalb, Illinois 60115 (US). LIU, Mei; 13413 Millbank Dr., Plainfield, Illinois 60585 (US). FURMAN, Gary S.; 108 South 12th Street, St. Charles, Illinois 60174 (US). SMORON, Dorota; 1925 Govenors Lane, Hoffman Estates, Illinois 60169 (US). WILSON, Shawnee M.; 4905 Edward Ave., Downers Grove, Illinois 60515 (US). ZHANG, Zhiyi; 2051 Steeplebrook Court, Naperville, Illinois 60565 (US).
- (74) **Agent:** SORENSEN, Andrew D.; Ecolab USA INC., 655 Lone Oak Drive, Eagan, Minnesota 55121 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CL, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** METHOD OF INCREASING PAPER SURFACE STRENGTH BY USING ACRYLIC ACID/ACRYLAMIDE COPOLYMER IN A SIZE PRESS FORMULATION CONTAINING STARCH

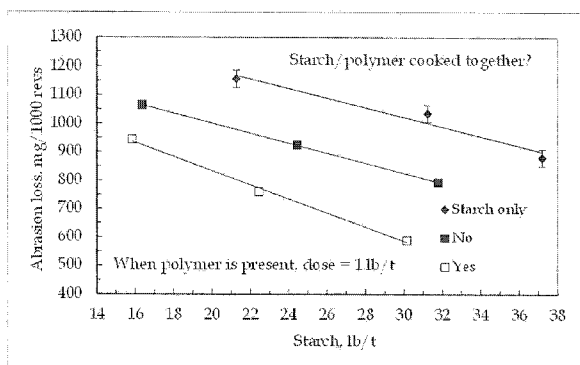


FIG. 1

(57) **Abstract:** The invention provides methods and compositions for increasing the strengthening effect of a starch coating on paper. The method involves contacting the starch with a synthetic polymer before the starch is cooked. This changes how the starch gelatinizes and how the polymer gets distributed on the paper resulting in greater paper surface strength.

WO 2014/105494 A1

**METHOD OF INCREASING PAPER SURFACE STRENGTH BY USING  
ACRYLIC ACID/ACRYLAMIDE COPOLYMER IN A SIZE PRESS  
FORMULATION CONTAINING STARCH**

**5 Background of the Invention**

The invention relates to compositions, methods, and apparatuses for improving paper surface strength. Paper is sheet material containing interconnected small, discrete fibers. The fibers are usually formed into a sheet on a fine screen from a dilute water suspension or slurry. Paper typically is made from cellulose  
10 fibers, although occasionally synthetic fibers are used.

As described in US Patent 5,585,456, paper products made from untreated cellulose fibers lose their strength rapidly when they become wet, i.e., they have very little wet strength. The wet strength of paper is defined as the resistance of the paper to rupture or disintegration when it is wetted with water. Wet strength of  
15 ordinary paper is only about 5% of its dry strength. To overcome this disadvantage, various methods of treating paper products have been employed.

One method of increasing the strength of paper is by the addition of a starch coating to the surface of paper. As described in US Patent 4,966,652, although originally applied to size (make resistant to water penetration) paper, starch  
20 coatings also increase the stiffness of paper. The increase in stiffness is so pronounced that it makes paper suitable for use in such applications as container board, packaging papers, and sheet fed printer papers. The starch is commonly added onto the paper sheet by an on-machine process (such as a size press device) or an off-machine process.

25 As described for example in US Patent Application 12/323,976, the high cost of paper fiber makes the strength enhancing process even more crucial.

Increasingly paper manufacturers are adding significant amounts of less expensive filler materials to defray costs and to enhance other properties required in the paper such as whiteness and brightness. However, papermakers are limited in the amount of fillers in the final product due in great part to a net loss in strength. Tensile strength, z-directional tensile strength and the tendency of the paper to shed filler particles (dusting) during typical handling processes, e.g., printing, are some of the main properties affected. US Patent 7,488,403 describes a method of enhancing the strengthening effect by adding a glyoxylated polyacrylamide polymer to the paper sheet. However there remains a continuing need in the art for methods of imparting appropriate levels of wet strength to paper products.

The art described in this section is not intended to constitute an admission that any patent, publication or other information referred to herein is "prior art" with respect to this invention, unless specifically designated as such. In addition, this section should not be construed to mean that a search has been made or that no other pertinent information as defined in 37 CFR § 1.56(a) exists.

### **Brief Summary of the Invention**

At least one embodiment of the invention is directed towards a method of coating a paper substrate. The method comprises the steps of: forming a composition by contacting starch and a synthetic polymer during a starch cooking process in a fluid under temperature and conditions sufficient to gelatinize the starch, and applying the composition to a paper substrate, the synthetic polymer not being a starch. The contact may occur after and/or before the starch cooking process has begun. The synthetic polymer may be a copolymer formed from monomer units

of both acrylic acid and acrylamide. The starch may be a solid before it is cooked. The composition may have a viscosity greater than a composition in which the polymer only enters the composition after the starch has been cooked. The paper substrate may comprises filler particles and may have a greater surface strength than a paper product similarly made but in which a smaller amount of filler was present and the polymer was added to the composition after cooking. The composition may be applied to a paper substrate by one device selected from the list consisting of: a size press device, print roll coater device, air-knife coater device, metering bar coater device, blade coater device, under vacuum coater device, cast coating device, and any combination thereof. A paper product made from the paper substrate may have a greater strength than a paper product made from the same materials but with a smaller amount of starch and in which the polymer was added to the composition after cooking.

Additional features and advantages are described herein, and will be apparent from, the following Detailed Description.

### **Brief Description of the Drawings**

A detailed description of the invention is hereafter described with specific reference being made to the drawings in which:

FIG. 1 is a graph illustrating how the invention improves the strength of a paper sheet.

FIG. 2 is a graph illustrating how the invention increases the viscosity of a starch solution.

For the purposes of this disclosure, like reference numerals in the figures shall refer to like features unless otherwise indicated. The drawings are only an exemplification of the principles of the invention and are not intended to limit the invention to the particular embodiments illustrated.

5

### **Detailed Description of the Invention**

The following definitions are provided to determine how terms used in this application, and in particular how the claims, are to be construed. The organization of the definitions is for convenience only and is not intended to limit any of the definitions to any particular category.

*"Consisting Essentially of"* means that the methods and compositions may include additional steps, components, ingredients or the like, but only if the additional steps, components and/or ingredients do not materially alter the basic and novel characteristics of the claimed methods and compositions.

*"Cooking"* means applying thermal energy to a fluid giving it sufficient energy to accelerate the process of gelatinizing starch.

*"Free," "No," "Substantially no" or "Substantially free"* means a composition, mixture, or ingredient that does not contain a particular compound or to which a particular compound or a particular compound-containing compound has not been added.

*"GCC"* means ground calcium carbonate filler particles, which are manufactured by grinding naturally occurring calcium carbonate rock

*"Papermaking Process"* means a method of making paper products from a pulp comprising forming an aqueous fibrous papermaking furnish from

processed pulp typically comprising cellulose fibers, draining the furnish to form a wet sheet and drying the sheet to form a dry sheet. The steps of forming the papermaking furnish, draining, and drying may be carried out in any conventional manner generally known to those skilled in the art.

5                   “*Paper Substrate*” means furnish, wet sheet, and/or dry sheet from a papermaking process.

                  “*PCC*” means precipitated calcium carbonate filler particles, which are synthetically produced.

                  “*Pre-cooked Starch*” means starch which is in such an insoluble form  
10   that when within water in the absence of cooking heat or other chemical agents, it is largely insoluble and can only be dispersed into a suspension.

                  “*Polysaccharide*” means a polymeric carbohydrate having a plurality of repeating units comprised of simple sugars, the C-O-C linkage formed between two such joined simple sugar units in a polysaccharide chain is called a glycosidic  
15   linkage, and continued condensation of monosaccharide units will result in polysaccharides, common polysaccharides are amylose and cellulose, both made up of glucose monomers, polysaccharides can have a straight chain or branched polymer backbone including one or more sugar monomers, common sugar monomers in polysaccharides include glucose, galactose, arabinose, mannose,  
20   fructose, rahnnose, and xylose.

                  “*STP*” means standard temperature and pressure.

                  “*Surfactant*” is a broad term which includes anionic, nonionic, cationic, and zwitterionic surfactants. Enabling descriptions of surfactants are stated in *Kirk-Othmer, Encyclopedia of Chemical Technology*, Third Edition,

volume 8, pages 900-912, and in *McCutcheon's Emulsifiers and Detergents*, both of which are incorporated herein by reference.

“*Surface Strength*” means resistance to loss of material due to abrasive forces applied along the surface of a substrate, one means of measuring surface strength is described in the test protocol in TAPPI 476.

“*Suspension*” means a thermodynamically unstable generally homogenous fluid containing an internal phase material dispersed throughout an external phase material, because the internal phase material does not dissolve in the external phase material, over time in the absence of some input of energy (such as mechanical agitation, excipients, or chemical suspending agents) the internal phase material will settle out, the external phase material may be a solid and often has a volume larger than 1 micrometer<sup>3</sup>.

In the event that the above definitions or a description stated elsewhere in this application is inconsistent with a meaning (explicit or implicit) which is commonly used, in a dictionary, or stated in a source incorporated by reference into this application, the application and the claim terms in particular are understood to be construed according to the definition or description in this application, and not according to the common definition, dictionary definition, or the definition that was incorporated by reference. In light of the above, in the event that a term can only be understood if it is construed by a dictionary, if the term is defined by the Kirk-Othmer Encyclopedia of Chemical Technology, 5th Edition, (2005), (Published by Wiley, John & Sons, Inc.) this definition shall control how the term is to be defined in the claims.

At least one embodiment of the invention is directed towards a method of increasing the surface strengthening effect that a starch containing coating can impart to a sheet of paper. The method includes the steps of preparing a strengthening composition by cooking starch in the presence of a synthetic polymer  
5 in a fluid (such as water), allowing the synthetic polymer and starch to complex with each other in the presence of heat sufficient to increase the gelatinization of the starch in the fluid, and applying the composition to a sheet of paper.

In at least one embodiment the synthetic polymer contacts the starch before the starch has begun to be cooked. In at least one embodiment the synthetic  
10 polymer contacts the starch after the starch has begun to undergo a cooking process.

In at least one embodiment the pre-cooked starch and the synthetic polymer are kept in a non-cooking state for between 1 minute and 57 years prior to cooking.

In at least one embodiment the temperature of the non-cooking state  
15 is no greater than 30° C.

In at least one embodiment the temperature of the cooking process is between STP and 200° C.

In at least one embodiment the fluid the starch is cooked in is at least in part a liquid. In at least one embodiment the fluid the starch is cooked in is at  
20 least in part a gas. In at least one embodiment the fluid the starch is cooked in is at least in part water. In at least one embodiment the fluid the starch is cooked in is at least in part steam.

As described in the textbook Handbook for Pulp & Paper Technologists (7th Printing), by G. A. Smook, TAPPI (1982), (hereinafter “Smook”)



(generally and in particular in chapter 18), starch is stored and transported in a pre-cooked format. When pre-cooked, the starch is typically a white granular powder. This powder is largely insoluble in cold water because of its polymeric structure and because of hydrogen bonding between adjacent polymer chains. In order for it to be effective as a paper coating however, water needs to penetrate into the structure and thereby gelatinize the starch into a form suitable for coating. In the absence of an energy input (such as vigorous stirring over a long period of time or added heat) the hydrogen bonding resists and impairs water penetration and gelatinization occurs either extremely slowly or not at all. When an aqueous suspension of pre-cooked starch is heated or cooked, the water is able to penetrate into the structures and swell up and gelatinize the starch. Heating and cooling of the now cooked starch can be performed to obtain a desired viscosity appropriate for applying the starch with a coating device. Typically a starch composition is applied by a coating device when it has a low viscosity achieved by the composition being between 6-15% starch and 85-94% water.

In at least one embodiment the cooking process excludes applying a temperature or pressure so extreme as to chemically degrade either of the starch and/or the synthetic polymer.

As elegantly illustrated in Smook's FIGs. 18-5 and 18-6 (page 266), according to the prior art, starch is first cooked and only afterwards is combined with other chemical additives such as strengthening agents to form a composition applied by a coating process. It has however been discovered that by allowing starch to remain in contact with a synthetic polymer during the cooking process, the properties of the resulting cooked starch change. Among those changed properties

are greater strengthening effect and a greater viscosity than if the starch and the polymer had come into contact with each other after the cooking process. In addition, because of the intense temperature and pressure effects of the cooking process and because of the specific conditions required to form synthetic polymers, it was not anticipated that synthetic polymers could survive the intense cooking process in a form which preserved their beneficial properties.

Without being limited by a particular theory or design of the invention or of the scope afforded in construing the claims, it is believed that when the starch and the synthetic polymer contact each other while being cooked together, they form a complex that does not otherwise form and that enhances the properties of the starch. This complex is believed to rely upon interactions too weak to form covalent bonds, but which holds the synthetic polymer and starch together by hydrogen bonds. In addition the altered geometry may change the configuration with which water can gelatinize the starch affecting its viscosity. As a result a starch cooked while in contact with a synthetic polymer is chemically different from cooked starch which has had a synthetic polymer added to it after the starch has been cooked. Objective evidence of these differences can be seen by the differences in viscosity shown in FIG. 2. These differences are believed to distribute the synthetic polymer relative to the paper sheet in a more beneficial manner.

In at least one embodiment the starch comprises: natural starch, modified starch, amylose, amylopectin, styrene-starch, butadiene starch, starches containing various amounts of amylose and amylopectin, such as 25% amylose and 75% amylopectin (corn starch) and 20% amylose and 80% amylopectin (potato starch); enzymatically treated starches; hydrolyzed starches; heated starches, also

known in the art as "pasted starches"; cationic starches, such as those resulting from the reaction of a starch with a tertiary amine to form a quaternary ammonium salt; anionic starches; ampholytic starches (containing both cationic and anionic functionalities); cellulose and cellulose derived compounds; and any combination  
5 thereof and/or a combination thereof which explicitly excludes one or more of these. Some representative examples of starch can be found in US Patents 5,800,870, and 5,003,022.

In at least one embodiment the composition of the starch is such that but for the contact between the starch and the synthetic polymer during the cooking  
10 process, the composition would not have proper viscosity and/or proper strengthening properties.

In at least one embodiment the synthetic polymer is a copolymer, terpolymer, etc... the polymer includes monomeric units of acrylic acid and acrylamide. Additional monomeric units that may be present in the synthetic  
15 polymer include one or more of: cationic character conferring monomers and other vinyl monomers.

In at least one embodiment the synthetic polymer and/or the starch is linear, branched, cyclic, and/or hyperbranched.

In at least one embodiment the synthetic polymer excludes starch.

20 Representative cationic character conferring monomers include: diallyl quaternary monomer (generally diallyl dimethyl ammonium chloride, DADMAC), 2-vinylpyridine, 4-vinylpyridine, 2-methyl-5-vinyl pyridine, 2-vinyl-N-methylpyridinium chloride, p-vinylphenyl-trimethyl ammonium chloride, 2-(dimethylamino) ethyl methacrylate, trimethyl(p-vinylbenzyl)ammonium chloride,

p-dimethylaminoethylstyrene, dimethylaminopropyl acrylamide, 2-methylacryloyloxyethyltrimethyl ammonium methylsulfate, 3-acrylamido-3-methylbutyl trimethyl ammonium chloride, 2-(dimethylamino) ethyl acrylate, and mixtures thereof. In addition to chloride, the counterion for the cationic monomers  
5 also can be fluoride, bromide, iodide, sulfate, methylsulfate, phosphate, and the like, and any combination thereof.

Other vinyl monomers that can be present during preparation of the synthetic polymer include: acrylic esters such as ethyl acrylate, methylmethacrylate and the like, acrylonitrile, vinyl acetate, N-vinyl pyrrolidone, N,N'-dimethyl  
10 acrylamide, hydroxy alkyl (meth) acrylates, styrene and the like, allylglycidyl ether, glycidyl methacrylate, co-monomers with a 1,2-diol in their structure, such as 3-allyloxy-1,2-propandiol, 3-acryloyloxy-1,2-propandiol and methacryloyloxy-1,2-propandiol, and the like, and any combination thereof.

In at least one embodiment glyoxal is also present when the starch  
15 and the synthetic polymer are cooked together. In at least one embodiment a glyoxyated polyacrylamide polymer is present when the pre-cooked starch and the synthetic polymer are contacted. In at least one embodiment the synthetic polymer or the material that is contacted with the cooking starch is one or more of those compositions described in one or more of US Patents: 4,966,652, 5,320,711,  
20 5,849,154, 6,013,359, 7,119,148, 7,488,403, 7,589,153, 7,863,395, 7,897,103, 8,025,924, 8,101,046, 8,163,134, and 8,273,215.

In at least one embodiment the strengthening composition is applied to a paper substrate by one or more of: a size press device, print roll coater device, air-knife coater device, metering bar coater device, blade coater device, under

vacuum coater device, cast coating device, and any combination thereof. A representative size press device is described in US Patent 4,325,784. In at least one embodiment the application is performed by an on-machine operation or an off-machine operation. Other examples of coating devices, compositions added to the strengthening composition (after starch cooking), and synthetic polymers (which are present during and/or after starch cooking) are described in US Patent Application 2005/0155731.

In at least one embodiment the composition is applied to a filler-bearing paper substrate. The filler particles may be PCC, GCC, and any combination thereof.

In at least one embodiment the resulting paper has superior strength alongside more filler and/or superior optical properties despite having filler or optical property enhancing material in an amount that but for the cooking contact would have produced lessor strength. Optical properties include but are not limited to whiteness, brightness, and opacity all of which are defined as described in the reference Measurement and Control of the Optical Properties of Paper, 2<sup>nd</sup> ed., Technidyne Corporation, New Albany, IN, (1996).

## EXAMPLES

The foregoing may be better understood by reference to the following examples, which are presented for purposes of illustration and are not intended to limit the scope of the invention.

Several laboratory experiments have been conducted to measure the ability of an AA/AcAm copolymer to increase the surface strength of paper. Except

in study 3, base paper containing 16% ash and that has not been passed through a size press was coated using the drawdown method with solutions containing the desired chemistry. The paper was weighted before and after coating to determine specific chemical dose. The paper was dried by passing it once through a drum  
 5 dryer at about 95°C and allowed to equilibrate at 23°C and 50% relative humidity for at least 12 hours.

Surface strength was measured using TAPPI (Technical Association of Pulp and Paper Industries) method T476 om-01. In this measurement, the surface strength is inversely proportional to the amount of mass lost from the surface of the  
 10 paper after having been systematically "rubbed" on a turn table by two abrasion wheels. The results are reported in mg of lost material per 1000 revolutions (mg/1000 revs): the lower the number the stronger the surface.

Below is a summary of the studies conducted in the laboratory.

#### Study 1. Screening.

15 This first study was designed to determine which polymer performed the best among a set of samples varying in acrylic acid mole ratio and/or average molecular weight. Table 1 shows the conditions and the results.

**Table 1**

Condition	Starch, lb/t	Polymer, lb/t	Acrylic acid/acrylamide ratio	Average MW	Abrasion loss, mg/1000 revs
1	14.8	0.00	--	--	1104.4
2	27.0	0.00	--	--	779.4
3	21.2	0.92	7.5/92.5	Low	856.7
4	20.5	0.89	7.5/92.5	High	804.4
5	19.6	0.85	15/85	--	765.6
6	19.1	0.83	30/70	--	798.3

The first two conditions span a range of starch dose within which the conditions containing the polymers will be dosed. The abrasion loss results demonstrate that the strongest surface is obtained with the copolymer containing 15% acrylic acid. The results of the two polymers containing 7.5% acrylic acid suggest that the higher average molecular weight polymer performs better.

#### Study 2. Monomer ratio.

This study was designed to determine which polymer performed the best among a set of samples varying only in acrylic acid mole ratio. Table 2 shows the conditions and the results.

10

**Table 2**

Condition	Acrylic acid/acrylamide ratio	Starch, lb/t	Polyacrylic acid/acrylamide, lb/t	Abrasion loss, mg/1000 revs
1	--	15.0	0.00	441.7
2	--	25.9	0.00	262.5
3	7.5/92.5	19.2	0.83	321.7
4	15/85	19.8	0.86	207.5
5	30/70	18.9	0.82	285.8

The first two conditions are meant to span a range of starch dose within which the conditions containing the polymers will be dosed. The abrasion loss results demonstrate that the strongest surface is obtained with the copolymer containing 15% acrylic acid.

#### Study 3. Ash replacement.

This study was designed to compare surface strength performance as a function of ash content. Controlling only for ash content, base sheets were prepared in the lab using a Noble and Wood mold, pressed in a static lab press and dried in a

drum dryer at approximately 100°C. All wet end chemistries were maintained constant. Table 3 shows the conditions and the results.

**Table 3**

Condition	Acrylic acid, % - Average MW, kDa	Starch, lb/t	Acrylic acid/acrylamide, lb <sub>actives</sub> /t	Ash, %	Abrasion loss, mg/1000 revs
1	--	63.7	0.00	15.9	346
2	--	66.2	0.00	23.9	483
3	7.5 - 200	61.8	1.03	15.5	303
4	7.5 - 200	66.2	1.10	23.8	449
5	15 - 400	62.6	1.04	15.5	262
6	15 - 400	58.9	0.98	23.2	346

5                    The first two conditions only contained starch, while the others contained about 1 lb/t of an AA/AcAm copolymer. The increase in surface strength is maximized with the higher average molecular weight copolymer containing 15% acrylic acid.

Study 4. Cooking a blend of starch and AA/AcAm.

10                    Table 4 illustrates a study designed to test the effect of cooking the starch in the presence of the AA/AcAm copolymer.

**Table 4**

Condition	Starch and polymer cooked together?	Starch, lb/t	AA/AcAm, lb/t	Abrasion loss, mg/1000 revs
1	No	21.3	0.00	1156
2	No	31.2	0.00	1034
3	No	37.2	0.00	880
4	No	16.4	1.09	1064
5	No	24.4	1.06	924
6	No	31.8	1.06	794
7	Yes	15.9	1.06	944
8	Yes	22.5	0.98	759
9	Yes	30.1	1.00	588



The results of these tests demonstrate that the formulation where the starch was cooked in the presence of a synthetic polymer such as AA/AcAm copolymer performs better than the formulation where the blending was done after cooking the starch.

5                   While this invention may be embodied in many different forms, there are described in detail herein specific preferred embodiments of the invention. The present disclosure is an exemplification of the principles of the invention and is not intended to limit the invention to the particular embodiments illustrated. All patents, patent applications, scientific papers, and any other referenced materials mentioned  
10 herein are incorporated by reference in their entirety. Furthermore, the invention encompasses any possible combination of some or all of the various embodiments described herein and/or incorporated herein. In addition the invention encompasses any possible combination that also specifically excludes any one or some of the various embodiments described herein and/or incorporated herein.

15                   The above disclosure is intended to be illustrative and not exhaustive. This description will suggest many variations and alternatives to one of ordinary skill in this art. All these alternatives and variations are intended to be included within the scope of the claims where the term "comprising" means "including, but not limited to". Those familiar with the art may recognize other equivalents to the  
20 specific embodiments described herein which equivalents are also intended to be encompassed by the claims.

All ranges and parameters disclosed herein are understood to encompass any and all subranges subsumed therein, and every number between the endpoints. For example, a stated range of "1 to 10" should be considered to include

any and all subranges between (and inclusive of) the minimum value of 1 and the maximum value of 10; that is, all subranges beginning with a minimum value of 1 or more, (e.g. 1 to 6.1), and ending with a maximum value of 10 or less, (e.g. 2.3 to 9.4, 3 to 8, 4 to 7), and finally to each number 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10  
5 contained within the range. All percentages, ratios and proportions herein are by weight unless otherwise specified.

This completes the description of the preferred and alternate embodiments of the invention. Those skilled in the art may recognize other equivalents to the specific embodiment described herein which equivalents are  
10 intended to be encompassed by the claims attached hereto.

**Claims**

1. A method of coating a paper substrate, the method comprising the steps of:  
forming a composition by contacting starch and a synthetic polymer during a  
starch cooking process in a fluid under temperature and conditions sufficient to  
5 gelatinize the starch, and applying the composition to a paper substrate, the synthetic  
polymer not being a starch.
2. The method of claim 1 in which the contact occurs after the starch cooking  
process has begun.
3. The method of claim 1 in which the contact occurs before the starch cooking  
10 process has begun.
4. The method of claim 1 in which the synthetic polymer is a copolymer  
formed from monomer units of both acrylic acid and acrylamide.
5. The method of claim 1 in which the starch is a solid before it is cooked.
6. The method of claim 1 in which the composition has a viscosity greater than  
15 a composition in which the polymer only enters the composition after the starch has  
been cooked.
7. The method of claim 1 in which the paper substrate comprises filler particles.
8. The method of claim 7 in which a paper product made from the paper  
substrate has a greater surface strength than a paper product similarly made but in  
20 which a smaller amount of filler was present and the polymer was added to the  
composition after cooking.
9. The method of claim 1 in which the composition is applied to a paper  
substrate by one device selected from the list consisting of: a size press device, print  
roll coater device, air-knife coater device, metering bar coater device, blade coater

device, under vacuum coater device, cast coating device, and any combination thereof.

**10.** The method of claim 1 in which a paper product made from the paper substrate has a greater strength than a paper product made from the same materials  
5 but with a smaller amount of starch and in which the polymer was added to the composition after cooking.

**11.** A sheet of paper made from a papermaking process which includes the process of claim 1.

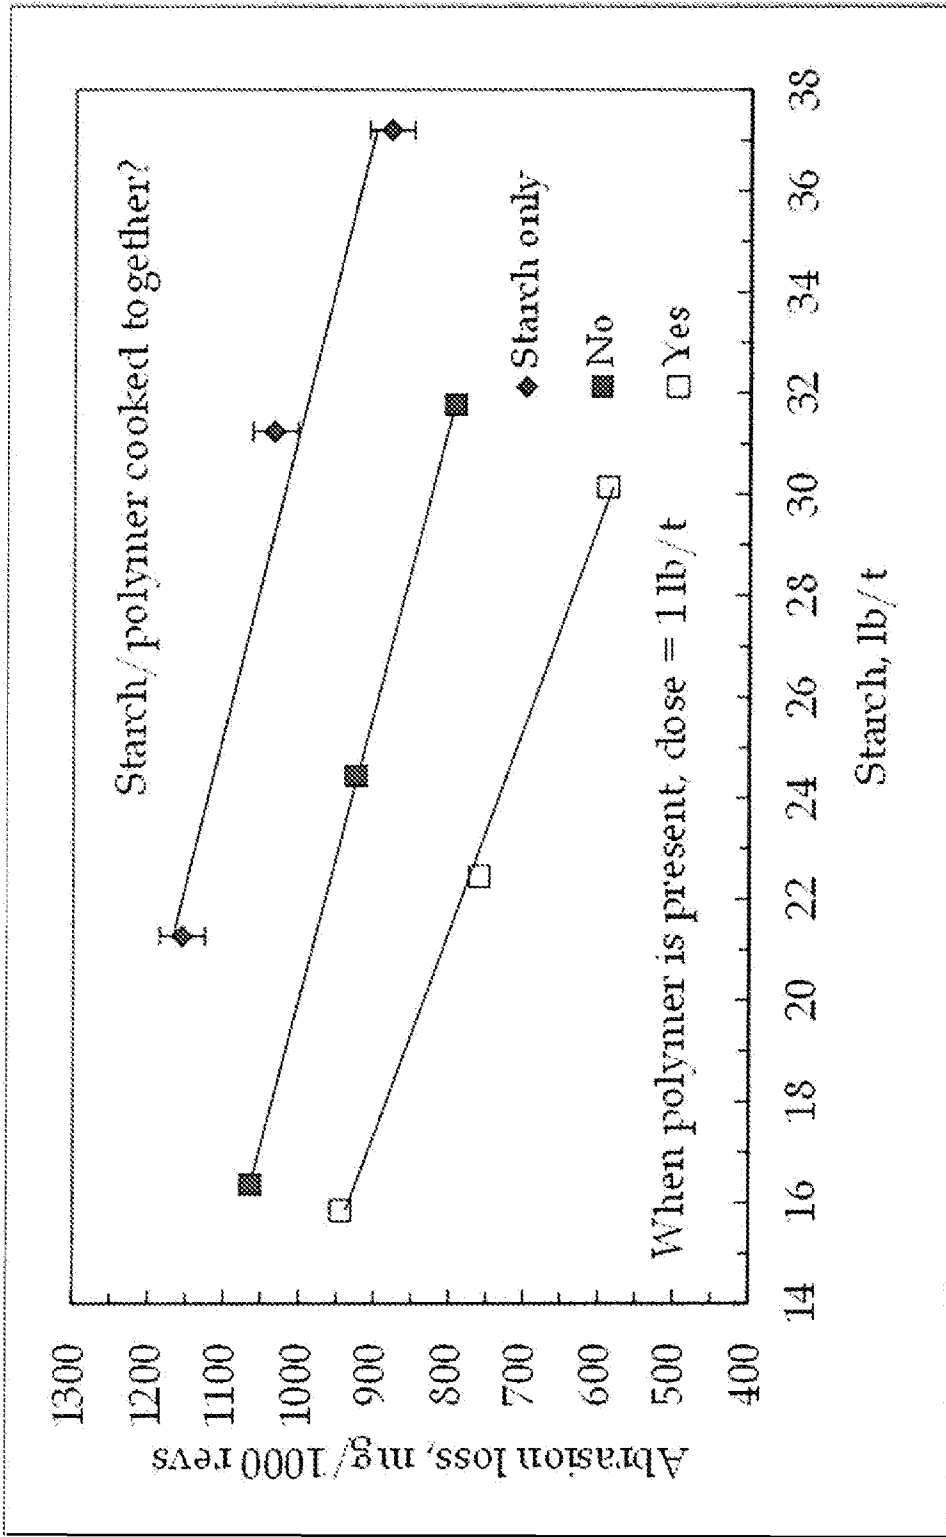


FIG. 1

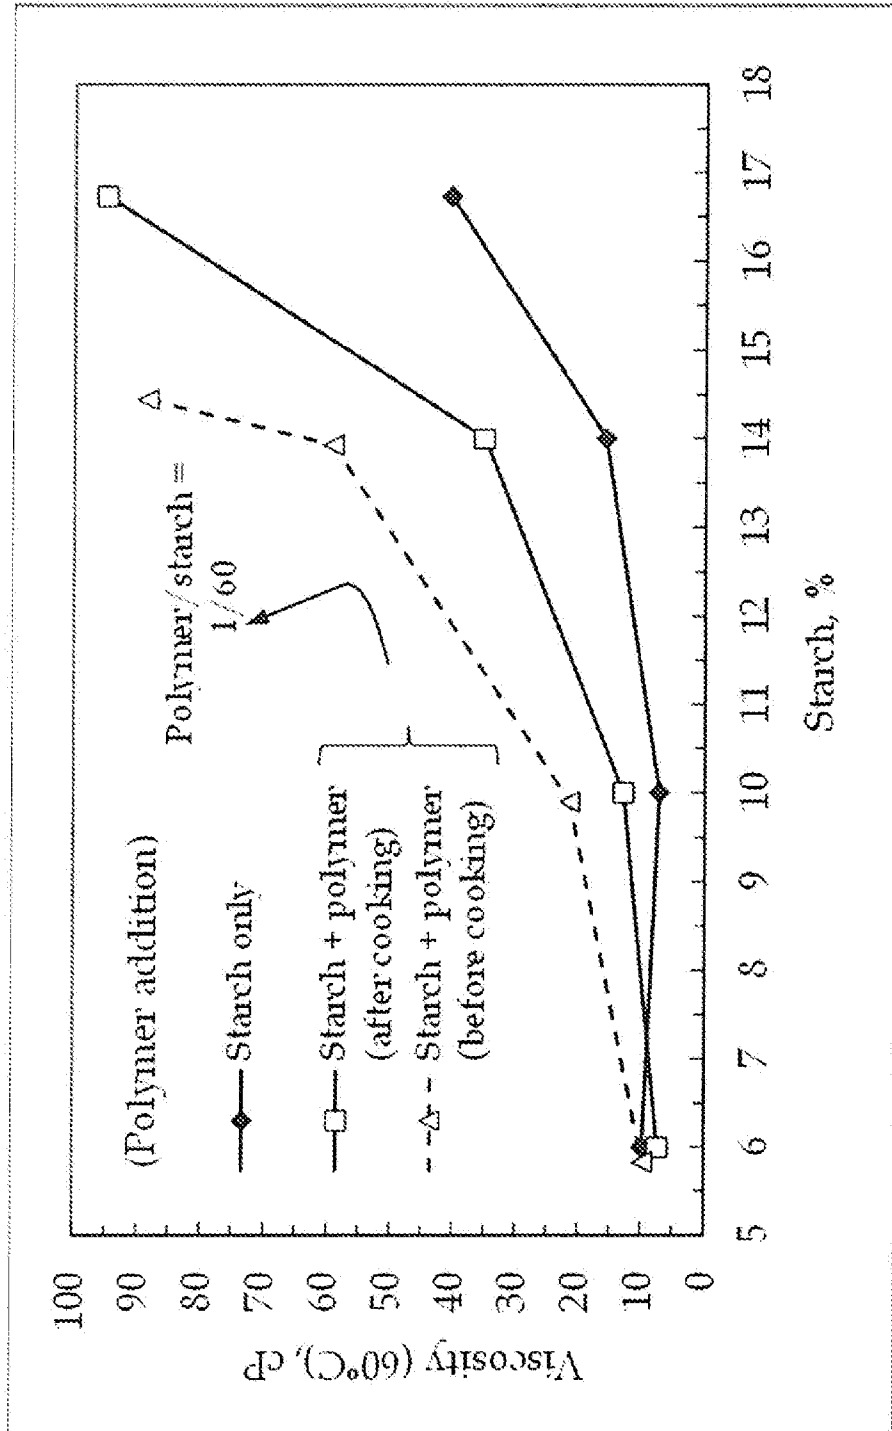


FIG. 2

**A. CLASSIFICATION OF SUBJECT MATTER****D21H 17/55(2006.01)i, D21H 17/33(2006.01)i, D21H 17/28(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

D21H 17/55; D21H 17/24; C09D 103/00; C08L 3/00; C08B 30/00; C08B 30/12; A61K ; D21H 17/42; D21H 17/28; D21H 21/18; D21H 19/00; D21H 17/33

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: paper substrate, starch, synthetic polymer, starch cooking, acrylic acid, acrylamide

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 03-087473 A1 (HERCULES INCORPORATED) 23 October 2003 See p.6, lines 15-19; claims 1 and 4.	1-5,7,9,11
A		6,8,10
Y	US 2012-0111517 A1 (BORKAR, SACHIN et al.) 10 May 2012 See paragraphs [0015], [0026] and [0029]; claim 1.	1-5,7,9,11
Y	US 2004-0171719 A1 (NEIVANDT, DAVID J. et al.) 02 September 2004 See paragraphs [0002] and [0023]-[0024]; claims 10 and 13-14.	1-5,7,9,11
Y	US 6746542 B1 (LORENCAK, PRIMOZ et al.) 08 June 2004 See column 5, lines 5-27; column 10, lines 13-36; claims 1, 8-9 and 11.	1-5,7,9,11
A	WO 2005-004812 A2 (THE UNIVERSITY OF MAINE BOARD OF TRUSTEES) 20 January 2005 See claim 1.	1-11
A	WO 2012-042115 A1 (KEMIRA OYJ et al.) 05 April 2012 See p.6, lines 14-23; claim 1.	1-11

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

25 April 2014 (25.04.2014)

Date of mailing of the international search report

**28 April 2014 (28.04.2014)**

Name and mailing address of the ISA/KR

International Application Division  
Korean Intellectual Property Office  
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,  
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

HEO, Joo Hyung

Telephone No. +82-42-481-8150



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2013/075469**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 03-087473 A1	23/10/2003	AU 2003-218192 A1	27/10/2003
		EP 1492925 A1	05/01/2005
		EP 1492925 B1	04/09/2013
		ES 2430317 T3	20/11/2013
		PT 1492925 E	30/10/2013
		TW 1263720 B	11/10/2006
		US 2003-0188840 A1	09/10/2003
		US 6723204 B2	20/04/2004
US 2012-0111517 A1	10/05/2012	AU 2011-323632 A1	27/06/2013
		CA 2813996 A1	10/05/2012
		CN 103201348 A	10/07/2013
		EP 2635645 A1	11/09/2013
		JP 2013-543066 A	28/11/2013
		KR 10-2013-0117804 A	28/10/2013
		MX 2013004106 A	17/07/2013
		TW 201229358 A	16/07/2012
		WO 2012-061305 A1	10/05/2012
		US 2004-0171719 A1	02/09/2004
CA 2517275 A1	10/09/2004		
CN 1768102 A	03/05/2006		
CN 1768103 A	03/05/2006		
EP 1603971 A1	14/12/2005		
JP 2007-521407 A	02/08/2007		
KR 10-2005-0119639 A	21/12/2005		
MX PA05009123 A	08/03/2006		
NO 20054457 A	26/09/2005		
US 2005-0150621 A1	14/07/2005		
US 2005-0236127 A1	27/10/2005		
WO 2004-076551 A1	10/09/2004		
US 6746542 B1	08/06/2004		
		AU 2000-41086 A1	23/10/2000
		AU 2000-41086 B2	15/01/2004
		AU 4108600 A	23/10/2000
		AU 769074 B2	15/01/2004
		CA 2367317 A1	12/10/2000
		EP 1183422 A1	06/03/2002
		EP 1183422 B1	08/10/2003
		ES 2208309 T3	16/06/2004
		JP 2002-541346 A	03/12/2002
		KR 10-0637091 B1	23/10/2006
		NZ 514892 A	29/08/2003
		PT 1183422 E	31/03/2004
		WO 00-60167 A1	12/10/2000
		WO 2005-004812 A2	20/01/2005
CA 2530534 A1	20/01/2005		



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2013/075469**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 1965024 A	16/05/2007
		EP 1641430 A2	05/04/2006
		JP 2007-530707 A	01/11/2007
		KR 10-2006-0028783 A	03/04/2006
		MX PA05014168 A	31/05/2006
		NO 20060521 A	30/03/2006
		US 2005-056390 A1	17/03/2005
		WO 2005-004812 A3	21/12/2006
WO 2012-042115 A1	05/04/2012	CA 2813148 A1	05/04/2012
		CN 103140626 A	05/06/2013
		CN 103201426 A	10/07/2013
		EP 2622131 A1	07/08/2013
		EP 2622132 A1	07/08/2013
		FI 20106021 A0	01/10/2010
		US 2013-0299109 A1	14/11/2013
		WO 2012-042116 A1	05/04/2012