




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E06B 9/17	A1	(11) International Publication Number: WO 96/24742 (43) International Publication Date: 15 August 1996 (15.08.96)
<p>(21) International Application Number: PCT/US96/01794</p> <p>(22) International Filing Date: 8 February 1996 (08.02.96)</p> <p>(30) Priority Data: 08/386,743 10 February 1995 (10.02.95) US 08/437,853 9 May 1995 (09.05.95) US</p> <p>(71) Applicant: RITE-HITE CORPORATION [US/US]; 8900 North Arbon Drive, Milwaukee, WI 53223 (US).</p> <p>(72) Inventor: SCHULTE, Peter, S.; 10 Truman Drive, E. Dubuque, IL 60125 (US).</p> <p>(74) Agents: McNEILL, Mathew, C.; Rite-Hite Corporation, P.O. Box 23043, Milwaukee, WI 53223 (US) et al.</p>	<p>(81) Designated States: BR, CA, CN, JP, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: CURTAIN BOTTOM TENSIONING ASSEMBLY

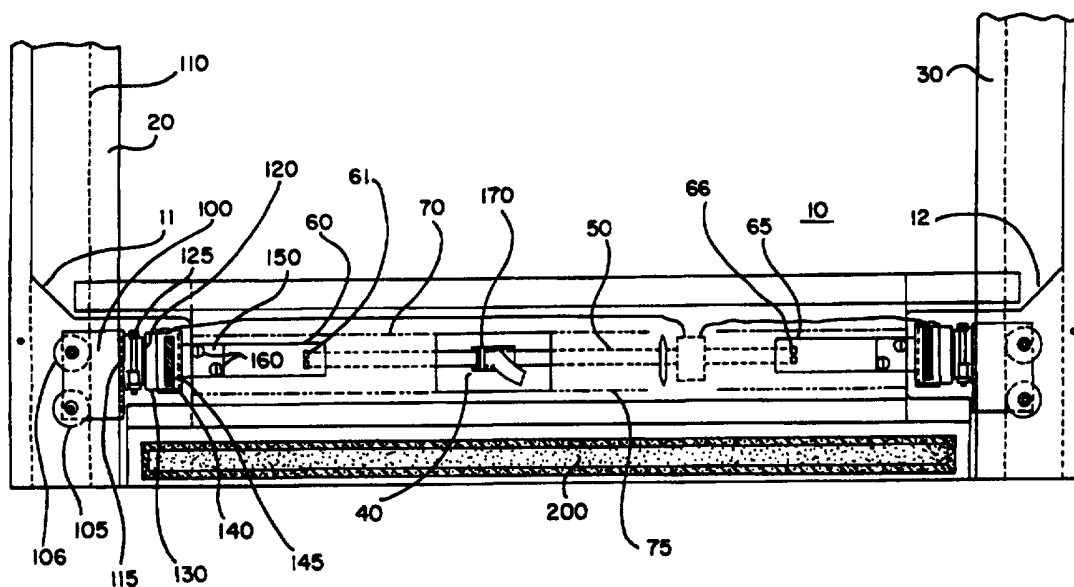

(57) Abstract

A curtain bottom tensioning assembly comprised primarily of a resilient member (50) extending across the bottom of the door (10). The resilient member (50) is directly or indirectly coupled to a guide extension (100) extending beyond the leading edge of the door (10) and engaging vertical guide members (20, 30) to guide the door (10) in a vertical plane. The guide extensions (100) also engage the vertical guide members (20, 30) to restrict the guide extensions (100) from moving horizontally toward the curtain (10). The coupling between these horizontally restricted guide extensions (100) and the resilient member (50) places a tension on the resilient member (50). The resilient member (50) is thus stretched across the bottom of the door or curtain (10), and serves as a bottom bar that also substantially conforms to or deflects around an obstruction, thus preventing or minimizing damage to the door (10), the bottom bar and the obstruction.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

CURTAIN BOTTOM TENSIONING ASSEMBLYFIELD OF THE INVENTION

The invention relates generally to doors comprising a pliable door curtain, and more particularly to an improved, adjustable soft bottom bar for a roll-up door.

5

BACKGROUND OF THE INVENTION

Industrial doors in which the door itself is made of pliable material such as fabric, are used in a variety of applications, typically for the purpose of separating areas within a building, or closing off building entries from the outside. Examples of such pliable doors are planar doors, overhead-storing doors and roll-up doors. Planar doors include frame members on which the fabric comprising the door is disposed. This plane of material is then movable between a doorway blocking position and a storage position, wherein the plane of material and associated frame members are disposed above the doorway. The frame typically includes extensions extending past either side of the door, and which are receivable within guide tracks to guide the door through its vertical movement. These extensions may include wheels or trolleys. An overhead-storing door is similar in that the fabric door is maintained on frame members and is movable between doorway blocking and storage positions. In this door, however, the storage position is overhead, as in a typical garage door. Accordingly, the guide members associated with such a door will curve between the vertical and horizontal. A typical roll-up door comprises a fabric curtain which is wound about a roller journalled for rotation above the doorway with which the roll-up door is associated. To close the door, the roller is rotated such that the curtain pays off of the roller to enclose the doorway. Of course, the door is opened by reversing the direction of the roller and rolling the fabric curtain onto the roller. Such roller

35

doors are typically either powered opened and closed, or are powered open and allowed to fall closed by gravity. As the invention herein is envisioned for use primarily with roll-up doors, it will be described with reference thereto. However, the invention may also be used in combination with other such pliable doors.

When a roll-up door is placed over an exterior doorway of a building, provision must be made to prevent the fabric curtain from billowing due to wind being applied from the outside. Similarly, when the roll-up door is in place between different sections of a warehouse, there may be pressure differentials between these two sections, which may also cause billowing of the roll-up door if the door does not have provision to prevent this from happening. Such billowing may be problematic as it impedes door function and allows leakage around the door. To correct for this problem, roll-up doors typically include a rigid or semi-rigid bottom bar to help in providing what is generally referred to as "wind retention". The bottom bar typically extends across the leading width of the door, and also includes extensions which extend past either side of the door. These extensions typically engage side frames disposed on either side of the door and which run vertically along the side of the doorway. As the door moves between its open and closed positions, the bottom bar and its extensions move within a generally vertical plane since the extensions engage and are guided along or within the generally vertical side frames. With the leading edge of the door thus restrained within a vertical plane, movement of the fabric curtain of the door out of that vertical plane is largely avoided. However, the bottom bar only ensures that the leading edge of the door stays in the vertical plane, and strong gusts of wind or large pressure differentials between sections of a building may still allow the remainder of

the curtain to billow either during the curtain's travel, or when it is fully closed.

To prevent this undesirable movement of the door, many prior art doors provide wind retention by use of a tensioning means to place a vertically disposed tension on the door to prevent it from billowing out of the vertical plane. One example of such a tensioning means is a heavy bottom bar. The weight of the heavy bottom bar may provide sufficient vertical tension to prevent undesirable billowing particularly (although not exclusively) in a gravity-fall type door. Alternatively, external means may be used to provide the necessary tension. For example, belting is often used for this purpose. Typically, one end of the belting is attached to the roller, and is wound and unwound from the roller in the opposite sense from the curtain. The belt is then passed through a pulley mounted near the bottom of the side frame. The other end of the belt is then attached to the extensions of the bottom bar. As the belt is wound and unwound from the roller in an opposite sense to the curtain, it exerts a downward pulling force on the bottom bar and the side frame inserts thus placing the necessary vertical tension on the door. Other particular arrangements for the belting besides that previously described are also used to achieve the same purpose.

A further exemplary means for exerting the necessary vertical tension on the door, at least in the closed position, is a system wherein the extensions of the bottom bar are latched in position when the door is in the closed position. In the case of the powered roll-up door, the motor is then reversed to exert the necessary vertical tension of the door to hold it taut.

While the variety of methods just described for wind retention are generally effective in preventing this problem, they are not without their own disadvantages. For example, obstacles in the path of travel of the bottom bar may be problematic. If an obstacle is in

place in this position, and the door continues its downward movement, damage to either the door or the object could occur. Further, if the obstacle should be personnel, goods or equipment either damage to the door,
5 goods or equipment or injury to the personnel could result. To avoid this problem, doors employing bottom bars typically also include some type of sensing mechanism for determining when an obstacle has been
10 which drives the roller, and cause the door to be reversed upon encountering an obstacle. Such sensors, however, may be subject to malfunction, and add both cost and complexity to the door.

15 SUMMARY OF THE INVENTION

It is thus a general aim of the invention to improve on the bottom bar mechanisms for use in pliable doors as compared to those that have been used heretofore.

20 In accordance with that aim, it is a primary object of the invention to provide a bottom bar for such all door that has enhanced safety features.

It is a related object to provide a bottom bar that will not cause or that will minimize injury or damage to obstructions that are encountered during downward travel
25 of the door.

It is the further object of the invention to provide a bottom bar that is adjustable to meet the demands of the potentially changing environment in which the door is located.

30 It is a further object of the invention to provide a bottom bar which can be easily and inexpensively implemented and maintained.

Other objects and advantages of the invention will become apparent from the description to follow.

35 In accordance with these and other objects, there is provided a curtain bottom tensioning assembly comprised primarily of a resilient member extending across the

bottom of the door. The resilient member is directly or indirectly coupled to a guide extension extending beyond the leading edge of the door and engaging vertical guide members to guide the door in a vertical plane. The guide extensions also engage the vertical guide members to restrict the guide extensions from moving horizontally toward the curtain. The coupling between these horizontally restricted guide extensions and the resilient member places a tension on the resilient member. The resilient member is thus stretched across the bottom of the door or curtain, and serves as a bottom bar. Unlike a typical bottom bar, however, upon impact with an obstruction the "soft" bottom bar according to the invention will substantially conform to or deflect around the obstruction, thus preventing or minimizing damage to the door, the bottom bar and the obstruction.

According to a preferred embodiment of the invention, the soft bottom bar is a resilient strap extending across the bottom of the door, and received within a pocket or flap formed on the door for that purpose. At either end of the door, the strap is received within a semi-rigid end stiffener. The end stiffener is adapted to engage a breakaway-type guide extension that is restricted in a horizontal direction. Included along the length of the resilient strap is a tightening member, allowing the tension and the resilient straps to be advantageously adjusted. With the breakaway guide extension mechanism attached to the semi-rigid end stiffeners, the resilient strap stretches across the bottom of the door, and serves the advantageous function of a soft bottom bar.

According to a further aspect of this preferred embodiment of the invention, the section of the door beneath the soft bottom bar includes a loop for receiving a ballast tube. The ballast tube is a tube of material filled with a compressible material such as sand or ground garnet, gel, silicone, a high viscosity liquid,

etc. The ballast tube extends across the leading edge of the door and provides a way of keeping the door taut in a vertical direction. At the same time it provides a soft and pliable door bottom and yields an excellent bottom seal when the door is in the closed position.

According to another embodiment, the resilient member is the leading edge of the curtain itself, the curtain being formed of a material having sufficient tensile strength to perform this function.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an elevational view of a curtain bottom tensioning assembly according to one embodiment of the invention, shown in connection with a breakaway side frame insert mechanism;

15

Fig. 2 is a top view of a horizontally restrained guide extension according to an embodiment of the invention; and

20

Fig. 3 is an end view of the leading edge of a roll-up door including a curtain bottom tensioning assembly and ballast tube according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

While the invention will be described in connection with certain preferred embodiments, there is no intent to limit it to those embodiments. On the contrary, the intent is to cover all alternatives, modifications and equivalents included within the spirit and scope of the invention as defined by the appended claims.

30

Turning now to Figure 1, there is shown a curtain bottom tensioning assembly according to one preferred embodiment of the invention, particularly - a tensioning assembly on a roll-up door. As mentioned, however, the tensioning assembly may be used in combination with other industrial doors including planar doors and overhead storing doors. In this embodiment, the curtain bottom tensioning assembly includes a resilient member and other

35

components mounted to a leading edge of the curtain door, and horizontally restrained side frame inserts which are coupled to the side frame inserts to place the resilient member across the bottom of the door in tension. The components across the bottom of the door will be referred to herein as a "soft bottom bar." The use of this term is not intended to be limiting, however. Rather, the invention broadly encompasses a curtain bottom tensioning assembly in the form of a horizontally restricted guide extensions coupled to a resilient member disposed along the leading edge of the door, regardless of whether discrete components are disposed along the bottom of the curtain, to form a bottom bar as in this embodiment, or whether the fabric of the door curtain itself forms the resilient member, as will be described in greater detail below.

The curtain bottom tensioning assembly of this embodiment is designed to be used with a conventional roll-up door including a fabric curtain 10, the leading edge of which is shown in FIG. 1. Vertical guide members, illustratively in the form of side frame members 20, 30, which support the roller upon which the curtain is wound, are disposed on either side of the door, and include vertical side channels which may receive the sides of the curtain above the bottom bar section, as well as guide extensions which are attached to the bottom bar, and are discussed in greater detail below. The curtain 10, in the area of the soft bottom bar, is preferably of reduced width, with the curtain narrowing for example in the sections 11, 12 shown in FIG. 1. The soft bottom bar, designated generally by the reference numeral 40 in FIG. 1 is shown disposed in this preferably narrower section of the curtain 10 at or near its bottom edge.

The soft bottom bar 40 is comprised primarily of a resilient member in the form of a strap 50 which extends across the bottom edge of the door. Other types of

resilient members besides strap 50 could be used, such as resilient cable, rope and the like, with $\frac{1}{8}$ " braided steel rope being particularly preferred. To anchor the strap or other resilient member at either end of the door, and to provide added stiffness in that area, semi-rigid end stiffeners 60, 65 receive respective ends of the resilient strap 50. According to the present embodiment, end stiffeners 60, 65 are generally rectangular in shape, with their major axis extending along the horizontal width of the door. Each stiffener 60, 65 includes a slot 61, 66 which is sized to receive the width of the resilient strap 50. In this embodiment, the strap 50 is received within the slots 61, 66, near its respective ends. Each end of the strap is then sewn onto a portion of the strap 50 near the end stiffeners 60, 65 thus forming a loop of the strap 50 received within the slots 61, 66. In the present embodiment, strap 50 is actually two straps, one attached to stiffener 60, and one to stiffener 65. The two straps are coupled through a centrally-disposed tightening member 170, to be discussed in greater detail below. A variety of resilient materials may be used for the resilient strap 50. As will be discussed below, the strap 50 according to this embodiment will typically have a tension applied to it so as to stretch it illustratively 2-5% longer than its unstretched length. A resilient material providing such stretch without requiring undue force is thus required. At present, the best material we have found for use as strap 50 is a webbed belting material in the form of a 1 inch wide polyester belt, with a 1,000 pound rating. The belt is manufactured by S.I.R. Webbing, Inc; Model Number 17337. As mentioned, the preferred resilient cable, if used, is $\frac{1}{8}$ " braided steel rope, available from a variety of sources.

As can be seen from FIG. 1, the resilient strap 50 and the end stiffeners 60, 65 are preferably received within a pocket formed on the fabric curtain 10. As an

alternative embodiment, resilient strap 50 could be sewn directly to the curtain fabric. In the embodiment of FIG. 1, this pocket is in two sections 70, 75 shown in broken lines. The pocket serves primarily to maintain
5 the strap 50 and end stiffeners 60, 65 in the proper vertical position on the curtain 10.

According to the invention, guide extensions extend past either side of the door curtain and engage the vertical guide members to guide the door in a vertical
10 plane. In the present embodiment, the guide extensions are in the form of side frame insert assemblies which are received within the vertical guide members in the form of side frames. The end stiffeners 60, 65 are preferably coupled to these side frame inserts which preferably also
15 include having a breakaway feature. In the present embodiment, end stiffeners 60, 65 are coupled to magnetic breakaway side frame insert assemblies, as disclosed and claimed in U.S. Patent Application Serial Number
08/386,436 which was filed concurrently with the earliest
20 parent of the present international application. The details of that breakaway side frame insert are disclosed in that '436 application, which is incorporated herein by reference. While, in this preferred embodiment, a
25 breakaway or indirect coupling between guide extensions and the resilient member is disclosed, the invention encompasses a non-breakaway or direct coupling as well.

A magnetic breakaway side frame insert according to the filed '436 application will be briefly described. Since the side frame inserts on either side of the door
30 are the same, only one will be described. A side frame insert in the form of a trolley 100 is received within the side frame 20. The trolley is comprised primarily of a flat piece of metal or other rigid material, having trolley wheels 105, 106 secured to the front and back of
35 the trolley, for free rotation therewith. The side frame 20 includes a horizontally extending projection, one of which is shown in a broken line at 110 in FIG. 1. The

trolley wheels engage this projection 110, to guide the trolley in vertical movement within the side frame as the fabric curtain 10 is raised and lowered. This arrangement of trolley wheels and horizontal projection 110 can be seen more clearly in FIG. 2. Returning to FIG. 1, coupled to the plate of the trolley 100 is a first c-shaped bracket 115. A second c-shaped bracket 120 is received within the first c-shaped bracket 115, and they are hinged together by a hinge pin 125.

Attached to the second c-shaped member 120 is a coupling magnet 130. The coupling magnet 130 is received within a cup assembly 140 comprised of plastic or other non-ferrous material. The cup assembly 140 receives a ferrous member 145 in its interior, which extends out the back of the cup and toward the bottom bar of the door curtain to which the magnetic breakaway mechanism is attached. In FIG. 1, the portion of the ferrous member extending out of the back of the cup is shown, and designated by reference number 150. This portion of the magnetic breakaway mechanism 150 is attached to the bottom bar of the roll-up door. With coupling magnet 130 received within magnetic cup assembly 140, and magnet 130 magnetically coupled to the ferrous member 145, the breakaway mechanism is assembled for operation. The side frame inserts just described break away when sufficient force is placed on the door, which overcomes the magnetic force coupling magnet 130 and ferrous member 150. As is described in significantly greater detail in the filed '436 application, this breakaway mechanism has the significant advantage of being omni-directional, and breaking away for a variety of directions and magnitudes of forces that are exerted on the door.

While the breakaway mechanism has been described in some detail, it does not form a part of the present invention directed to a curtain bottom tensioning assembly. Rather, the invention is directed to a curtain bottom tensioning assembly including a resilient member

disposed along the leading edge of the door, and coupled to guide extensions which are horizontally restricted so that, upon coupling of the guide extensions to the resilient member, a tension is placed on the resilient member. In the exemplary guide extension in the form of a breakaway side frame insert, just described, the engagement of the trolley wheels 105, 106 with the horizontal projection 110 in side frame 20 restrict the trolley from horizontal movement in the direction of the arrow 112 of FIG. 2. One skilled in the art will appreciate that other horizontally restricted guide extensions, within the scope of the invention, may be advantageously employed. Such horizontally restricted guide extensions require contact between the extension and the vertical guide member to restrict the horizontal movement of the extension while also providing for smooth movement of the extension along the vertical guide member during travel of the door. In the present embodiment the side frame insert includes an engagement member, which engages the side frame to perform both of these functions. The engagement member in the present embodiment is in the form of the plurality of trolley wheels 105,106. Alternative designs of the insert could also achieve the functions of the engagement member. It should also be noted that the guide extension according to the invention need not include a breakaway function as in the side frame inserts of the filed '436 application. Further, while the presently-described break away mechanism provides for separation of the bottom bar and side frame insert outside of the side frame, the invention is not so limited. Rather, given the resilient nature of the bottom bar or tensioning assembly according to the invention, the resilient member itself could extend into the side frame, with breakaway between the resilient member and a side frame insert occurring inside the side frame.

As mentioned, a horizontally restricted guide extension like that of the present embodiment forms an aspect of the invention only in that it allows a tension to be applied to the strap 50 upon attachment of the soft bottom bar to the respective guide extensions or inserts. This attachment is achieved, according to the present embodiment, by means of end stiffener 60 being coupled to the magnetic breakaway side frame insert by means of bolts 160 which couple, for example, the ferrous member 150 to the end stiffener 60. With end stiffener 60 coupled to the side frame insert, the stiffener 60 and resilient strap 50 (along with the other end stiffener/insert member combination) along with cup assembly 140 comprise the bottom bar across the bottom of curtain 10 which attaches the curtain to the side frame inserts, and also serves to stiffen the bottom edge of the curtain to provide wind retention. According to the invention, strap 50 has an unstretched length before attachment of the cup assembly 140 to horizontally restricted side frame inserts. The strap 50 is then stretched to a length illustratively 2-5% longer than its unstretched length. This loading or stretching of resilient strap 50 upon securement to the horizontally restricted inserts ensures that the strap is taut enough across the bottom of the door to perform the desirable bottom bar functions including wind retention.

At the same time, however, and according to a significant aspect of the invention, the bottom bar according to this embodiment can substantially conform to or deflect around obstacles. That is, upon the soft bottom bar encountering an obstacle, the presence of either the resilient strap 50 or another resilient member instead of a rigid member, as is conventional, allows the soft bottom bar to substantially conform to or deflect around whatever obstacle is encountered. By use of the term "substantially conform to or deflect around" it is intended to convey that the engagement between a soft

bottom bar according to this embodiment and an obstacle can result in the bottom bar taking on several possible configurations. This function is provided for by the fact that the bottom bar is in the form of a resilient member as opposed to a rigid member, as is conventional. The soft bottom bar may "substantially conform" to an obstacle by the profile of the bottom bar taking on the profile of the obstacle. Of course, depending on the height of the obstacle above the floor, such "conforming" of the bottom bar may only take place over a portion of the obstacle. However, if the object is close enough to the floor, the bottom bar may be entirely conformed about the outer upper surfaces of the obstruction. In such a situation, the soft bottom bar is designed to allow, for example, the obstruction to be pulled out from underneath the door, with the bottom bar conformed around it in this configuration. This ability to remove the obstruction without a need for stopping and reversing the direction of the door is advantageous. Further, the resiliency of the bottom bar prevents the obstacle from being crushed by continued downward travel of the door to the floor, as might be the case with a conventional, rigid, bottom bar. In other situations, the soft bottom bar according to this embodiment may "deflect" about the obstruction. For example, if the obstruction only minimally projects into the plane of the door, the descending bottom bar may engage a surface of the obstacle, and then, by virtue of the resilient nature of the bottom bar, deflect about the obstacle such that the bottom bar and door may continue downward, albeit in a slightly different plane than that in which the door was traveling prior to encountering the obstruction. Whether the door conforms to or deflects about the article will depend on which of these represents the path of least resistance to the continued travel of the door. The provision of both "conforming" and "deflecting" of the soft bottom bar according to this embodiment significantly enhances the safety of this

bottom bar as compared to rigid, non-deflecting and non-deforming bottom bars. Further, the need for a sensing means for immediately stopping or reversing the door upon contact with an obstruction may be eliminated. When the
5 soft bottom bar is advantageously used with the omnidirectional breakaway side frame insert according to filed U.S. Patent Application Serial No. 08/386,436 which was filed concurrently with the earliest parent of the present international application, breakaway of the soft
10 bottom bar may occur as the bottom bar conforms to the obstructing object.

To provide adjustability to the tension in the soft bottom bar, an adjustable tightening member 170 is included in this preferred embodiment. Such
15 adjustability may be desirable, for example, when increased wind retention is necessitated by changing environmental or atmospheric conditions. In the present embodiment, tightening member 170 is in the form of a buckle which receives ends of two sections of the
20 resilient strap 50, and is adjustable and securable along the lengths thereof. According to an alternative embodiment, the resilient strap 50 may be a single strap extending through both slots 61, 66 with the two ends attached to or engaged with tightening member 170. The
25 presence of an adjustable tightening member allows the tension of the resilient belt 50 or other resilient member to be adjusted as may be desirable for a given environment. With the respective ends of the adjustable soft bottom bar coupled to horizontally restrained side
30 frame inserts, the tension on the resilient strap 50 can be increased without the risk of pulling the side frame inserts inwardly so that they no longer engage the side frame. Further, if the adjustable soft bottom bar according to the invention is used with a magnetic
35 breakaway side frame insert as described in concurrently filed U.S. Patent Application Serial No. 08/386,436 which was filed concurrently with the earliest parent of the

present international application, the magnetic coupling may be advantageously adjusted in order to allow the desired tension to be placed on the resilient strap 50. With stronger magnetic coupling between the coupling magnet 130 and ferrous member 150, increased tension may be placed on the resilient strap 50. As previously noted, under typical circumstances it is assumed that resilient strap 50, or whatever resilient member is used, will only be stretched in the range of 2-5 percent of its length when it is coupled to whatever side frame insert is used in combination with the soft bottom bar. The presence of the tightening member 170 allows adjustment of this stretch amount as may be desired.

The soft bottom bar according to this preferred embodiment of the invention also advantageously includes a ballast tube 200. According to a preferred embodiment, the ballast tube 200 is in the form of a resilient hose-type material filled with a compressible material such as sand, ground garnet, gel, silica, etc. which will allow the ballast tube to substantially conform to or deflect when the ballast tube contacts either the floor beneath the door opening, or an obstacle. With the hose material filled with sand, or one of the other listed compressible materials, the ballast tube 200 takes on a generally circular cross section, seen most clearly in the end view of FIG. 3. According to the preferred embodiment, ballast tube 200 is received within a loop 210 formed by the bottom of the curtain being doubled back upon itself although the ballast tube could be located at other positions of the door, including above resilient strap 50. The leading edge of the curtain and a portion of the curtain above the ballast tube 200 may advantageously be provided with complementary strips of Velcro® type fasteners. Of course, other means for forming the loop 210 in the bottom of the curtain may also be used. Ballast tube 200 is advantageous in that it provides weight on the bottom of the door. This is particularly

advantageous if the soft bottom bar according to the invention is used in a gravity-fall door. In that situation, the weight of the ballast tube keeps the curtain taut in the vertical direction. At the same
5 time, the ballast tube 200 filled with granular material is soft and pliable. Thus, the ballast tube 200 would also substantially conform to or deflect around any encountered obstacles like the soft bottom bar 20 according to the invention. Moreover, the deformable
10 ballast tube 200, when engaging the floor beneath the door in the closed position, provides an excellent seal preventing the escape or entrance of air beneath the bottom of the door.

To protect the leading edge of the curtain, the soft
15 bottom bar 40, and the ballast tube 200 from undue wear, a loop seal 230 is preferably provided. According to the present embodiment, the loop seal is simply a piece of fabric, which is the same fabric of which curtain 20 is comprised although other materials could be used. As is
20 seen most clearly from the side view of FIG. 3, the two ends of the loop seal are secured to the curtain at 240. Preferably, each end of the loop seal 230 is provided with Velcro®, and a strip of Velcro® is provided on both sides of the door as at 240 in FIG. 1. Loop seal 230
25 surrounds and protects the various components held within it.

As mentioned above, the soft bottom bar and horizontally restricted side frame inserts just described are only a representative embodiment of the curtain
30 bottom tensioning assembly according to the invention. In alternative embodiments, discrete components forming a "soft bottom bar" along the leading edge of the door are not required. All that is required according to the invention, is a resilient member disposed at the leading
35 edge of the door, and directly or indirectly coupled to horizontally restricted guide extensions which extend past the sides of the door, and engage vertical guide

members to guide the door in a vertical plane, and to restrict the guide extensions from moving horizontally toward the door curtain. In the case of the "soft bottom bar" just described, the resilient member was the strap

5 50. According to an alternative embodiment, however, the resilient member may be leading edge of the curtain itself. This would require the curtain to be formed of a material having sufficient tensile strength and resiliency to perform the advantageous function of

10 substantially conforming to or deflecting about encountered obstacles while under tension. One example of a suitable curtain material which would meet this criteria is manufactured by Seaman, and has part number 3150 (MFRLTA) and another is made by the same

15 manufacturer and bears part number 8138XR-40. In such an embodiment, this resilient curtain fabric is stretched and the curtain ends are secured to the horizontally restricted guide extensions to form a curtain bottom tensioning assembly according to the invention. The

20 tension applied to the leading edge of the curtain could be adjusted, for example, by changing the relative position of the point where the guide extensions are attached to the curtain.

Any of the various embodiments of the invention, which can be envisioned by one skilled in the art, share the common feature of tension being applied in the area of the leading edge of the curtain by means of a resilient member coupled to horizontally restricted guide extensions. Such curtain bottom tensioning assemblies

30 are designed to substantially conform to or deflect around encountered obstacles, while still giving the curtain advantageous functional features typically associated with a rigid bottom bar, including wind retention. Since a curtain bottom tensioning assembly

35 according to the invention substantially conforms to or deflects around any obstructions which it may encounter, the need for sensors to sense such obstructions, and

signal the need for stopping or reversal of the door, is eliminated. Other advantages of the invention will be apparent to those skilled in the art.

WHAT IS CLAIMED IS:

1. A curtain bottom tensioning assembly disposed along the leading edge of a door curtain for selectively blocking and unblocking a doorway, vertical guide members
5 being disposed on either side of the doorway, the curtain bottom tensioning assembly comprising, in combination:

a resilient member extending horizontally across the leading edge of the door;

guide extensions coupled to either end of the
10 resilient member, the guide extensions extending laterally beyond the leading edge of the door and engaging the vertical guide members to guide the door in a vertical plane, the guide extensions also engaging the vertical guide members to restrict each guide extension
15 from moving horizontally toward the curtain;

the guide extensions being coupled to the resilient member to place a tension on the resilient member;

whereby the tensioned resilient member acts as a wind retention bottom bar that can substantially conform
20 to or deflect about encountered obstacles.

2. The curtain bottom tensioning assembly of claim 1, wherein the resilient member is a strap of webbed belting material.

25

3. The curtain bottom tensioning assembly of claim 2, wherein the resilient strap is coupled to a tightening member to provide adjustment of the tension on the resilient strap.

30

4. The curtain bottom tensioning assembly of claim 2, wherein the resilient strap is coupled at either end to a horizontally disposed end stiffener, each end stiffener being coupled to a guide extension.

35

5. The curtain bottom tensioning assembly of claim 2, wherein the resilient strap received within a flap of material fixed to the door to form a pocket.

5 6. The curtain bottom tensioning assembly of claim 2, wherein a ballast tube is disposed on the door beneath the resilient member.

10 7. The curtain bottom tensioning assembly of claim 6, wherein the ballast tube is a collapsible tube filled with a compressible material.

15 8. The curtain bottom tensioning assembly of claim 6, wherein the ballast tube is received with in a pocket formed by looping the leading edge of the door upon itself.

20 9. The curtain bottom tensioning assembly of claim 6, wherein a loop seal comprising a length of fabric is fixed to the door to enclose the resilient member and ballast tube.

25 10. The curtain bottom tensioning assembly of claim 1, wherein the guide extensions are indirectly coupled to the resilient member and include a breakaway mechanism to provide separation of the resilient member and the guide extensions upon application of a force to the door above a predetermined magnitude.

30 11. The curtain bottom tensioning assembly of claim 1, wherein the guide extensions are directly coupled to the resilient member.

35 12. The curtain bottom tensioning assembly of claim 1, wherein the resilient member is the leading edge of the curtain.

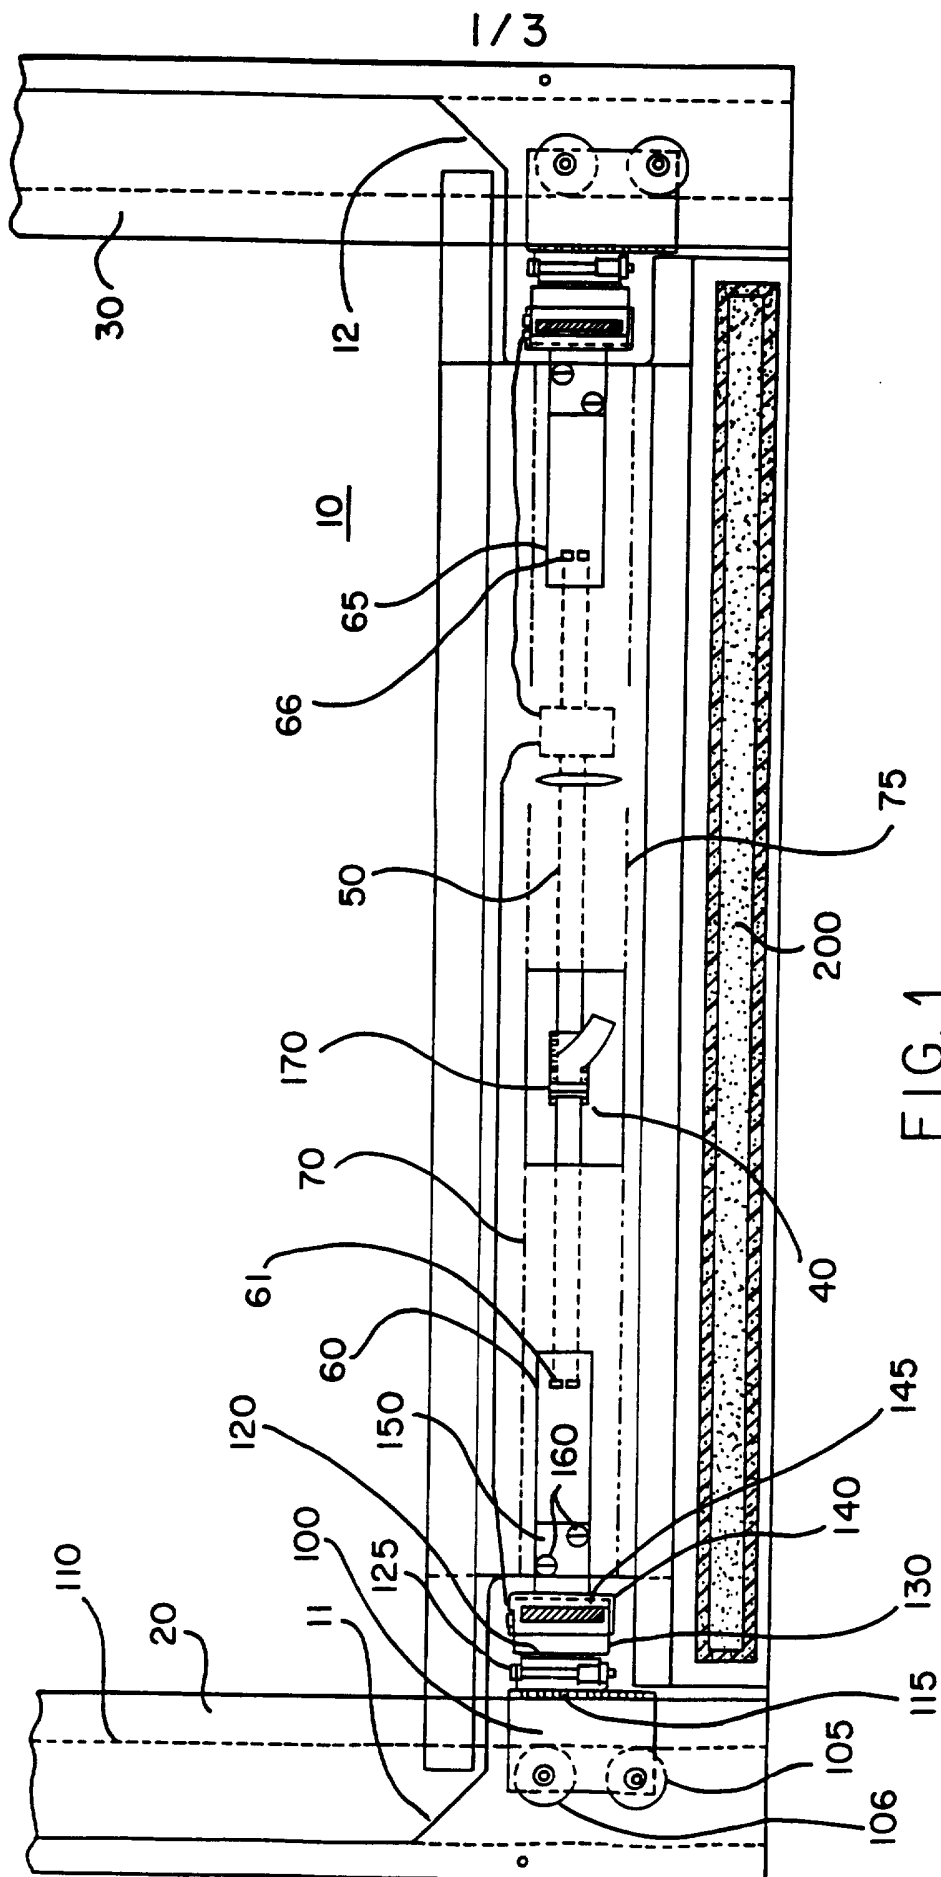


FIG. 1

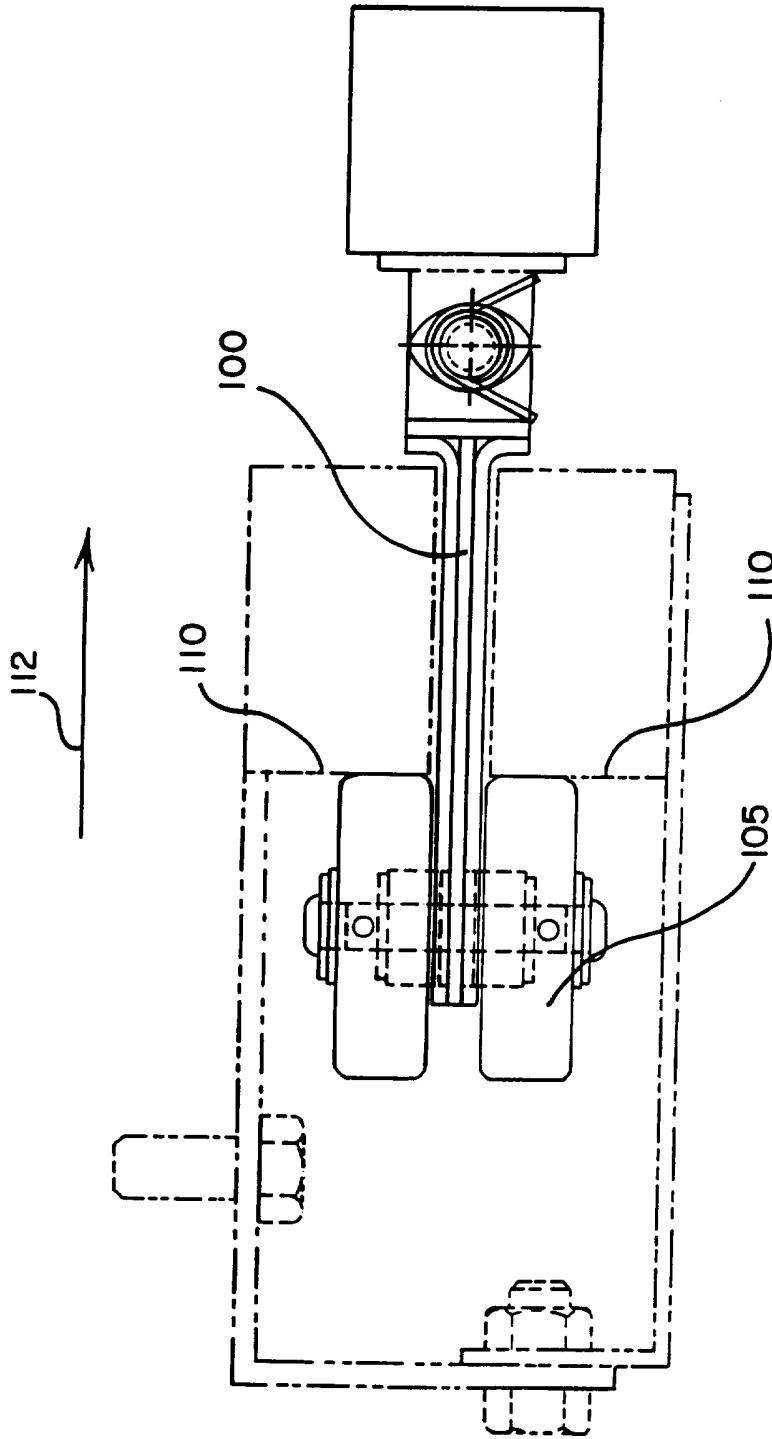


FIG. 2

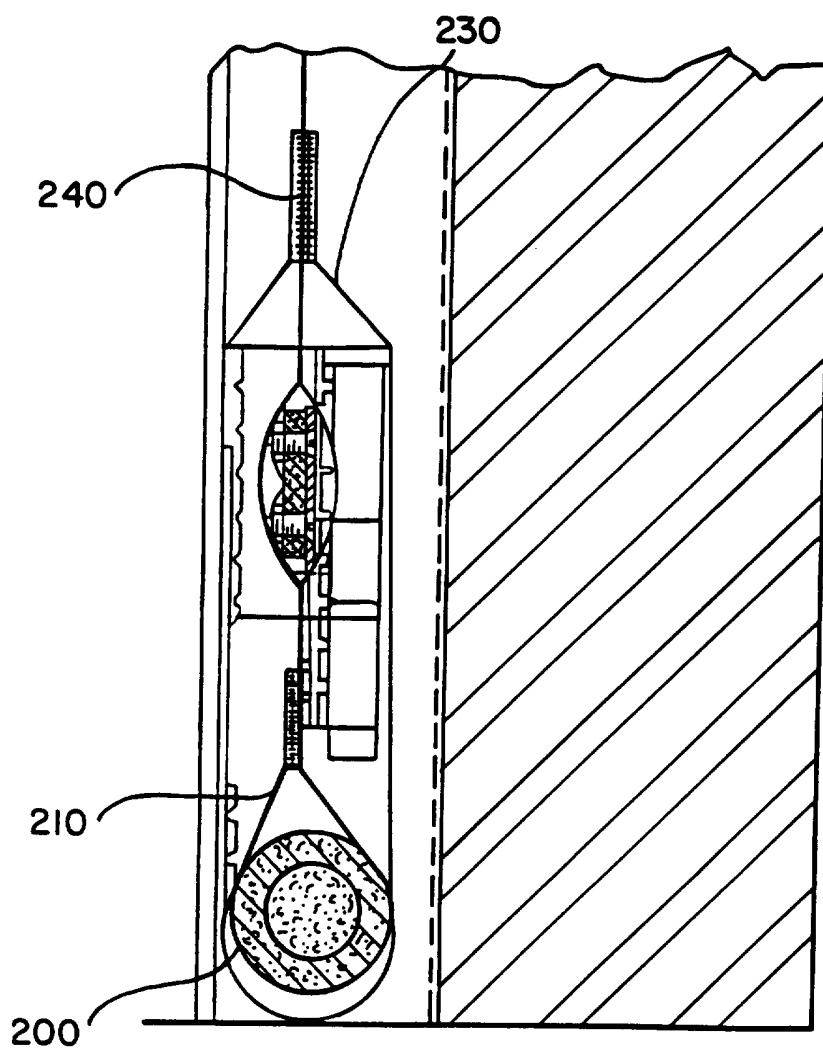


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/01794

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :E06B 9/17

US CL :160/266,271,268.1,273.1,265,270,272,264,322

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 160/266,271,268.1,273.1,265,270,272,264,322

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 1,033,224 (Andlauer) 23 July 1912 (see entire document)	1-12
A	US, A, 4,478,268 (Palmer) 23 October 1984 (see entire document)	1-12
X	US, A, 4,601,320 (Taylor) 22 July 1986 (see entire document)	1,11,12
A	US, A, 5,056,579 (Krafutler) 15 October 1991 (see entire document)	1-12
A	US, A, 5,025,847 (Mueller) 25 June 1991 (see entire document)	1-12
A	US, A, 5,139,074 (Warner) 18 August 1992 (see entire document)	1-12

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*&* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

14 May 1996

Date of mailing of the international search report

24 MAY 1996

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

BLAIR M. JOHNSON

Telephone No. (703) 308-0526

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/01794

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5,141,044 (Hying et al) 25 August 1992 (see entire document)	1-12
A	US, A, 5,222,541 (Hornberger) 29 June 1993 (see entire document)	1-12