



US 20080160993A1

(19) **United States**

(12) **Patent Application Publication**

Levin et al.

(10) **Pub. No.: US 2008/0160993 A1**

(43) **Pub. Date:**

**Jul. 3, 2008**

(54) **COMMUNICATIONS SYSTEMS AND METHODS INCLUDING EMISSION DETECTION**

**Publication Classification**

(51) **Int. Cl.**  
*H04Q 7/20* (2006.01)  
(52) **U.S. Cl.** ..... **455/427**

(75) **Inventors:** **Lon C. Levin**, Washington, DC (US); **Peter D. Karabinis**, Cary, NC (US)

(57) **ABSTRACT**

A system for communications on an extraterrestrial body may include a space-based component and an ancillary extraterrestrial component on the extraterrestrial body. The space-based component may be configured to provide wireless communications with a plurality of radioterminals located on the extraterrestrial body over a satellite frequency band wherein the space-based component includes at least one satellite orbiting the extraterrestrial body. The ancillary extraterrestrial component may be configured to provide wireless communications with the plurality of radioterminals located on the extraterrestrial body. Moreover, the ancillary extraterrestrial component may reuse at least one satellite frequency of the satellite frequency band, and the space-based component and the ancillary extraterrestrial component may be configured to relay communications therebetween. Related methods are also discussed.

Correspondence Address:  
**MYERS BIGEL SIBLEY & SAJOVEC, P.A.**  
**P.O. BOX 37428**  
**RALEIGH, NC 27627**


(73) **Assignee:** **Mobile Satellite Ventures, LP**

(21) **Appl. No.:** **12/048,882**

(22) **Filed:** **Mar. 14, 2008**

**Related U.S. Application Data**

(63) Continuation of application No. 10/827,961, filed on Apr. 20, 2004.

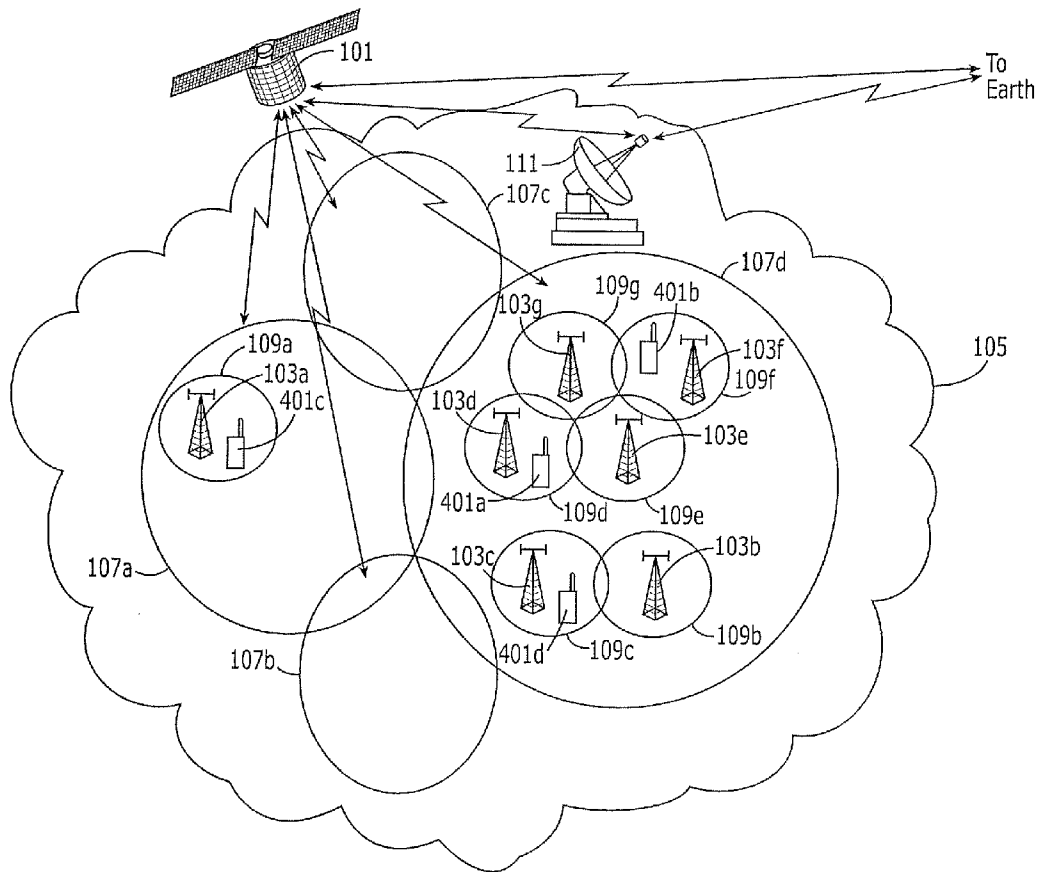



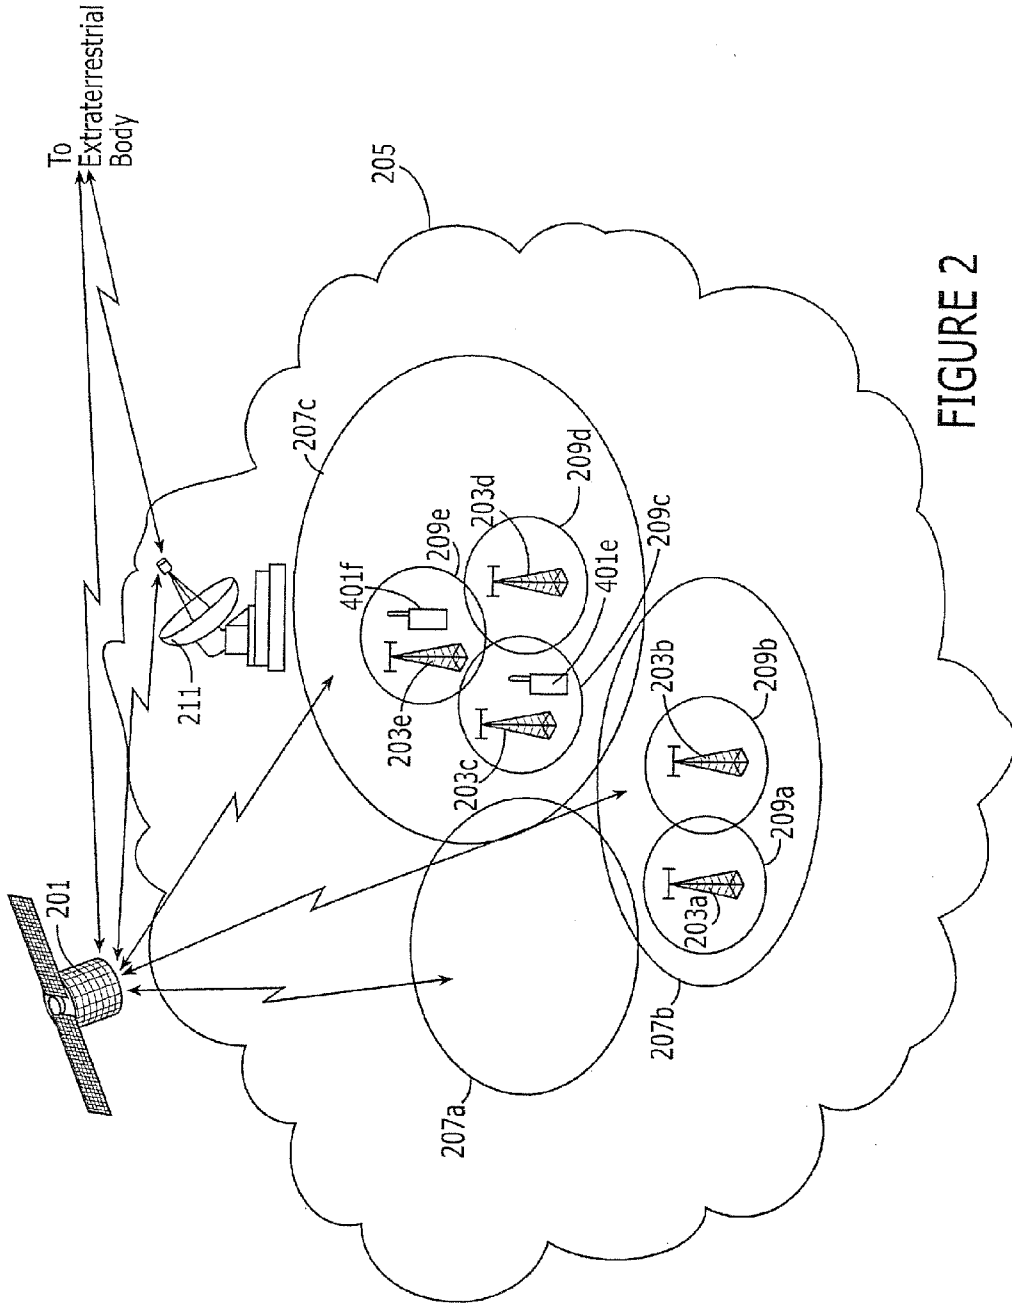


FIGURE 2

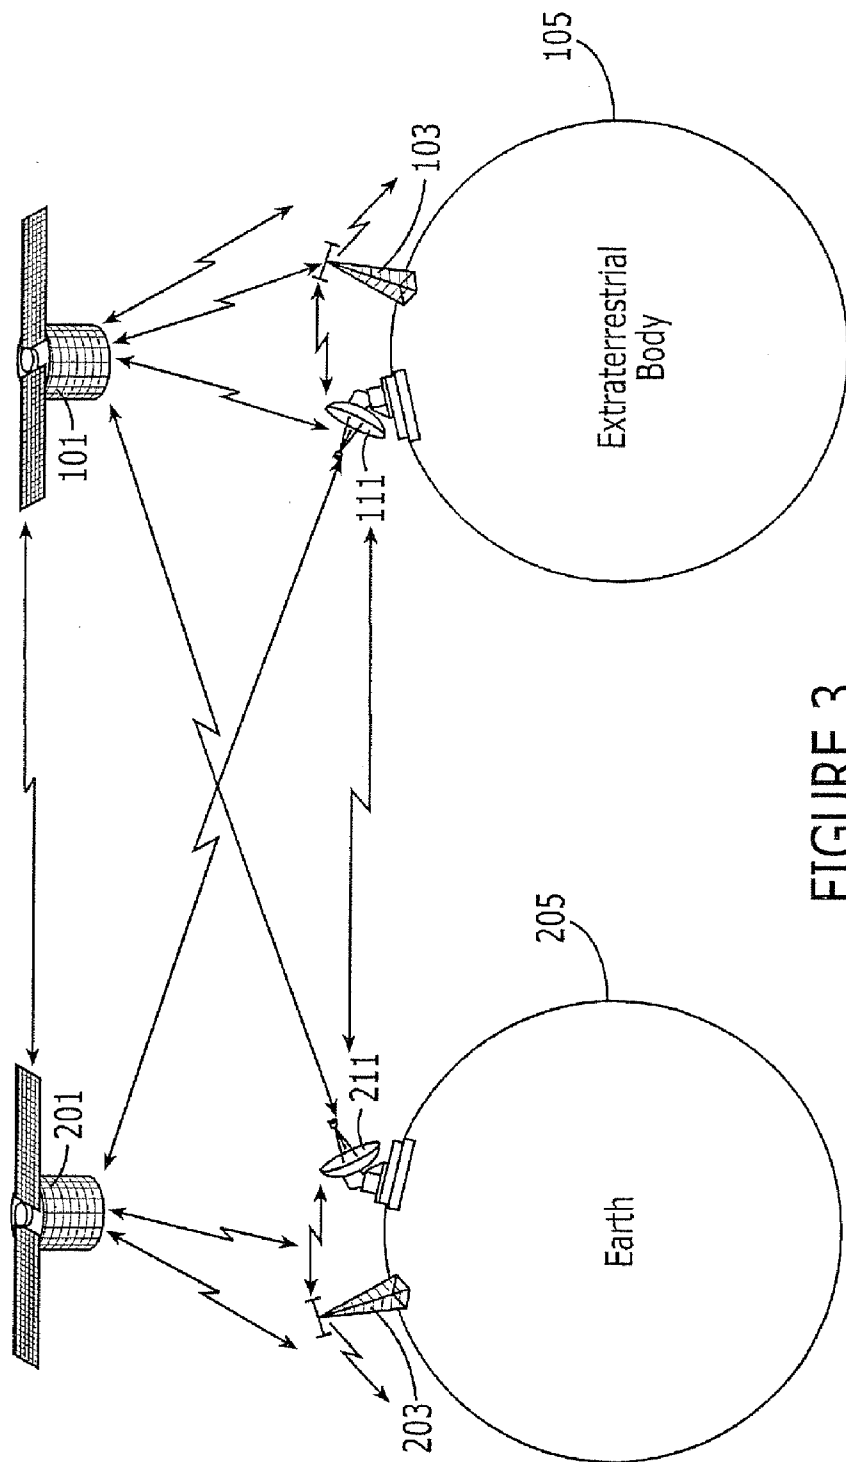


FIGURE 3

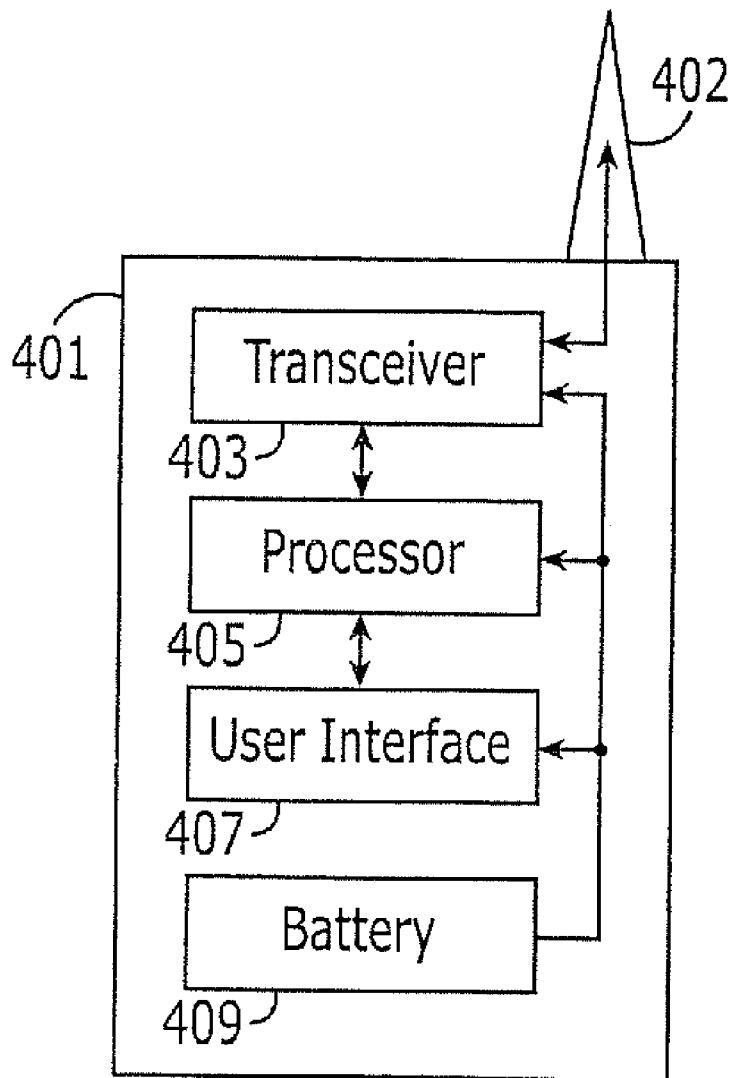


FIGURE 4

**COMMUNICATIONS SYSTEMS AND METHODS INCLUDING EMISSION DETECTION**

**Related Application**

[0001] The present application claims the benefit of priority as a continuation of U.S. application Ser. No. 10/827,961 filed Apr. 20, 2004, the disclosure of which is hereby incorporated herein in its entirety by reference.

**FIELD OF THE INVENTION**

[0002] This invention relates to communications systems and methods, and more particularly to extraterrestrial communications systems and methods.

**BACKGROUND OF THE INVENTION**

[0003] Interplanetary communications are provided for various spacecraft being sent, for example to Mars. Communications for the Mars Exploration Rover Mission are discussed, for example, in the following Web publications by the NASA Jet Propulsion Laboratory at the California Institute of Technology: (1) "Mars Exploration Rover Mission, Spacecraft: Surface Operations. Rover, The rover's antennas," marsrovers.jpl.nasa.gov/mission/spacecraft\_rover\_antennas.html; and (2) "Mars Exploration Rover Mission: Communications With Earth: How the rovers can communicate through Mars-orbiting spacecraft," marsrovers.jpl.nasa.gov/mission/comm\_orbiters.html. The disclosures of both of these publications are hereby incorporated herein in their entirety by reference.

[0004] In the on-going Mars Rover mission, a rover on the surface of Mars can communicate either directly with Earth or through a Mars-orbiting spacecraft. More particularly, a rover on the surface of Mars can transmit communications directly to one or more Deep Space Network antennas on Earth. A rover on Mars can also uplink information to a spacecraft orbiting Mars, and the information can then be passed from the spacecraft orbiting Mars to Earth. The spacecraft orbiting Mars can also send information to the rover on Mars.

[0005] Potential benefits of using an orbiting spacecraft may include: (1) that the orbiting spacecraft is closer to the rover than the Deep Space Network antennas on Earth; and (2) that the spacecraft orbiting Mars has the Earth in view for a longer and/or a more frequently occurring time period than the rover on the surface of Mars. Moreover, the rover may not have to use as much energy to send a communication to a spacecraft orbiting Mars as may be required to send a communication to an antenna on earth.

[0006] Improved communications systems and methods, however, may be desired to accommodate increasing communications to and from extraterrestrial bodies such as the Moon and/or Mars as more missions are sent to extraterrestrial bodies. More particularly, communications systems and methods may be desired that can accommodate increased communications between radioterminals on an extraterrestrial body and increased communications between radioterminals on the extraterrestrial body and a satellite orbiting a celestial body and/or transceivers on earth.

**SUMMARY OF THE INVENTION**

[0007] According to first embodiments of the present invention, a system for communications on an extraterrestrial body may include a space-based component having at least

one satellite orbiting the extraterrestrial body and an ancillary extraterrestrial component on the extraterrestrial body. The space-based component may be configured to provide wireless communications with a plurality of radioterminals located on the extraterrestrial body over a satellite frequency band. The ancillary extraterrestrial component may be configured to provide wireless communications with the plurality of radioterminals located on the extraterrestrial body. Moreover, the ancillary extraterrestrial component may reuse at least one satellite frequency of the satellite frequency band, and the space-based component and the ancillary extraterrestrial component may be configured to relay communications therebetween.

[0008] The space-based component may be configured to relay communications between first and second radioterminals on the extraterrestrial body using at least one satellite frequency of the satellite frequency band. The ancillary extraterrestrial component may be configured to relay communications between first and second radioterminals on the extraterrestrial body reusing the at least one satellite frequency of the satellite frequency band. In addition, the ancillary extraterrestrial component and the space-based component may be configured to relay communications between first and second terminals on the extraterrestrial body such that communications between the first and second radioterminals are relayed through both the ancillary extraterrestrial component and the space-based component. At least one of the radioterminals may be configured to provide full duplex voice communications and/or digital data communications.

[0009] The ancillary extraterrestrial component may be one of a plurality of ancillary extraterrestrial components on the extraterrestrial body with each ancillary extraterrestrial component defining a respective coverage area on the extraterrestrial body. More particularly, the ancillary extraterrestrial components may reuse one or more of frequencies of the satellite frequency band. The one or more frequencies may be shared among the plurality of ancillary extraterrestrial components according to a frequency reuse pattern to reduce interference between the ancillary extraterrestrial components.

[0010] The systems may also include a second space-based component that is configured to provide wireless communications with a plurality of radioterminals located on earth over a second satellite frequency band. Moreover, the second space-based component may include at least one satellite orbiting the earth, and the first space-based component, the second space-based component, and the ancillary extraterrestrial component may be configured to relay communications therebetween. In addition, an ancillary terrestrial component on earth may be configured to provide wireless communications with the plurality of radioterminals located on earth, and the ancillary terrestrial component may reuse at least one satellite frequency of the second satellite frequency band, and the second space-based component and the ancillary terrestrial component may be configured to relay communications therebetween. Moreover, the first satellite frequency band and the second satellite frequency band may be substantially the same satellite frequency band.

[0011] The ancillary extraterrestrial component on the extraterrestrial body and the ancillary terrestrial component on earth may also be configured to relay communications between a radioterminal on earth and a radioterminal on the extraterrestrial body. More particularly, communications between the radioterminal on earth and the radioterminal on

the extraterrestrial body may be relayed through both the ancillary extraterrestrial component and ancillary terrestrial component. In addition or in an alternative, communications between the radioterminal on earth and the radioterminal on the extraterrestrial body may be relayed through the first and/or second space-based components. In addition or in another alternative, communications between the radioterminal on earth and the radioterminal on the extraterrestrial body may be relayed through both the first space-based component and the ancillary terrestrial component. In addition or in yet another alternative, communications between the radioterminal on earth and the radioterminal on the extraterrestrial body may be relayed through both the ancillary extraterrestrial component and the second space-based component.

**[0012]** According to second embodiments of the present invention, an extraterrestrial communications system may include a first space-based component having at least one satellite orbiting the extraterrestrial body, an ancillary extraterrestrial component on the extraterrestrial body, a second space-based component having at least one satellite orbiting earth, and an ancillary terrestrial component on earth. The first space-based component may be configured to provide wireless communications with a plurality of radioterminals located on an extraterrestrial body. The ancillary extraterrestrial component on the extraterrestrial body may be configured to provide wireless communications with the plurality of radioterminals located on the extraterrestrial body. Moreover, the first space-based component and the ancillary extraterrestrial component may be configured to relay communications therebetween. The second space-based component may be configured to provide wireless communications with a plurality of radioterminals located on earth. The ancillary terrestrial component on earth may be configured to provide wireless communications with the plurality of radioterminals located on earth, and the second space-based component and the ancillary terrestrial component may be configured to relay communications therebetween. In addition, the first space-based component, the ancillary extraterrestrial component, the second space-based component, and the ancillary terrestrial component may be configured to relay communications between a radioterminal on the extraterrestrial body and a radioterminal on earth. Moreover, communications between the radioterminal on the extraterrestrial body and the radioterminal on earth may be relayed through at least two of the first space-based component, the ancillary extraterrestrial component, the second space-based component, and/or the ancillary terrestrial component.

**[0013]** The first space-based component may be configured to provide wireless communications over a first satellite frequency band, and the ancillary extraterrestrial component may be configured to reuse at least one satellite frequency of the first satellite frequency band. In addition, the second space-based component may be configured to provide wireless communications over a second satellite frequency band and the ancillary terrestrial component may be configured to reuse at least one satellite frequency of the second satellite frequency band. Moreover, the first and second satellite frequency bands may be substantially the same satellite frequency band.

**[0014]** The first space-based component may be configured to relay communications between first and second radioterminals on the extraterrestrial body, and the ancillary extrater-

restrial component may be configured to relay communications between first and second radioterminals on the extraterrestrial body.

**[0015]** In addition, the first space-based component and the ancillary extraterrestrial component may be configured to relay communications between first and second radioterminals on the extraterrestrial body such that communications between the first and second radioterminals are relayed through both the ancillary extraterrestrial component and the first space-based component. The radioterminals located on earth and/or on the extraterrestrial body may be mobile radio terminals configured to provide full duplex voice communications, and/or to provide digital data communications.

**[0016]** The ancillary extraterrestrial component may be one of a plurality of ancillary extraterrestrial components on the extraterrestrial body with each ancillary extraterrestrial component defining a respective coverage area on the extraterrestrial body. More particularly, the first space-based component may be configured to provide wireless communications over a first satellite frequency band, the ancillary extraterrestrial component may be configured to reuse one or more of the satellite frequencies of the first satellite frequency band, and the one or more frequencies may be shared among the plurality of ancillary extraterrestrial components according to a reuse pattern to reduce interference between the extraterrestrial components.

**[0017]** The ancillary extraterrestrial component on the extraterrestrial body and the ancillary terrestrial component on earth may be configured to relay communications between a radioterminal on earth and a radioterminal on the extraterrestrial body. More particularly, communications between the radioterminal on earth and the radioterminal on the extraterrestrial body may be relayed through both the ancillary extraterrestrial component and the ancillary terrestrial component. The first space-based component and the second space-based component may be configured to relay communications between a radioterminal on earth and a radioterminal on the extraterrestrial body. More particularly, communications between the radioterminal on earth and the radioterminal on the extraterrestrial body may be relayed through the first space-based component and/or the second space-based component.

**[0018]** The first space-based component and the ancillary terrestrial component may be configured to relay communications between a radioterminal on earth and a radioterminal on the extraterrestrial body. More particularly, communications between the radioterminal on earth and the radioterminal on the extraterrestrial body may be relayed through both the first space-based component and the ancillary terrestrial component. The ancillary extraterrestrial component and the second space-based component may be configured to relay communications between a radioterminal on earth and a radioterminal on the extraterrestrial body. More particularly, communications between the radioterminal on earth and the radioterminal on the extraterrestrial body may be relayed through both the ancillary extraterrestrial component and the second space-based component.

**[0019]** According to third embodiments of the present invention, a communications system may include a space-based component having at least one satellite orbiting earth and an ancillary terrestrial component on earth. The space-based component may be configured to provide wireless communications with a plurality of radioterminals located on earth over a satellite frequency band. The ancillary terrestrial

component may be configured to provide wireless communications with the plurality of radioterminals located on earth. Moreover, the ancillary terrestrial component may reuse at least one satellite frequency of the satellite frequency band, and the space-based component and the ancillary terrestrial component may be configured to relay communications therebetween. In addition, at least one of the space-based component and/or the ancillary terrestrial component may be configured to relay communications between one of the plurality of radioterminals located on earth and a radioterrestrial located on an extraterrestrial body.

**[0020]** The communications system may also include a second space-based component that is configured to provide wireless communications with a plurality of radioterminals located on the extraterrestrial body over a second satellite frequency band. More particularly, the second space-based component may include at least one satellite orbiting the extraterrestrial body, and the first space-based component, the second space-based component, and the ancillary terrestrial component may be configured to relay communications therebetween. In addition, an ancillary extraterrestrial component on the extraterrestrial body may be configured to provide wireless communications with the plurality of radioterminals located on the extraterrestrial body. Moreover, the ancillary extraterrestrial component may reuse at least one satellite frequency of the second satellite frequency band, and the second space-based component and the ancillary extraterrestrial component may be configured to relay communications therebetween. The first satellite frequency band and the second satellite frequency band may also be substantially the same satellite frequency band.

**[0021]** According to fourth embodiments of the present invention, methods may be provided for operating a communications system including a space-based component having at least one satellite orbiting an extraterrestrial body and an ancillary extraterrestrial component on the extraterrestrial body. Wireless communications may be provided from the space-based component with a plurality of radioterminals located on the extraterrestrial body over a satellite frequency band. Wireless communications may also be provided from the ancillary extraterrestrial component with the plurality of radioterminals located on the extraterrestrial body, and the ancillary extraterrestrial component may reuse at least one satellite frequency of the satellite frequency band. In addition, communications may be relayed between the space-based component and the ancillary extraterrestrial component.

**[0022]** According to fifth embodiments of the present invention, methods may be provided for operating a communications system including a first space-based component having at least one satellite orbiting an extraterrestrial body, an ancillary extraterrestrial component on the extraterrestrial body, a second space-based component having at least one satellite orbiting earth, and an ancillary terrestrial component on earth. Wireless communications may be provided from the first space-based component with a plurality of radioterminals located on the extraterrestrial body, and wireless communications may be provided from the ancillary extraterrestrial component with the plurality of radioterminals located on the extraterrestrial body. Communications may also be relayed between the first space-based component and the ancillary extraterrestrial component. Wireless communications may be provided from the second space-based component with a plurality of radioterminals located on earth, and wireless communications may be provided from the ancillary

terrestrial component with the plurality of radioterminals located on earth. Communications may also be relayed between the second space-based component and the ancillary terrestrial component. Communications may also be relayed between a radioterrestrial on the extraterrestrial body and a radioterrestrial on earth. More particularly, communications between the radioterrestrial on the extraterrestrial body and the radioterrestrial on earth may be relayed through at least two of the first space-based component, the ancillary extraterrestrial component, the second space-based component, and/or the ancillary terrestrial component.

**[0023]** According to sixth embodiments of the present invention, methods may be provided for operating a communications system including a space-based component including at least one satellite orbiting earth, and an ancillary terrestrial component on earth. Wireless communications may be provided from the space-based component with a plurality of radioterminals located on earth over a satellite frequency band, and wireless communications may be provided from the ancillary terrestrial component with the plurality of radioterminals located on earth. More particularly, the ancillary terrestrial component may reuse at least one satellite frequency of the satellite frequency band. Communications may be relayed between the space-based component and the ancillary terrestrial component. In addition, communications may be relayed between one of the plurality of radioterminals located on earth and a radioterrestrial located on an extraterrestrial body using at least one of the space-based component and/or the extraterrestrial component.

BRIEF DESCRIPTION OF THE DRAWINGS

**[0024]** FIG. 1 is a schematic diagram of extraterrestrial communications systems and methods according to embodiments of the invention.

**[0025]** FIG. 2 is a schematic diagram of communications systems and methods on earth according to embodiments of the present invention.

**[0026]** FIG. 3 is a schematic diagram of communications systems and methods on earth and on an extraterrestrial body according to embodiments of the present invention.

**[0027]** FIG. 4 is a block diagram of mobile terminals and methods according to embodiments of the present invention.

DETAILED DESCRIPTION

**[0028]** The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which typical embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

**[0029]** It will be understood that although the terms first and second are used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another element. Thus, a first element below could be termed a second element, and similarly, a second element may be termed a first element without departing from the teachings of the present invention. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.



Moreover, as used herein, “substantially the same” band means that the bands substantially overlap, but that there may be some areas of non-overlap, for example at the band ends. Moreover, “substantially the same” air interface means that the air interfaces are similar but need not be identical. Some changes may be made to the air interface to account for different characteristics for the terrestrial, extraterrestrial, and/or satellite environments.

**[0030]** According to embodiments of the present invention illustrated in FIG. 1, communications systems and methods may be provided for an extraterrestrial body such as the Moon, Mars, or another planet or moon thereof. More particularly, a communications system may comprise a space-based network including at least one space-based component such as a satellite **101** orbiting the extraterrestrial body **105**, and an ancillary extraterrestrial network including one or a plurality of ancillary extraterrestrial components **103a-g** on the extraterrestrial body **105**. While the space-based network is illustrated with a single satellite **101**, the space-based network may include a plurality of satellites and each satellite may provide communications over different coverage areas **107a-d** of the extraterrestrial body **105**. While the ancillary extraterrestrial network is illustrated with a plurality of ancillary components **103a-g**, ancillary extraterrestrial networks according to embodiments of the present invention may operate with only a single ancillary extraterrestrial component. As shown in FIG. 1, only a portion of the extraterrestrial body **105** is illustrated.

**[0031]** More particularly, the space-based network is configured to provide wireless communications with a plurality of radioterminals on the extraterrestrial body using a satellite frequency band. As shown in FIG. 1, the space-based network may define a plurality of non-overlapping, partially overlapping, and/or substantially overlapping satellite coverage areas **107a-d** on the extraterrestrial body **105** using respective spot beams. One or more satellite frequencies of the satellite frequency band may be used to provide communications with each of the coverage areas **107a-d**, and a satellite frequency reuse pattern may be established so that the same satellite frequencies may not be used in adjacent/overlapping ones of coverage areas **107a-d**. While a single satellite **101** is shown in FIG. 1 providing communications in four coverage areas **107a-d**, a space-based network according to embodiments of the present invention may include a plurality of satellites with each satellite providing service for one or a plurality of coverage areas.

**[0032]** Moreover, a satellite **101** or satellites of the space-based network may be relatively stationary (i.e. extraterrestrial-body-stationary) with respect to particular locations on the extraterrestrial body so that one or more coverage areas **107a-d** thereof are relatively stationary with respect to the extraterrestrial body. Accordingly, a single satellite may provide continuous coverage for a relatively stationary coverage area. An orbit for an extraterrestrial-body-stationary satellite, however, may be relatively high. In addition or in an alternative, a satellite or satellites of the space-based network may be provided in a relatively low orbit to reduce transmission delays and/or to reduce a transmission power. With a relatively low orbit satellite, however, a radioterminal on the extraterrestrial body may not have continuous coverage from a single low orbit satellite. For example, a space-based network may include a plurality of relatively low orbit satellites with each satellite providing coverage for a particular location on the extraterrestrial body at a different time.

**[0033]** Accordingly, the space-based network of the communications system is configured to relay communications between first and second radioterminals on the extraterrestrial body **105** using at least one frequency of the satellite frequency band. For example, communications between two radioterminals located in the coverage area **107b** may be relayed through the satellite **101** using a first communications channel between the first radioterminal and the satellite **101** and using a second communications channel between the second radioterminal and the satellite **101**. Because the two radioterminals are in the same coverage area **107b**, the first and second communications channels may be provided on different satellite frequencies of the satellite frequency band in a FDM/FDMA architecture; the first and second communications channels may be provided on the same satellite frequency using different time slots in a TDM/TDMA architecture; and/or the first and second communications channels may be provided on the same satellite frequency using different spread-spectrum codes in a CDM/CDMA (frequency-hopped and/or direct-sequence spread) architecture. Other architectures and/or air interface protocols may also be used. The space-based network of the communications system may also be configured to relay communications between radioterminals located in different coverage areas, such as coverage areas **107b** and **107c**.

**[0034]** Accordingly, the space-based network may provide for communications over relatively large portions of the extraterrestrial landscape. Communications between two radioterminals located in the same or different coverage areas **107a-d** may be relayed through the space-based network. While a space-based network with a single satellite **101** is shown in FIG. 1, multiple satellites may be included in the space-based network. For example, communications may be relayed between a first radioterminal in coverage area **107b** and a second radioterminal in coverage area **107c** through a first satellite providing service for coverage area **107b** and a second satellite providing service for coverage area **107c**. A communications path between two radioterminals may thus pass through two or more satellites.

**[0035]** Each of the ancillary extraterrestrial components **103a-g** of the ancillary extraterrestrial network defines a respective coverage area **109a-g**. Each of the ancillary extraterrestrial components **103a-g** may be configured to provide wireless communications with a plurality of radioterminals located on the extraterrestrial body. More particularly, each of the ancillary extraterrestrial components **103a-g** is configured to reuse at least one satellite frequency of the satellite frequency band, and each of the ancillary extraterrestrial components **103a-g** and the space-based component(s) such as satellite **101** are configured to relay communications therebetween. Coverage areas are shown as circles for purposes of illustration. Coverage areas, however, may have other shapes such as hexagonal, octagonal, wedge shaped, triangular, oval, substantially circular, etc.

**[0036]** Moreover, a plurality of adjacent ancillary extraterrestrial components **103d-g** may have overlapping coverage areas **109d-g**, and each of the ancillary extraterrestrial components **103d-g** may reuse one or more satellite frequencies of the satellite frequency band. As discussed above, the space-based component such as satellite **101** may provide wireless communications with the coverage area **107d** using one or more satellite frequencies of the satellite frequency band with different satellite frequencies being used by the space-based component such as satellite **101** to provide wireless commu-

nications over the coverage areas **107b-c**. Accordingly, the ancillary extraterrestrial components **103d-g** may reuse satellite frequencies other than satellite frequencies used by the satellite **101** to provide wireless communications with the coverage area **107d**. Accordingly, interference between the ancillary extraterrestrial components **103d-g** and the space-based network can be reduced.

**[0037]** In addition, a plurality of satellite frequencies may be shared among the ancillary extraterrestrial components **103d-g** according to a frequency reuse pattern to reduce interference between adjacent ancillary extraterrestrial components **103d-g**. Reuse of satellite frequencies among the adjacent ancillary extraterrestrial components **103d-g** may be provided, for example, such that adjacent ancillary extraterrestrial components do not reuse the same frequencies at the same time. For example, ancillary extraterrestrial components **103e-g** have overlapping coverage areas **109e-g** so that the same satellite frequencies may not be reused at the same time by any of the ancillary extraterrestrial components **103e-g** in a FDM/FDMA and/or TDM/TDMA architecture and/or air interface protocol. However, for certain architectures and/or air interface protocols, such as a CDM/CDMA architecture and/or air interface protocol, the ancillary extraterrestrial components **103e-g** may reuse at the same time the same satellite band frequency or frequencies. Ancillary extraterrestrial components **103d** and **103f** have non-overlapping coverage areas **109d** and **109f**, and the same satellite frequencies may thus be reused by ancillary extraterrestrial components **103d** and **103f** at the same time. Moreover, satellite frequencies used by ancillary extraterrestrial components **103d-g** may be used at the same time by a space-based component such as satellite **101** for communications with coverage areas **107a**, **107b**, and/or **107c**.

**[0038]** Similarly, ancillary extraterrestrial components **103b-c** may define overlapping coverage areas **109b-c**, and ancillary extraterrestrial components **103b-c** may use different satellite frequencies to reduced interference therebetween. Moreover, satellite frequencies used by ancillary extraterrestrial components **103b-c** may be different than satellite frequencies used by the space-based component for communications in the coverage area **107d**. Satellite frequencies used by the ancillary extraterrestrial components **103b-c**, however, may be reused by a space-based component such as satellite **101** for communications in coverage areas **107a**, **107b**, and/or **107c**. In addition, ancillary extraterrestrial component **103a** may define coverage area **109a**, and ancillary extraterrestrial communication component **103a** may use satellite frequencies different than those used by a space-based component such as satellite **101** for communications in the coverage area **107a**. Satellite frequencies used by the ancillary extraterrestrial component **103a**, however, may be reused by the space-based component for communications in coverage areas **107b**, **107c**, and/or **107d**.

**[0039]** A single ancillary extraterrestrial component (such as **103g**), for example, may relay communications between two radioterminals located in the respective coverage area (such as **109g**). Moreover, ancillary extraterrestrial components **103d-g** may be networked such that communications between a first radioterminal in coverage area **109d** and a second radioterminal in coverage area **109f** are relayed through respective ancillary extraterrestrial components **103d** and **103f**. Links between ancillary extraterrestrial components **103d-g** may be provided, for example, by wire link, by optic fiber link, by radio link, and/or by satellite link.

Moreover, service for a radioterminal may be switched during communications from one ancillary extraterrestrial component to another as the radioterminal moves from the coverage area of one ancillary extraterrestrial component to another. Switching, for example, may be controlled from a switching office, the functionality of which may be distributed among different ancillary extraterrestrial components, provided at one of the ancillary extraterrestrial components, provided separate from any of the ancillary extraterrestrial components, and/or provided at one or more space-based components of the space-based network.

**[0040]** Similarly, ancillary extraterrestrial components **103a-c** may provide wireless communications for radioterminals located in coverage areas **109a-c**. For example, ancillary extraterrestrial component **103a** may relay communications between two radioterminals located in coverage area **109a**, ancillary extraterrestrial component **103b** may relay communications between two radioterminals located in coverage area **109b**, and ancillary extraterrestrial component **103c** may relay communications between two radioterminals located in coverage area **109c**. Moreover, links between all of the ancillary extraterrestrial components **103a-g** may be provided, for example, by wire link, by optic fiber link, by radio link, and/or by satellite link. Communications between a radioterminal in coverage area **109a** and a radioterminal in coverage area **109c**, for example, may be relayed through ancillary extraterrestrial components **103a** and **103c**.

**[0041]** Coverage for a radioterminal on the extraterrestrial body may thus be provided by either the space-based network (including one or more space based components such as satellite **101**) or the ancillary extraterrestrial network (including one or more ancillary extraterrestrial components **103a-g**). More particularly, one or more ancillary extraterrestrial components may be provided at locations on the extraterrestrial body where a relatively high volume of radioterminal usage is expected, and coverage from the space-based network may be provided over larger areas to cover areas not covered by the ancillary extraterrestrial components **103a-g**.

**[0042]** A space-based component such as satellite **101** may thus provide communications for radioterminals located in relatively large coverage areas **107a-d** while the ancillary extraterrestrial components **103a-g** may provide communications for radioterminals located in relatively small coverage areas **109a-g**. Moreover, the satellite(s) **101** of the space-based network and the ancillary extraterrestrial components **103a-g** of the ancillary extraterrestrial network may be networked so that communications can be relayed therebetween.

**[0043]** When a radioterminal is in a coverage area of an ancillary extraterrestrial component, the radioterminal may elect to establish a link with the available ancillary extraterrestrial component instead of the space-based component to conserve power, to reduce propagation delays, and/or to enhance system efficiency and/or capacity. Because the ancillary extraterrestrial component is on the extraterrestrial body and may cover a relatively limited area thereof, the radioterminal can transmit to the ancillary extraterrestrial component at a lower power than may be required to transmit to the space-based component. Moreover, a propagation delay in communications may be reduced if all of the links in a communication can be maintained within one or more ancillary extraterrestrial components. When a radioterminal is outside a coverage area of the ancillary extraterrestrial components, a link may be established with a space-based component such as satellite **101**. In addition, use of relatively small coverage

areas in the ancillary extraterrestrial network may allow a relatively high degree of frequency reuse and a greater density of radioterminal usage.

**[0044]** A first radioterminal **401a**, for example, may initially be located in coverage area **109d** when a communication is first established with a second radioterminal **401b** located in coverage area **109f**. Accordingly, communications may be initially relayed between the radioterminals through ancillary extraterrestrial components **103d** and **103f**. If the first radioterminal moves to coverage area **109g**, coverage of the first radioterminal may be handed off from the ancillary extraterrestrial component **103d** to ancillary extraterrestrial component **103g** so that communications are relayed between the radioterminals through ancillary extraterrestrial components **103g** and **103f**. If the first radioterminal then moves outside any of the coverage areas **103d-g**, coverage of the first radioterminal may be handed off to a portion of the space-based network such as satellite **101** providing coverage for coverage area **107d**. Accordingly, communications may be relayed between the radioterminals through the satellite **101** and the ancillary extraterrestrial component **103f**. A communication such as a radiotelephone conversation may thus be maintained as one or both radioterminals move between coverage areas **103a-g** and/or coverage areas **107a-d**.

**[0045]** According to another example, a first radioterminal **401c** may be located in coverage area **109a**, and a second radioterminal **401d** may be located in coverage area **109c**, and a link between ancillary extraterrestrial components **103a** and **103c** may be provided via satellite **101**. Communications may thus be relayed between the first and second radioterminals **401c-d** through the ancillary extraterrestrial component **103a**, the satellite **101**, and the ancillary component **103c**. While a propagation delay may be introduced through the satellite link, the use of the ancillary extraterrestrial components **103a** and **103c** may reduce a transmission power required from the radioterminals to thereby extend battery life thereof. Stated in other words, even though the communications are transmitted through the satellite, the introduction of an ancillary extraterrestrial component into the communications link may reduce power consumption (and/or increase battery life) at the radioterminal(s). If the first radioterminal **401c** moves outside the coverage area **109a**, communications may be relayed between the first and second radioterminals **401c-d** through the satellite **101** and the ancillary extraterrestrial component **103c**.

**[0046]** According to particular embodiments of the present invention, a radioterminal on the extraterrestrial body may initially seek service from an ancillary extraterrestrial component on the extraterrestrial body so that the radioterminal may transmit at a lower power than may otherwise be required to transmit to a space-based component such as a satellite. Even if a particular communication will require a link through a satellite, an ancillary extraterrestrial component may provide the link to the satellite more efficiently than the radioterminal alone because an ancillary extraterrestrial component may be less constrained in size than a radioterminal, and an ancillary extraterrestrial component may have a greater power capacity. If an ancillary extraterrestrial component is not available, the radioterminal may seek service directly from a space-based component such as satellite **101**.

**[0047]** The ancillary extraterrestrial components **103a-g** may be specially adapted for operation in an extraterrestrial environment. Each ancillary extraterrestrial component may be self-contained, for example, including a power supply

such as one or more of a solar cell, a battery, and/or a fuel cell. Moreover, each ancillary extraterrestrial component may include one (or more) transceiver(s) to provide one (or more) communications link(s) with one or more satellites of the space-based component, one (or more) transceiver(s) to provide one (or more) communications link(s) with one (or more) radioterminal(s), and/or one (or more) transceiver(s) to provide one (or more) communications link(s) with one (or more) other ancillary extraterrestrial component(s). In addition, each ancillary extraterrestrial component may be configured to be deployed from space with little or no manual assembly required once the ancillary extraterrestrial component lands on the extraterrestrial body.

**[0048]** Each ancillary extraterrestrial component may also be configured to automatically scan for the presence of other nearby ancillary extraterrestrial components to create an adaptable ancillary extraterrestrial network. For example, if two ancillary extraterrestrial components land near one another on the extraterrestrial body, one component may detect transmissions of the other and initiate a link therebetween. The link between the two components may then be used to coordinate frequency reuse between the two components, transmission powers of the two components, hand-offs of radioterminals between the two ancillary extraterrestrial components, and/or links with a space-based component (such as a satellite).

**[0049]** Each ancillary extraterrestrial component may also be configured to automatically scan for the presence of a space-based component such as a satellite. For example, the ancillary extraterrestrial component may detect transmissions from a space-based component (such as a satellite) to a coverage area in which the ancillary extraterrestrial component is located and initiate a link therebetween. The link may be used to coordinate frequency reuse, hand-offs of radioterminals between the ancillary extraterrestrial component and the space-based component, and/or links through the satellite to other ancillary extraterrestrial components and/or radioterminals.

**[0050]** Because both the space-based component(s) and the ancillary extraterrestrial component(s) operate using satellite frequencies, a radioterminal according to embodiments of the present invention may communicate through both space-based and ancillary extraterrestrial components using substantially a same transceiver and/or substantially a same communications protocol. A number of components and/or size of the radioterminal can thus be reduced. Moreover, a radioterminal according to embodiments of the present invention may be incorporated into a space suit used to provide life-support on the extraterrestrial body. In other embodiments, the radioterminal may be a hand-held device.

**[0051]** According to additional embodiments of the present invention illustrated in FIG. 1, communications may be relayed between a radioterminal(s) on the extraterrestrial body and communications systems on earth through a space-based component such as satellite **101** and/or through a relay station(s) **111** (also referred to as a gateway) on the extraterrestrial body. For example, a communication may be established between a radioterminal in coverage area **109a** and a radioterminal on earth with links being provided through the ancillary extraterrestrial component **103a**, the satellite **101**, and a communications system on earth (such as will be described with respect to FIG. 2). In another example, a communication may be established with links being provided through the ancillary extraterrestrial component **103a**, the

satellite **101**, the relay station **111**, and a communications system on earth. In yet another example, a communication may be established with links being provided through the ancillary extraterrestrial component **103a**, the relay station **111** (without a link through a satellite orbiting the extraterrestrial body), and a communications system on earth.

**[0052]** In other examples, a radioterminal may be outside any coverage areas provided by ancillary extraterrestrial components. For example, a communication may be established between a radioterminal in coverage area **107b** and a radioterminal on earth with links being provided through the satellite **101** and a communications system on earth. In another example, a communication may be established with links being provided through the satellite **101**, the relay station **111**, and a communications system on earth. Moreover, service for a radioterminal may be handed-off from one ancillary extraterrestrial component to another, from an ancillary extraterrestrial component to a space-based component, and/or from one space-based component coverage area to another during a communication with a radioterminal on earth.

**[0053]** The relay station **111** may be optional with links to earth being provided through a space-based component such as a satellite. Moreover, a space-based network may include a plurality of satellites in orbit around the extraterrestrial body to provide that at least one satellite is always in alignment for communication with earth. In another alternative, links to earth may be provided through one or more of the ancillary extraterrestrial components without requiring a separate relay station. Stated in other words, one or more of the ancillary extraterrestrial components may include functionality of a relay station therein.

**[0054]** If a separate relay station **111** is included, links between the relay station **111** and one or more of the ancillary extraterrestrial components may be provided, for example, by wire link, by optic fiber link, by radio link, and/or by satellite link. Moreover, a plurality of relay stations **111** may be provided around the extraterrestrial body to provide that at least one relay station **111** is always in alignment for communication with earth. For example, three relay stations could be provided at approximately 120 degree intervals around the extraterrestrial body.

**[0055]** According to additional embodiments of the present invention illustrated in FIG. 2, communications systems and methods may be provided for use on earth. As shown in FIG. 2, a second space-based network may include at least one space-based component such as a satellite **201** orbiting earth **205**, and an ancillary terrestrial network including one or a plurality of ancillary terrestrial components **203a-e** on earth **205**. While the second space-based network is illustrated with a single satellite **201**, the space-based network may include a plurality of satellites, and each satellite may provide communications over different coverage areas **207a-c** on earth. While a plurality of ancillary terrestrial components **203a-e** are illustrated, ancillary terrestrial networks according to embodiments of the present invention may operate with only a single ancillary terrestrial component. As shown in FIG. 2, only a portion of earth **205** is illustrated.

**[0056]** Terrestrial communications systems including space-based and ancillary terrestrial components used to provide communications for radioterminals are discussed, for example, in the following U.S. patents and U.S. patent publications. Satellite radioterminal communications systems and methods that may employ terrestrial reuse of satellite frequencies are described, for example, in U.S. Pat. No.

6,684,057 to Karabinis, entitled *Systems and Methods for Terrestrial Reuse of Cellular Satellite Frequency Spectrum*; and Published U.S. patent application Nos. US 2003/0054760 to Karabinis, entitled *Systems and Methods for Terrestrial Reuse of Cellular Satellite Frequency Spectrum*; US 2003/0054761 to Karabinis, entitled *Spatial Guardbands for Terrestrial Reuse of Satellite Frequencies*; US 2003/0054814 to Karabinis et al., entitled *Systems and Methods for Monitoring Terrestrially Reused Satellite Frequencies to Reduce Potential Interference*; US 2003/0073436 to Karabinis et al., entitled *Additional Systems and Methods for Monitoring Terrestrially Reused Satellite Frequencies to Reduce Potential Interference*; US 2003/0054762 to Karabinis, entitled *Multi-Band/Multi-Mode Satellite Radiotelephone Communications Systems and Methods*; US 2003/0153267 to Karabinis, entitled *Wireless Communications Systems and Methods Using Satellite-Linked Remote Terminal Interface Subsystems*; US 2003/0224785 to Karabinis, entitled *Systems and Methods for Reducing Satellite Feeder Link Bandwidth/Carriers in Cellular Satellite Systems*; US 2002/0041575 to Karabinis et al., entitled *Coordinated Satellite-Terrestrial Frequency Reuse*; US 2002/0090942 to Karabinis et al., entitled *Integrated or Autonomous System and Method of Satellite-Terrestrial Frequency Reuse Using Signal Attenuation and/or Blockage, Dynamic Assignment of Frequencies and/or Hysteresis*; US 2003/0068978 to Karabinis et al., entitled *Space-Based Network Architectures for Satellite Radiotelephone Systems*; US 2003/0143949 to Karabinis, entitled *Filters for Combined Radiotelephone/GPS Terminals*; US 2003/0153308 to Karabinis, entitled *Staggered Sectorization for Terrestrial Reuse of Satellite Frequencies*; and US 2003/0054815 to Karabinis, entitled *Methods and Systems for Modifying Satellite Antenna Cell Patterns in Response to Terrestrial Reuse of Satellite Frequencies*. All of the above referenced patents and patent publications are assigned to the assignee of the present invention, and the disclosures of all of these patents and patent publications are hereby incorporated herein by reference in their entirety as if set forth fully herein.

**[0057]** Accordingly, the second space-based network including satellite **201** may provide communications for radioterminals located in coverage areas **207a-c** using a satellite frequency band. According to particular embodiments of the present invention, substantially the same satellite frequency band may be used by both the first space-based network including satellite **101** orbiting the extraterrestrial body and the second space-based network including satellite **201** orbiting earth. Accordingly, a same radioterminal may operate on both earth and the extraterrestrial body without requiring multi-mode operation. For example, substantially the same satellite frequency band used by both the first and second space-based networks may include frequencies in the range of approximately 1626.5 MHz to approximately 1660.5 MHz and/or frequencies in the range of approximately 1525 MHz to approximately 1559 MHz. More particularly, a forward link for transmissions from the space-based networks may be provided by frequencies in the range of approximately 1525 MHz to approximately 1559 MHz, and a return link for transmissions to the space-based networks may be provided by frequencies in the range of approximately 1626.5 MHz to approximately 1660.5 MHz. In an alternative, different satellite frequency bands may be used by a space-based network including one or more satellites orbiting the

extraterrestrial body and by the space-based network including one or more satellites orbiting earth.

**[0058]** More particularly, a satellite frequency reuse pattern may be established so that the same satellite frequencies are not used in adjacent/overlapping ones of the coverage areas **207a-c** at the same time. Accordingly, the space-based network of the communications system is configured to relay communications between first and second radioterminals on earth using at least one frequency of the satellite frequency band. For example, communications between two radioterminals located in the coverage area **207b** may be relayed through satellite **201** using a first communications channel between the first radioterminal and the satellite **201** and using a second communications channel between the second radioterminal and the satellite **201**. Because the two terminals are in the same coverage area, the first and second communications channels may be provided on different satellite frequencies of the satellite frequency band; the first and second communications channels may be provided on the same satellite frequency using different time slots in a TDM/TDMA architecture and/or air interface protocol; and/or the first and second communications channels may be provided on the same satellite frequency using different codes in a CDM/CDMA architecture and/or air interface protocol. The space-based network may also be configured to relay communications between radioterminals located in different coverage areas, such as coverage areas **207a** and **207b**.

**[0059]** Accordingly, the space-based network including satellite **201** may provide for communications over relatively large portions of earth. Communications between two radioterminals located in the same or different coverage areas **207a-c** may be relayed through the space-based component. While a space-based network with a single satellite **201** is shown in FIG. 2, multiple satellites may be included in the space-based network. For example, communications may be relayed between a first radioterminal in coverage area **207b** and a second radioterminal in coverage area **207c** through a first satellite providing service for coverage area **207b** and a second satellite providing service for coverage area **207c**. A communications path between two radioterminals may thus pass through two or more satellites.

**[0060]** Each of the ancillary terrestrial communications components **203a-e** defines a respective coverage area **209a-e**. Each of the ancillary terrestrial communications components **203a-e** is configured to provide wireless communications with a plurality of radioterminals located within a coverage area thereof. More particularly, each of the ancillary terrestrial components **203a-e** is configured to reuse at least one satellite frequency of the satellite frequency band, and each of the ancillary terrestrial components **203a-e** and the space-based component(s) such as satellite **201** may be configured to relay communications therebetween.

**[0061]** Moreover, a plurality of adjacent ancillary terrestrial components **203c-e** may have overlapping coverage areas **209c-e**, and each of the ancillary terrestrial components **203c-e** may reuse one or more satellite frequencies of the satellite frequency band. As discussed above, a space-based component such as satellite **201** may provide wireless communications for radioterminals in the coverage area **207c** using one or more satellite frequencies of the satellite frequency band with different satellite frequencies being used by the space-based component to provide wireless communications over the coverage areas **207a-b**. Accordingly, the ancillary terrestrial components **203c-e** may reuse satellite fre-

quencies other than the satellite frequencies used by the satellite **201** to provide wireless communications for radioterminals in the coverage area **207c**. Accordingly, interference between ancillary terrestrial components **203c-e** and the space-based network can be reduced.

**[0062]** In addition, a plurality of satellite frequencies may be shared among the ancillary terrestrial components **203c-e** according to a frequency reuse pattern to reduce interference between adjacent ancillary terrestrial components **203c-e**. Reuse of satellite frequencies among the adjacent ancillary terrestrial components **203c-e** may be provided, for example, such that adjacent ancillary terrestrial components do not reuse the same frequencies at the same time. Ancillary terrestrial components **203a-b** (and/or additional adjacent ancillary terrestrial components) may also share a plurality of satellite frequencies according to a frequency reuse pattern. Moreover, satellite frequencies used by ancillary terrestrial components **203c-e** may be used at the same time by the satellite **201** for communications with radioterminals in coverage areas **207a-b**. Similarly, satellite frequencies used by ancillary terrestrial components **203a-b** may be used at the same time by the satellite **201** for communications with radioterminals in coverage areas **207a** or **207c**.

**[0063]** Communications for a radioterminal on earth may thus be provided by a space-based component such as satellite **201** within one of the coverage areas **207a-c** and/or by an ancillary terrestrial component **203a-e** within one of the coverage areas **209a-e**. When within a coverage area **209a-e**, a radioterminal may communicate through the respective ancillary terrestrial component **203a-e**. When outside coverage areas **209a-e** of the ancillary terrestrial components **203a-e** or when an ancillary terrestrial component is not available, the radioterminal may communicate through a space-based component(s) (such as satellite **201**) of the space-based network. Moreover, components of the space-based and ancillary terrestrial networks may be coupled with a public switched telephone network on earth. Accordingly, a radioterminal may establish communications through a space-based component and/or an ancillary terrestrial component with another radioterminal on earth. The other radioterminal may be coupled through the space-based network including the satellite **201** and the ancillary terrestrial components **203a-e** or through another wireless network such as a cellular and/or PCS radiotelephone network. In another alternative, a radioterminal may establish communications through a space-based component or an ancillary terrestrial component with a conventional telephone through a public switched telephone network.

**[0064]** A single ancillary terrestrial component (such as **203e**), for example, may relay communications between two radioterminals located in the respective coverage area (such as **209e**). Moreover, ancillary terrestrial components **203c-e** may be networked such that communications between a first radioterminal in coverage area **209c** and a second radioterminal in coverage area **209e** are relayed through respective ancillary terrestrial components **203c** and **203e**. Links between ancillary components **209c-e** may be provided, for example, by wire link, by optic fiber link, by radio link, and/or by satellite link. Moreover, service for a radioterminal may be switched during communications from one ancillary terrestrial component to another as the radioterminal moves from the coverage area of one ancillary terrestrial component to another. Switching, for example, may be controlled from a switching office, the functionality of which may be distrib-

uted among different ancillary terrestrial components, provided at one of the ancillary terrestrial components, provided separate from any of the ancillary terrestrial components, and/or provided at one or more satellites of the space-based component.

**[0065]** Similarly, ancillary terrestrial components **203a-b** may provide wireless communications for radioterminals located in coverage areas **209a-b**. For example, ancillary terrestrial component **203a** may relay communications between two radioterminals located in coverage area **209a**, and ancillary terrestrial component **203b** may relay communications between two radioterminals located in coverage area **209b**. Moreover, links between all of the ancillary terrestrial components **203a-e** may be provided, for example, by wire link, by optic fiber link, by radio link, and/or by satellite link. Communications between a radioterminal in coverage area **209a** and a radioterminal in coverage area **209e**, for example, may be relayed through ancillary terrestrial components **203a** and **203e**.

**[0066]** A space-based component such as satellite **201** may thus provide communications for radioterminals located in relatively large coverage areas **207a-c** while the ancillary terrestrial components **203a-e** may provide communications for radioterminals located in relatively small coverage areas **209a-e**. Moreover, a satellite(s) **201** of the space-based network and ancillary terrestrial components **203a-e** of the ancillary terrestrial network may be networked so that communications can be relayed therebetween.

**[0067]** According to a particular example, a first radioterminal **401e** may initially be located in coverage area **209c** when a communication is first established with a second radioterminal **401f** in coverage area **209e**. Accordingly, communications may be initially relayed between the radioterminals **401e-f** through ancillary terrestrial components **203c** and **203e**. If the first radioterminal **401e** moves to coverage area **209d**, coverage of the first radioterminal **401e** may be handed off from the ancillary terrestrial component **203c** to ancillary terrestrial component **203d** so that communications are relayed between the radioterminals **401e-f** through ancillary terrestrial components **203d** and **203e**. If the first radioterminal **401e** then moves outside of any of coverage areas **203c-e**, coverage of the first radioterminal **401e** may be handed off to a space-based component such as satellite **201** providing coverage for coverage area **207c**. Accordingly, communications may be relayed between two radioterminals **401e-f** through the satellite **201** and/or the ancillary terrestrial component **203e**. A communication such as a radiotelephone communication may thus be maintained as one or both radioterminals move between coverage areas **203a-e** and/or coverage areas **207a-c**.

**[0068]** According to embodiments of the present invention illustrated in FIG. 2, communications may be relayed between a radioterminal(s) on earth and communications systems on an extraterrestrial body (such as illustrated in FIG. 1) through a satellite(s) **201** of the space-based network and/or through a relay station(s) **211** (also referred to as a gateway) on earth. For example, a communication may be established between a radioterminal in coverage area **209a** and a radioterminal on an extraterrestrial body with links being established through the ancillary terrestrial component **203a**, the satellite **201**, the relay station **211**, and a communications network on the extraterrestrial body. In yet another example, a communication may be established with links being provided through the ancillary terrestrial component **203a**, the

relay station **211** (without a link through a satellite orbiting earth), and a communications network on the extraterrestrial body.

**[0069]** In other examples, a radioterminal may be outside any coverage areas provided by ancillary terrestrial components. For example, a communication may be established between a radioterminal in coverage area **207b** and a radioterminal on the extraterrestrial body with links being provided through the satellite **201** and a communications network on the extraterrestrial body. In another example, a communication may be established with links being provided through the satellite **201**, the relay station **211**, and a communications network on the extraterrestrial body. Moreover, service for a radioterminal may be handed-off from one ancillary terrestrial component to another, from an ancillary terrestrial component to a space-based component, and/or from one space-based component coverage area to another during a communication with a radioterminal on the extraterrestrial body.

**[0070]** The relay station **211** may be optional with links to the extraterrestrial body being provided through a satellite of the space-based component. Moreover, the space-based component may include a plurality of satellites in orbit around earth to provide that at least one satellite is always in alignment for communication with the extraterrestrial body. In other alternatives, links to the extraterrestrial body may be provided through one or more of the ancillary terrestrial components without requiring a separate relay station. Stated in other words, one or more of the ancillary terrestrial components may include functionality of a relay station therein.

**[0071]** If a separate relay station **211** is included, links between the relay station **211** and one or more of the ancillary terrestrial components may be provided, for example, by wire link, by optic fiber link, by radio link, and/or by satellite link. Moreover, a plurality of relay stations **211** may be provided around earth to provide that at least one relay station **211** is always in alignment for communication with the extraterrestrial body. For example, three relay stations could be provided at approximately 120 degree intervals around earth.

**[0072]** Communications systems and methods as discussed above with respect to FIGS. 1 and 2 can thus relay communications therebetween to support communications between radioterminals on earth and radioterminals on an extraterrestrial body as shown in FIG. 3. As discussed above, a plurality of ancillary terrestrial components may be included in the communications system on earth, and a plurality of ancillary extraterrestrial components may be included in the communications system on the extraterrestrial body as discussed above with respect to FIGS. 1 and 2. Moreover, a plurality of satellites may be included in the space-based components orbiting earth and/or the extraterrestrial body as discussed above with respect to FIGS. 1 and 2. A single ancillary terrestrial component **203** on earth, a single satellite **201** orbiting earth, a single ancillary extraterrestrial component **103** on the extraterrestrial body, and a single satellite **101** orbiting the extraterrestrial body are shown in FIG. 3 for ease of illustration. It will be understood, however, that all elements discussed above with respect to FIGS. 1 and 2 may be implemented in systems and methods illustrated in FIG. 3.

**[0073]** As discussed above, the satellite **101** orbiting the extraterrestrial body may provide communications for radioterminals in one or more satellite coverage areas on the extraterrestrial body using one or more frequencies of a satellite frequency band. The ancillary extraterrestrial component **103**

provides communications for radioterminals in an ancillary coverage area serviced by the ancillary extraterrestrial component 103 using one or more frequencies of the satellite frequency band. A radioterminal may thus obtain service from the ancillary extraterrestrial component 103 (or another ancillary extraterrestrial component) when within range of the ancillary extraterrestrial component. A radioterminal may obtain service from the satellite 101 when outside a range of any ancillary extraterrestrial components. A radioterminal may also obtain service from the satellite 101 when inside a range of any ancillary extraterrestrial component.

[0074] On the extraterrestrial body, communications between two radioterminals both within a coverage area of the ancillary extraterrestrial component 103 may be relayed between the two radioterminals through the ancillary extraterrestrial component 103 and/or through the satellite 101. Communications between two radioterminals both outside coverage areas of ancillary extraterrestrial components may be relayed between the two radioterminals through the satellite 101. Moreover, communications between a first radioterminal within a coverage area of the ancillary extraterrestrial component 103 and a second radioterminal outside coverage areas of any ancillary extraterrestrial components may be relayed between the two radioterminals through the ancillary extraterrestrial component 103 and the satellite 101 and/or through the satellite 101.

[0075] On earth, communications between two radioterminals both within a coverage area of the ancillary terrestrial component 203 may be relayed between the two radioterminals through the ancillary terrestrial component 203 and/or through the satellite 201. Communications between two radioterminals both outside coverage areas of ancillary terrestrial components may be relayed between the two radioterminals through the satellite 201. Moreover, communications between a first radioterminal within a coverage area of the ancillary terrestrial component 203 and a second radioterminal outside coverage areas of any ancillary terrestrial components may be relayed between the two radioterminals through the ancillary terrestrial component 203 and the satellite 201 and/or through the satellite 201.

[0076] In addition, the communications systems of FIG. 3 may support communications between a first radioterminal on earth and a second radioterminal on the extraterrestrial body. A first radioterminal may be within a coverage area of the ancillary terrestrial component 203 and a second radioterminal may be within a coverage area of the ancillary extraterrestrial component 103 and communications may be relayed therebetween. For example, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the satellite 201, the satellite 101, and the ancillary extraterrestrial component 103. In an alternative, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the relay station 211, the satellite 101, and the ancillary extraterrestrial component 103. In another alternative, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the satellite 201, the relay station 111, and the ancillary extraterrestrial component 103. In yet another alternative, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the relay station 211, the relay station 111, and the ancillary extraterrestrial component 103. In still another alternative, communications between the first

and second radioterminals may be relayed through the ancillary terrestrial component 203, the satellite 201 and/or the relay station 211, the relay station 111, and/or the satellite 101, and the ancillary extraterrestrial component 103.

[0077] The first radioterminal on earth may be within a coverage area of the ancillary terrestrial component 203 and the second radioterminal on the extraterrestrial body may be outside coverage areas of any ancillary extraterrestrial components, and communications may be relayed therebetween. For example, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the satellite 201, and the satellite 101. In an alternative, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the relay station 211, and the satellite 101. In another alternative, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the satellite 201, the relay station 111, and/or the satellite 101. In still another alternative, communications between the first and second radioterminals may be relayed through the ancillary terrestrial component 203, the satellite 201 and/or the relay station 211, the relay station 111, and/or the satellite 101.

[0078] The first radioterminal may be outside a coverage area of any ancillary terrestrial component and the second radioterminal may be within a coverage area of the ancillary extraterrestrial component 103, and communications may be relayed therebetween. For example, communications between the first and second radioterminals may be relayed through the satellite 201, the satellite 101, and/or the ancillary extraterrestrial component 103. In an alternative, communications between the first and second radioterminals may be relayed through the satellite 201, the relay station 211, and/or the satellite 101, and/or the ancillary extraterrestrial component 103. In another alternative, communications between the first and second radioterminals may be relayed through the satellite 201, and/or the relay station 211, and the ancillary extraterrestrial component 103. In yet another alternative, communications between the first and second radioterminals may be relayed through the satellite 201, and/or the relay station 211, the relay station 111, and the ancillary extraterrestrial component 103. In still another alternative, communications between the first and second radioterminals may be relayed through the satellite 201, and/or the relay station 211, the relay station 111, and/or the satellite 101, and the ancillary extraterrestrial component 103.

[0079] A first radioterminal on earth may be outside a coverage area of any ancillary terrestrial components and a second radioterminal on the extraterrestrial body may be outside a coverage area of any ancillary extraterrestrial components, and communications may be relayed therebetween. For example, communications between the first and second radioterminals may be relayed through the satellite 201 and the satellite 101. In an alternative, communications between the first and second radioterminals may be relayed through the satellite 201, and/or the relay station 211, and the satellite 101. In another alternative, communications between the first and second radioterminals may be relayed through the satellite 201, and/or the relay station 211, the relay station 111, and/or the satellite 101. In still another alternative, communications between the first and second radioterminals may be relayed through the satellite 201, the relay station 111, and the satellite 101.



**[0080]** As used herein the term radioterminal includes radiotelephones (such as cellular and/or satellite radiotelephones) with or without a multi-line display; Personal Communications System (PCS) terminals that may combine a radiotelephone with data processing, facsimile, and/or data communications capabilities; Personal Digital Assistants (PDA) that can include a radio frequency transceiver and pager, Internet/intranet access, Web browser, organizer, calendar, e-mail transmitter/receiver, and/or global/extraterrestrial positioning system receiver; and/or conventional laptop and/or palmtop computers or other appliances, which include a radio frequency transceiver.

**[0081]** Accordingly, communications systems according to embodiments of the present invention may provide bi-directional communications (such as radiotelephone communications) between a radioterminal on Earth and a radioterminal on an extraterrestrial body such as the Moon or Mars. Moreover, the component(s) providing the link between the Earth and the extraterrestrial body may relay communications therebetween regeneratively and/or non-regeneratively. For example, either one of the ancillary terrestrial component **203**, the relay station **211**, the satellite **201**, the ancillary extraterrestrial component **103**, the relay station **111**, or the satellite **101** may function as a regenerative and/or a non-regenerative repeater. In addition or in an alternative, communications systems according to embodiments of the present invention may provide uni-directional communications between a radioterminal on Earth and a radioterminal on an extraterrestrial body.

**[0082]** It will be further understood that communications systems and/or methods according to embodiments of the present invention may be implemented to provide communications between two or more extraterrestrial bodies and/or the earth. For example, a communication system such as that illustrated on the extraterrestrial body **105** maybe implemented on the Moon so that communications may be provided between a first radioterminal on the Moon and a second radioterminal on the extraterrestrial body **105** (such as Mars). Moreover, communications systems and/or methods may be implemented on the earth and two or more extraterrestrial bodies to provide communications between radioterminals on any two of the extraterrestrial bodies and/or the earth.

**[0083]** Radioterminals and methods according to embodiments of the present invention are illustrated in FIG. 4. As shown in FIG. 4, a radioterminal **401** may include an antenna **402**, a transceiver **403**, a processor **405**, a user interface **407**, and a battery **409** and the radioterminal **401** may be configured for use on earth and/or on an extraterrestrial body using communications systems discussed above with respect to FIGS. 1, 2, and/or 3. For example, substantially the same band of satellite frequencies and/or substantially the same air interface protocol may be used by the space-based and ancillary components of FIGS. 1-3 so that the radioterminal **401** can be used on earth and on the extraterrestrial body using both space-based and ancillary components thereon.

**[0084]** More particularly, the transceiver **403** and antenna **402** may be configured to transmit and receive communications over frequencies of the satellite frequency band used by the ancillary terrestrial components **203** on earth, the space-based network including the satellite **201** orbiting earth, the ancillary extraterrestrial components **103** on the extraterrestrial body, and the space-based network including the satellite **101** orbiting the extraterrestrial body. The processor **405** may be configured to process communications received and/or

transmitted by the transceiver **403**, and the user interface **407** may be configured to receive input from a user for communications to be transmitted and to provide user output for communications received. The user interface **407**, for example, may include a speaker, a microphone, a liquid crystal display, a touch sensitive display, a key pad, a dial, an arrow key, and/or a joy stick.

**[0085]** The radioterminal **401** may thus establish a bidirectional communications pathway with another radioterminal through one or more of an ancillary terrestrial component **203** on earth, an space-based network including the satellite **201** orbiting earth, an ancillary extraterrestrial component **103** on the extraterrestrial body, a space-based network including the satellite **101** orbiting the extraterrestrial body, a relay station **111** on the extraterrestrial body, and/or a relay station **211** on earth. The bidirectional communications pathway, for example, may support an audio radiotelephone communication, a web browsing session, an e-mail transmission, a facsimile transmission, internet/intranet access, and/or a digital data transmission. In an alternative, a unidirectional pathway from one radioterminal to another through one or more elements of FIGS. 1, 2, and/or 3 may support a one way communication such as a page, an e-mail transmission, and/or a facsimile transmission.

**[0086]** If the ancillary and space-based components provide communications on earth and on the extraterrestrial body operatively using substantially the same satellite frequency band and/or substantially the same air interface protocol and/or standard, a same radioterminal with a substantially single transceiver can be used for communication with space-based and ancillary components on earth and on the extraterrestrial body. Accordingly, a duplication of parts in the transceiver **403** for different communications modes can be reduced thereby reducing a cost and/or size of the radioterminal **401**. Moreover, power consumed by the transceiver **403** may be reduced by providing communications through ancillary components when available on earth and/or on the extraterrestrial body (instead of requiring all transmissions to go through space-based components). A drain on the battery **409** during transmission to ancillary component(s), compared to during transmission to space-based components, may be reduced so that a life of the battery before discharge may be extended and/or so that a smaller, lighter, and/or cheaper battery may be used.

**[0087]** Radioterminals according to the present invention may be hand-held devices and may be similar in appearance to conventional radiotelephones. When used on an extraterrestrial body, a radioterminal according to embodiments of the present invention may be integrated into a spacesuit, an extraterrestrial roving vehicle, an extraterrestrial landing vehicle, and/or an extraterrestrial living quarter. Moreover, radioterminals according to embodiments of the present invention may be used to transmit data from and/or receive data at an unmanned vehicle and/or station. In addition, communications according to embodiments of the present invention may be provided between a radioterminal and a fixed and/or wired communications device.

**[0088]** In the drawings and specification, there have been disclosed typical preferred embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims. Moreover, while particular systems are dis-



cussed above with respect to the figures, analogous methods are also included in the present invention.

What is claimed is:

1. A system comprising:  
a first device that is configured to detect an emission of a second device, to establish a first link between the first device and the second device responsive to the detected emission and to use the first link to coordinate a frequency reuse, a transmission power, a hand-off procedure and/or a second link.
2. A system according to claim 1, wherein the first device is configured to communicate wirelessly with at least one other device.
3. A system according to claim 2, wherein the first device is a base station.

4. A method comprising:  
detecting an emission of a second device;  
establishing a first link between a first device and the second device responsive to the detecting; and  
using the first link to coordinate a frequency reuse, a transmission power, a hand-off procedure and/or a second link.
5. A method according to claim 4, wherein the first device is configured to communicate wirelessly with at least one other device.
6. A method according to claim 5, wherein the first device is a base station.
7. A method according to claim 6, wherein the base station is configured to communicate with at least one radioterminal using frequencies of a satellite frequency band.

\* \* \* \* \*