


- (72) AMATUCCI, Glenn G., US
(72) TARASCON, Jean-Marie, US
(71) BELL COMMUNICATIONS RESEARCH, INC., US
(51) Int.Cl.⁶ C01G 45/12, H01M 4/50
(30) 1996/09/06 (08/706,546) US
(54) **OXY-FLUORURES DE LITHIUM MANGANESE POUR
ELECTRODES DE BATTERIES AUX IONS DE LITHIUM
RECHARGEABLES**
(54) **LITHIUM MANGANESE OXY-FLUORIDES FOR LI-ION
RECHARGEABLE BATTERY ELECTRODES**



(57) La stabilité et la capacité de mise en cycle des batteries aux ions de lithium rechargeables peuvent être améliorées par l'utilisation de matières qui permettent d'insérer des composantes d'électrodes d'oxy-fluorures de lithium-manganèse dont la formule générale est $Li_{1+x}M_yMn_{2-x-y}O_{4-z}F_z$ dans laquelle M représente un métal, tel que Co, Cr, ou Fe, et $x \leq 0,4$, $y \leq 0,3$ et $0,05 \leq z \leq 1,0$.

(57) The cycling stability and capacity of li-ion rechargeable batteries are improved by the use of lithium manganese oxy-fluoride electrode component intercalation materials having the general formula $Li_{1+x}M_yMn_{2-x-y}O_{4-z}F_z$ where M is a metal, e.g., Co, Cr, or Fe, and $x \leq 0.4$, $y \leq 0.3$ and $0.05 \leq z \leq 1.0$.

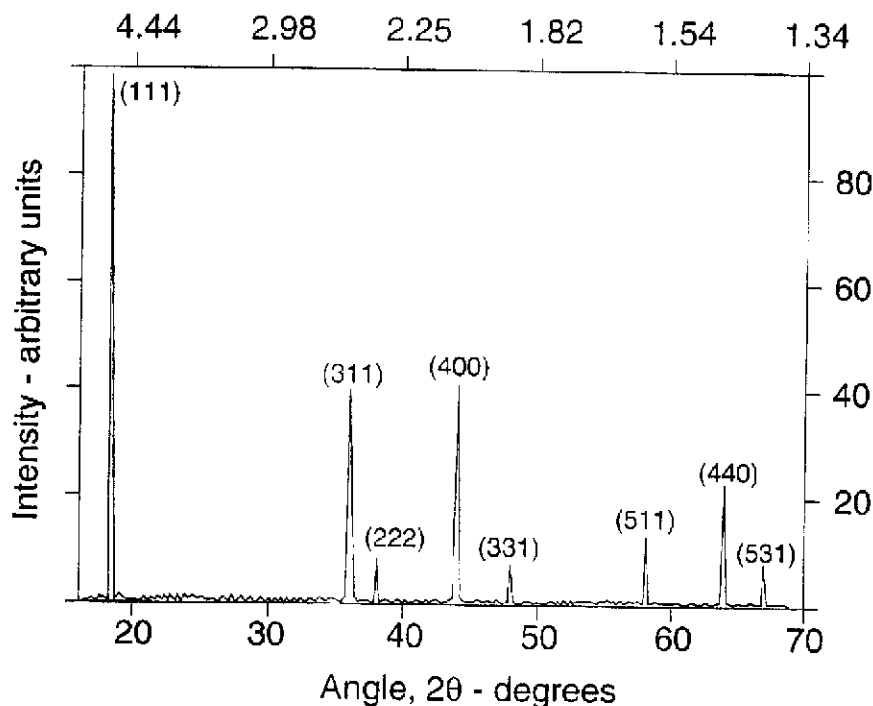



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01M 4/50, C01G 45/12	A1	(11) International Publication Number: WO 98/10476 (43) International Publication Date: 12 March 1998 (12.03.98)
<p>(21) International Application Number: PCT/US97/15588</p> <p>(22) International Filing Date: 4 September 1997 (04.09.97)</p> <p>(30) Priority Data: Not furnished 6 September 1996 (06.09.96) US</p> <p>(71) Applicant: BELL COMMUNICATIONS RESEARCH, INC. [US/US]; 445 South Street, Morristown, NJ 07960-6438 (US).</p> <p>(72) Inventors: AMATUCCI, Glenn, G.; 407 Cornell Boulevard, Raritan, NJ 08869 (US). TARASCON, Jean-Marie; 16 Davis Court, Martinsville, NJ 08836 (US).</p> <p>(74) Agents: GIORDANO, Joseph et al.; c/o International Coordinator, Room 1G112R, 445 South Street, Morristown, NJ 07960-6438 (US).</p>	<p>(81) Designated States: AU, CA, CN, IL, JP, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: LITHIUM MANGANESE OXY-FLUORIDES FOR LI-ION RECHARGEABLE BATTERY ELECTRODES

(57) Abstract

The cycling stability and capacity of li-ion rechargeable batteries are improved by the use of lithium manganese oxy-fluoride electrode component intercalation materials having the general formula $Li_{1+x}M_yMn_{2-x-y}O_{4-z}F_z$, where M is a metal, e.g., Co, Cr, or Fe, and $x \leq 0.4$, $y \leq 0.3$ and $0.05 \leq z \leq 1.0$.

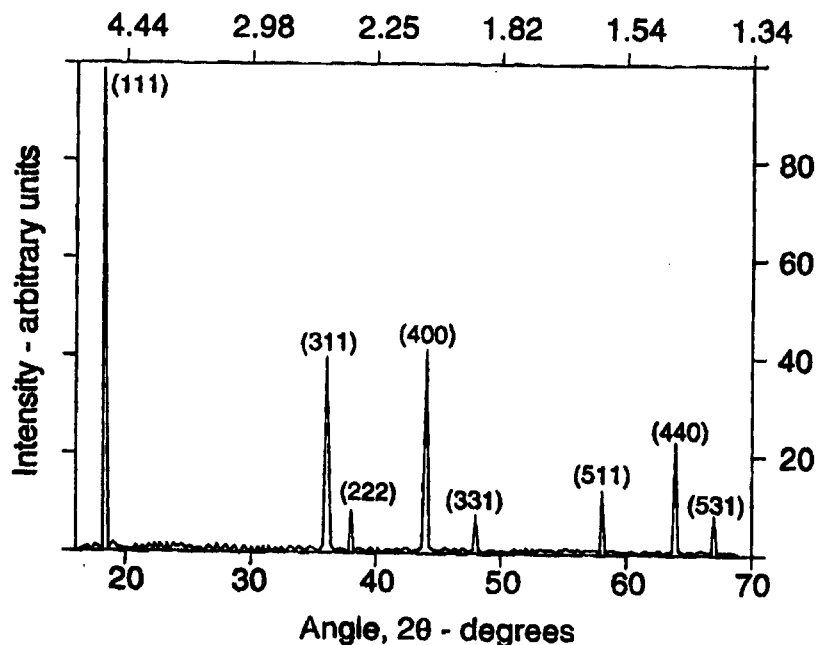

WO 98/10476

PCT/US97/15588

LITHIUM MANGANESE OXY-FLUORIDES FOR
LI-ION RECHARGEABLE BATTERY ELECTRODES

5

BACKGROUND OF THE INVENTION

The present invention relates to lithium manganese oxide
10 intercalation compounds useful as active electrode materials in
Li-ion rechargeable batteries and, particularly, to oxy-
fluoride complexes of such compounds and their use to improve
the cycling stability and capacity of such batteries.

15 Lithium manganese oxide intercalation compounds,
nominally LiMn_2O_4 , have been increasingly proven to be effective
and economical materials for the fabrication of secondary,
rechargeable Li-ion electrolytic cells and composite batteries.
Successful batteries of this type are described in U.S. Pat.
20 Nos. 5,296,318 and 5,460,904. These batteries exhibit an
admirable level of electrical storage capacity and recharge
cycling stability over a wide range of voltages; however, these
properties have not been considered entirely satisfactory to
meet the increasingly stringent requirements of modern
25 electronic equipment and applications.

Extensive investigations have been undertaken to improve
the noted properties, and such works have resulted in
determinations that variations in the structural parameters of
30 the LiMn_2O_4 spinel, for example, the a-axis lattice dimension of
the compound, contribute significantly to ultimate cell

WO 98/10476

PCT/US97/15588

performance. Such structural parameters have in turn been found to depend to a great extent upon the constitution of the intercalation compound and upon the conditions of its synthesis. In this respect, it has been generally agreed, for instance, that an a-axis parameter of less than 8.23 Å promotes desirable recharging stability over extended cycles.

Approaches to achieve this advantageous parameter range have included close control of synthesis conditions, such as described by Tarascon in U.S. Pat. No. 5,425,932, to gain the advantage of smaller a-axis dimensions exhibited by higher Mn valence levels; and cationic substitutions, such as noted by Tarascon et al., *J. Electrochem. Soc.*, Vol. 138, No. 10, pp. 2859-2864, October 1991, or by replacement of a portion of the Mn atoms with Co, Cr, or Fe, such as suggested in European Patent 390,185. A number of other investigators have recommended an increased level of lithium insertion to obtain a similar effect from a replacement of Mn, according to the representative structural formula, $(\text{Li})_{\text{tet}}[\text{Mn}_{2-x}\text{Li}]_{\text{oct}}\text{O}_4$, as an effective means of improving cycling stability, but this practice has been found to result in a sacrifice of cell capacity, as was observed with the earlier Mn replacement approach.

In contrast to these previously implemented expedients, the present invention utilizes anionic substitution to provide a means for achieving concurrent improvements in both cycling stability and cell capacity and enables the fabrication of batteries capable of long-lasting and high-powered operation.

30

SUMMARY OF THE INVENTION

We have discovered that the inadequacies of prior
5 practices may be remedied by anionic substitution of a portion
of the nominal LiMn_2O_4 oxygen atoms with fluorine. Although such
substitutions alone were initially observed to result in
expansion of the a-axis parameter beyond the preferred range,
apparently due to Mn valence reduction, we found, upon further
10 investigation, that a contemporary increase in Li substitution
for Mn surprisingly achieved a dramatic shift of a-axis
dimension into the optimum range below 8.23 Å. Electrolytic
battery cells comprising these fluoro-substituted electrode
materials thereafter exhibited remarkable cell capacity, as
15 well as cycling stability.

Preparation of these advantageous oxy-fluoride spinel
derivatives may most simply follow the usual practice, such as
noted in Tarascon, U.S. 5,425,932, of annealing at about 800°C
20 stoichiometric mixtures of appropriate precursor compounds,
typically Li_2CO_3 , LiF , and MnO_2 . These derivatives may also
include precursors for cationic substitutions as earlier-noted
in EP 390,185. The resulting intercalation materials that may
be effectively employed to achieve an improvement in prior
25 electrolytic cells are therefore represented in the general
formula, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where M is a metal, such as Co, Cr,
or Fe, and $x \leq 0.4$, $y \leq 0.3$, and $0.05 \leq z \leq 1.0$.

Series of battery cell positive electrode compositions
30 prepared with the oxy-fluoride compounds varying primarily in x
and z formula components, i.e., Li and F, were examined by x-ray

WO 98/10476

PCT/US97/15588

diffraction analysis to determine the resulting a-axis lattice parameters and were then incorporated into test cells in the usual manner, as described in the above-mentioned patents. The cells were subjected to repeated charge/discharge cycling to determine the effect of compound constitution on the level of electrical storage capacity exhibited by the cells, generally as mAh/g of electrode compound, as well as on the cycling stability, i.e., the ability to maintain the initial level of capacity over extended cycling.

10

BRIEF DESCRIPTION OF THE DRAWING

15 The present invention will be described with reference to the accompanying drawing of which:

FIG. 1 is the x-ray diffraction pattern of an invention compound, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0.1$, $y = 0$, and $z = 0.1$;

20

FIG. 2 is a graph of a-axis lattice dimensions v. z of invention compounds, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0.05$, $y = 0$, and $z \leq 0.5$;

25 FIG. 3 is a graphic comparison of capacity and cycling stability v. number of charging cycles for battery cells comprising positive electrode compounds of FIG. 2;

30 FIG. 4 is a graphic comparison of capacity and cycling stability v. number of charging cycles for cells comprising prior $\text{Li}_{1+x}\text{Mn}_2\text{O}_4$ electrode compounds and a compound of the present invention;

WO 98/10476

PCT/US97/15588

FIG. 5 is a graphic comparison of a-axis lattice dimension v. z of invention compounds, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x \leq 0.2$, $y = 0$, and $z \leq 0.4$;

5 FIG. 6 is a graphic comparison of capacity and cycling stability v. number of charging cycles for cells comprising invention compounds, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0$, $y = 0$, and $z \leq 0.4$;

10 FIG. 7 is a graphic comparison of capacity and cycling stability v. number of charging cycles for cells comprising invention compounds, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0.1$, $y = 0$, and $z \leq 0.4$;

15 FIG. 8 is a graphic comparison of capacity and cycling stability v. number of charging cycles for cells comprising invention compounds, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0.2$, $y = 0$, and $z \leq 0.4$; and

20 FIG. 9 is a graphic comparison of capacity and cycling stability v. number of charging cycles for cells comprising invention compounds, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0$, $y = 0.2$, and $z \leq 0.1$.

25

DESCRIPTION OF THE INVENTION

$\text{Li}_{1+x}\text{Mn}_2\text{O}_4$ intercalation materials employed in prior
30 practices (according to present formula designation,
 $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $y = 0$ and $z = 0$) were prepared for use

WO 98/10476

PCT/US97/15588

as performance control samples in the manner described in the
aforementioned U.S. 5,425,932, using stoichiometric mixtures of
the primary precursor compounds, for example, 9.23 parts by
weight of Li_2CO_3 to 43.46 parts of MnO_2 to obtain the nominal
5 LiMn_2O_4 . Test cells of these control samples, as well as samples
of the present invention materials to be described later, were
likewise prepared and tested in galvanostatic and
potentiostatic studies, generally as described in that patent
specification. Such test cells comprised lithium foil negative
10 electrodes as a practical expedient, since experience has
confirmed that performance results achieved in this manner are
objectively comparable to those obtained with Li-ion cell
compositions described in the other above-noted patent
specifications. Additional tests, as indicated below, were
15 nonetheless conducted with Li-ion compositions comprising the
present materials to obtain further confirmation of this
correlation in results.

Example 1

20

In a typical preparation of an intercalation material of
the present invention, stoichiometric proportions of the
precursors, MnO_2 (EMD-type), Li_2CO_3 , and LiF , were thoroughly
mixed in an agate mortar and pestle in a weight ratio of
25 60.94:12.82:1, and the mixture was annealed in air in an alumina
crucible in the manner of the control samples to obtain a test
composition of $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0.1$, $y = 0$, and
 $z = 0.1$ ($\text{Li}_{1.1}\text{Mn}_{1.9}\text{O}_{3.9}\text{F}_{0.1}$). Specifically, the mixture was heated
at a regular rate over a period of about 12 hours to a
30 temperature of 800°C at which it was maintained for about 12
hours. The sample was then cooled to room temperature at a

WO 98/10476

PCT/US97/15588

regular rate over a period of about 24 hours. After a
mix/grinding, the sample was reheated over a period of 5 hours
to 800°C where it was held for about 12 hours before being
finally cooled to room temperature over a period of about 24
5 hours. The resulting oxy-fluoride compound was characterized by
CuK α x-ray diffraction (XRD) examination to obtain the graphic
pattern shown in FIG. 1. The clearly-defined peaks of the
pattern confirmed the well-crystallized, single-phase product
of the synthesis.

10

Example 2

A series of oxy-fluoride compounds of the present
invention was similarly prepared with appropriate combinations
15 of precursor compounds to yield $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where
 $x = 0.05$, $y = 0$, and $z = 0, 0.05, 0.10, 0.15, 0.20, 0.35$, and
 0.50 . The resulting samples were characterized by XRD and the
respective a-axis lattice parameters were calculated. A plot of
these parameter dimensions as shown in FIG. 2 indicates the
20 regular increase which tracks and is indicative of the increase
in fluorine substitution.

Portions of the same samples were individually
incorporated with about 10% conductive carbon and 5%
25 polyvinylidene fluoride binder and formed as a layer on an
aluminum foil substrate to provide positive test cell
electrodes. Arranged in the usual manner with a lithium foil
electrode and intervening glass fiber separator saturated with
a 1 M electrolyte solution of LiPF_6 in a 2:1 mixture of ethylene
30 carbonate:dimethylcarbonate, the sample electrodes formed test
cells which were subjected to charge/discharge cycling over the

WO 98/10476

PCT/US97/15588

range of 3.4 - 4.5 V at a C/5 rate (full cycle over 5 hours). The capacity of each cell was traced during a period of up to 35 cycles to provide an indication, as seen in FIG. 3, of the rate of change of that property, i.e., the cycling stability of the cell, with extended recharging. Traces 31-36 reflect the above-stated increasing levels of fluorine substitution, z, from 0.05 to 0.5. A comparison of the results depicted in FIG.s 2 and 3 graphically confirms the general tendency toward loss of both capacity and cycling stability with an increase in a-axis dimension above the preferred limit of about 8.23 Å.

Example 3

A series of unsubstituted intercalation compounds of the prior art varying only in Li, i.e., $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0.05, 0.075, \text{ and } 0.1$, $y = 0$, and $z = 0$, was prepared and tested in similar manner to provide an indication of the effect of that variable on the capacity and cycling stability of resulting cells. As may be seen in FIG. 4 as traces 41-43 of increasing Li content, that variance alone improves cycling stability, but significantly reduces cell capacity. The performance of an additional cell prepared with the oxy-fluoride ($x = 0.1, z = 0.1$) compound of Example 1 is also represented in FIG. 4, at trace 44, and reflects the surprising effect achieved by the present invention. In particular, a comparison of traces 43 and 44 having like Li content reveals the outstanding improvement in both capacity and cycling stability resulting from this combination with fluorine substitution.

30

Example 4

Series of oxy-fluoride compounds were prepared varying in both Li and F, i.e., $\text{Li}_{1-x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0, 0.1, \text{ and } 0.2$, $y = 0$, and $z = 0, 0.05, 0.1, 0.2, \text{ and } 0.4$. The variations of a-axis lattice parameter for each series are shown in FIG. 5 as traces 52-56 of increasing Li and indicate the remarkable effect of the combination of Li and F content on achieving an optimum range of this parameter.

10

Example 5

The series of compounds of Example 4 comprising $x = 0$ was used to prepare battery cells which were tested in the manner described above. The results shown in FIG. 6 as traces 61-65 of increasing fluorine content indicate the effect on capacity and cycling stability of a compound favoring F in the Li:F ratio.

15

Example 6

The series of compounds of Example 4 comprising $x = 0.1$ was used to prepare battery cells which were tested in the manner described above. The results shown in FIG. 7 as traces 71-75 of increasing fluorine content indicate the improvement on capacity and cycling stability of a closer balance of F in the Li:F ratio.

20

25

Example 7

The series of compounds of Example 4 comprising $x = 0.2$ was used to prepare battery cells which were tested in the manner described above. The results shown in FIG. 8 as traces

30

WO 98/10476

PCT/US97/15588

81-85 of increasing fluorine content indicate the further effect, particularly on cycling stability of a still closer balance of F in the Li:F ratio.

5

Example 9

A series of compounds of the present invention with both cationic (Cr) and anionic substitutions, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where $x = 0$, $y = 0.2$, and $z = 0, 0.05$, and 0.1 , was prepared in the above manner by combining appropriate stoichiometric amounts of precursors, for example, 10.3:2.31:1.0:0.086 weight ratio of MnO_2 , Li_2CO_3 , Cr_2O_3 , and LiF ($\text{LiCr}_{0.2}\text{Mn}_{1.8}\text{O}_{3.9}\text{F}_{0.05}$). The resulting materials were used to prepare test cells whose performance improvement was comparable to the foregoing results, as shown at FIG. 9 in traces 92-96 of increasing fluorine content. Similar results may be obtained with cationic Co and Fe substitutions.

20

Example 10

A series of Li-ion battery cells was prepared with the positive electrode materials of Example 6, and employing petroleum coke negative electrodes and polyvinylidene copolymer matrix electrolyte/separator elements, as described in above-noted U.S. 5,460,904. Tests of repeated charge cycling showed cell capacities and cycling stability comparable to those of Example 6.

30

It is expected that other embodiments of the present invention will become apparent to the skilled artisan in light of the foregoing description, and such variations are intended to be included within the scope of this invention as recited in the appended claims.

WO 98/10476

PCT/US97/15588

What is claimed is:

- 1 1. A lithium manganese oxy-fluoride compound having the
 2 general formula, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where M is a metal and
 3 $x \leq 0.4$, $y \leq 0.3$, and $0.05 \leq z \leq 1.0$.
- 1 2. A compound according to claim 1 where M is Co, Cr, or Fe.
- 1 3. A compound according to claim 2 where $x \leq 0.2$, $y = 0$, and
 2 $0.05 \leq z \leq 0.4$.
- 1 4. A compound according to claim 2 where $0.1 \leq x \leq 0.2$, $y = 0$,
 2 and $0.05 \leq z \leq 0.4$.
- 1 5. A compound according to claim 2 where $0.1 \leq x \leq 0.2$, $y = 0$,
 2 and $0.05 \leq z \leq 0.2$.
- 1 6. A compound according to claim 2 where $0.05 \leq x \leq 0.2$,
 2 $y \leq 0.3$, and $0.05 \leq z \leq 0.2$.
- 1 7. A rechargeable battery cell comprising a positive
 2 electrode, a negative electrode, and a separator disposed
 3 therebetween
 4 characterized in that
 5 said positive electrode comprises an intercalation compound
 6 having the general formula, $\text{Li}_{1+x}\text{M}_y\text{Mn}_{2-x-y}\text{O}_{4-z}\text{F}_z$, where M is a
 7 metal and $x \leq 0.4$, $y \leq 0.3$, and $0.05 \leq z \leq 1.0$.

WO 98/10476

PCT/US97/15588

1 8. A rechargeable battery cell according to claim 7 where M is
2 Co, Cr, or Fe.

1 9. A rechargeable battery cell according to claim 8 where
2 $x \leq 0.2$, $y = 0$, and $0.05 \leq z \leq 0.4$.

1 10. A rechargeable battery cell according to claim 8 where $0.1 \leq$
2 $x \leq 0.2$, $y = 0$, and $0.05 \leq z \leq 0.4$.

1 11. A rechargeable battery cell according to claim 8 where
2 $0.1 \leq x \leq 0.2$, $y = 0$, and $0.05 \leq z \leq 0.2$.

1 12. A rechargeable battery cell according to claim 8 where
2 $0.05 \leq x \leq 0.2$, $y \leq 0.3$, and $0.05 \leq z \leq 0.2$.

1/8

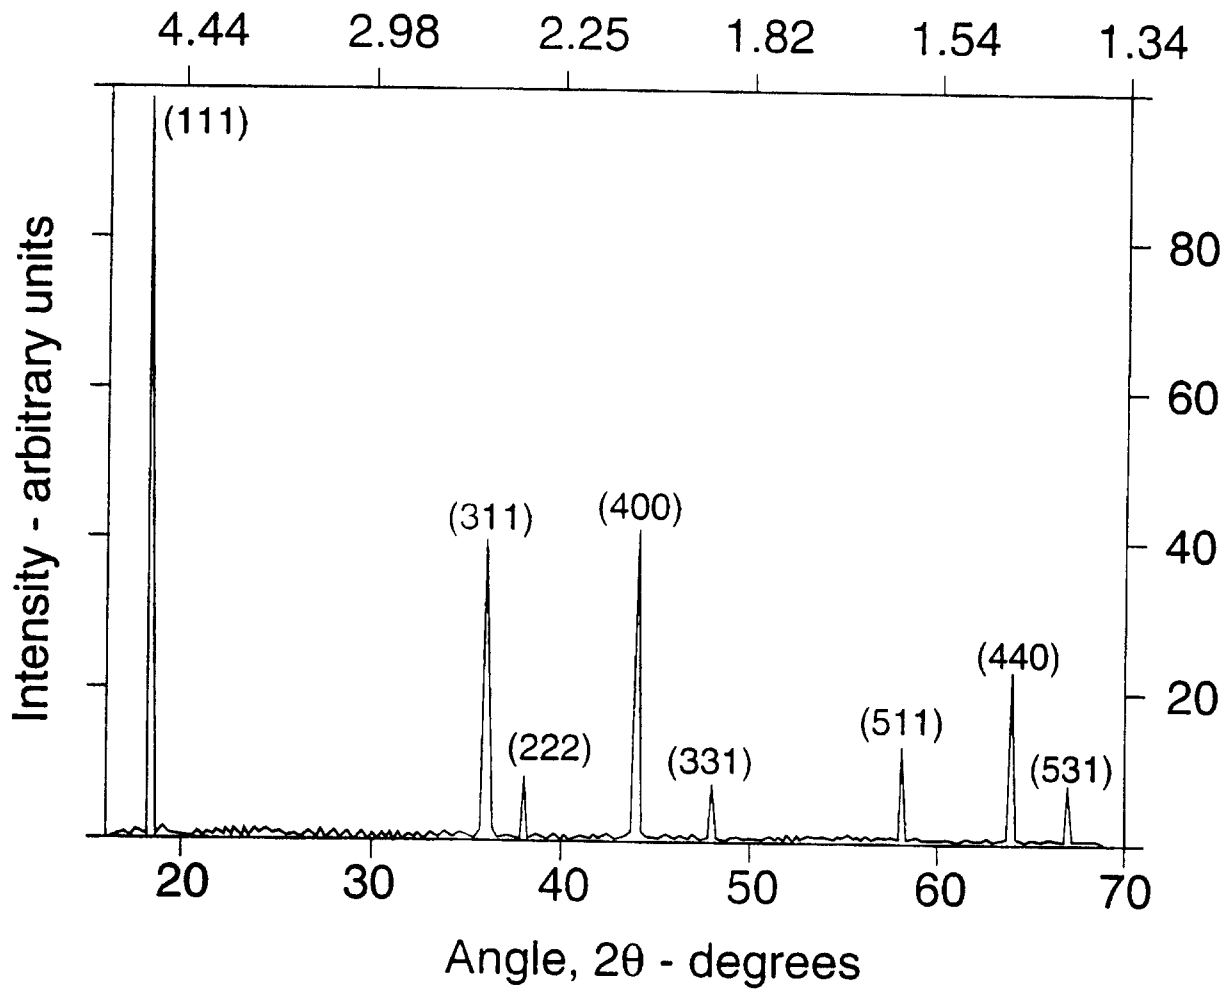


FIG. 1

2/8

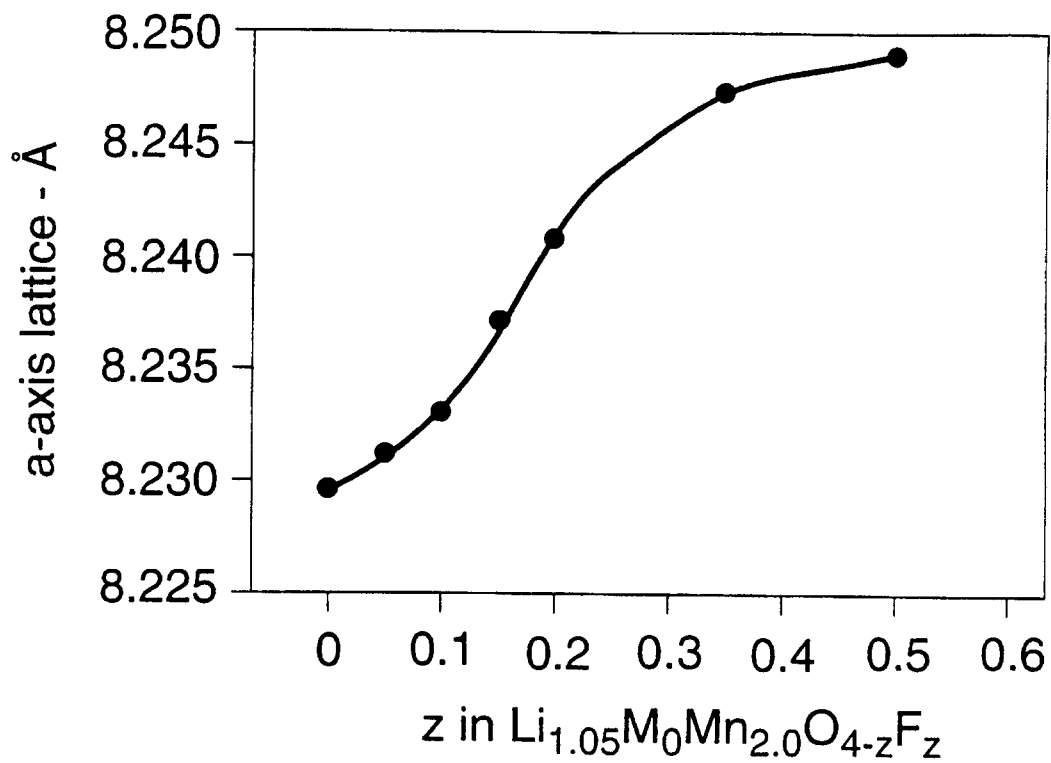


FIG. 2

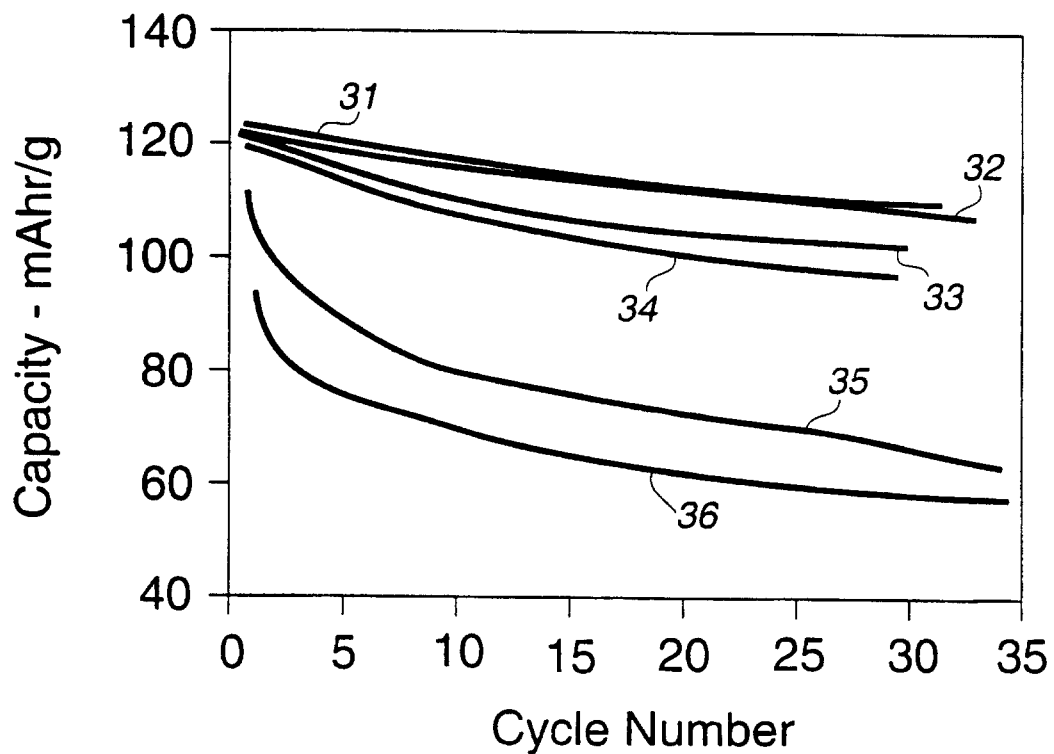


FIG. 3

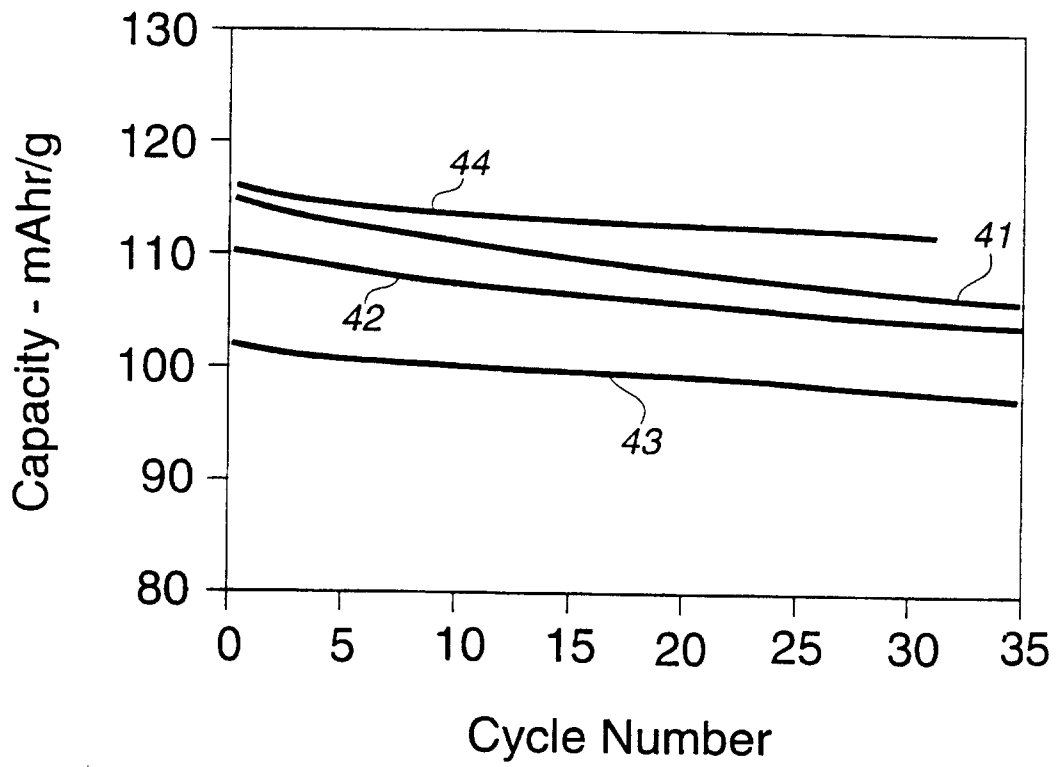


FIG. 4

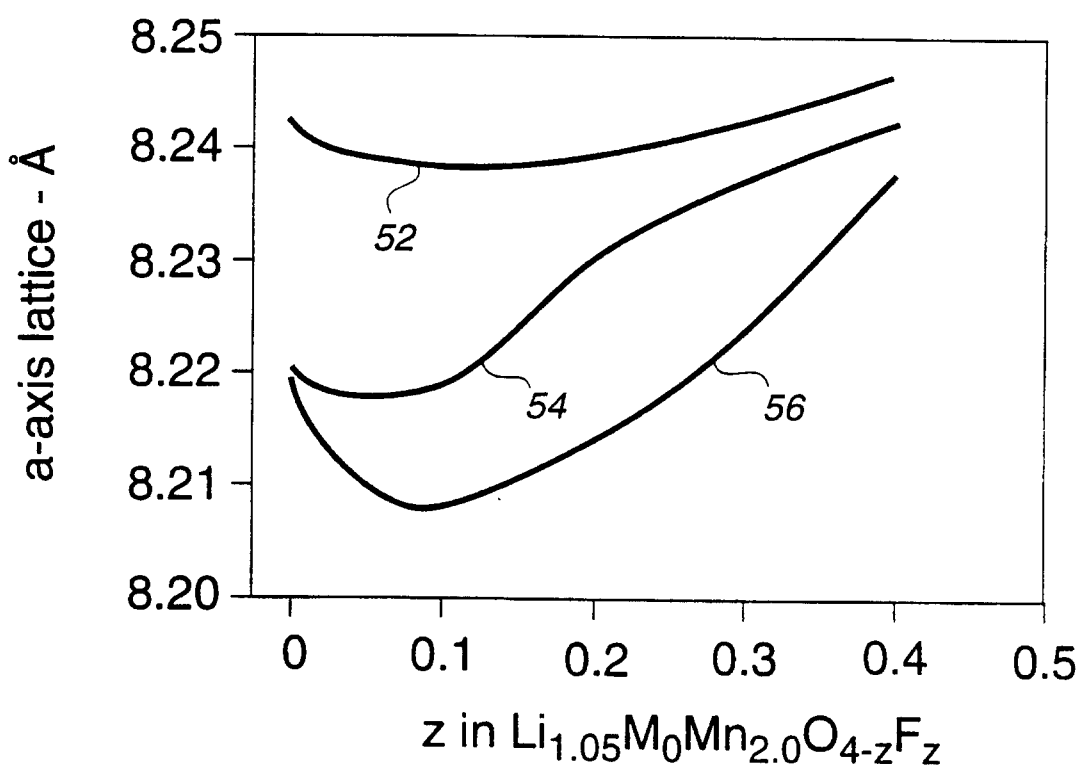


FIG. 5

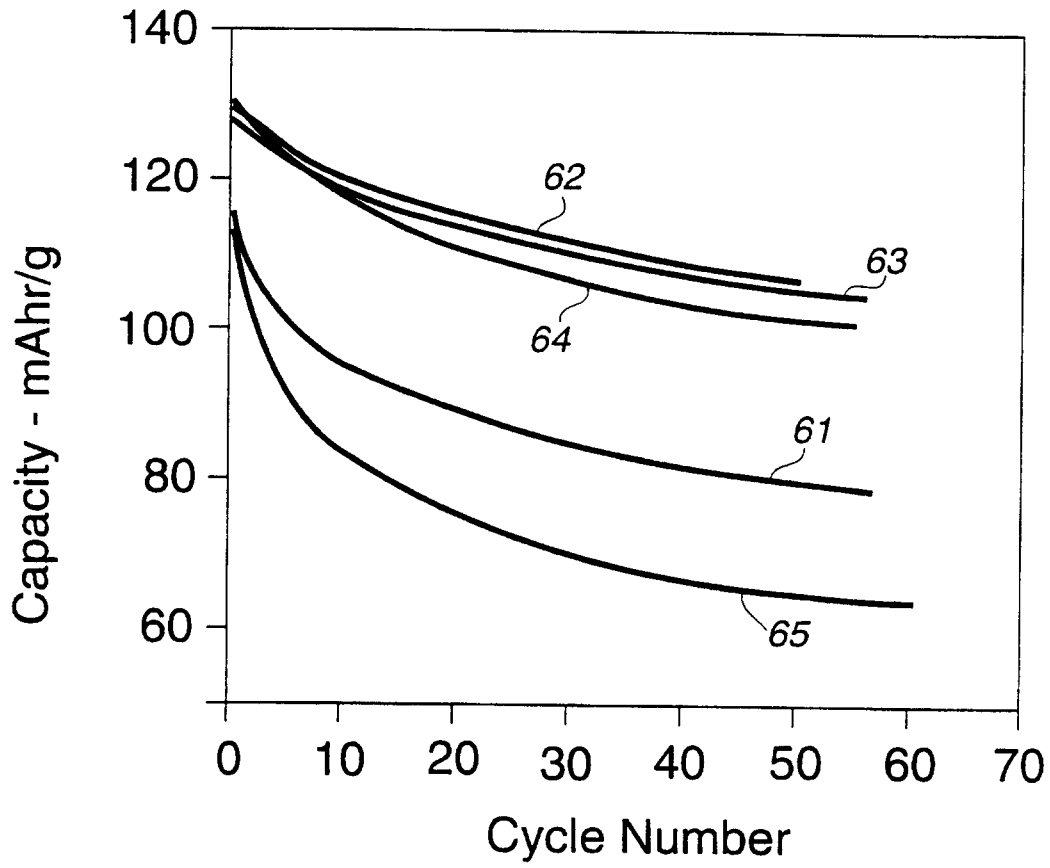


FIG. 6

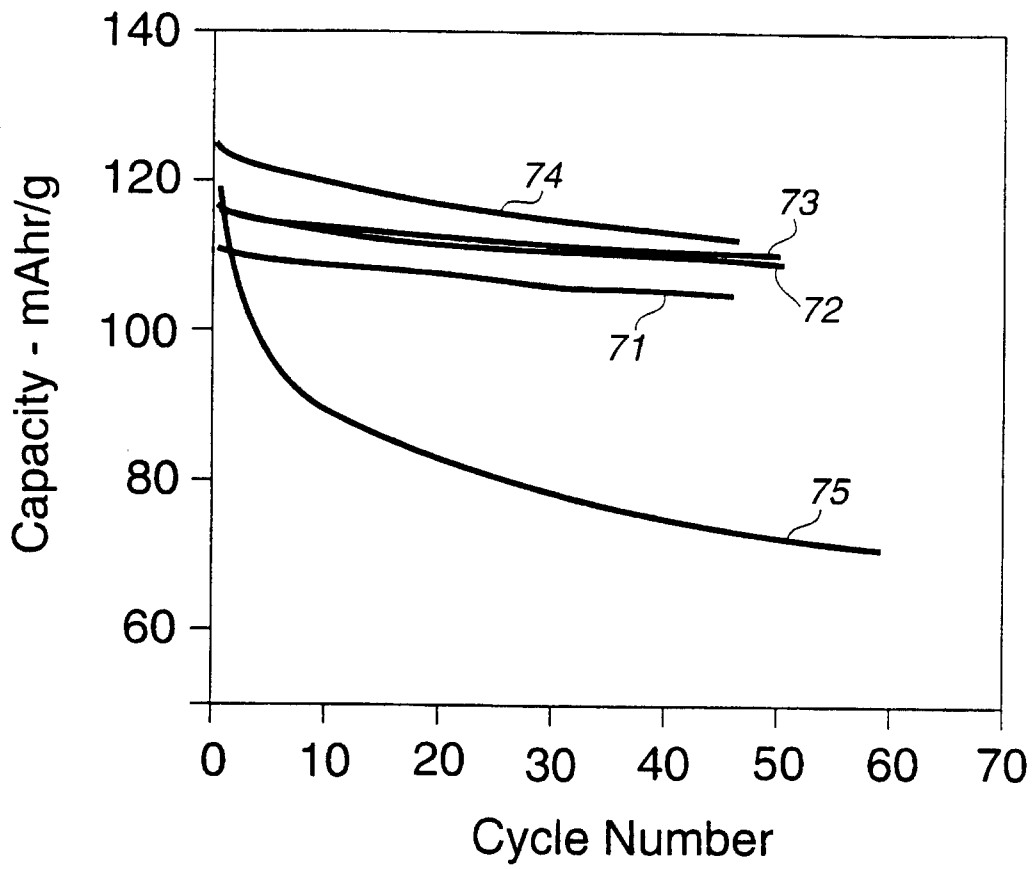


FIG. 7

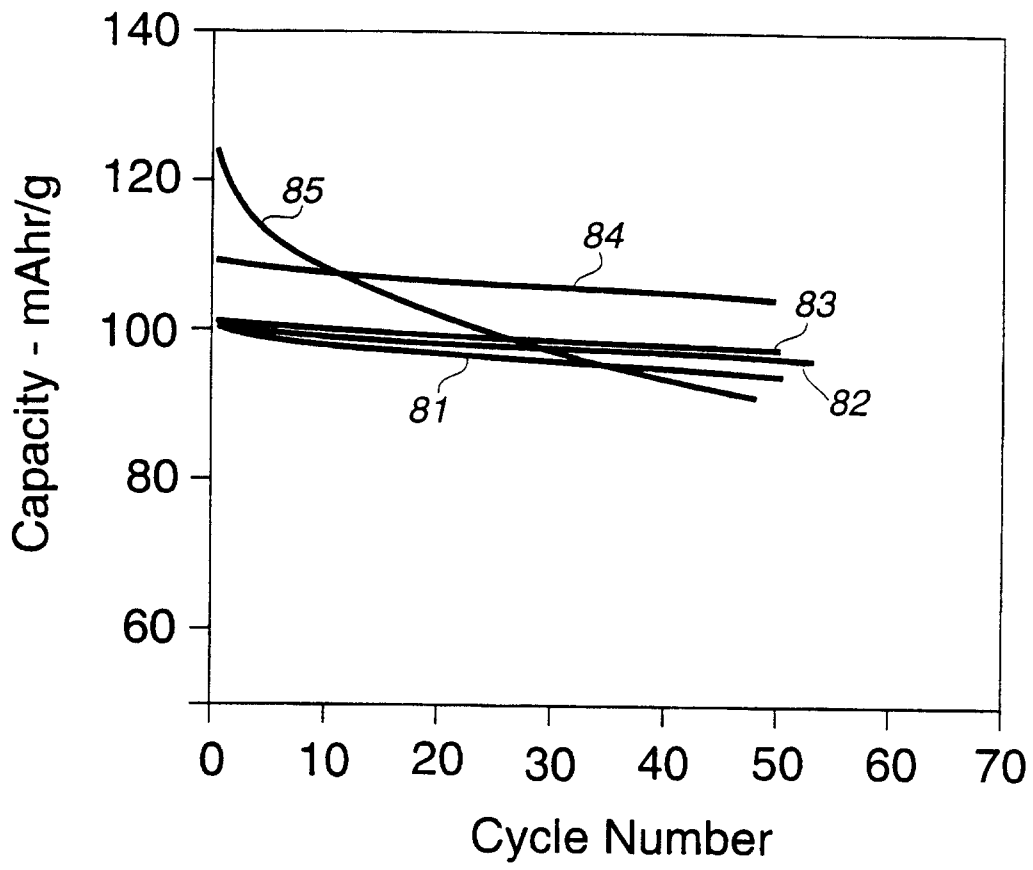


FIG. 8

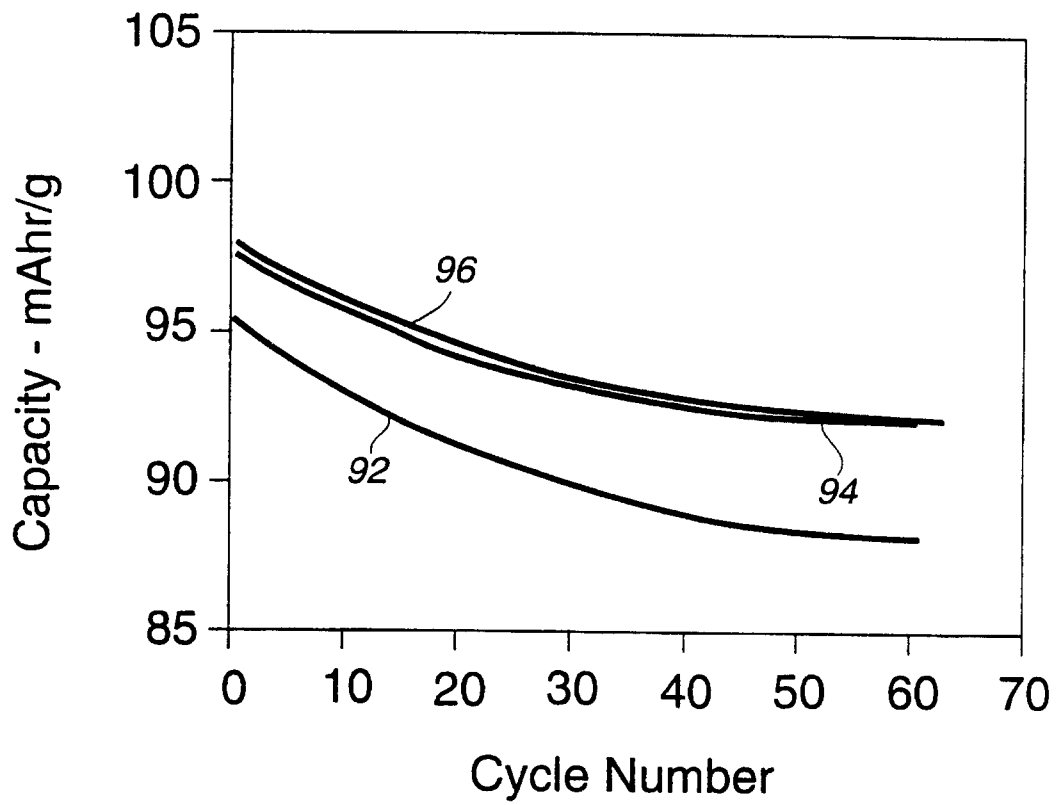


FIG. 9

