

(19)



(11)

**EP 2 392 886 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**24.08.2016 Bulletin 2016/34**

(51) Int Cl.:  
**F28F 9/02 (2006.01) F28D 21/00 (2006.01)**  
**F28D 1/02 (2006.01) F28D 1/053 (2006.01)**

(21) Application number: **11167680.5**

(22) Date of filing: **26.05.2011**

**(54) Orientation insensitive refrigerant distributor tube**

Ausrichtungsunabhängiges Kühlmittelverteilerrohr

Tube de distributeur réfrigérant insensible à l'orientation

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **01.06.2010 US 350123 P**  
**24.05.2011 US 201113114405**

(43) Date of publication of application:  
**07.12.2011 Bulletin 2011/49**

(73) Proprietor: **MAHLE International GmbH**  
**70376 Stuttgart (DE)**

(72) Inventors:  
• **Joshi, Shrikant Mukund**  
**Williamsville, NY New York 14221 (US)**

- **Wintersteen, Douglas Charles**  
**Burt, NY New York 14028 (US)**
- **Johnson, Russel Scott**  
**Tonawanda, NY New York 14150 (US)**
- **Xia, Yanping**  
**North Tonawanda, NY New York 14120 (US)**

(74) Representative: **BRP Renaud & Partner mbB**  
**Rechtsanwälte Patentanwälte**  
**Steuerberater**  
**Königstraße 28**  
**70173 Stuttgart (DE)**

(56) References cited:  
**WO-A1-2008/060270 WO-A2-2010/005676**  
**JP-A- 2004 278 935 US-A1- 2002 174 978**  
**US-A1- 2006 102 331**

**EP 2 392 886 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### TECHNICAL FIELD OF INVENTION

**[0001]** The present disclosure relates to an inlet distributor for an evaporator; more particularly to an inlet distributor having a plurality of orifices arranged along the length of the distributor tube.

### BACKGROUND OF INVENTION

**[0002]** Residential and commercial air conditioning and heat pump systems are known to employ modified automotive heat exchangers, which are desirable for its proven high heat transfer efficiency, durability, and relatively ease of manufacturability. Automotive heat exchangers typically include an inlet header, an outlet header, and a plurality of refrigerant tubes hydraulically connecting the headers for refrigerant flow therebetween. Corrugated fins interconnect adjacent refrigerant tubes to increase the available heat transfer area, as well as to increase the structural integrity of the heat exchanger. The coil of the heat exchanger is defined by the refrigerant tubes and interconnecting corrugated fins. To meet the demands of residential and commercial applications, the size of the coil of the heat exchanger has to be increased accordingly, which in turn dramatically increased the lengths of the inlet and outlet headers. For a heat exchanger operating in evaporator mode, the increased length of the headers tends to result in refrigerant mal-distribution through the refrigerant tubes. Momentum and gravity effects, due to the large mass differences between the liquid and gas phases, can result in separation of the phases in the inlet header and cause poor refrigerant distribution through the refrigerant tubes. Poor refrigerant distribution degrades evaporator performance and can result in uneven temperature distribution over the coil. To assist in providing uniform refrigerant distribution through the refrigerant tubes, it is known to provide a distributor tube in the inlet header. JP2004278935, US2006102331, WO2008060270 and WO2010005676 disclose heat exchangers provided with distributor tubes. US-A-2006102331 discloses a heat exchanger assembly according to the preamble of claim 1.

**[0003]** A typical distributor tube extends the length of the inlet header and includes a plurality of uniformly spaced orifices for distributing the two-phase refrigerant throughout the length of the header. The orifices are oriented at a designed angle relative to the center of the cross-section of the refrigerant tube to provide the maximum performance for the coil in a specific application. Typically, the angle of the orifices is selected based on testing a vertical slab coil design with the refrigerant tube aligned in the opposite direction of gravity. Indoor evaporators also have the additional challenge of packaging constraints; the evaporators have to fit within the limited volume offered by the plenums of residential HVAC systems. In a slab coil design, the refrigerant tubes lie in a

plane much like that of an automotive heat exchanger, and for maximum efficiency it is preferable that the refrigerant tubes are aligned in the direction of gravity with the inlet header lower than the outlet header. To provide the cooling capacity required within a limited space, two smaller slab coils are assembled into an A-Frame design or a single larger slab coil is bent into an ARC design. The A-Frame design or ARC design may need to be installed in various orientations with respect to gravity, in which the refrigerant tubes may not be aligned in the direction of gravity and the inlet header may not be lower than the outlet header. The desired distribution of refrigerant flowing through the coil may be adversely affected due to the orientation of the evaporator. There is a long felt need for an evaporator that provides good refrigerant distribution regardless of its orientation.

### SUMMARY OF THE INVENTION

**[0004]** The invention relates to a heat exchanger assembly according to claim 1.

### BRIEF DESCRIPTION OF DRAWINGS

**[0005]** This invention will be further described with reference to the accompanying drawings in which:

Figs. 1A-C show representative end views of an A-type coil or bent coil design evaporator.

Fig. 2 shows a distributor tube in an inlet header of an evaporator, in which the orifices of the distributor tube are oriented in a direction opposite that of the direction of gravity.

Fig. 3 shows a distributor tube in an inlet header of an evaporator, in which the orifices of the distributor tube are oriented in the direction of gravity.

Fig. 4 shows a cross-section of the inlet header having a distributor tube with the liquid phase of refrigerant pressed-up against the interior surface of the distributor tube.

Fig. 5 shows a refrigerant distributor tube having groups of two (2) orifices along the length of the distributor tube, wherein the orifices in each group are oriented 180 degrees apart from each other and the groups of two (2) orifices are rotated 90 degrees apart from each other.

Fig. 6 shows a refrigerant distributor tube having groups of four (4) orifices along the length of the distributor tube, wherein the orifices in each group are oriented 90 degrees apart from each other.

Fig. 7 shows a refrigerant distributor tube according to the invention and having a plurality of orifices spiraled along the tube at an exemplary 90 degrees between adjacent orifices.

**[0006]** Only the distributor tube disclosed and described with respect to Fig. 7 is in accordance with the invention. The distributor tubes disclosed in Figs. 5 and

6 do not form part of the invention and only present examples which are useful for understanding the invention.

#### DETAILED DESCRIPTION OF INVENTION

**[0007]** For a typical slab coil design evaporator, the desired angle of the orifices of a distributor tube is selected based on testing of a vertical slab coil in which the refrigerant tubes are aligned in the direction of gravity with the inlet header lower than the outlet header. To accommodate the packaging constraints required for residential applications, a residential indoor evaporator may be constructed by using two slab coils in an A-Frame design or a single slab coil bent into an ARC design. Shown in Figs. 1A-1C are representations of an end view of an A-Frame design or ARC design residential indoor evaporator 10 having an inlet header 12a, an outlet header 12b spaced apart from the inlet header 12a, and a plurality of refrigerant tubes 14 hydraulically connecting the headers 12a, 12b for refrigerant flow. An evaporator coil 16, partially shown in Figs. 2 and 3, is defined by the plurality of refrigerant tubes 14 together with external fins 15 interconnecting the adjacent refrigerant tubes 14. The evaporator 10 includes a distributor tube 20 in the inlet header 12a, shown in Figs. 2-7, for improved refrigerant distribution. The above mentioned components of the evaporator 10 are typically constructed of a heat conductive material such as aluminum.

**[0008]** Each of the A-Frame design and ARC design provides an evaporator 10 having at least one apex 18. The A-Frame or ARC design can be installed within a HVAC plenum in various orientations with respect to the direction of gravity, in which the apex 18 may be up, down, horizontal, and any other orientation therebetween. With these varieties of possible orientations, the inlet header 12a may be located above the outlet header 12b, below the outlet header 12b, or horizontal with the outlet header 12b. The headers 12a, 12b are typically perpendicular to that of the direction of gravity, but the bottom header may be slightly angled toward the direction of gravity to facilitate condensate drainage.

**[0009]** A standard angle designed for the orifices 22 of the distributor tube 20 relative to the refrigerant tube 14 may not necessarily work efficiently when used in all the various potential orientations of the evaporator 10. It was found that only certain range of angles of the orifices 22 of the distributor tube 20 relative to the refrigerant tube 14 are acceptable for each of the various evaporator coil 16 orientations. In other words, orifice angles are application specific; therefore, the desired orifice range of angles has to be calculated for each specific orientation of the evaporator 10.

**[0010]** With reference to Figs. 2-4, it is believed that the liquid phase 24 of a two-phase refrigerant flowing through the distributor tube 20 tends to migrate to the bottom of the interior surface 28 of the distributor tube 20 due to gravity. It is suspected that the liquid phase 24 does not necessary puddle on the bottom or low spot of

the distributor tube 20, but instead it is pressed against and rides up a portion of the interior surface 28 of the distributor tube 20 by the flow of refrigerant through the distributor tube 20, thereby forming a liquid refrigerant cross-sectional profile 30 much like a crescent moon with its apex on the bottom. The limit would be annular flow where the liquid distributes around the entire peripheral internal surface 28 of the distributor tube 20, but more typically a thicker layer would exist on the bottom.

**[0011]** It was found that if the orifices 22 were facing in a direction other than between 45 to 315 degrees with respect to the opposite direction of gravity being 0 degree, mostly vapor phase refrigerant tend to exits the orifices 22 migrating toward the refrigerant tubes 14. This is undesirable because optimal heat transfer efficiency is obtained when the refrigerant entering the refrigerant tubes is in a substantially liquid phase.

**[0012]** With reference to Fig. 3, it was surprisingly found that when the orifices 22 are oriented substantially in the direction of gravity, the pressure and momentum of the refrigerant flowing through the distributor tube 20 pushes the liquid phase refrigerant out of the distributor tube 20 through the orifices 22 toward the refrigerant tubes. The refrigerant remains substantially in liquid phase until it reaches the refrigerant tubes 14, at which point the liquid phase refrigerant starts to absorb heat and vaporizes, thereby providing optimum heat transfer and even temperature distribution across the evaporator coil 16. With reference to Fig. 4, during periods of high refrigerant flow, the liquid refrigerant cross-sectional profile 30 occupies the interior surface 28 of the distributor tube 20 from 45 to 315 degrees with respect to the opposite direction of gravity being 0 degree. During normal operating conditions, the liquid refrigerant cross-sectional profile 30 occupies the interior surface 28 of the distributor tube 20 from 90 to 270 degrees.

**[0013]** An aspect of the invention provides a means to transport the liquid phase refrigerant from the distributor tube 20 to the refrigerant tubes 14 for efficient boiling and thus improved heat transfer performance regardless of the orientation of the A-Frame or ARC evaporator coil evaporator.

**[0014]** Fig. 5 shows a cylindrical refrigerant distributor tube 20 extending along a substantially central axis (A-axis). This embodiment is not part of the invention Pairs of orifices 22 are substantially uniformly spaced along the length of the distributor tube 20, in which each pair of orifices 22 is located about its respective point on the A-axis. Within each pair of orifices 22, one of the orifices 22 may be oriented 90 to 180 degrees apart from the other with respect to the pair's respective point on the A-axis. Furthermore, each pair of orifices 22 may be rotated 90 to 180 degrees from the adjacent pair of orifices 22.

**[0015]** Fig. 6 shows a cylindrical refrigerant distributor tube 20 extending along the A-axis. This embodiment is not part of the invention Groups of four (4) orifices 22 are substantially uniformly spaced along the length of the distributor tube 20, in which each group of orifices 22 is

located about its respective point on the A-axis. Within each group of four (4) orifices 22, each of the orifices 22 may be oriented 90 degrees apart from the adjacent orifice 22 with respect to the group's respective point on the A-axis. Furthermore, each group of (4) orifices 22 may be rotated 45 degrees from the adjacent group of (4) orifices 22.

**[0016]** Fig. 7 shows a cylindrical refrigerant distributor tube 20 according to the invention and having a plurality of orifices 22 spiraled along the tube. With respect to an end view of the A-axis, each succeeding orifice 22 may be offset 45 to 180 degrees from the preceding orifice 22.

**[0017]** With the above configurations of orifices 22 on the distributor tube 20 or any configuration that provides at least one orifice 22 in the desired direction regardless of the orientation of the evaporator 10 would improve the distribution of refrigerant through the refrigerant tubes 14. Therefore, if the evaporator coil 16 is positioned in any one of the various possible orientations, at least one of the orifices 22 would be located within the liquid refrigerant cross-sectional profile 30.

**[0018]** While this invention has been described in terms of the preferred embodiments thereof, it is not intended to be so limited, but rather only to the extent set forth in the claims that follow.

#### Claims

1. A heat exchanger assembly (10) for use with a two-phase refrigerant, comprising;
  - an inlet header (12a);
  - an outlet header (12b) spaced from said inlet header (12a);
  - a plurality of refrigerant tubes (14) hydraulically connecting said inlet header (12a) to said outlet header (12b);
  - a distributor tube (20) having a plurality of orifices (22) disposed in said inlet header (12a), wherein said orifices (22) are arranged along said distributor tube (20) such that at least one orifice (22) is oriented in the liquid phase (24) of the refrigerant pressed against said internal surface of said distributor tube (20) regardless of orientation of said heat exchanger assembly (10), **characterized in that** said plurality of orifices (22) is spirally positioned along said distributor tube (20) about a substantially center axis and wherein, each of said plurality of orifices (22) is off-set 90 degrees or 180 degrees from adjacent orifices (22).

#### Patentansprüche

1. Wärmetauscheranordnung (10) zur Verwendung mit einem Zweiphasenkältemittel, welche umfasst:

einen Einlasssammler (12a);

einen Auslasssammler (12b), der von dem Einlasssammler (12a) beabstandet ist; mehrere Kältemittelrohre (14), die den Einlasssammler (12a) mit dem Auslasssammler (12b) hydraulisch verbinden;

ein Verteilerrohr (20) mit mehreren Öffnungen (22), das in dem Einlasssammler (12a) angeordnet ist, wobei die Öffnungen (22) entlang des Verteilerrohres (20) derart angeordnet sind, dass wenigstens eine Öffnung (22) in die flüssigen Phase (24) des Kältemittels ausgerichtet ist, die gegen die Innenfläche des Verteilerrohres (20) gepresst wird, unabhängig von der Ausrichtung der Wärmetauscheranordnung (10), **dadurch gekennzeichnet, dass**

die mehreren Öffnungen (22) entlang des Verteilerrohres (20) spiralförmig um eine im Wesentlichen zentrale Achse positioniert sind, und wobei

jede der mehreren Öffnungen (22) um 90 Grad oder 180 Grad gegenüber benachbarten Öffnungen (22) versetzt ist.

#### 25 Revendications

1. Ensemble d'échangeur thermique (10) à utiliser avec un fluide frigorigène diphasique, comprenant :

un collecteur d'entrée (12a) ;  
un collecteur de sortie (12b) espacé dudit collecteur d'entrée (12a) ;  
une pluralité de tubes de fluide frigorigène (14) raccordant hydrauliquement ledit collecteur d'entrée (12a) avec ledit collecteur de sortie (12b) ;

un tube distributeur (20) ayant une pluralité d'orifices (22) disposés dans ledit collecteur d'entrée (12a), dans lequel lesdits orifices (22) sont disposés le long dudit tube distributeur (20) de sorte qu'au moins un orifice (22) soit orienté dans la phase liquide (24) du fluide frigorigène pressé contre ladite surface interne dudit tube distributeur (20) indépendamment de l'orientation dudit ensemble d'échangeur thermique (10), **caractérisé en ce que**

ladite pluralité d'orifices (22) est positionnée en spirale le long dudit tube distributeur (20) autour d'un axe substantiellement central et dans lequel

chacun de ladite pluralité d'orifices (22) est décalé de 90 degrés ou 180 degrés par rapport aux orifices adjacents (22).

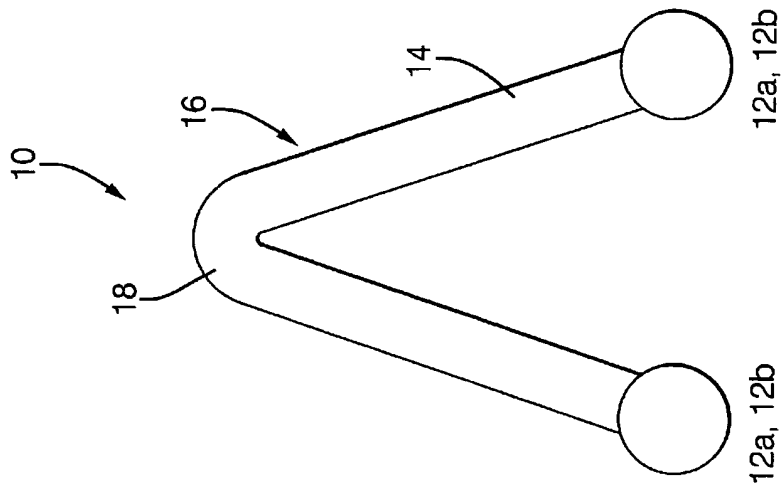


FIG. 1 A

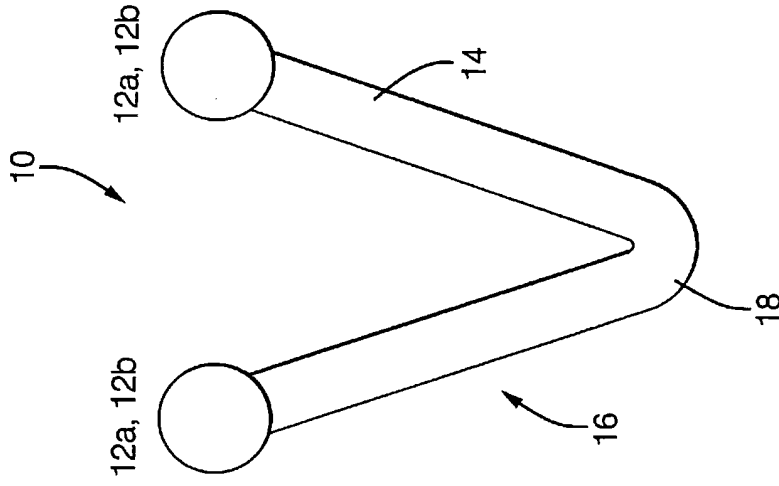


FIG. 1 B

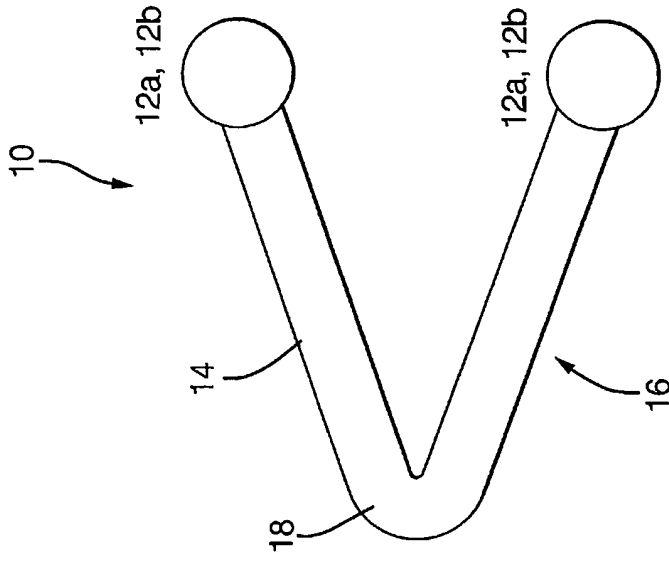


FIG. 1 C

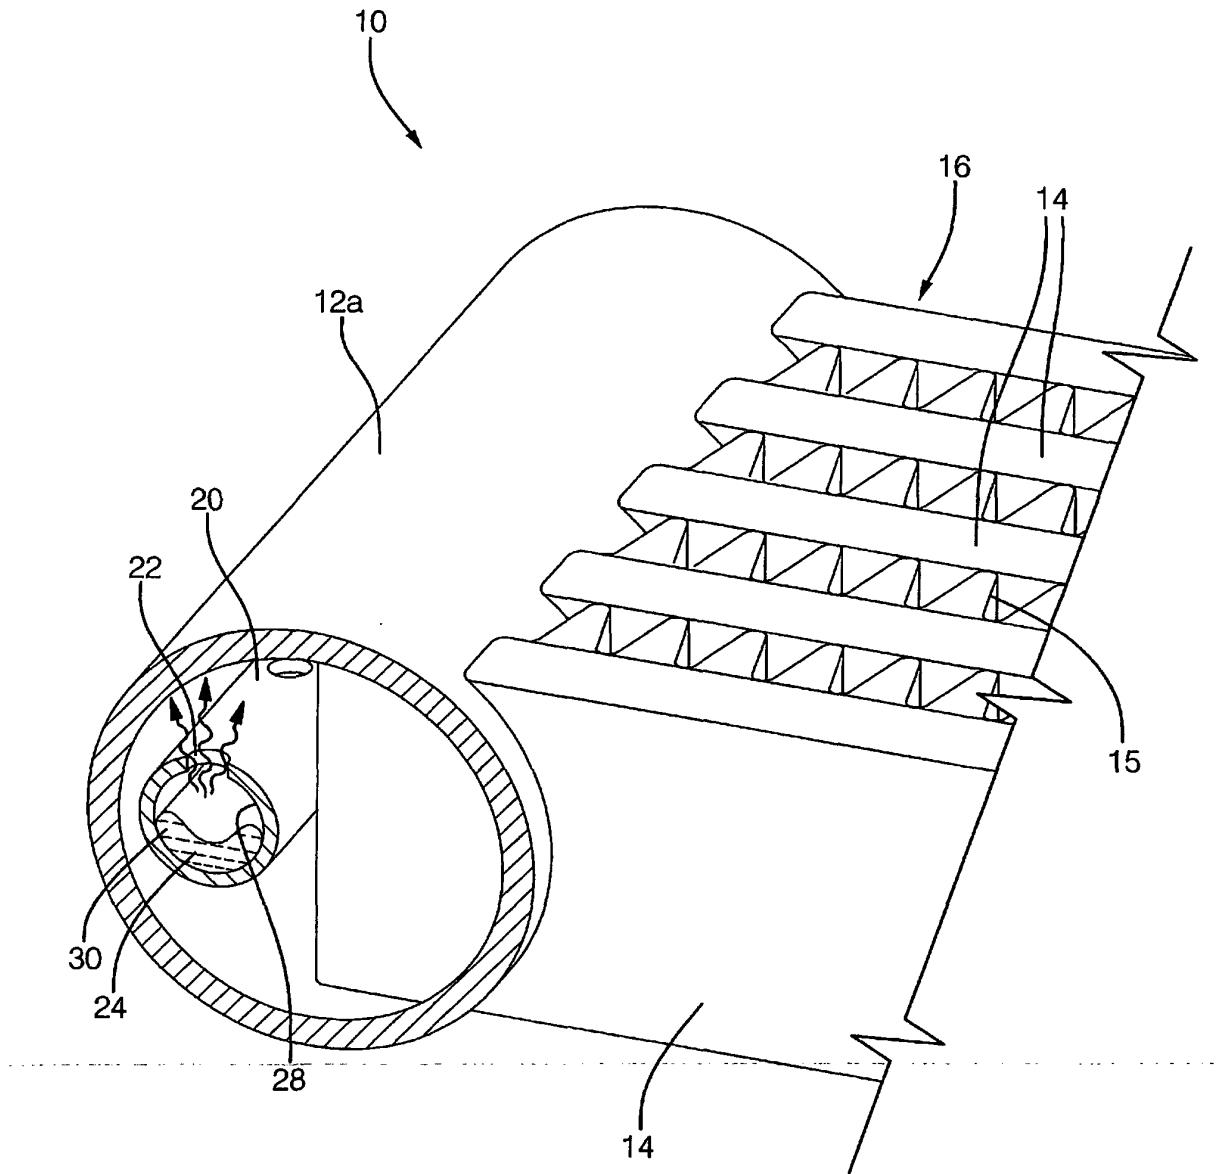


FIG. 2

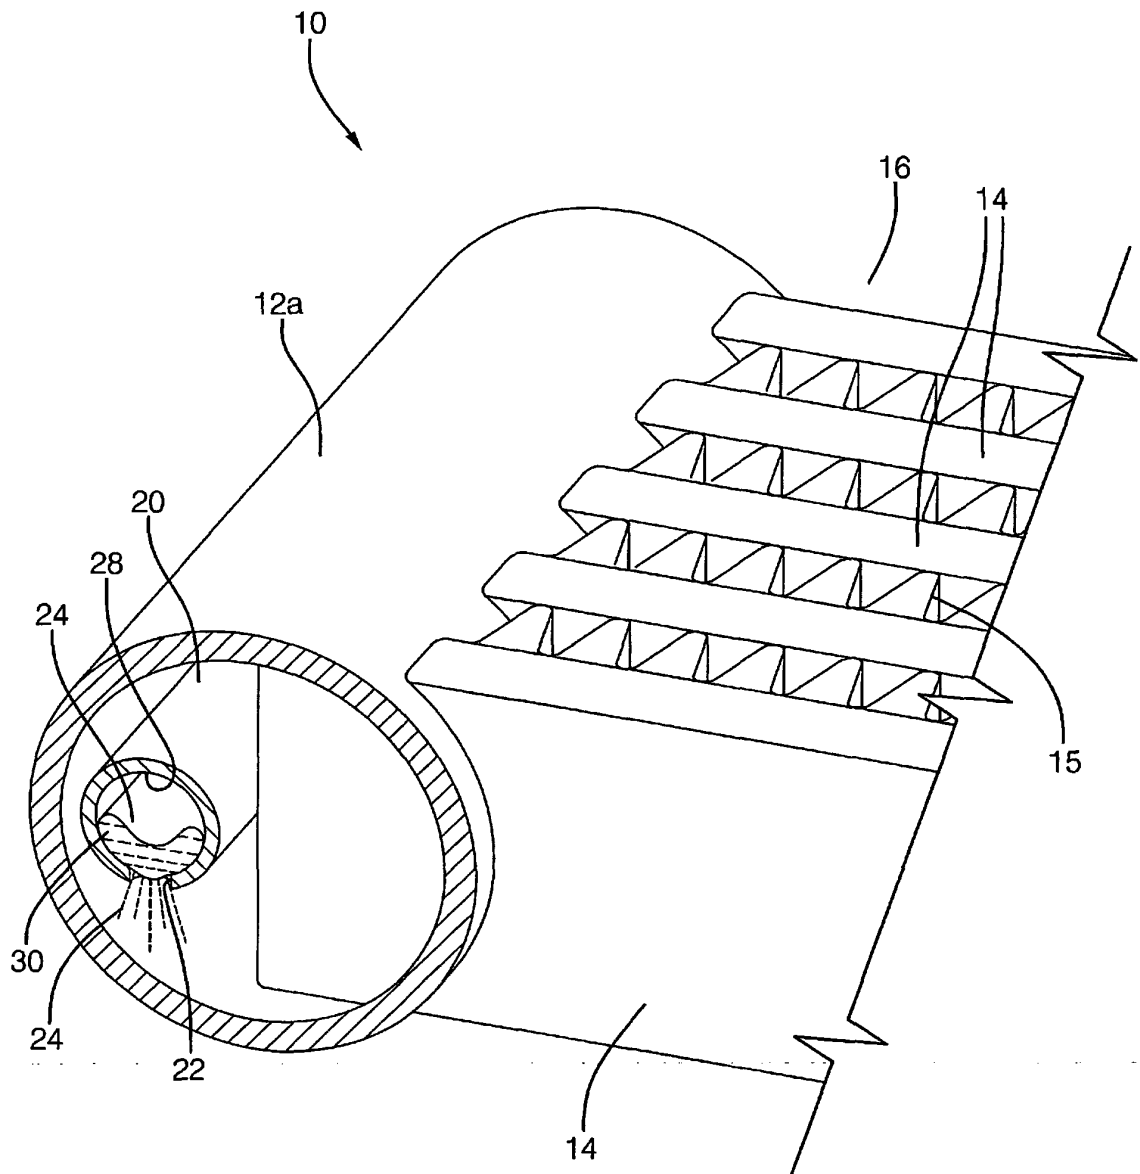


FIG. 3

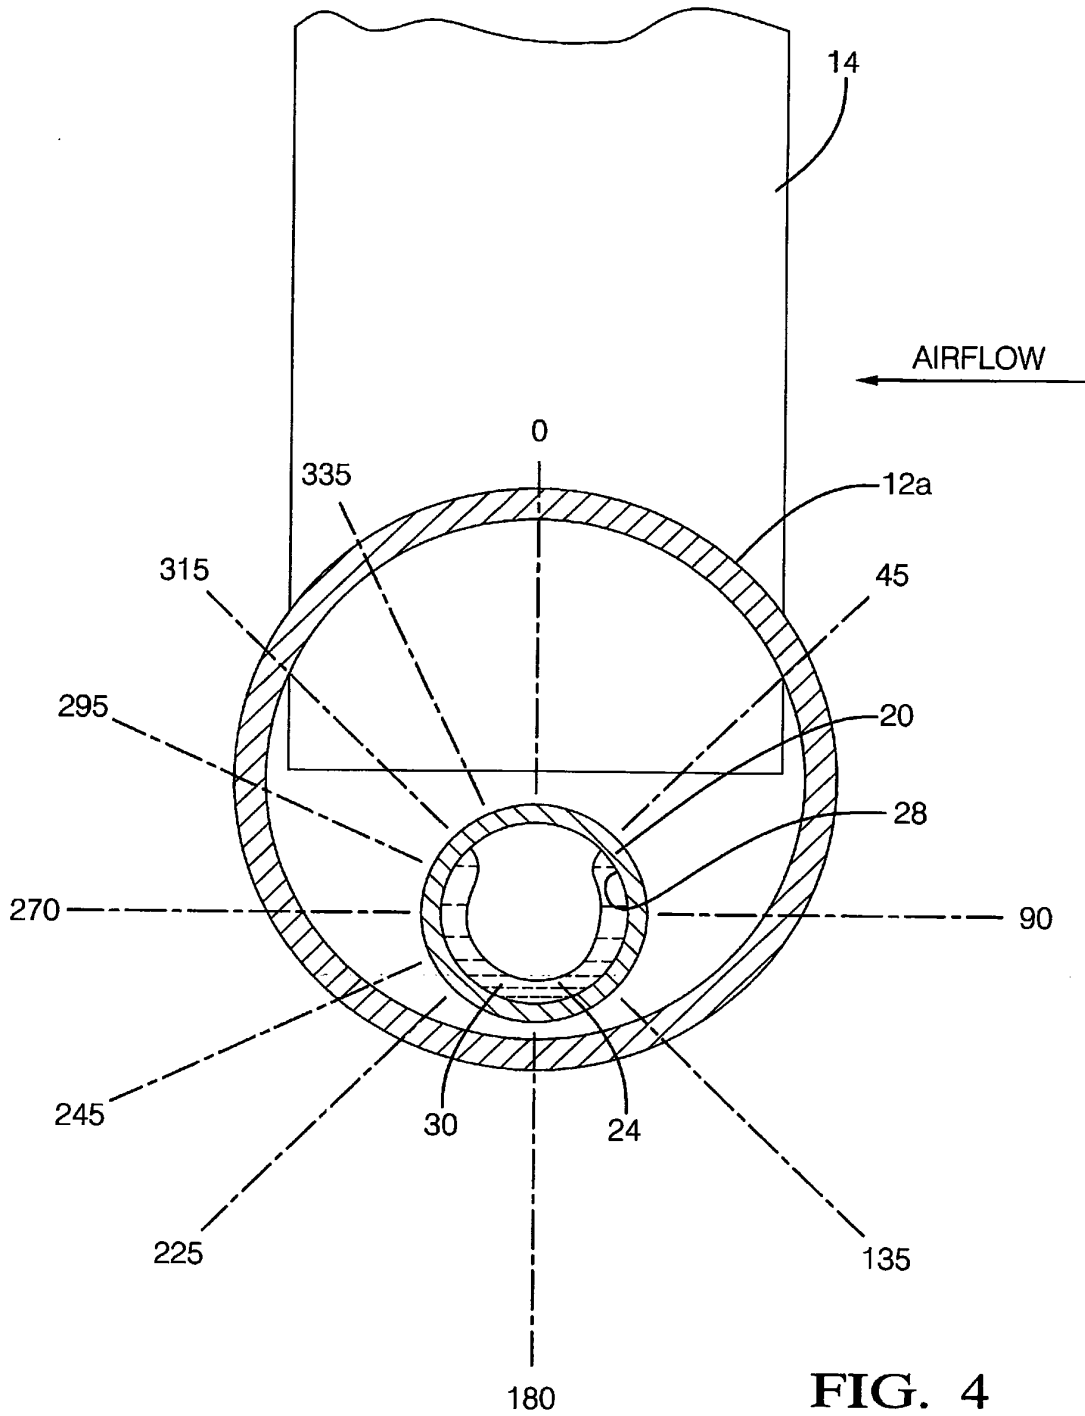


FIG. 4



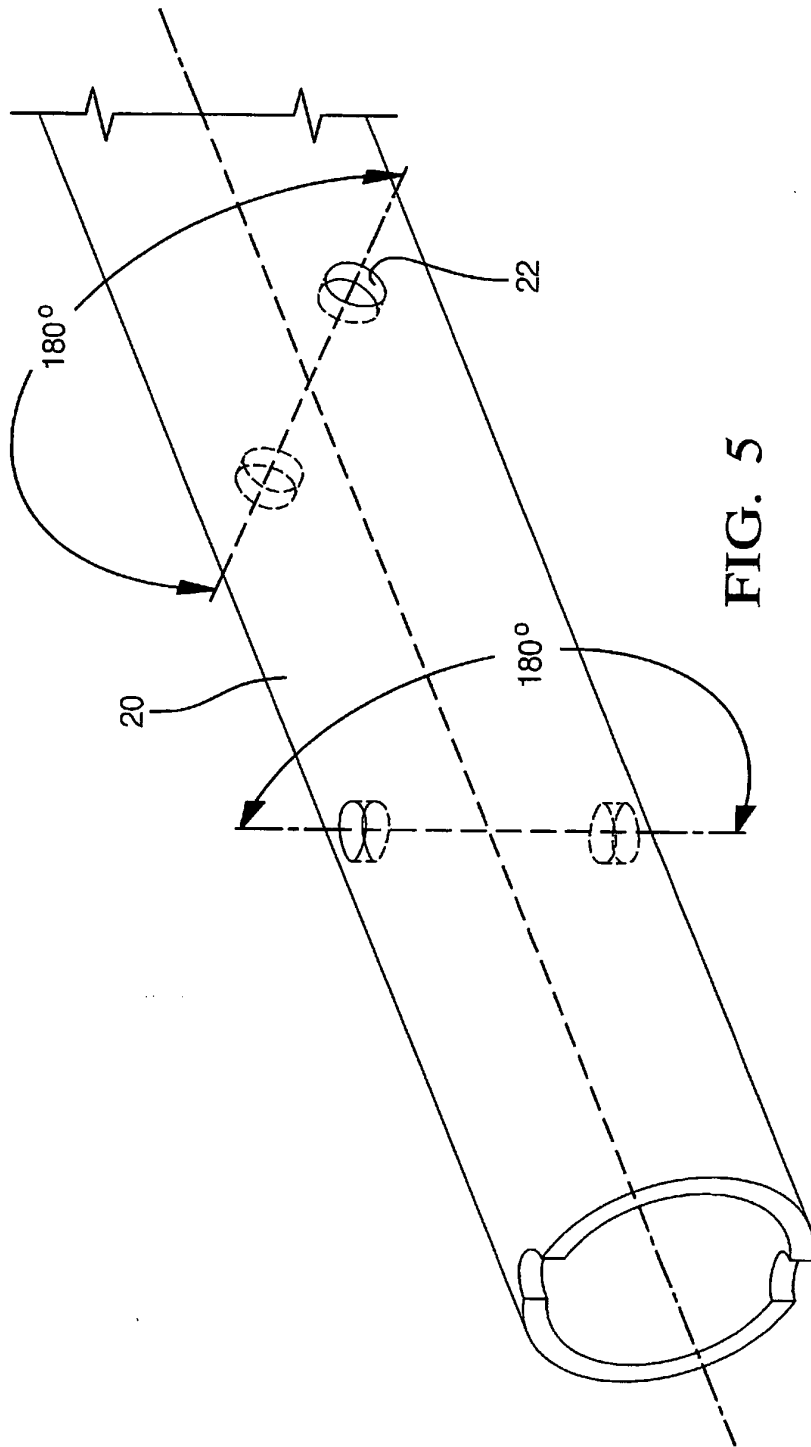


FIG. 5

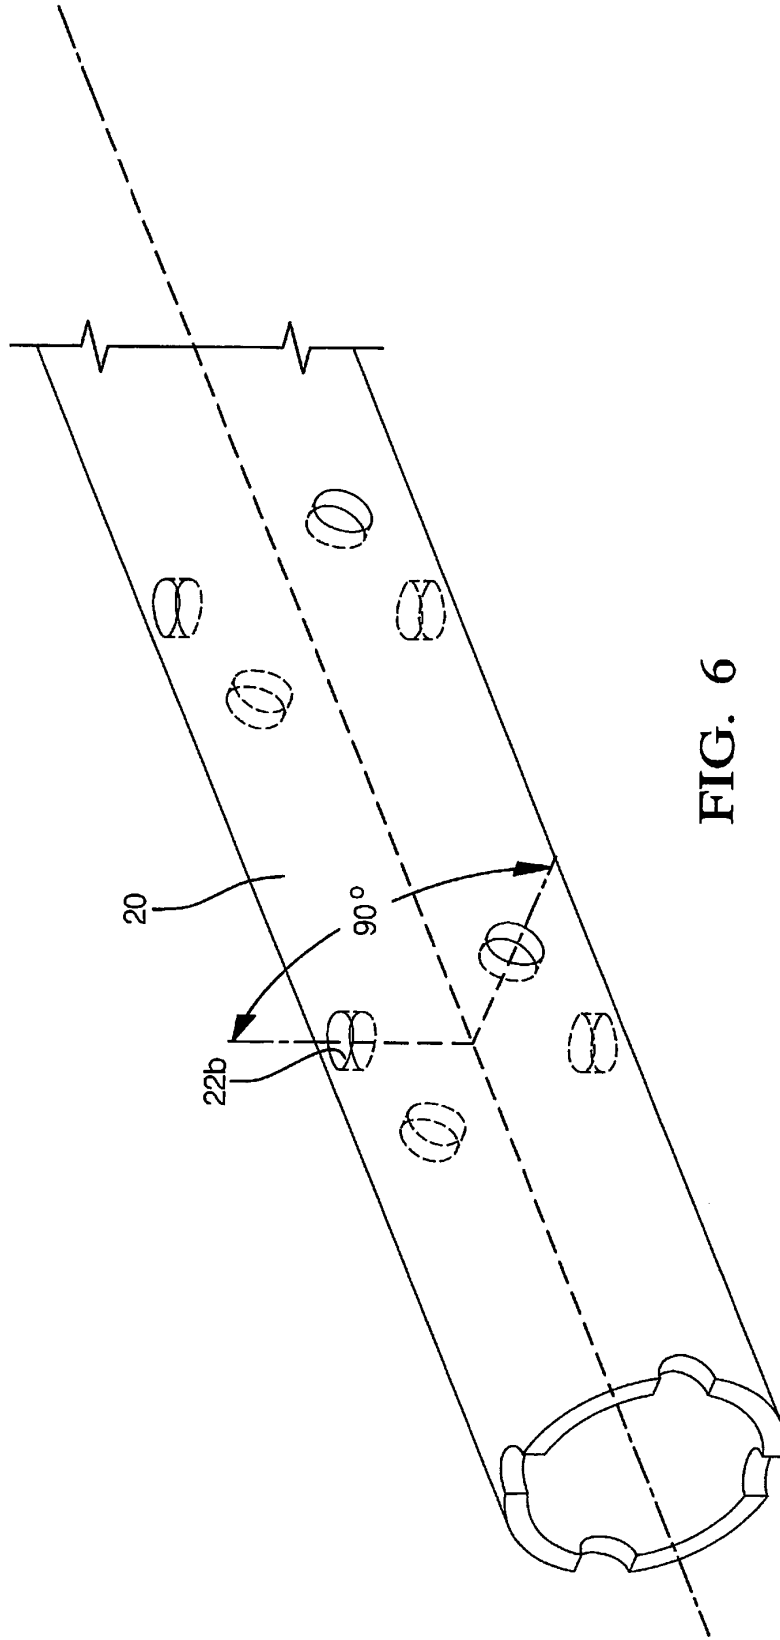


FIG. 6

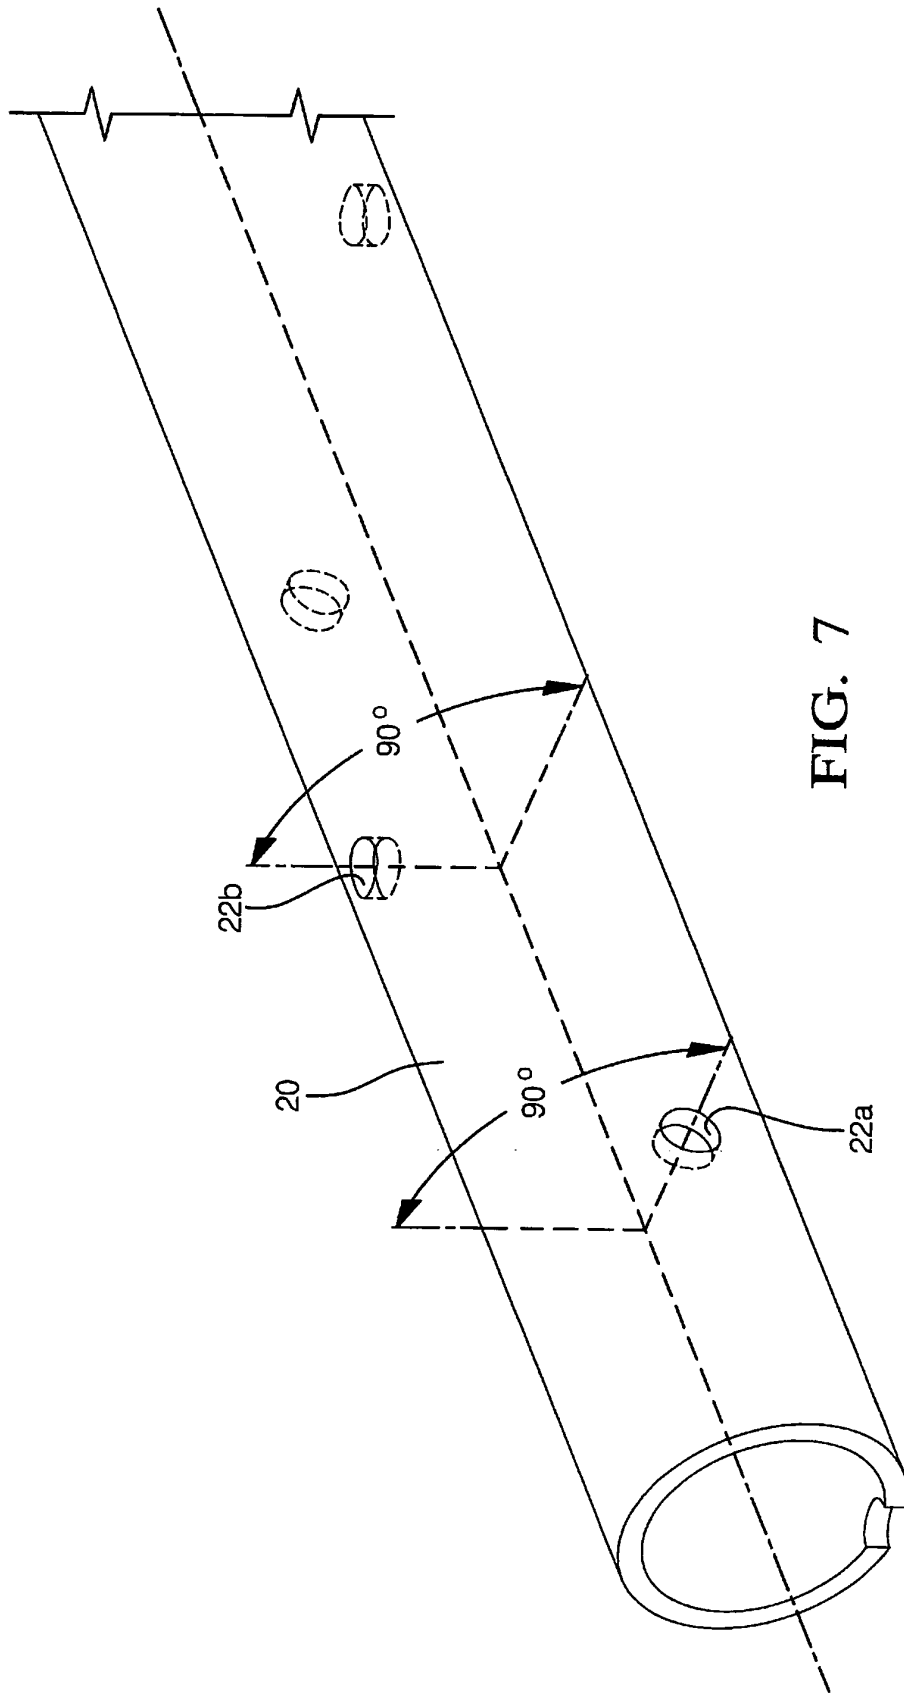


FIG. 7

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2004278935 B [0002]
- US 2006102331 A [0002]
- WO 2008060270 A [0002]
- WO 2010005676 A [0002]