




(22) Date de dépôt/Filing Date: 2003/12/22
(41) Mise à la disp. pub./Open to Public Insp.: 2005/03/19
(30) Priorité/Priority: 2003/09/19 (10-2003-0065260) KR

(51) Cl.Int.⁷/Int.Cl.⁷ F02M 37/10
(71) Demandeurs/Applicants:
KIA MOTORS CORPORATION, KR;
HYUNDAI MOTOR COMPANY, KR
(72) Inventeur/Inventor:
LEE, SUNG WON, KR
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : POMPE A ESSENCE POUR VEHICULE
(54) Title: FUEL PUMP ASSEMBLY FOR VEHICLE

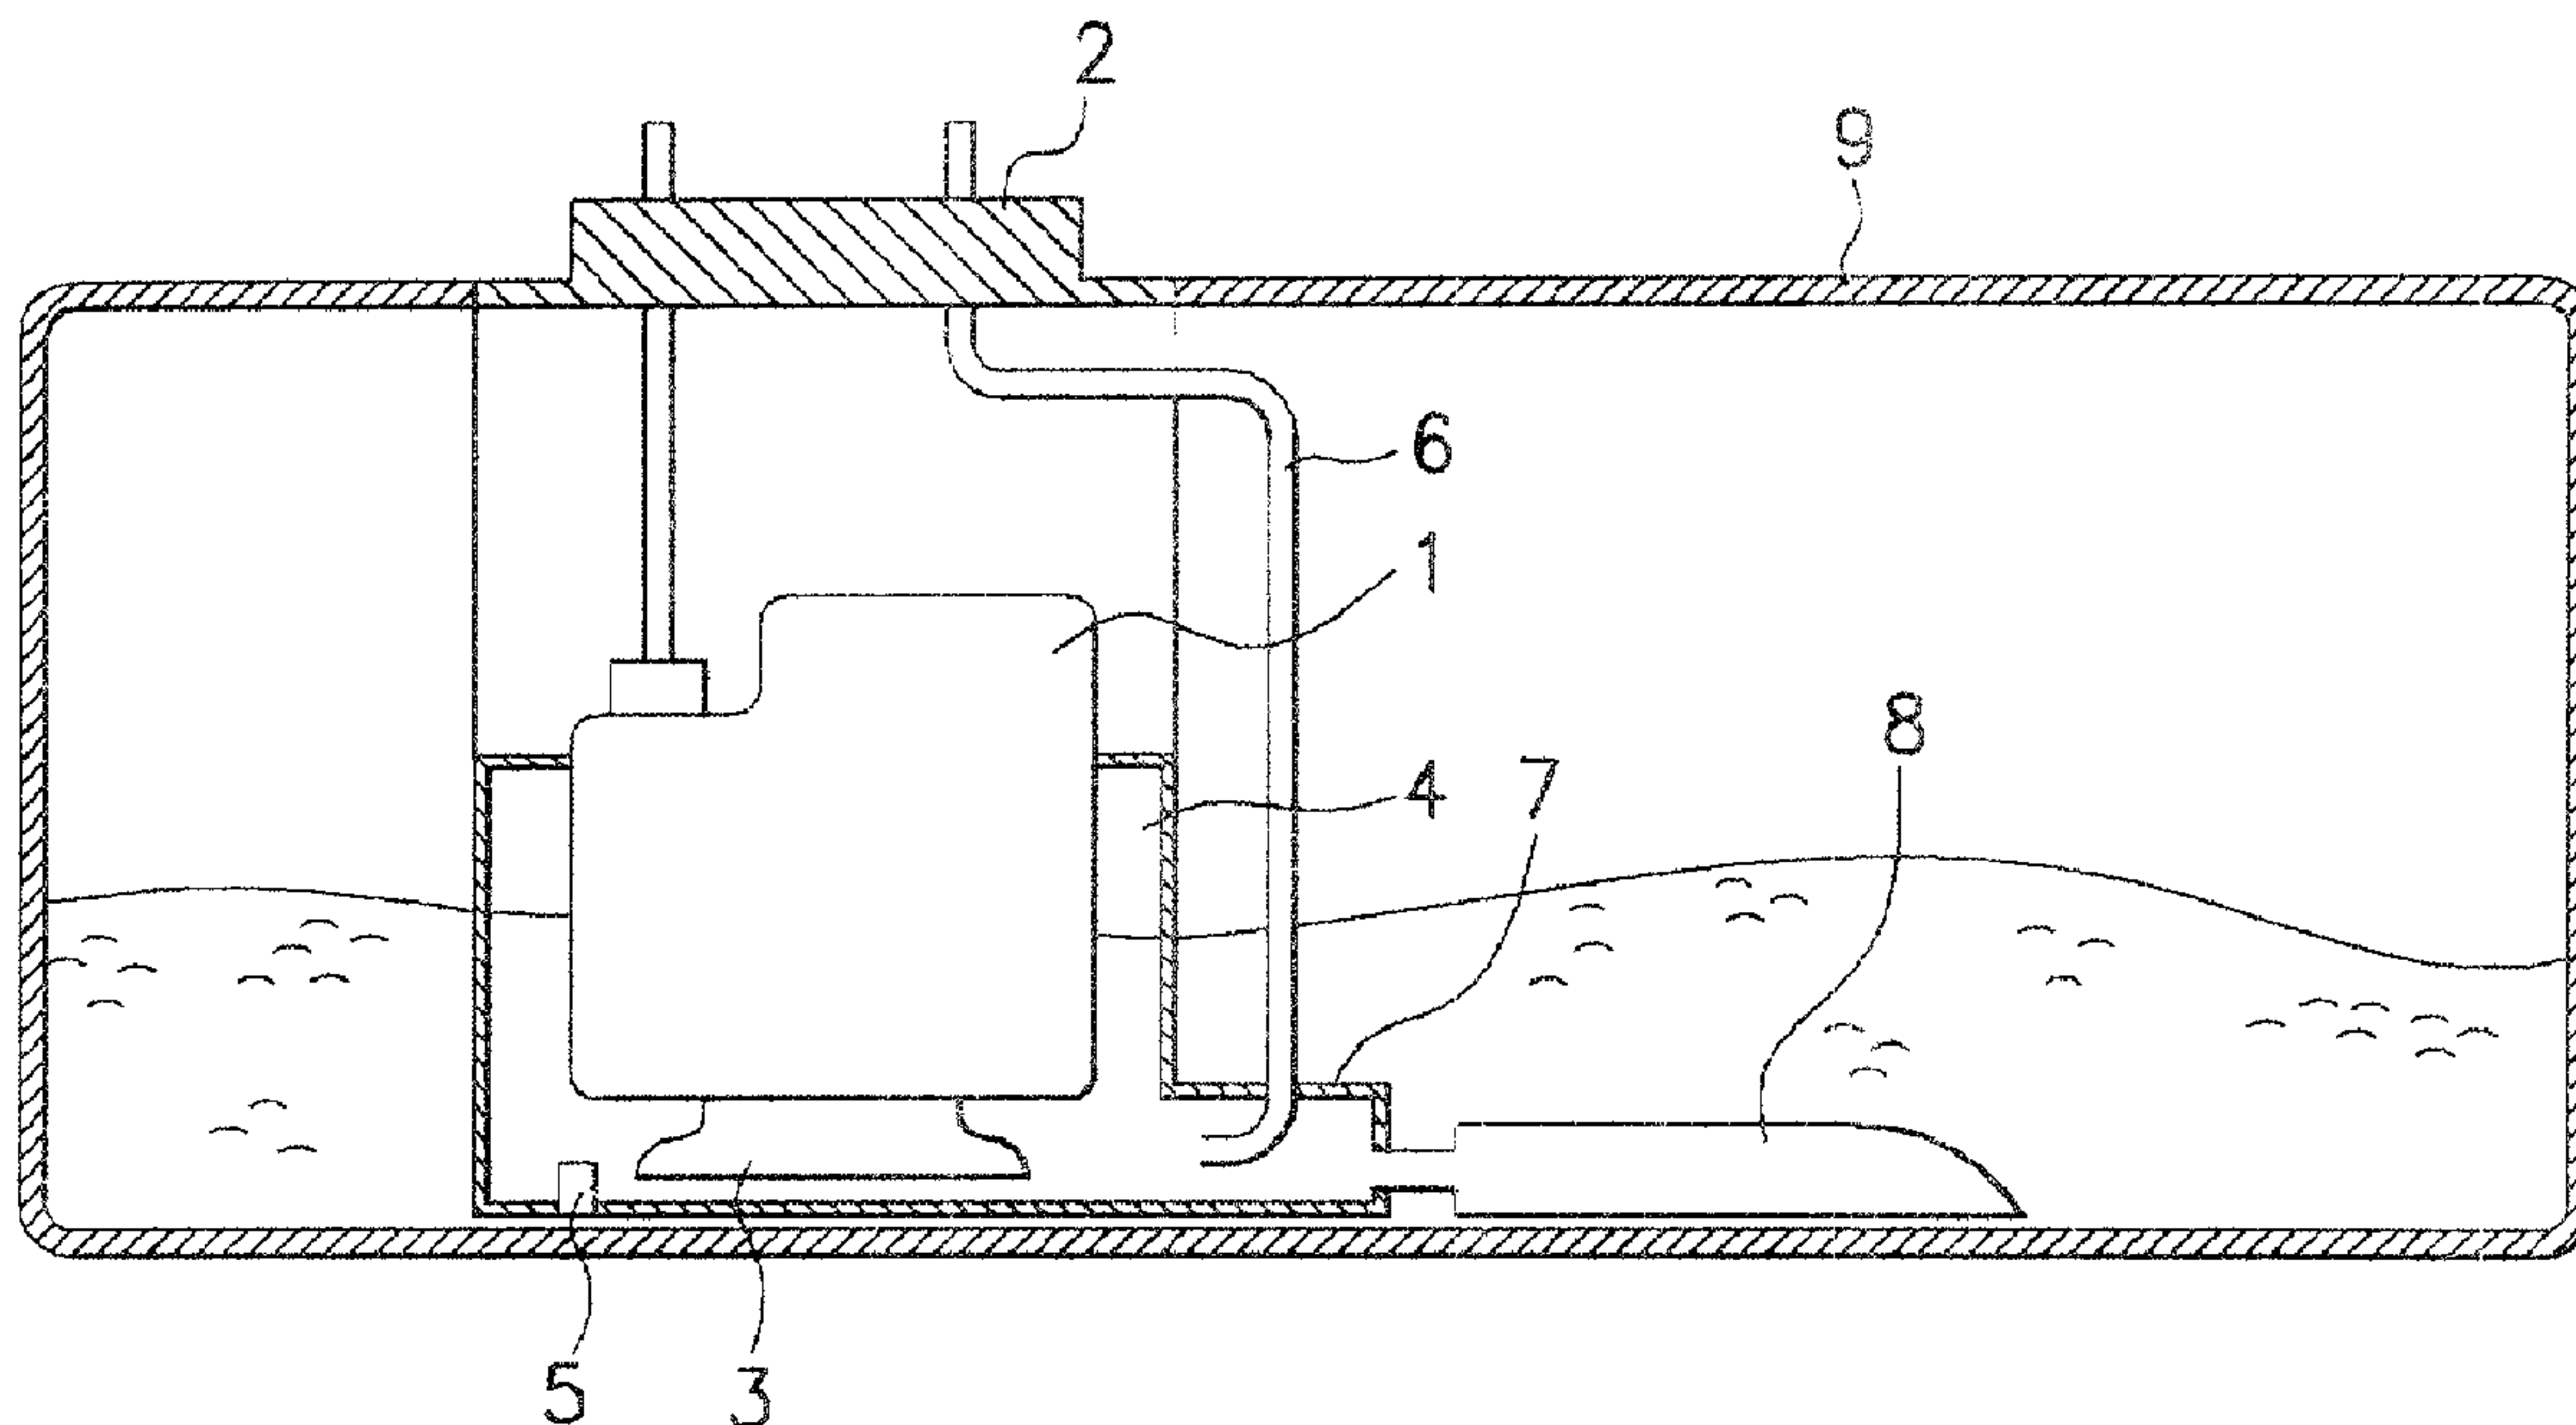

(57) **Abrégé/Abstract:**

A fuel pump assembly mounted in a fuel tank for sending fuel to a fuel injector according to this invention includes a driving means for supplying a driving force for sending or returning fuel; a reservoir for temporarily reserving fuel from the fuel tank through a check valve mounted on a bottom portion thereof; a first fuel sucker for sucking fuel reserved in the reservoir; a return pipe for returning fuel from the fuel injector to the reservoir; a second fuel sucker for sucking fuel stored in the fuel tank; and a Z-nozzle portion of which an outlet is connected to a bottom portion of the reservoir, wherein the second fuel sucker and a return pipe is connected to an inlet of the Z-nozzle portion.

ABSTRACT OF DISCLOSURE

A fuel pump assembly mounted in a fuel tank for sending fuel to a fuel injector according to this invention includes a driving means for supplying a driving force for sending or returning fuel; a reservoir for temporarily reserving fuel from the fuel tank through a check valve mounted on a bottom portion thereof; a first fuel sucker for sucking fuel reserved in the reservoir; a return pipe for returning fuel from the fuel injector to the reservoir; a second fuel sucker for sucking fuel stored in the fuel tank; and a Z-nozzle portion of which an outlet is connected to a bottom portion of the reservoir, wherein the second fuel sucker and a return pipe is connected to an inlet of the Z-nozzle portion.

TITLE OF THE INVENTION

FUEL PUMP ASSEMBLY FOR VEHICLE

BACKGROUND OF THE INVENTION**(a) Field of the Invention**

5 This invention relates to a fuel pump assembly mounted in a fuel tank for sending fuel stored in the fuel tank to a fuel injector, and more particularly, to a fuel pump assembly for stably sending fuel to a fuel injector when the fuel is driven to the corner of the fuel tank.

(b) Description of the Related Art

10 Generally, a fuel pump assembly mounted in a fuel tank storing fuel comprises a fuel pump for sending fuel from the fuel tank to a fuel injector and returning fuel from the fuel injector to the fuel tank, and a reservoir mounted in the fuel tank for temporarily reserving fuel.

15 However, when a vehicle moves on an inclined road or a curved road, the fuel reserved in the fuel tank is driven to a corner of the fuel tank such that an additional fuel sucker driven by the fuel pump should be provided.

Accordingly, due to the additional sucker and a connecting means for connecting the fuel sucker and the fuel tank assembly, the inner structure of the

fuel tank become complicated such that it is difficult to assemble the fuel tank assembly.

SUMMARY OF THE INVENTION

The motivation for the present invention is to solve the above problems,
5 and accordingly to provide a fuel pump assembly having non-limiting advantages of stable fuel supplying to the fuel injector with a simple structure for the case in which the fuel is driven to the corner of the fuel tank.

An exemplary fuel pump assembly mounted in a fuel tank for sending fuel to a fuel injector according to this invention includes a driving means for supplying a
10 driving force for sending or returning fuel; a reservoir for temporarily reserving fuel from the fuel tank through a check valve mounted on the bottom portion thereof; a first fuel sucker for sucking fuel reserved in the reservoir; a return pipe for returning fuel from the fuel injector to the reservoir; a second fuel sucker for sucking fuel stored in the fuel tank; and a Z-nozzle portion of which an outlet is
15 connected to a bottom portion of the reservoir, wherein the second fuel sucker and a return pipe are connected to an inlet of the Z-nozzle portion.

Preferably, the second fuel sucker horizontally extends with respect to the fuel

tank.

Preferably, the return pipe functions as an orifice such that the fuel in the fuel tank is sucked into the reservoir through the second fuel sucker.

Preferably, one end of the return pipe, which is connected to the
5 Z-nozzle portion, is bended to the direction of the reservoir.

Preferably, a first detent is formed on the bottom portion of the reservoir and a hook is formed on the Z-nozzle portion such that the Z-nozzle portion is fixed to the reservoir by a connection between the first detent and the hook.

Preferably, a hole is formed on the second fuel sucker and a second
10 detent is formed on the Z-nozzle portion such that the second fuel sucker is fixed to the Z-nozzle portion by connection between the second detent and the hole.

Preferably, the connection between the second fuel sucker and the Z-nozzle portion is sealed with thermal fusion.

BRIEF DESCRIPTION OF THE DRAWINGS

15 The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrates an embodiment of the invention, and together with the specification, serve to explain the principles of the invention.

FIG.1 is sectional view of a fuel pump assembly according to an

embodiment of this invention.

FIG. 2 illustrates a connection between a Z-nozzle portion and a reservoir.

FIG. 3 illustrates a fuel flow in the Z-nozzle portion.

5 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

An embodiment of the present invention will hereinafter be described in detail with reference to the accompanying drawings.

FIG. 1 is a sectional view of a fuel pump assembly according to an embodiment of this invention.

10 As shown in FIG. 1, the fuel pump assembly 2 includes a driving means 1, a reservoir 4 mounted in a fuel tank 9, a first fuel sucker 3 for sucking fuel in the reservoir 4, a return pipe 6 for returning fuel, a second fuel sucker 8 for sucking fuel stored in the fuel tank 9, and a Z-nozzle portion 7 mounted to the reservoir 4.

15 The reservoir 4 receives the driving means 1 and the first fuel sucker 3 therein, and a check valve 5 is mounted on the bottom surface of the reservoir 4 such that fuel in the fuel tank 9 is supplied to the reservoir 4 through the check valve 5.

Furthermore, the fuel from a fuel injector (not shown) is returned to the reservoir 4 through the return pipe 6.

The fuel temporarily reserved in the reservoir is sent to the fuel injector by the driving force generated by the driving means 1.

5 Meanwhile, the Z-nozzle portion is connected to the side of the reservoir 4.

An inlet of the Z-nozzle portion is connected to the return pipe 6 and the second fuel sucker 8, and the outlet of the Z-nozzle portion is connected to the reservoir 4.

10 FIG. 2 illustrates a connection between a Z-nozzle portion and a reservoir.

As shown in FIG. 2, a first detent 10 is formed on the reservoir 4 and a hook 11 is formed on the Z-nozzle portion 7. The first detent 10 and the hook 11 are complementarily combined such that the Z-nozzle portion 7 is fixed to the
15 reservoir 4.

Furthermore, a second detent 12 is formed on the Z-nozzle portion 7 and a hole 13 is formed on the connecting pipe of the second fuel sucker 8. The second detent 12 and the hole 13 are complementarily combined such the

second fuel sucker 8 is fixed to the Z-nozzle portion 7.

Preferably, the connection between the Z-nozzle portion 7 and the second fuel sucker 8 is sealed with thermal fusion for preventing the fuel from permeating through the connection. The Z-nozzle portion 7 has two inlets
5 respectively communicated with the return pipe 6 and the second fuel sucker 8, and one outlet communicated with the reservoir 4.

The second fuel sucker 8 horizontally extends with respect to the fuel tank 9, and the return pipe 6 is fixed to the upper portion of the Z-nozzle portion
7.

10 The second fuel sucker 8 faces the bottom surface of the fuel tank 9 such that when the fuel in the fuel tank 9 is driven to the corner, fuel can still be supplied to the reservoir 9.

FIG. 3 illustrates a fuel flow in the Z-nozzle portion 7.

As described above, the Z-nozzle portion 7 has two inlets respectively
15 communicated with the return pipe 6 and the second fuel sucker 8, and one outlet communicated with the reservoir 4. Fuel flow from the return pipe 6 and the second fuel sucker 8 passes through the Z-nozzle portion 7 and is supplied to the reservoir 4. The return pipe 6 is connected to the upper portion of the

Z-nozzle portion 7 and curved in the direction of the reservoir 4 inside of the Z-nozzle portion.

Accordingly, when the fuel is returned by the fuel return pipe 6 and flows through the Z-nozzle portion 7, the return pipe 6 functions as an orifice such that
5 the fuel in the fuel tank is sucked by the second fuel sucker 8, and is supplied to the fuel reservoir 4 without any additional driving means for the second fuel sucker 8.

Specifically, even though the fuel is driven to the corner of the fuel tank 9 such that the fuel can not be supplied to the reservoir 4 through the check valve
10 5, the fuel driven to the corner is sucked by the second fuel sucker 8 and can be supplied to the fuel reservoir 9.

According to the fuel pump assembly of this invention, when the vehicle moves on an inclined road such that the fuel in the fuel tank is driven to the corner of the fuel tank, fuel supply to the fuel injector can be performed utilizing a
15 second fuel sucker. Furthermore, the suction of the second fuel sucker can be performed without any additional driving means such that the inner structure of the fuel tank becomes simple.

WHAT IS CLAIMED IS:

1. A fuel pump assembly mounted in a fuel tank for sending fuel to fuel injector,

comprising:

a driving means for supplying a driving force for sending or returning fuel;

5 a reservoir for temporarily reserving fuel from the fuel tank through a check

valve mounted on a bottom portion thereof;

a first fuel sucker for sucking fuel reserved in the reservoir;

a return pipe for returning fuel from the fuel injector to the reservoir;

a second fuel sucker for sucking fuel stored in the fuel tank; and

10 a Z-nozzle portion of which an outlet is connected to a bottom portion of the

reservoir,

wherein the second fuel sucker and a return pipe are connected to an inlet of
the Z-nozzle portion.

15 2. The fuel pump assembly of claim 1, wherein the second fuel sucker

horizontally extends with respect to the fuel tank.

3. The fuel pump assembly of claim 2, wherein the return pipe functions

as an orifice such that the fuel in the fuel tank is sucked into the reservoir through the second fuel sucker.

4. The fuel pump assembly of claim 3, wherein one end of the return pipe, which is connected to the Z-nozzle portion, is bended to the direction of the reservoir.

5. The fuel pump assembly of claim 3, wherein a first detent is formed on the bottom portion of the reservoir and a hook is formed on the Z-nozzle portion such that the Z-nozzle portion is fixed to the reservoir by a connection between the first detent and the hook.

6. The fuel pump assembly of claim 5, wherein a hole is formed on the second fuel sucker and a second detent is formed on the Z-nozzle portion such that the second fuel sucker is fixed to the Z-nozzle portion by connection between the second detent and the hole.

7. The fuel pump assembly of claim 6, wherein the connection between

the second fuel sucker and the Z-nozzle portion is sealed with thermal fusion.

FIG. 1

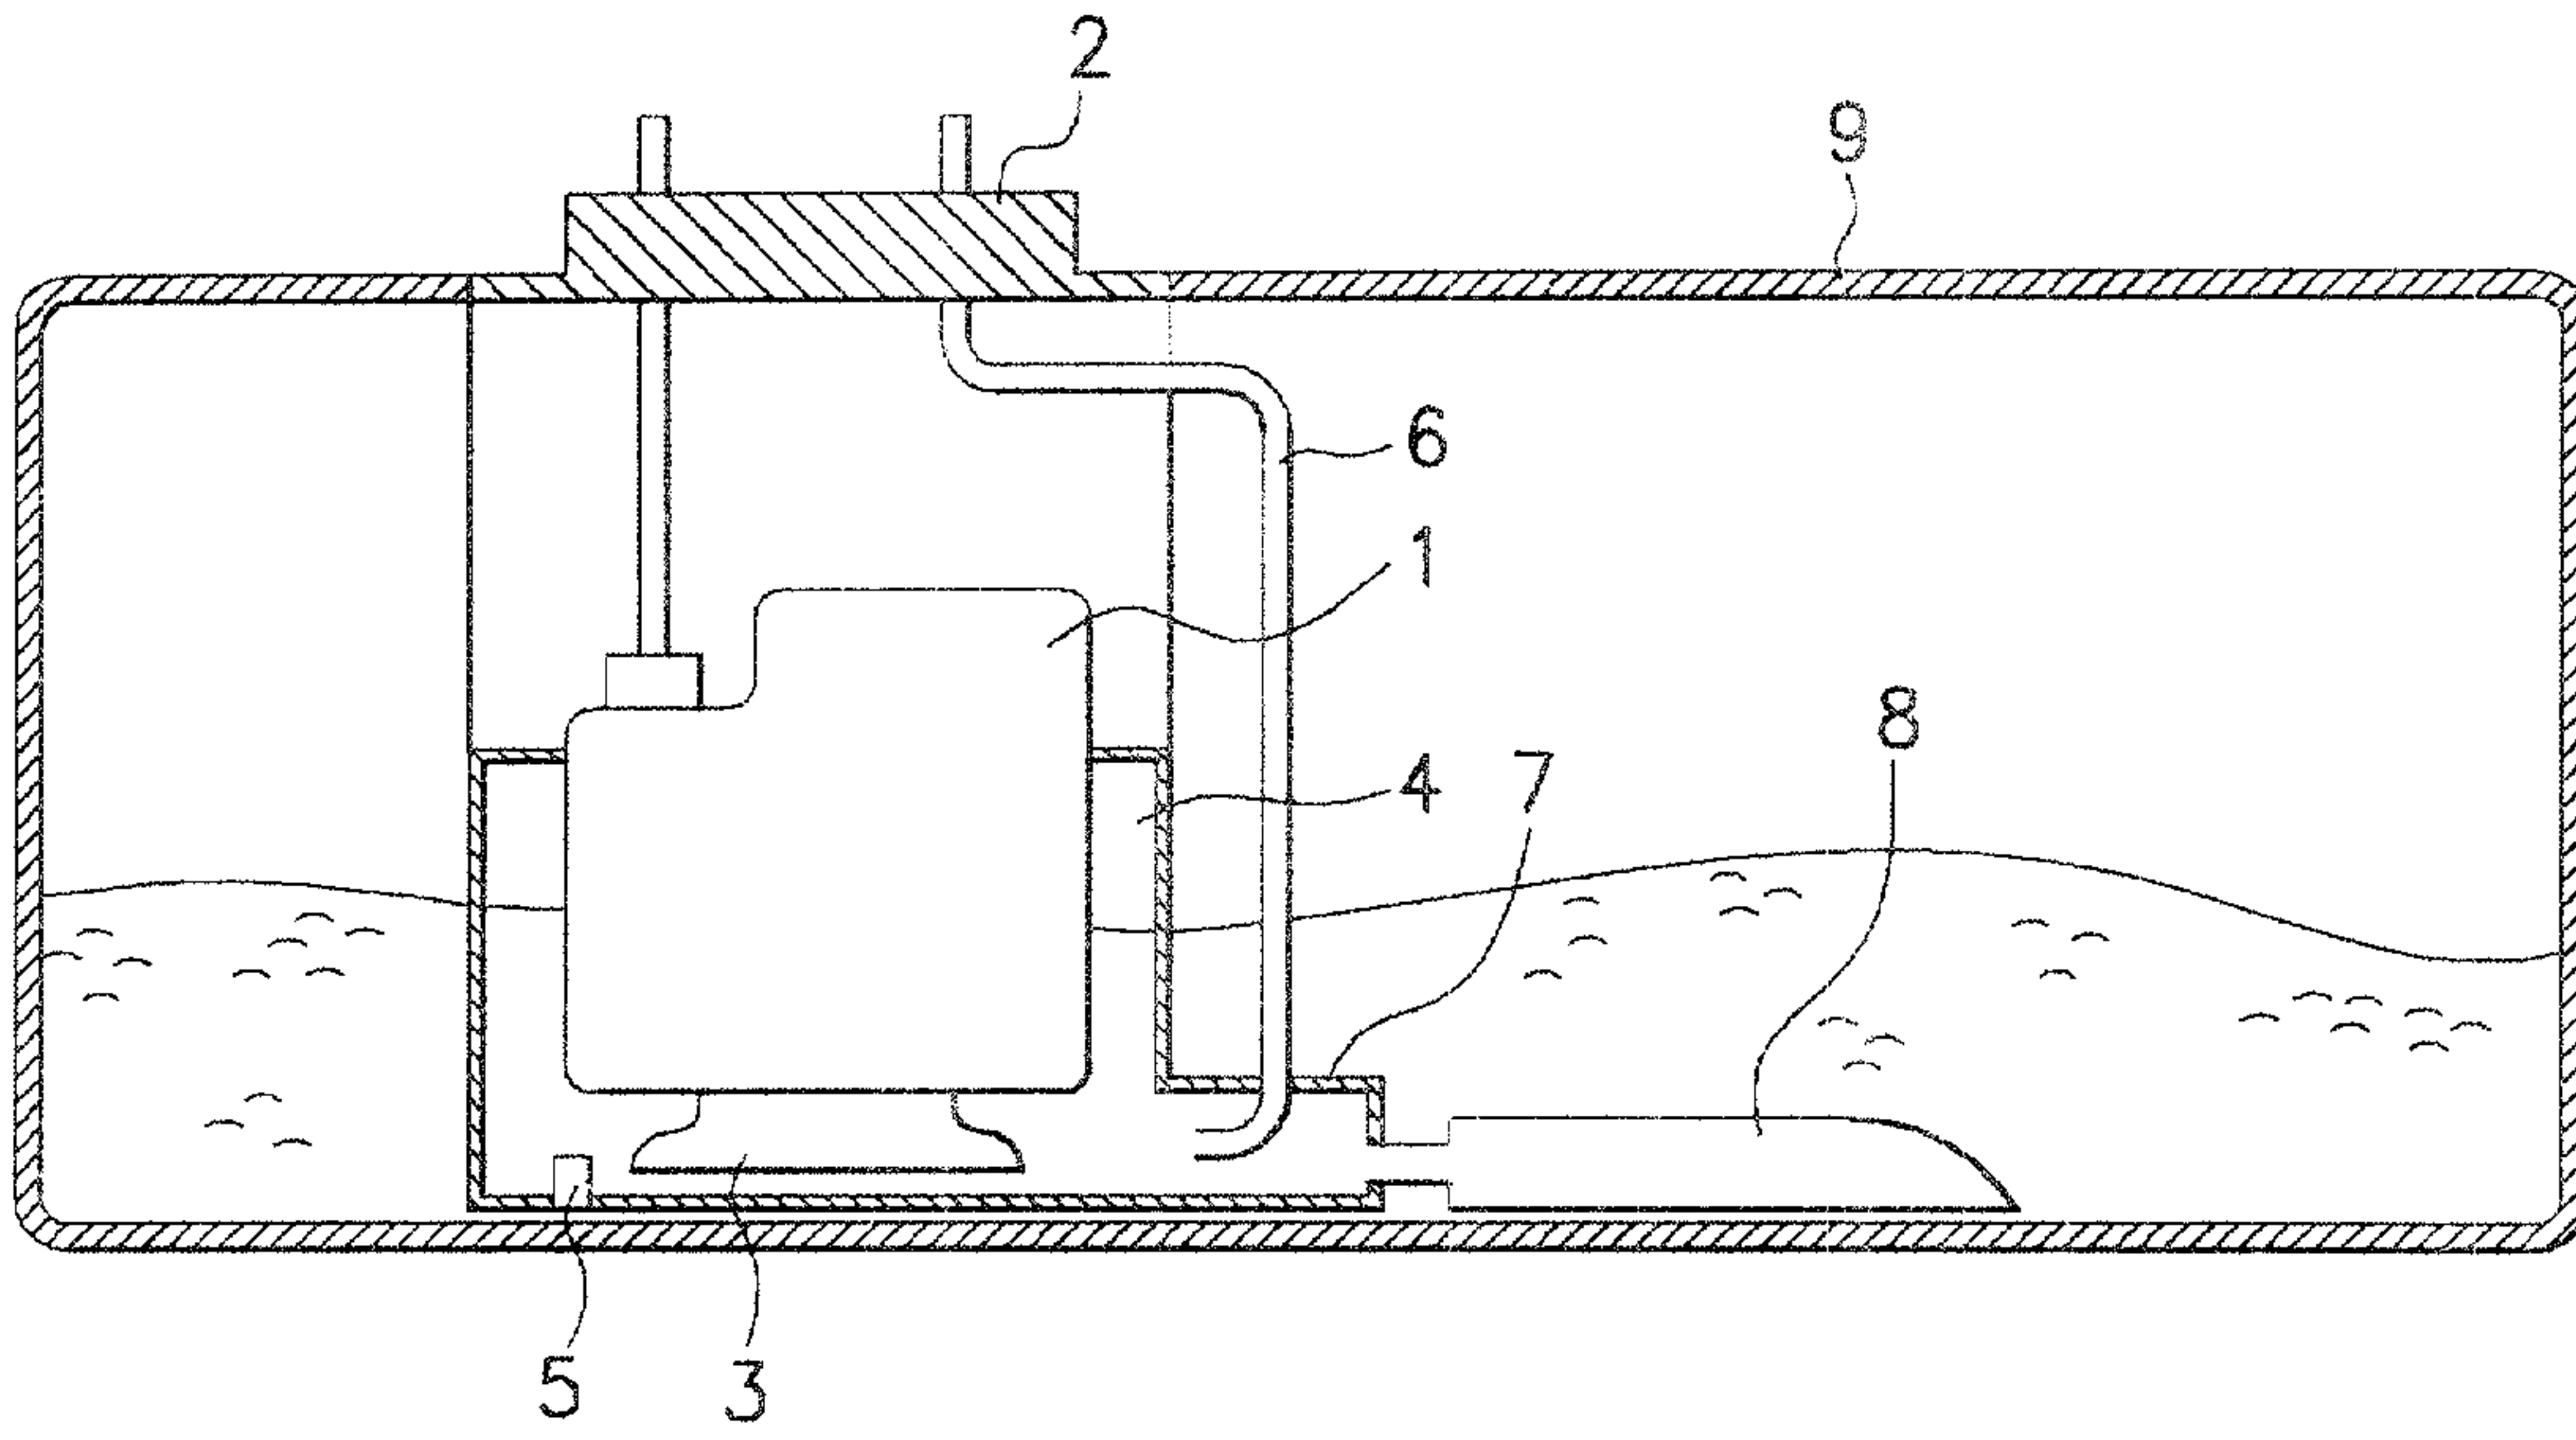


FIG. 2

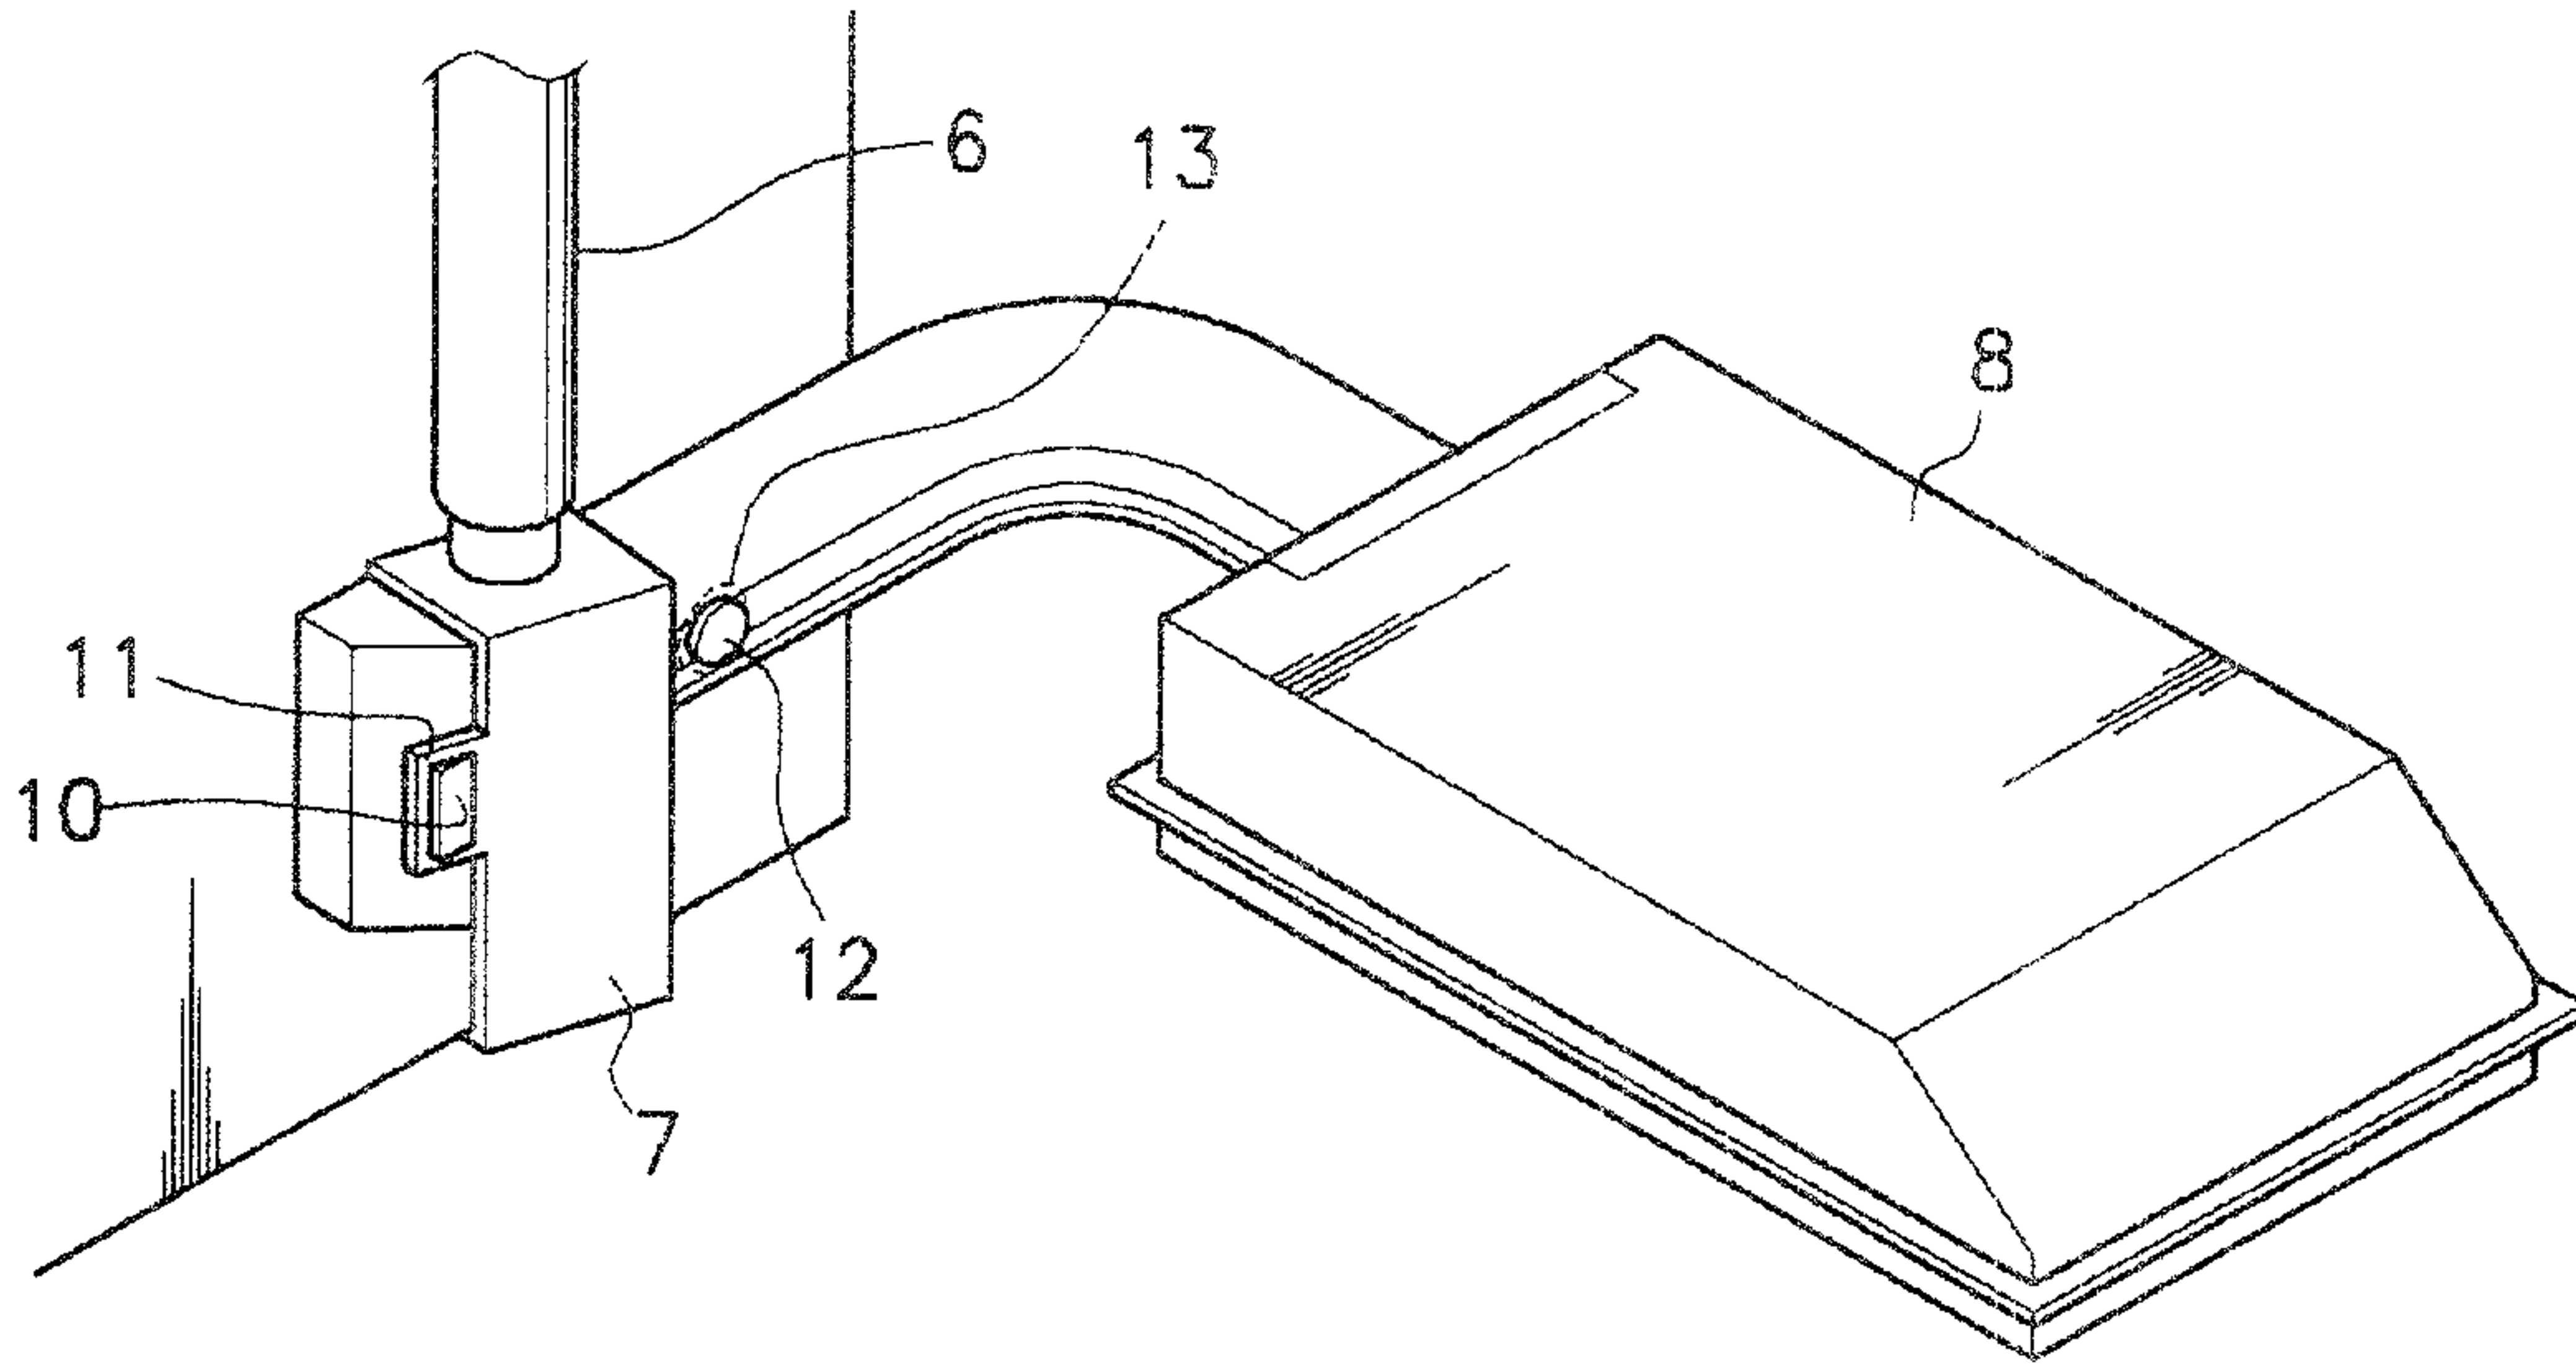


FIG. 3

