



(51) International Patent Classification:

B01J 20/34 (2006.01) **B01D 53/08** (2006.01)
C10L 3/10 (2006.01) **C07C 7/13** (2006.01)
B01D 53/02 (2006.01) **C10G 5/02** (2006.01)

(21) International Application Number:

PCT/US2014/049775

(22) International Filing Date:

5 August 2014 (05.08.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/930,590 23 January 2014 (23.01.2014) US

(71) Applicant: **DOW GLOBAL TECHNOLOGIES LLC**
[US/US]; 2040 Dow Center, Midland, MI 48674 (US).

(72) Inventors: **MATTEUCCI, Scott T.**; 2600 Longfellow Lane, Midland, MI 48640 (US). **BADHWAR, Ajay N.**; 1114 Lakin Street, Houston, TX 77007 (US). **SHUR-GOTT, Nicholas J.**; 5406 Tara Oaks Ct, Rosharon, TX 77583 (US). **GOLTZ, H. Robert**; 3737 Julie Ann Drive, Midland, MI 48642 (US).

(74) Agent: **CHRISTY, M. Robert**; The Dow Chemical Company, Intellectual Property, PO Box 1967, Midland, Michigan 48641-1967 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD TO PROVIDE PIPELINE QUALITY NATURAL GAS

FIG. 1

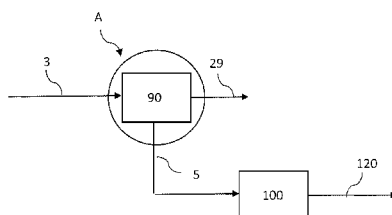

(57) Abstract: A method of separating and recovering NGLs (29) from a natural gas feedstream (3) is described. Specifically, the present method allows for the separation of ethane and heavier hydrocarbons and/or propane and heavier hydrocarbons from a raw natural gas feedstream (3) to provide pipeline quality natural gas (5). One embodiment of this method provides for the use of a regenerable adsorbent media which is regenerated by a microwave heating system. Said regeneration step may be operated as a batch process, a semi-continuous process, or a continuous process.



METHOD TO PROVIDE PIPELINE QUALITY NATURAL GAS

FIELD OF THE INVENTION

5 This invention relates to a method for providing pipeline quality natural gas from a natural gas feedstream comprising natural gas liquids, preferably at or near the source of the natural gas feedstream, by separating and recovering natural gas liquids.

BACKGROUND OF THE INVENTION

10

Natural gas consists primarily of saturated hydrocarbon components such as methane, ethane, propane, butane, and heavier hydrocarbons. Natural gas typically contains about 60-100 mole percent methane, the balance being primarily heavier alkanes. Alkanes of increasing carbon number are normally present in decreasing amounts. Carbon dioxide, hydrogen sulfide, 15 nitrogen, and other gases may also be present.

There are many reasons to separate the higher alkanes known as natural gas liquids (NGL) from natural gas to provide a methane-rich natural gas stream. One such reason is to meet pipeline specifications or liquefied natural gas (LNG) specification for heating value, dew point, and condensation. Some stationary internal combustion engines, such as natural gas 20 engines, are designed to operate for optimal efficiency within a specific BTU range and may require higher maintenance costs, higher operating temperatures, reduced equipment life expectancy, and/or generate increased pollution if operated at higher BTUs.

Additionally, it may be financially desirable to recover natural gas liquids from natural gas. NGLs including ethane, propane, butane, and lesser amounts of other heavy hydrocarbons 25 may be used as petrochemical feedstocks where they have a higher value as compared to their value as a fuel gas component.

In other instances, gas is co-produced with oil and the concentrations of NGLs can be very high ranging from a fraction of a percent of the gas flow to tens of percent. This gas can be of poor quality due to high levels of carbon dioxide, nitrogen, and other components. The 30 gas flow rate can be small and often it is not economical to bring a pipeline to an isolated location where natural gas is produced, such gas is sometimes referred to as stranded gas. In these instances, the best alternative is to flare the gas. However, flaring of gas high in NGLs may have a significant negative impact on the environment, accounting for a significant amount of CO₂ and heat that is injected into the atmosphere. In addition to capturing value for 35 separated NGLs that can be stored in a tank for later transportation and sale, it would be

environmentally advantageous to remove the NGLs from the gas to reduce the amount of CO₂ and heat uselessly released into the environment.

There are two basic steps for the separation of natural gas liquids from a natural gas stream. First, the liquids must be extracted from the natural gas. Second, these natural gas
5 liquids must be separated themselves, down to their base components. There are two principle techniques for removing NGLs from the natural gas stream are the oil absorption method and the cryogenic expander process. These two processes account for around 90 percent of total natural gas liquids production.

The absorption method of NGL extraction utilizes an absorbing oil which has an affinity
10 for NGLs. Before the oil has picked up any NGLs, it is termed "lean" absorption oil. As the natural gas is passed through an absorption tower, it is brought into contact with the absorption oil which soaks up a high proportion of the NGLs. The "rich" absorption oil, now containing NGLs, exits the absorption tower through the bottom. It is now a mixture of absorption oil, propane, butanes, pentanes, and other heavier hydrocarbons. The rich oil is fed into lean oil
15 stills, where the mixture is heated to a temperature above the boiling point of the NGLs, but below that of the oil. This process allows for the recovery of around 75 percent of butanes, and 85 to 90 percent of pentanes and heavier molecules from the natural gas stream.

Although there are many known adsorption processes, there is always a compromise between high recovery and process simplicity (i.e., low capital investment). Common
20 adsorption technologies focus on removal of hydrocarbons, which works well in non-hydrocarbon rich streams, but is limited in applicability in hydrocarbon continuous streams. Further this technology is not selective for certain molecular size/weight.

Cryogenic processes are also used to extract NGLs from natural gas. While absorption methods can extract almost all of the heavier NGLs, the lighter hydrocarbons, such as ethane,
25 are often more difficult to recover from the natural gas stream. In certain instances, it is economic to simply leave the lighter NGLs in the natural gas stream. However, if it is economic to extract ethane and other lighter hydrocarbons, cryogenic processes are required for high recovery rates. Essentially, cryogenic processes consist of dropping the temperature of the gas stream to around -120 degrees Fahrenheit. There are a number of different ways of chilling
30 the gas to these temperatures, but one of the most effective is known as the turbo expander process. In this process, external refrigerants are used to cool the natural gas stream. Then, an expansion turbine is used to rapidly expand the chilled gases, which causes the temperature to drop significantly. This expansion can take place across a valve as well. This rapid temperature drop caused by the Joule-Thompson effect condenses ethane and other hydrocarbons in the gas
35 stream, while maintaining methane in gaseous form. This process allows for the recovery of

about 90 to 95 percent of the ethane originally in the natural gas stream. In addition, the expansion turbine is able to convert some of the energy released when the natural gas stream is expanded into recompressing the gaseous methane effluent, thus saving energy costs associated with extracting ethane. These plants can be called JT plants, refrigeration plants, or cryo plants which are all variations on the same temperature drop processes.

While reliable, cryogenic systems suffer from a number of shortcomings including high horsepower requirements. Further, such systems require relatively rigorous and expensive maintenance to function properly. Mechanical refrigeration systems also have practical limits with respect to the amount of cold that may be delivered, accordingly, the efficiency and capacity of such systems is limited. The operating window (range of operating conditions the plants can function well within) is a relatively narrow window, requires time to start-up and shut-down effectively, and is quite capitolly intensive. As a result these facilities are often used at higher gas flow rates to ensure a more economic cost to treat the system. And if the facility is to be constructed, and can only operate in a narrow range of operating conditions, there are significant upstream treatment systems required to remove CO₂ (amine systems), water (glycol dehydration) and sometimes even pre-chilling (propane chillers).

Once NGLs have been removed from the natural gas stream, the mixed stream of different NGLs must be separated out. The process used to accomplish this task is called fractionation. Fractionation works based on the different boiling points of the different hydrocarbons in the NGL stream. Essentially, fractionation occurs in stages consisting of the boiling off of hydrocarbons one by one. By proceeding from the lightest hydrocarbons to the heaviest, it is possible to separate the different NGLs reasonably easily.

Of the various alternative technologies, adsorption process appears to be the most promising. An adsorbent suitable for the separation of NGLs should have high adsorption capacity and selectivity for either olefin or paraffin. Adsorbed component should be able to desorb easily by simple chemical engineering operation such as by increasing the temperature or by reducing the pressure. Conventional adsorbents such as zeolites, activated carbon, activated alumina, silica gels, polymer supported silver chloride, copper-containing resins, and the like known in the prior art which exhibit selectivity for ethylene or propylene suffer from one or more drawbacks such as slow adsorption kinetics, poor adsorption capacity, and/or selectivity. Furthermore, due to ever changing business requirements and demands, it is desirable to have adsorbents exhibiting even higher adsorption capacity, selectivity, and/or reversibility for efficient separation of hydrocarbon gases.

NGLs are valuable as separate products; therefore, it is profitable to remove them from raw natural gas feedstreams. NGLs have their own unique properties that make them suited to a

specific use – for example, butane is used in lighters, while propane is used in backyard grills and home heating systems. Petrochemical plants are the largest consumers of NGLs, particularly ethane, which is used in the manufacturing of plastics. Processing facilities remove NGLs so they can be recovered and used separately.

5 NGLs are primarily transported by pipeline under pressure in a liquid state. Where NGLs pipelines do not exist, NGLs can be liquefied and transported by truck, railcar, or ship.

It would be desirable to have a method, preferably an on-site method to remove some or all of the NGLs from a raw natural gas feedstreams to provide pipeline quality natural gas suitable for transportation directly through the mainline transmission grid. Further, where the
10 NGL pipelines exist, it would be desirable to transport the recovered NGLs as mixed NGLs to processing facilities, refineries and import terminals to fractionation plants, petrochemical plants, export facilities and refineries. Alternatively, it may be desirable to separate the NGLs, store, and deliver them as ethane, propane, butane, etc., to petrochemical plans or direct propane or butane customers along the pipeline systems and/or by pipeline, truck, rail, ship, or other
15 suitable means.

SUMMARY OF THE INVENTION

The present invention is such a method to remove and recover some or all of the natural
20 gas liquids (NGLs) from a natural gas feedstreams to provide pipeline quality natural gas and to capture value for the recovered NGLs.

In one embodiment, the present invention is a method to remove and recover some or all of the natural gas liquids (NGLs): ethane, propane, butane, pentane, or heavier hydrocarbons, from a natural gas feedstream, preferably a natural gas feedstream from an oil well, a gas well, a
25 condensate well, or a pipeline natural gas containing NGLs to provide a methane-rich natural gas supply for pipeline transportation and/or for use as fuel for a combustion process, wherein the NGLs are separated from the natural gas feedstream by means of a NGLs separation unit comprising: (i) an adsorption unit comprising an adsorption bed comprising an adsorbent media which adsorbs NGLs to form a loaded adsorbent media and (ii) a regeneration unit comprising
30 a means to regenerate loaded adsorbent media by causing the release of adsorbed NGLs from the loaded adsorbing media and forming regenerated adsorbent media wherein the method further comprises the steps of: (a) passing the natural gas feedstream through the adsorption unit generating the adsorbent loaded with NGLs and a methane-rich natural gas supply, preferably with a BTU level equal to or less than 1073, (b) transporting the adsorbent loaded
35 with NGLs from the adsorption unit to the regeneration unit, (c) regenerating the adsorbent

loaded with NGLs by releasing the adsorbed NGLs from the loaded adsorbing media and forming regenerated adsorbent media (d) transporting the regenerated adsorbent media back to the adsorption unit for reuse, (e) recovering the released NGLs, and (f) providing the methane-rich natural gas supply to a natural gas pipeline for transportation.

5 In another embodiment of the present invention, the method described herein above further comprises the step: (g) transporting the recovered NGLs by pipeline, truck, rail, or ship to a chemical processing facility where one or more of the NGLs is used as a chemical feedstock in the chemical processing facility.

10 In the method of the present invention described herein above, preferably the adsorption media is silica gel, alumina, silica-alumina, zeolites, activated carbon, polymer supported silver chloride, copper-containing resins, porous cross-linked polymeric adsorbents, pyrolyzed macroporous polymers, or mixtures thereof.

15 In the method of the present invention described herein above the loaded adsorption media is regenerated by means of reduced pressure over the media, heating the media, or a combination of reduced pressure and heating and preferably regenerated by a microwave heating system, preferably the regeneration step is operated as a batch process, a semi-continuous process, or as a continuous process.

BRIEF DESCRIPTION OF THE DRAWINGS

20

FIG. 1 is a schematic of a method of the present invention to provide pipeline quality natural gas.

FIG. 2 is a schematic of a NGLs adsorption and regeneration process useful for the method of the present invention.

25 **FIG. 3** is a schematic of a NGLs adsorption and regeneration process useful for the method of the present invention comprising a microwave regeneration unit.

FIG. 4 shows the initial and repeat sorption isotherms for butane for Example 1.

FIG. 5 shows the initial and repeat sorption isotherms for butane for Example 2.

FIG. 6 shows the initial and repeat sorption isotherms for propane for Example 3.

30 **FIG. 7** shows the sorption isotherms for methane, ethane, propane, butane, and pentane for Example 1.

FIG. 8 shows the sorption isotherms for methane, ethane, propane, butane, and pentane for Example 2.

35 **FIG. 9** shows the sorption isotherms for methane, ethane, propane, butane, and pentane for Example 3 an example of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Raw natural gas comes from three types of wells: oil wells, gas wells, and condensate wells. Natural gas that comes from oil wells is typically termed "associated gas". This gas can exist separate from oil in the formation (free gas), or dissolved in the crude oil (dissolved gas). Natural gas from gas and condensate wells, in which there is little or no crude oil, is termed "non-associated gas". Gas wells typically produce raw natural gas by itself, while condensate wells produce free natural gas along with a semi-liquid hydrocarbon condensate. Whatever the source of the natural gas, once separated from crude oil (if present) it commonly exists as methane in mixtures with other hydrocarbons; principally ethane, propane, butane, and pentanes and to a lesser extent heavier hydrocarbons.

Raw natural gas often contain a significant amount of impurities, such as water or acid gases, for example carbon dioxide (CO₂), hydrogen sulfide (H₂S), sulfur dioxide (SO₂), carbon disulfide (CS₂), hydrogen cyanide (HCN), carbonyl sulfide (COS), or mercaptans as impurities. The term "natural gas feedstream" as used in the method of the present invention includes any natural gas source, raw or raw natural gas that has been treated one or more times to remove water and/or other impurities.

The terms "natural gas liquids" (NGL) and "ethane plus" (C₂+) refer broadly to hydrocarbons having two or more carbons such as ethane, propane, butane, and possibly small quantities of pentanes or heavier hydrocarbons. Preferably, NGL have a methane concentration of 5 mol percent or less.

The term "methane-rich" refers broadly to any vapor or liquid stream, e.g., after fractionation from which at least some ethane plus amounts have been recovered. Thus, a methane-rich stream has a higher concentration of C₁ than the concentration of C₁ in associated and non-associated natural gas. Preferably, the concentration increase of C₁ is from removal of at least 90 mole percent of the ethane in the natural and removal of at least 95 mole percent of the propane plus.

The present invention is a method to remove and recover some or all natural gas liquids (NGLs) from natural gas or raw natural gas, produced in remote locations prior to transportation through a natural gas pipeline and/or from pipeline natural gas containing NGLs. The present invention provides several benefits. First, pipeline quality natural gas is provided by removing NGLs. Secondly, value for the recovered NGLs can be captured as NGLs are valued chemical building blocks. NGLs have significantly higher value than natural gas or methane itself.

Recovered NGLs can be condensed, stored as necessary, and transported by pipeline, truck, rail, ship, or other means to a chemical processing facility that uses NGLs, for example chemical manufacturers where they may be used as chemical feedstocks.

In another embodiment, some natural gas pipelines are operated with some NGLs present (referred to as pipeline natural gas containing NGLs). Such pipeline natural gas containing NGLs may be used for combustion processes. In such cases, the NGLs are typically consumed as fuel in subsequent combustion processes. However, in some instances, the pipeline natural gas containing NGLs is delivered to a location that can use NGLs to produce chemicals, such as refineries ethylene or propylene crackers, or other types of processing facilities. In such instances, the pipeline natural gas containing NGLs may be a natural gas source for the method of the present invention wherein the NGLs may be removed from the pipeline natural gas containing NGLs and subsequently transferred to a process where value is captured for the recovered NGLs beyond that of the NGLs fuel value. Such examples include chemical processes, including but not limited to ethylene cracking, propylene cracking, butane cracking, oil refining, propane dehydrogenation.

FIG. 1 shows a schematic of one embodiment of the present invention wherein raw natural gas **3** from an oil well, a gas well, or a condensate well is passed through a separation unit **90** to remove some or all of the NGLs **29** forming a methane-rich natural gas stream **5** that is passes through a compressor **100** and provided to a natural gas pipeline **120** for transportation. The NGLs are discharged **29** from the separation unit **90** and recovered individually or as a mixture of gases (e.g., as C₂, C₃, C₄, C₅, etc.) or liquefied and recovered individually or as a mixture of liquids.

FIG. 2 shows a schematic of the separation unit **90** for the process depicted in **FIG. 1**. The separation unit **90** comprises an adsorption unit **10** comprising an adsorption bed **2** comprising an adsorbent media which adsorbs NGLs to form a loaded adsorbent media and a regeneration unit **20** comprising a means to regenerate loaded adsorbent media **32** causing the release of adsorbed NGLs **33** from the loaded adsorbing media and forming regenerated adsorbent media which can be transported **8** back to the adsorption unit **10** for reuse.

Preferably, the methane-rich natural gas **5** suitable for pipeline transmission preferably has a BTU value equal to or less than 1073, more preferably equal to or less than 1066, more preferably equal to or less than 1058, and most preferably a BTU value of equal to or less than 1028.

Preferably, the separation means **90** comprises an adsorbent. Suitable adsorbents are solids having a microscopic structure. The internal surface of such adsorbents is preferably between 100 to 2000 m²/g, more preferably between 500 to 1500 m²/g, and even more

preferably 1000 to 1300 m²/g. The nature of the internal surface of the adsorbent in the adsorbent bed is such that C₂ and heavier hydrocarbons are adsorbed. Suitable adsorbent media include materials based on silica, silica gel, alumina or silica-alumina, zeolites, activated carbon, polymer supported silver chloride, copper-containing resins. Most preferred adsorbent
5 media is a porous cross-linked polymeric adsorbent or a partially pyrolyzed macroporous polymer. Preferably, the internal surface of the adsorbent is non-polar.

In one embodiment, the present invention is the use of an adsorbent media to extract NGLs from a natural gas stream. The mechanism by which the macroporous polymeric adsorbent extracts the NGLs from the natural gas stream is a combination of adsorption and
10 absorption; the dominating mechanism at least is believed to be adsorption. Accordingly, the terms "adsorption" and "adsorbent" are used throughout this specification, although this is done primarily for convenience. The invention is not considered to be limited to any particular mechanism.

When an adsorbent media has adsorbed any amount of C₂+ hydrocarbons it is referred
15 to as "loaded". Loaded includes a range of adsorbance from a low level of hydrocarbons up to and including saturation with adsorbed hydrocarbons.

The term "macroporous" is used in the art interchangeably with "macroreticular," and refers in general to pores with diameters of about 500 Å or greater. "Mesopores" are characterized as pores of between 50 Å and larger but less than 500 Å. "Micropores" are
20 characterized as pores of less than 50 Å. The engineered distribution of these types of pores gives rise to the desired properties of high adsorption capacity for NGLs and ease of desorption of NGLs under convenient/practical chemical engineering process modifications (increase in temperature or reduced pressure [vacuum]). The process giving rise to the distribution of micropores, mesopores and macropores can be achieved in various ways, including forming the
25 polymer in the presence of an inert diluent or other porogen to cause phase separation and formation of micropores by post cross-linking.

In one embodiment, the adsorbent media of the present invention is a macroporous polymeric adsorbent of the present invention is a post cross-linked polymeric synthetic adsorbents engineered to have high surface area, high pore volume and high adsorption
30 capacities as well as an engineered distribution of macropores, mesopores and micropores.

Preferably, the macroporous polymeric adsorbent of the present invention is hypercrosslinked and/or methylene bridged having the following characteristics: a BET surface area of equal to or greater than 500 m²/g and preferably equal to or greater than 1,000 m²/g, and having a particle size of 300 microns to 1500 microns, preferably 500 to 1200 microns.

Examples of monomers that can be polymerized to form macroporous polymeric adsorbents useful are styrene, alkylstyrenes, halostyrenes, haloalkylstyrenes, vinylphenols, vinylbenzyl alcohols, vinylbenzyl halides, and vinylnaphthalenes. Included among the substituted styrenes are ortho-, meta-, and para-substituted compounds. Specific examples are
5 styrene, vinyltoluene, ethylstyrene, t-butylstyrene, and vinyl benzyl chloride, including ortho-, meta-, and para-isomers of any such monomer whose molecular structure permits this type of isomerization. Further examples of monomers are polyfunctional compounds. One preferred class is polyvinylidene compounds, examples of which are divinylbenzene, trivinylbenzene, ethylene glycol dimethacrylate, divinylsulfide and divinylpyridine. Preferred polyvinylidene
10 compounds are di- and trivinyl aromatic compounds. Polyfunctional compounds can also be used as crosslinkers for the monomers of the first group.

One preferred method of preparing the polymeric adsorbent is by swelling the polymer with a swelling agent, then crosslinking the polymer in the swollen state, either as the sole crosslinking reaction or as in addition to crosslinking performed prior to swelling. When a
15 swelling agent is used, any pre-swelling crosslinking reaction will be performed with sufficient crosslinker to cause the polymer to swell when contacted with the swelling agent rather than to dissolve in the agent. The degree of crosslinking, regardless of the stage at which it is performed, will also affect the porosity of the polymer, and can be varied to achieve a particular porosity. Given these variations, the proportion of crosslinker can vary widely, and the
20 invention is not restricted to particular ranges. Accordingly, the crosslinker can range from about 0.25% of the polymer to about 45%. Best results are generally obtained with about 0.75% to about 8% crosslinker relative to the polymer, the remaining (noncrosslinking) monomer constituting from about 92% to about 99.25% (all percentages are by weight).

Other macroporous polymeric adsorbents useful in the practice of this invention are
25 copolymers of one or more monoaromatic monomers with one or more nonaromatic monovinylidene monomers. Examples of the latter are methyl acrylate, methyl methacrylate and methylethyl acrylate. When present, these nonaromatic monomers preferably constitute less than about 30% by weight of the copolymer.

The macroporous polymeric adsorbent is prepared by conventional techniques,
30 examples of which are disclosed in various United States patents. Examples are USP 4,297,220; 4,382,124; 4,564,644; 5,079,274; 5,288,307; 4,950,332; and 4,965,083. The disclosures of each of these patents are incorporated herein by reference in their entirety.

For polymers that are swollen and then crosslinked in the swollen state, the crosslinking subsequent to swelling can be achieved in a variety of ways, which are further disclosed in the
35 patents cited above. One method is to first haloalkylate the polymer, and then swell it and

crosslink by reacting the haloalkyl moieties with aromatic groups on neighboring chains to form an alkyl bridge. Haloalkylation is achieved by conventional means, an example of which is to first swell the polymer under non-reactive conditions with the haloalkylating agent while including a Friedel-Crafts catalyst dissolved in the haloalkylating agent. Once the polymer is swollen, the temperature is raised to a reactive level and maintained until the desired degree of haloalkylation has occurred. Examples of haloalkylating agents are chloromethyl methyl ether, bromomethyl methyl ether, and a mixture of formaldehyde and hydrochloric acid. After haloalkylation, the polymer is swelled further by contact with an inert swelling agent. Examples are dichloroethane, chlorobenzene, dichlorobenzene, ethylene dichloride, methylene chloride, propylene dichloride, and nitrobenzene. A Friedel-Crafts catalyst can be dissolved in the swelling agent as well, since the catalyst will be used in the subsequent crosslinking reaction. The temperature is then raised to a level ranging from about 60°C to about 85°C in the presence of the catalyst, and the bridging reaction proceeds. Once the bridging reaction is complete, the swelling agent is removed by solvent extraction, washing, drying, or a combination of these procedures.

The pore size distribution and related properties of the finished adsorbent can vary widely and no particular ranges are critical to the invention. In most applications, best results will be obtained at a porosity (total pore volume) within the range of from 0.5 to 1.5 cc/g of the polymer. A preferred range is 0.7 to 1.3 cc/g. Within these ranges, the amount contributed by macropores (i.e., pores having diameters of 500 Å or greater) will preferably range from 0.025 to 0.6 cc/g, and most preferably from 0.04 to 0.5 cc/g. The surface area of the polymer, as measured by nitrogen adsorption methods such as the well-known BET method, will in most applications be within the range of 150 to 2100 m²/g, and preferably from 400 to 1400 m²/g. The average pore diameter will most often range from 10 Å to about 100 Å.

The form of the macroporous polymeric adsorbent is likewise not critical and can be any form which is capable of containment and contact with a flowing compressed air stream. Granular particles and beads are preferred, ranging in size from about 50 to about 5,000 microns, with a range of about 500 to about 3,000 microns particularly preferred. Contact with the adsorbent can be achieved by conventional flow configurations of the gas, such as those typically used in fluidized beds or packed beds. The adsorbent can also be enclosed in a cartridge for easy removal and replacement and a more controlled gas flow path such as radial flow.

The macroporous polymeric adsorbent can function effectively under a wide range of operating conditions. The temperature will preferably be within any range which does not cause further condensation of vapors or any change in physical or chemical form of the

adsorbent. Preferred operating temperatures are within the range of from 5°C to 75°C, and most preferably from 10°C to 50°C. In general, operation at ambient temperature or between ambient temperature and 10°C to 15°C above ambient will provide satisfactory results. The pressure of the natural gas stream entering the adsorbent bed can vary widely as well, preferably extending
5 from 2 psig (115 kPa) to 1000 psig (7000 kPa). The pressure will generally be dictated by the plant unit where the product gas will be used. A typical pressure range is from 100 psig (795 kPa) to 300 psig (2170 kPa). The residence time of the natural gas stream in the adsorbent bed will most often range from 0.02 second to 5 seconds, and preferably from 0.3 second to 3.0 seconds. The space velocity of the natural gas stream through the bed will most often fall
10 within the range of 0.1 foot per second to 5 feet per second, with a range of 0.3 foot per second to 3 feet per second preferred. Finally, the relative humidity can have any value up to 100%, although for convenience, the preferred range of relative humidity is about 25% to about 98%.

The macroporous polymeric adsorbents of the present invention described herein above can be used to separate ethane, propane, butane, pentane, and heavier hydrocarbons from mixed
15 gases containing methane. Preferably, the macroporous polymeric adsorbents of the present invention adsorb equal to or greater than 60 cm³ STP of propane per gram of sorbent at 35°C and 500 mmHg of propane. Preferably, the adsorbents of the present invention adsorb equal to or greater than 60 cm³ STP of n-butane per gram of sorbent at 35°C and 100 mmHg of n-butane. Furthermore, these materials are able to be degassed of propane or n-butane and then able to
20 readsorb equal to or greater than 60 cm³ STP of propane per gram of sorbent at 35°C and 500 mmHg of propane or readsorb greater than 60 cm³ STP of n-butane per gram of sorbent at 35°C and 100 mmHg of n-butane at least once. Preferably, the adsorbents of the present invention adsorb equal to or greater than 30 cm³ STP of ethane per gram of sorbent at 35°C and 600 mmHg of ethane. Preferably, the adsorbents of the present invention adsorb equal to or greater
25 than 100 cm³ STP of pentane per gram of sorbent at 35°C and 50 mmHg of pentane.

In another embodiment, the adsorbent media of the present invention is a pyrolyzed macroporous polymeric adsorbent media to extract NGLs from a natural gas stream.

Pyrolyzed macroporous polymeric adsorbent media are well known, for instance see
USP 4,040,990, incorporated by reference herein in its entirety. Partially pyrolyzed particles,
30 preferably in the form of beads or spheres, produced by the controlled decomposition of a synthetic polymer of specific initial porosity. In a preferred embodiment, the pyrolyzed particles are derived from the thermal decomposition of macroreticular ion exchange resins containing a macroporous structure.

In general pyrolysis comprises subjecting the starting polymer to controlled
35 temperatures for controlled periods of time under certain ambient conditions. The primary

purpose of pyrolysis is thermal degradation while efficiently removing the volatile products produced.

The maximum temperatures may range from about 300°C to up to about 900°C, depending on the polymer to be treated and the desired composition of the final pyrolyzed particles. Higher temperature, e.g., about 700°C and higher result in extensive degradation of the polymer with the formation of molecular sieve sized pores in the product.

Most desirably, thermal decomposition (alternatively denoted "pyrolysis" or "heat treatment") is conducted in an inert atmosphere comprised of, for example, argon, neon, helium, nitrogen, or the like, using beads of macroreticular synthetic polymer substituted with a carbon-fixing moiety which permits the polymer to char without fusing in order to retain the macroreticular structure and give a high yield of carbon. Among the suitable carbon-fixing moieties are sulfonate, carboxyl, amine, halogen, oxygen, sulfonate salts, carboxylate salts and quaternary amine salts. These groups are introduced into the starting polymer by well-known conventional techniques, such as those reactions used to functionalize polymers for production of ion exchange resins. Carbon-fixing moieties may also be produced by imbibing a reactive precursor thereof into the pores of macroreticular polymer which thereupon, or during heating, chemically binds carbon-fixing moieties onto the polymer. Examples of these latter reactive precursors include sulfuric acid, oxidizing agents, nitric acid, Lewis acids, acrylic acid, and the like.

Suitable temperatures for practicing the process of this invention are generally within the range of 300°C to about 900°C, although higher temperatures may be suitable depending upon the polymer to be treated and the desired composition of the final pyrolyzed product. At temperatures above about 700°C the starting polymer degrades extensively with the formation of molecular sieve sized pores in the product, i.e., 4 Å to 6 Å critical dimensions, yielding a preferred class of adsorbents according to this invention. At lower temperatures, the thermally-formed pores usually range from 6 Å to as high as 50 Å in average critical size. A preferred range of pyrolysis temperatures is between about 400°C and 800°C. As will be explained more fully hereinafter, temperature control is essential to yield a partially pyrolyzed material having the composition, surface area, pore structures and other physical characteristics of the desired product. The duration of thermal treatment is relatively unimportant, providing a minimum exposure time to the elevated temperature is allowed.

A wide range of pyrolyzed resins may be produced by varying the porosity and/or chemical composition of the starting polymer and also by varying the conditions of thermal decomposition. In general, the pyrolyzed resins of the invention have a carbon to hydrogen ratio of 1.5 : 1 to 20 : 1, preferably 2.0 : 1 to 10 : 1, whereas activated carbon normally has a C/H

ratio much higher, at least greater than 30 : 1 (Carbon and Graphite Handbook, Charles L. Mantell, Interscience Publishers, N.Y. 1968, p. 198). The product particles contain at least 85% by weight of carbon with the remainder being principally hydrogen, alkali metals, alkaline earth metals, nitrogen, oxygen, sulfur, chlorine, etc., derived from the polymer or the functional group (carbon-fixing moiety) contained thereon and hydrogen, oxygen, sulfur, nitrogen, alkali metals, transition metals, alkaline earth metals and other elements introduced into the polymer pores as components of a filler (may serve as a catalyst and/or carbon-fixing moiety or have some other functional purpose).

The pore structure of the final product must contain at least two distinct sets of pores of differing average size, i.e., multimodal pore distribution. The larger pores originate from the macroporous resinous starting material which preferably contains macropores ranging from between about 50 to about 100,000 Å in average critical dimension. The smaller pores, as mentioned previously, generally range in size from 4 Å to 50 Å, depending largely upon the maximum temperature during pyrolysis. Such multimodal pore distribution is considered a novel and essential characteristic of the composition of the invention.

The pyrolyzed polymers of the invention have relatively large surface area resulting from the macroporosity of the starting material and the smaller pores developed during pyrolysis. In general the overall surface area as measured by nitrogen adsorption ranges between about 50 and 1500 m²/gram. Of this, the macropores will normally contribute 6 to 700 m²/gram, preferably 6 to 200 m²/g, as calculated by mercury intrusion techniques, with the remainder contributed by the thermal treatment. Pore-free polymers, such as "gel" type resins which have been subjected to thermal treatment in the prior art do not contribute the large pores essential to the adsorbents of the invention nor do they perform with the efficiency of the pyrolyzed polymers described herein.

The duration of pyrolysis depends upon the time needed to remove the volatiles from the particular polymer and the heat transfer characteristics of the method selected. In general, the pyrolysis is very rapid when the heat transfer is rapid, e.g., in an oven where a shallow bed of material is pyrolyzed, or in a fluidized bed. To prevent burning of the pyrolyzed polymer, normally the temperature of the polymer is reduced to not more than 400°C, preferably not more than 300°C, before the pyrolyzed material is exposed to air. The most desirable method of operation involves rapid heating to the maximum temperature, holding the temperature at the maximum for a short period of time (in the order of 0 to 20 minutes) and thereafter quickly reducing the temperature to room temperature before exposing the sample to air. Products according to the invention have been produced by this preferred method by heating to 800°C and cooling in a period of 20 to 30 minutes. Longer holding periods at the elevated

temperatures are also satisfactory, since no additional decomposition appears to occur unless the temperature is increased.

Activating gases such as CO₂, NH₃, O₂, H₂O or combinations thereof in small amounts tend to react with the polymer during pyrolysis and thereby increase the surface area of the final material. Such gases are optional and may be used to obtain special characteristics of the adsorbents.

The starting polymers which may be used to produce the pyrolyzed resins of the invention include macroreticular homopolymers or copolymers of one or more monoethylenically or polyethylenically unsaturated monomers or monomers which may be reacted by condensation to yield macroreticular polymers and copolymers. The macroreticular resins used as precursors in the formation of macroreticular heat treated polymers are not claimed as new compositions of matter in themselves. Any of the known materials of this type with an appropriate carbon-fixing moiety is suitable. The preferred monomers are those aliphatic and aromatic materials which are ethylenically unsaturated.

Examples of suitable monoethylenically unsaturated monomers that may be used in making the granular macroreticular resin include: esters of acrylic and methacrylic acid such as methyl, ethyl, 2-chloro ethyl, propyl, isobutyl, isopropyl, butyl, tert-butyl, sec-butyl, ethylhexyl, amyl, hexyl, octyl, decyl, dodecyl, cyclohexyl, isobornyl, benzyl, phenyl, alkylphenyl, ethoxymethyl, ethoxyethyl, ethoxypropyl, propoxymethyl, propoxyethyl, propoxypropyl, ethoxyphenyl, ethoxybenzyl, ethoxycyclohexyl, hydroxyethyl, hydroxypropyl, ethylene, propylene, isobutylene, diisobutylene, styrene, ethylvinylbenzene, vinyltoluene, vinylbenzylchloride, vinyl chloride, vinyl acetate, vinylidene chloride, dicyclopentadiene, acrylonitrile, methacrylonitrile, acrylamide, methacrylamide, diacetone acrylamide, functional monomers such as vinylbenzene, sulfonic acid, vinyl esters, including vinyl acetate, vinyl propionate, vinyl butyrate, vinyl laurate, vinyl ketones including vinyl methyl ketone, vinyl ethyl ketone, vinyl isopropyl ketone, vinyl n-butyl ketone, vinyl hexyl ketone, vinyl octyl ketone, methyl isopropenyl ketone, vinyl aldehydes including acrolein, methacrolein, crotonaldehyde, vinyl ethers including vinyl methyl ether, vinyl ethyl ether, vinyl propyl ether, vinyl isobutyl ether, vinylidene compounds including vinylidene chloride bromide, or bromochloride, also the corresponding neutral or half-acid half-esters or free diacids of the unsaturated dicarboxylic acids including itaconic, citraconic, aconitic, fumaric, and maleic acids, substituted acrylamides, such as N-monoalkyl-, -N,N-dialkyl-, and N-dialkylaminoalkylacrylamides or methacrylamides where the alkyl groups may have from one to eighteen carbon atoms, such as methyl, ethyl, isopropyl, butyl, hexyl, cyclohexyl, octyl, dodecyl, hexadecyl and octadecyl aminoalkyl esters of acrylic or methacrylic acid, such as

.beta.-dimethylaminoethyl, .beta.-diethylaminoethyl or 6-dimethylaminoethyl acrylates and methacrylates, alkylthioethyl methacrylates and acrylates such as ethylthioethyl methacrylate, vinylpyridines, such as 2-vinylpyridine, 4-vinylpyridine, 2-methyl-5-vinylpyridine, and so on.

In the case of copolymers containing ethylthioethyl methacrylate, the products can be oxidized to, if desired, the corresponding sulfoxide or sulfone.

Polyethylenically unsaturated monomers which ordinarily act as though they have only one such unsaturated group, such as isoprene, butadiene, and chloroprene, may be used as part of the monoethylenically unsaturated category.

Examples of polyethylenically unsaturated compounds include: divinylbenzene, divinylpyridine, divinyl naphthalenes, diallyl phthalate, ethylene glycol diacrylate, ethylene glycol dimethacrylate, trimethylolpropanetriacrylate, divinylsulfone, polyvinyl or polyallyl ethers of glycol, of glycerol, of pentaerythritol, of diethyleneglycol, of monothio or dithio-derivatives of glycols, and of resorcinol, divinylketone, divinylsulfide, allyl acrylate, diallyl maleate, diallyl fumarate, diallyl succinate, diallyl carbonate, diallyl malonate, diallyl oxalate, diallyl adipate, diallyl sebacate, divinyl sebacate, diallyl tartrate, diallyl silicate, triallyl tricarballylate, triallyl aconitate, triallyl citrate, triallyl phosphate, N,N'-methylenediacylamide, N,N'-methylenedimethacrylamide, N,N'-ethylenediacylamide, trivinylbenzene, trivinyl naphthalenes, and polyvinylanthracenes.

A preferred class of monomers of this type is aromatic ethylenically unsaturated molecules such as styrene, vinyl pyridine, vinyl naphthalene, vinyl toluene, phenyl acrylate, vinyl xylenes, and ethylvinylbenzene.

Examples of preferred polyethylenically unsaturated compounds include divinyl pyridine, divinyl naphthalene, divinylbenzene, trivinylbenzene, alkyldivinylbenzenes having from 1 to 4 alkyl groups of 1 to 2 carbon atoms substituted in the benzene nucleus, and alkyltrivinylbenzenes having 1 to 3 alkyl groups of 1 to 2 carbon atoms substituted in the benzene nucleus. Besides the homopolymers and copolymers of these poly(vinyl) benzene monomers, one or more of them may be copolymerized with up to 98% (by weight of the total monomer mixture) of (1) monoethylenically unsaturated monomers, or (2) polyethylenically unsaturated monomers other than the poly(vinyl)benzenes just defined, or (3) a mixture of (1) and (2). Examples of the alkyl-substituted di- and tri-vinyl-benzenes are the various vinyltoluenes, the divinylethylbenzene, 1,4-divinyl- 2,3,5,6-tetramethylbenzene, 1,3,5-trivinyl-2,4,6-trimethylbenzene, 1,4-divinyl, 2,3,6-triethylbenzene, 1,2,4-trivinyl-3,5-diethylbenzene, 1,3,5-trivinyl-2-methylbenzene.

Most preferred are copolymers of styrene, divinylbenzene, and ethylvinylbenzene.

Examples of suitable condensation monomers include: (a) aliphatic dibasic acids such as

maleic acid, fumaric acid, itaconic acid, 1,1-cyclobutanedicarboxylic acid, etc.; (b) aliphatic diamines such as piperazine, 2-methylpiperazine, cis, cis-bis (4-aminocyclohexyl) methane, metaxylylenediamine, etc.; (c) glycols such as diethylene glycol, triethylene glycol, 1,2-butanediol, neopentyl glycol etc.; (d) bischloroformates such as cis and trans- 1,4-cyclohexyl bischloroformate, 2,2,2,4-tetramethyl-1,3-cyclobutyl bischloroformate and bischloroformates of other glycols mentioned above, etc.; (e) hydroxy acids such as salicylic acid, m- and p-hydroxybenzoic acid and lactones, derived therefrom such as the propiolactones, valerolactones, caprolactones, etc.; (f) diisocyanates such as cis and trans-cyclopropane-1,2 -diisocyanate, cis and trans-cyclobutane-1-2-diisocyanate etc.; (g) aromatic diacids and their derivatives (the esters, anhydrides and acid chlorides) such as phthalic acid, phthalic anhydride, terephthalic acid, isophthalic acid, dimethylphthalate, etc.; (h) aromatic diamines such as benzidine, 4,4'-methylenediamine, bis(4-aminophenyl) ether, etc.; (i) bisphenols such as bisphenol A, bisphenol C, bisphenol F, phenolphthalein, recorcinol, etc.; (j) bisphenol bis(chloroformates) such as bisphenol A bis(chloroformate), 4,4' -dihydroxybenzophenone bis(chloroformate) etc.; (k) carbonyl and thiocarbonyl compounds such as formaldehyde, acetaldehyde, thioacetone acetone, etc.; (l) phenol and derivatives such as phenol, alkylphenols, etc.; (m) polyfunctional cross-linking agents such as tri or poly basic acids such as trimellitic acid, tri or polyols such as glycerol, tri or polyamines such as diethylenetriamine; and other condensation monomers and mixtures of the foregoing.

Ion exchange resins produced from aromatic and/or aliphatic monomers provide a preferred class of starting polymers for production of porous adsorbents. The ion exchange resin may also contain a functional group selected from cation, anion, strong base, weak base, sulfonic acid, carboxylic acid, oxygen containing, halogen and mixtures of the same. Further, such ion exchange resins may optionally contain an oxidizing agent, a reactive substance, sulfuric acid, nitric acid, acrylic acid, or the like at least partially filling the macropores of the polymer before heat treatment.

The synthetic polymer may be impregnated with a filler such as carbon black, charcoal, bonechar, sawdust or other carbonaceous material prior to pyrolysis. Such fillers provide an economical source of carbon which may be added in amounts up to about 90% by weight of the polymer.

The starting polymers, when ion exchange resins, may optionally contain a variety of metals in their atomically dispersed form at the ionic sites. These metals may include iron, copper, silver, nickel, manganese, palladium, cobalt, titanium, zirconium, sodium, potassium, calcium, zinc, cadmium, ruthenium, uranium and rare earths such as lanthanum. By utilizing the ion exchange mechanism it is possible for the skilled technician to control the amount of

metal that is to be incorporated as well as the distribution.

Although the incorporation of metals onto the resins is primarily to aid their ability to serve as catalytic agents, useful adsorbents may also contain metal.

Synthetic polymers, ion exchange resins whether in the acid, base or metal salt form are commercially available. According to the invention there is also provided an adsorption process for separating components from a gaseous or liquid medium which comprises contacting the medium with particles of a pyrolyzed synthetic polymer.

For example it has been discovered that a styrene-divinylbenzene based strongly acidic exchange resin pyrolyzed from any of the forms of Hydrogen, Iron (III), Copper(II), Silver(I) or Calcium(II) can decrease the concentration of vinylchloride in air preferably dry air from initial concentration of 2 ppm to 300,000 ppm to a level of less than 1 ppm at flow rates of 1 bedvolume/hour to 600 bedvolume/min. preferably 10 to 200 bedvolume/minute.

The partially pyrolyzed macroporous polymer adsorbent of the present invention disclosed herein above are able to adsorb greater than 25 cm³ STP of ethane per gram of sorbent at 35°C and 200 mmHg of ethane and greater than 30 cm³ STP of propane per gram of sorbent at 35°C and 100 mmHg of propane. Furthermore, these materials are able to be degassed of ethane or propane and then able to re-adsorb greater than 25 cm³ STP of ethane per gram of sorbent at 35°C and 200 mmHg of ethane, or re-adsorb greater than 30 cm³ STP of propane per gram of sorbent at 35°C and 100 mmHg of propane one or more times.

The separation process comprises passing a natural gas stream through an adsorber bed charged with the adsorbent(s) of the invention. Preferably, the ethane and/or propane and/or butane and/or pentane and/or heavier hydrocarbons, which are selectively adsorbed, can be readily desorbed either by lowering the pressure or by increasing the temperature of the adsorber bed resulting in a regenerated adsorbent. The adsorbent so regenerated can be reused as an adsorbent for the separation of ethane and/or propane and/or butane and/or pentane and/or heavier hydrocarbons from the natural gas stream.

Batch, semi-continuous, and continuous processes and apparatuses for separating NGLs from natural gas feedstreams are well known. **FIG. 2** depicts one embodiment of a separation process of the present invention. The separation unit **90** comprises an adsorption unit **10** and a regeneration unit **20**. The separation process comprises the steps of (a) passing a natural gas feedstream **3** through an adsorption unit **10** comprising an adsorbent bed **2** comprising an adsorbent media which adsorbs heavier hydrocarbons (C₂, C₃, C₄, C₅, etc.) to obtain a methane-rich natural gas product **5** which may be compressed **100** and provided to a natural gas pipeline **120** and/or for use as fuel for a combustion process, (b) transporting **11** adsorbent loaded with heavier hydrocarbons from the adsorption unit **10** to a regeneration unit **20** comprising a means

32 to regenerate the loaded adsorbent media whereby by causing the release of the heavier hydrocarbons 33 from the loaded adsorbing media and forming regenerated adsorbent media 23, (c) wherein the regenerated adsorbent media 23 is transported 8 back to the adsorption unit 10 for reuse, and (d) the released heavier hydrocarbons 33 are discharged 29, (e.g., recovered, 5 excluded, by-passed, or flared) individually or as a mixture of gases (e.g., as C₂, C₃, C₄, C₅, etc.) or liquefied by a means 60, and recovered individually or as a mixture liquids.

Although a particular preferred embodiment of the invention is disclosed in FIG. 2 for illustrative purposes, it will be recognized that variations or modifications of the disclosed process lie within the scope of the present invention. For example, in another embodiment of 10 the present invention, there may be multiple adsorbent beds and/or the adsorbent bed(s) may be regenerated in-place as exemplified by USP 3,458,973, which is incorporated herein by reference in its entirety.

The adsorption step and/or the regeneration step of the process of the present invention may operate in as a batch process, a semi-continuous process, a continuous process, or 15 combination thereof. For instance in one embodiment of the present invention, both the adsorption step and the regeneration step may operate in the batch mode. In another embodiment of the present invention both the adsorption step and the regeneration step may operate in the semi-continuous mode. In yet another embodiment of the present invention both the adsorption step and the regeneration step may operate in the continuous mode.

20 Alternatively, in one embodiment of the present invention the adsorption step may operate in a batch, semi-continuous, or continuous mode while the regeneration step operates in a different mode than that of the adsorption step. For example, in one embodiment of the present invention the adsorption step may operate in a batch mode while the regeneration step operates in a continuous mode. In another embodiment of the present invention the adsorption 25 step may operate in a continuous mode while the regeneration step operates in a continuous mode. All possible combinations of batch, semi-continuous, and continuous modes for the adsorbent step and regeneration step are considered within the scope of the present invention.

Adsorption is in many situations a reversible process. The practice of removing volatiles from an adsorption media can be accomplished by reducing the pressure over the 30 media, heating, or the combination of reduced pressure and heating. In either case the desired outcome is to re-volatilize the trapped vapors, and subsequently remove them from the adsorbent so that it can be reused to capture additional volatiles. Preferably, the adsorption media of the present invention when regenerated, desorbs adsorbed gases in an amount equal to or greater than 75 percent of the amount adsorbed, more preferably equal to or greater than 85 35 percent, more preferably equal to or greater than 90 percent, more preferably equal to or greater

than 95 percent, more preferably equal to or greater than 99 percent and most preferably virtually all the NGLs adsorbed.

Traditional means of heating adsorbent media for the purpose of removing adsorbed volatiles that utilize conventional heating systems such as heated gas (air or inert gas), or radiant
5 heat contact exchangers are suitable for use in the present NGL separation process as part of the adsorbent media regeneration step.

Preferably, the NGL separation process of the present invention employs a microwave heating system as part of the adsorbent media regeneration step. Such a microwave heating system provides a heating system and method for removing volatiles from adsorbent media with
10 higher thermal efficiency at a reduced cost.

Referring to **FIG. 3**, a NGLs separation unit **90** comprises an adsorption unit **10** which has an adsorption tank **1** containing an adsorbent bed **2** comprising the adsorption media of the present invention. The natural gas feedstream enters the adsorption unit **10** via line **3** at the lower portion of the adsorption tank **1** and passes **4** through the adsorbent bed **2**. The
15 adsorption bed **2** comprises an adsorbent media which can adsorb C₂, C₃, C₄, C₅, and heavier hydrocarbons from the natural gas feedstream. Inlet temperature of the adsorption unit **10** can range from 5 to 100°C, preferably from 15 to 80°C, and more preferably from 20 to 70°C. Pressures of 14 to 1400 psia, preferably from 600 to 1200 psia, and more preferably from 800 to 1000 psia can be used. A methane-rich natural gas product stream a vastly reduced heavy
20 hydrocarbon content than natural gas feedstream leaves the adsorbent bed **2** and is leaves from the top of the adsorption tank **1** through line **5**. The methane-rich natural gas stream **5** may be compressed **100** and provided to a natural gas pipeline **120** and/or for use as fuel for a combustion process.

As the adsorption media becomes loaded with NGLs it passes through the bottom of the
25 adsorption tank **1** through a transport mechanism **9** through line **11** into a microwave regeneration unit **20** having a regeneration tank **21** and a microwave heating system **32**. The operating temperatures of the microwave heating system **32** can range from 105 to 350°C, preferably from 140 to 250°C, and more preferably from 145 to 200°C. Pressures of from 20 to 600 psia, preferably 100 to 400 psia, and more preferably 150 to 200 psia can be used. The
30 microwave power source **30** heats the adsorbent media **2** in the microwave heating system **32** causing the NGLs to vaporize **33**.

The microwave heating system **32** can irradiate a loaded adsorbent media to desorb volatile materials. Irradiation of adsorbent media with microwave radiation can provide an economical and thermally efficient alternative for heating adsorbent materials to remove
35 adsorbed volatiles from the adsorbent. Microwave radiation energy can be applied to an

adsorbent without heating a gas, and can effectively transfer thermal energy to specific adsorbents through path lengths in excess of 12 inches. To accomplish this method of heating the adsorbent media, the apparatus for applying or generating the microwave radiation for a heating device must be constructed in such a manner as to afford uniform heating of the adsorbent, and to minimize or eliminate any reflection of the radiation back onto the microwave power source **30**. The microwave heating system **32** can include a heating apparatus and a heating or radiation system (not shown in **FIG. 3**), and optionally a purge gas system **24**. The heating apparatus can be coupled to and in communication with the radiation system for receipt of thermal energy generated by the radiation system, such as microwave radiation or electromagnetic energy, and with the purge gas system **24** for receipt of a purge gas to assist in the removal of volatiles from the adsorbent.

The NGLs are extracted from the regeneration tank **21** through a suction port **28** via a vacuum evacuation system **40**. The regeneration tank **21** may optionally be fitted with a purge gas system **24** wherein purge gas, for example nitrogen, enters through line **22** and is dispersed **25** at the bottom of the regeneration tank **21**.

The regenerated adsorbent media **23** is allowed to pass from the bottom of the regeneration tank **21** through line **26** then returned to the adsorption tank **1**. A portion of the methane-rich natural gas from the top of the adsorber tank **1** is circulated via line **6** through blower **7** to transport the regenerated adsorption media **23** through line **8** to once again adsorb NGLs from natural gas **3**.

The NGLs vacuum extracted from the regeneration tank **21** pass through the vacuum extraction system **40** through a gas compression system **50** and part or all of the NGLs may be introduced into a condenser **60** where the NGLs are condensed, optionally separated, and discharged either as a mixture of NGLs or individual fractions of ethane, propane, butane, pentane, and/or heavier hydrocarbons into one or more tank **73, 74, 75, and/or 76**. The discharged NGLs may be recovered, transported, liquefied, excluded, by-passed, or flared. Any methane making it to the condenser is recycled back to the adsorption tank **1** through line **61** and any other gas(es), purge gas, water, and/or contaminants can be separated through line **62**.

In one embodiment of the present invention, the NGL separation process **90** is a continuous process with continuous adsorbent media regeneration. For example, in **FIG. 3** there is a valve **12** in line **11** between the adsorber tank **1** and the regeneration tank **21** and a valve **27** in the line **26** between the regeneration tank **21** and collection tank **17**. Valves **12** and **27** are synchronized to allow for holding loaded adsorption media from the adsorption tank **1** while adsorption media is being regenerated in the regenerator unit **20**. When the adsorption media is regenerated in the regenerator tank **21**, valve **27** allows the regenerated adsorption

Example 2

is a porous cross-linked polymeric adsorbent having a surface area equal to or greater than 1,000 m²/g made from a macroporous copolymer of a monovinyl aromatic monomer and a crosslinking monomer, where the macroporous copolymer has been post-crosslinked in the swollen state in the presence of a Friedel-Crafts catalyst with post capping of residual chloromethyl groups with hydrophobic aromatic compounds resulting in a media that has increased hydrophobicity; and

5

10 Example 3

is a partially pyrolyzed macroporous polymer of a monovinyl aromatic monomer and a crosslinking monomer that has been sulfonated.

Adsorption capacity and breakthrough properties are determined for Example 1 and Example 2 as followed:

15

Adsorption Capacity

Methane, Ethane, Propane and Butane:

A Micromeritics ASAP 2020 Surface Area and Porosity Analyzer is used to analyze methane (Sigma-Aldrich, 99.0%), ethane (Sigma-Aldrich, 99.99%), propane (Sigma-Aldrich, 99.97%), and butane (Matheson Tri-Gas, 99.9%) adsorption at 308 K. Prior to analysis, the macroporous polymeric adsorbent being tested (.3 to .5 grams) is degassed in a quartz U-tube at 423 K under vacuum to a pressure below 5 μmHg for 12 hours. Pressure points are taken between 5 to 600 mmHg with a 45 seconds equilibration interval. The samples are then evacuated under vacuum for 1 hour before repeating the pressure points.

25

Pentane:
A Micromeritics ASAP 2020 Surface Area and Porosity Analyzer equipped with vapor introduction option with dual-zone temperature control is used to analyze static pentane adsorption at 273 K. An ethylene glycol/water mixture contained within a chiller dewer is used as temperature control for the sample. Pentane (Sigma-Aldrich, anhydrous, ≥ 99%) is placed in a quartz vessel located in the temperature-regulated vapor furnace which is controlled to 308K. Prior to pentane analysis, the macroporous polymeric adsorbent being tested is degassed in a quartz tube at 373 K under vacuum to a pressure below 5 μmHg for at least 12 hours. Relative pressure points are taken between $0.005 < P/P_0 < 0.50$. The saturation pressure, P_0 , was calculated to be 183.526 mmHg based on pentane adsorptive properties and the analysis bath temperature.

35

FIGs. 4 and 5 show the initial and repeat adsorption isotherms for butane for Example 1 and Example 2, respectively.

FIG. 6 shows the initial and repeat adsorption isotherms for propane for Example 3.

FIGs. 7, 8, and 9 show the adsorption isotherms for ethane (C2), propane (C3), butane (C4), and pentane (C5) for Examples 1, 2, and 3, respectively.

Adsorption Breakthrough

Breakthrough curve data for the macroporous polymeric adsorbent is determined using a GC/mass spectrometer (mass spec). The GC/mass spec is calibrated then a 40g sample is loaded into the sample column. A mixed gas comprising a ratio of CH₄/C₂H₆/C₃H₈/C₄H₁₀ at 40/40/40/40 standard cubic centimeters per minute (SCCM) is analyzed. Gas flow is initiated. This flow by-passes the packed bed (i.e., column). The system is allowed to equilibrate for 2 hours. The gas from the by-pass is then analyzed by the mass spec. Following a two minute delay, the three-way valve is opened to allow the mixed gas to enter the packed bed column. The data for the mass spec analysis of the mixed gas leaving the packed bed column is recorded. The system is allowed to run until all four gases have been analyzed in the mass spec and recorded. Table 1 lists the breakthrough times for each gas.

Table 1

Polymeric Sorbent Media	Example 1	Example 2	Example 3
Weight, g	40	40	40
Volume, cc	109	130	71
Bulk Density, g/cc	0.37	0.31	0.56
Methane breakthrough, min	5.2	6	6.3
Ethane breakthrough, min	13.2	16.5	11.1
Propane Breakthrough, min	27.3	33.2	16.4
Butane breakthrough, min	64	81.4	31.9

What is claimed is:

1. A method to remove and recover some or all of the natural gas liquids (NGLs): ethane, propane, butane, pentane, or heavier hydrocarbons, from a natural gas feedstream to provide a methane-rich natural gas supply wherein the NGLs are separated from the natural gas
5 feedstream by means of a NGLs separation unit comprising:

(i) an adsorption unit comprising an adsorption bed comprising an adsorbent media which adsorbs NGLs to form a loaded adsorbent media

and

(ii) a regeneration unit comprising a means to regenerate loaded adsorbent media
10 by causing the release of adsorbed NGLs from the loaded adsorbing media and forming regenerated adsorbent media

wherein the method comprises the steps of:

(a) passing the natural gas feedstream through the adsorption unit generating the adsorbent loaded with NGLs and a methane-rich natural gas supply,

15 (b) transporting the adsorbent loaded with NGLs from the adsorption unit to the regeneration unit,

(c) regenerating the adsorbent loaded with NGLs by releasing the adsorbed NGLs from the loaded adsorbing media and forming regenerated adsorbent
20 media

(d) transporting the regenerated adsorbent media back to the adsorption unit for reuse,

(e) recovering the released NGLs,
and

(f) providing the methane-rich natural gas supply to a natural gas pipeline for
25 transportation and/or for use as fuel for a combustion process.

2. The method of Claim 1 wherein the source of the natural gas feedstream is from an oil well, a gas well, a condensate well, or a pipeline natural gas containing NGLs.

3. The method of Claim 1 wherein the methane-rich natural gas supply has a BTU value equal to or less than 1073.

30 4. The method of Claim 1 wherein the adsorption media is silica gel, alumina, silica-alumina, zeolites, activated carbon, polymer supported silver chloride, copper-containing resins, porous cross-linked polymeric adsorbents, pyrolyzed macroporous polymers, or mixtures thereof.

5. The method of Claim 1 wherein the adsorption media is a porous cross-linked
35 polymeric adsorbent, a pyrolyzed macroporous polymer, or mixtures thereof.

6. The method of Claim 1 wherein the loaded adsorption media is regenerated by means of reduced pressure over the media, heating the media, or a combination of reduced pressure and heating.

7. The method of Claim 1 wherein the loaded adsorption media is regenerated by a
5 microwave heating system.

8. The method of Claim 1 wherein the regeneration step is operated as a batch process, a semi-continuous process, or as a continuous process.

9. The method of Claim 1 further comprising the step

10 (g) transporting the recovered NGLs by pipeline, truck, rail, or ship to a chemical processing facility where one or more of the NGLs is used as a chemical feedstock in the chemical processing facility.

FIG. 1

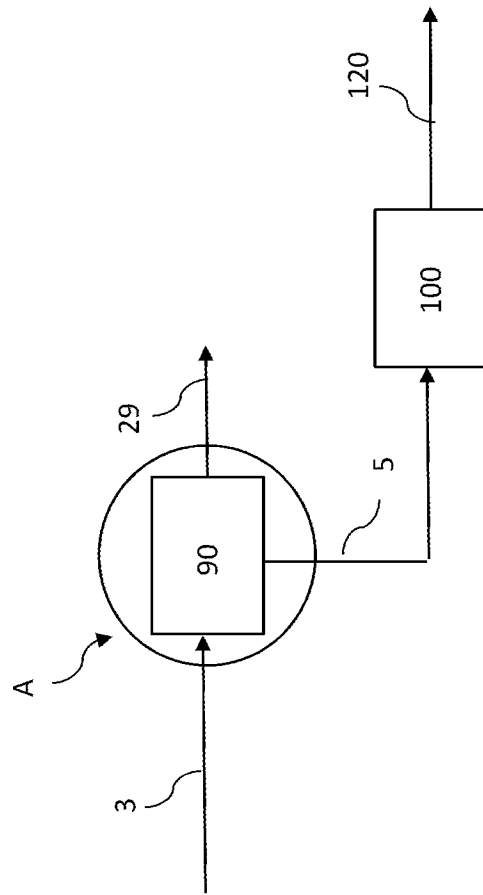


FIG. 2

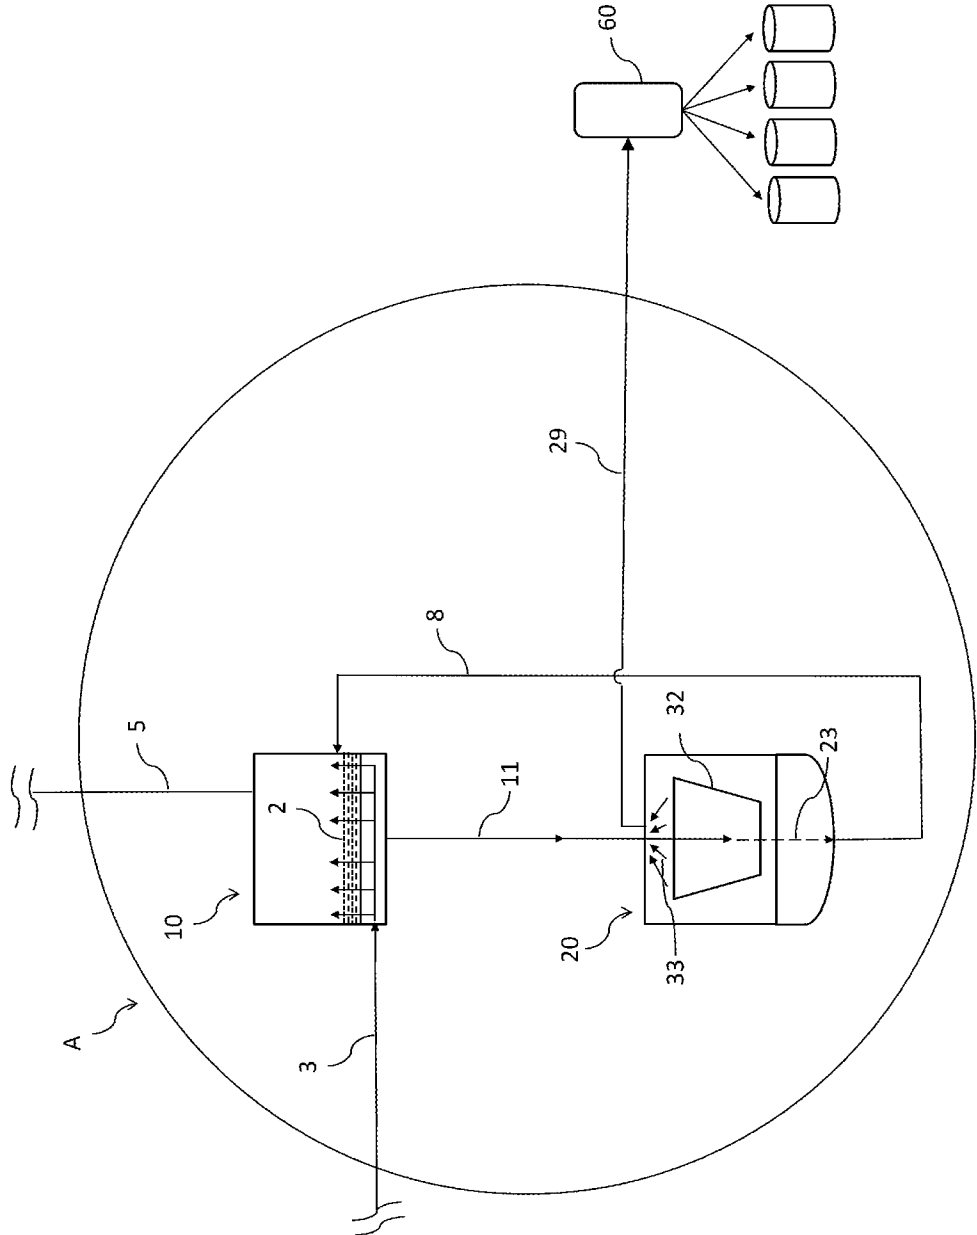


FIG. 3

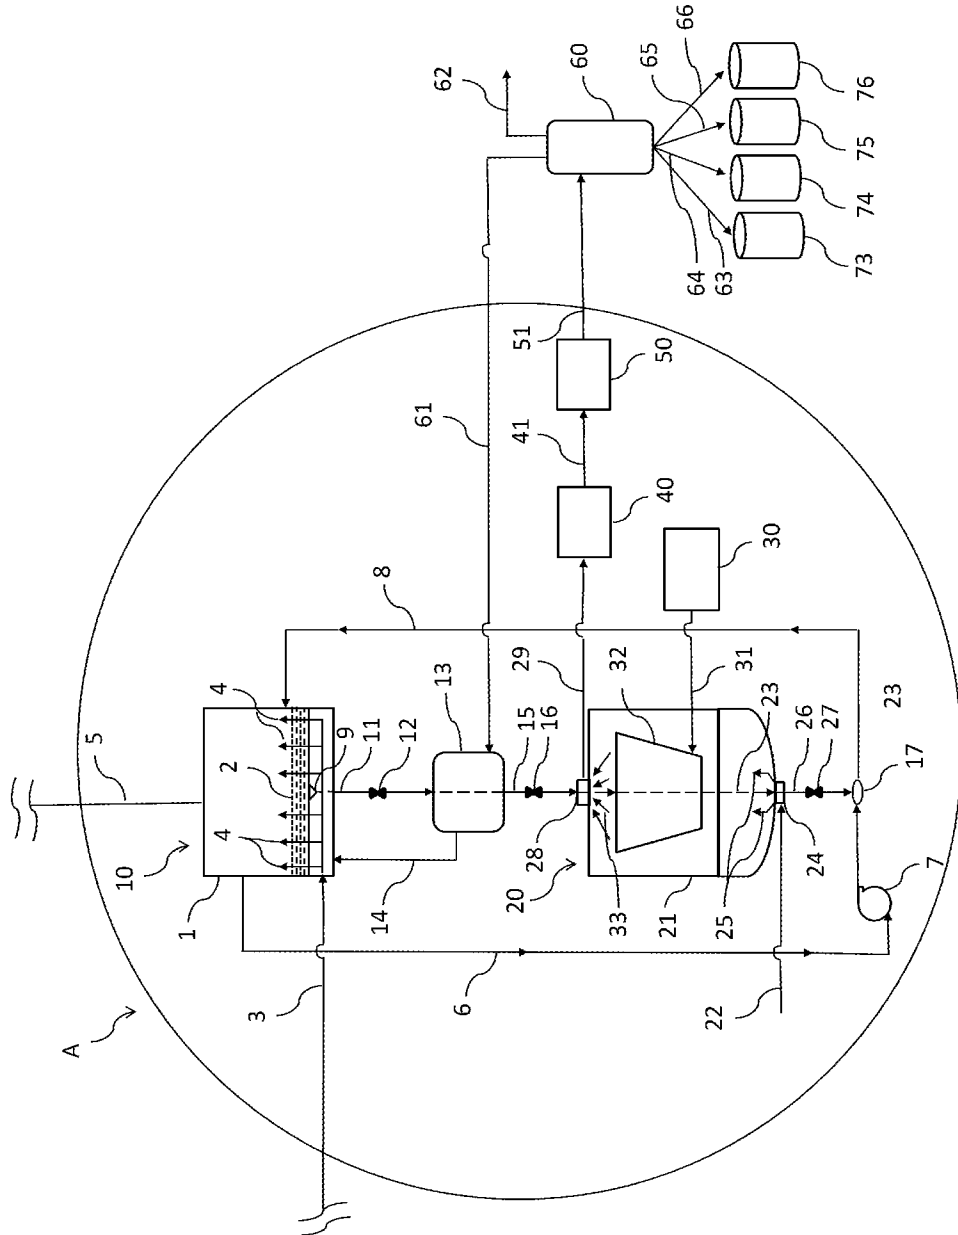


FIG. 4

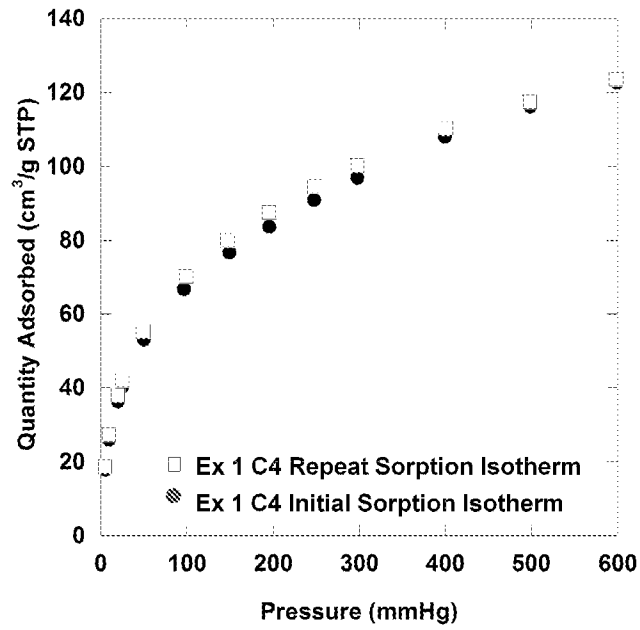


FIG. 5

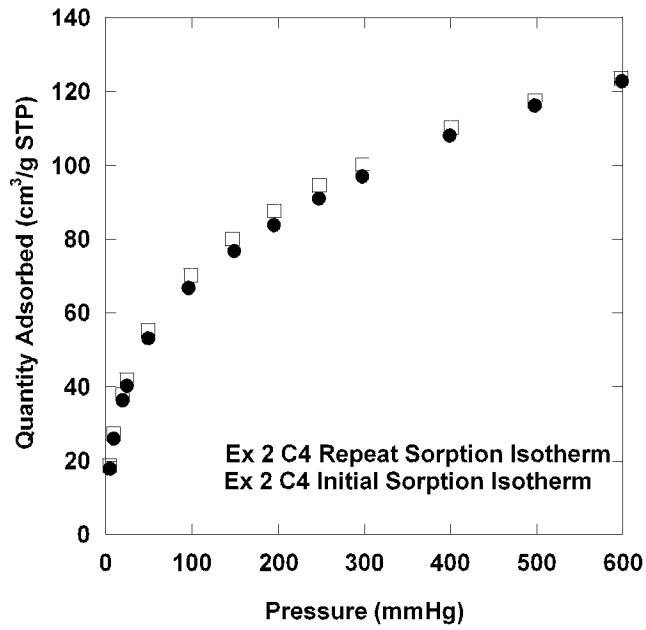


FIG. 6

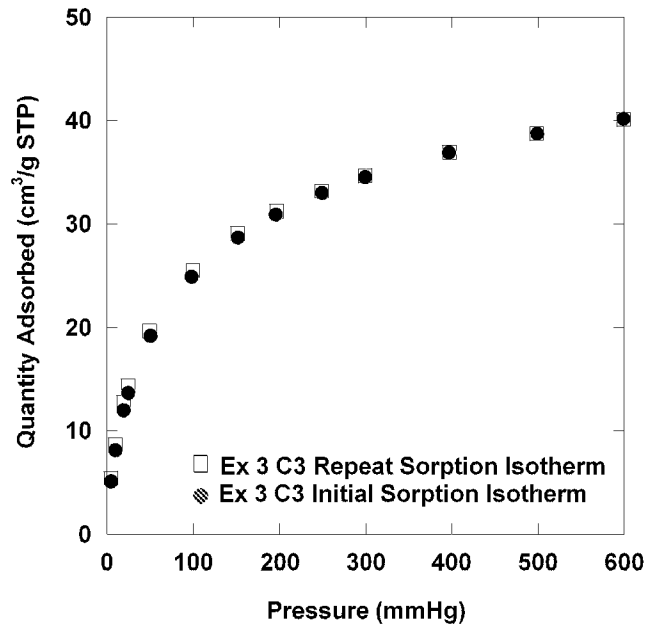


FIG. 7

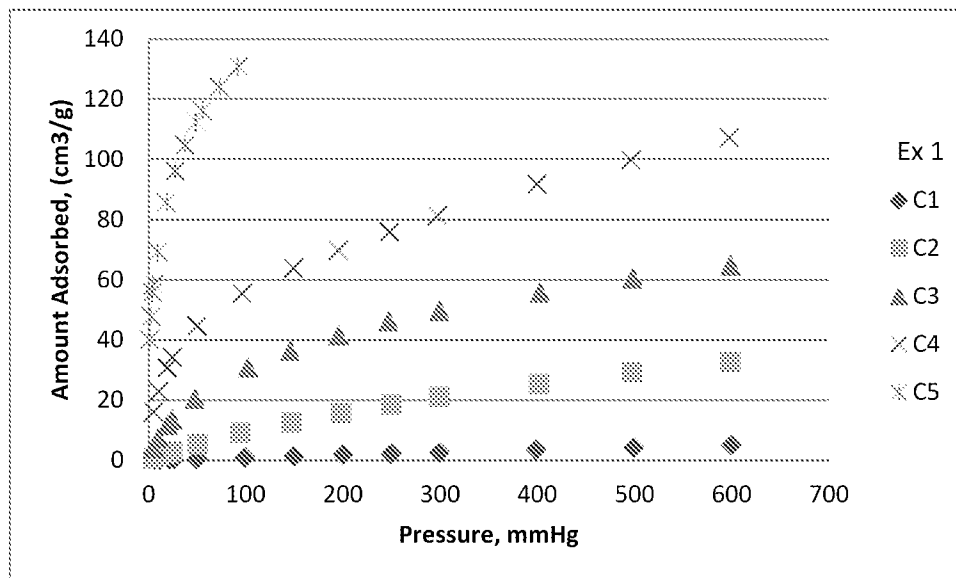


FIG. 8


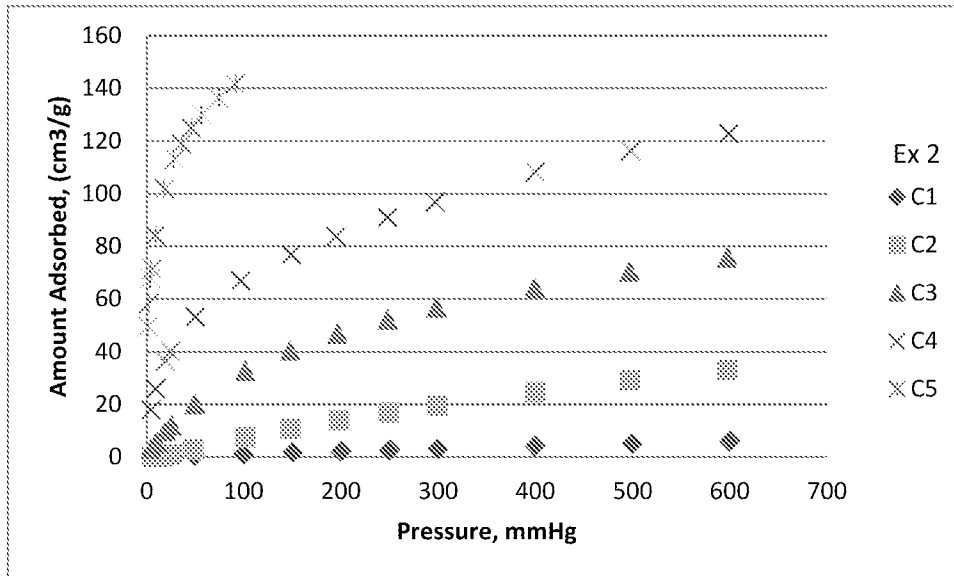


FIG. 9

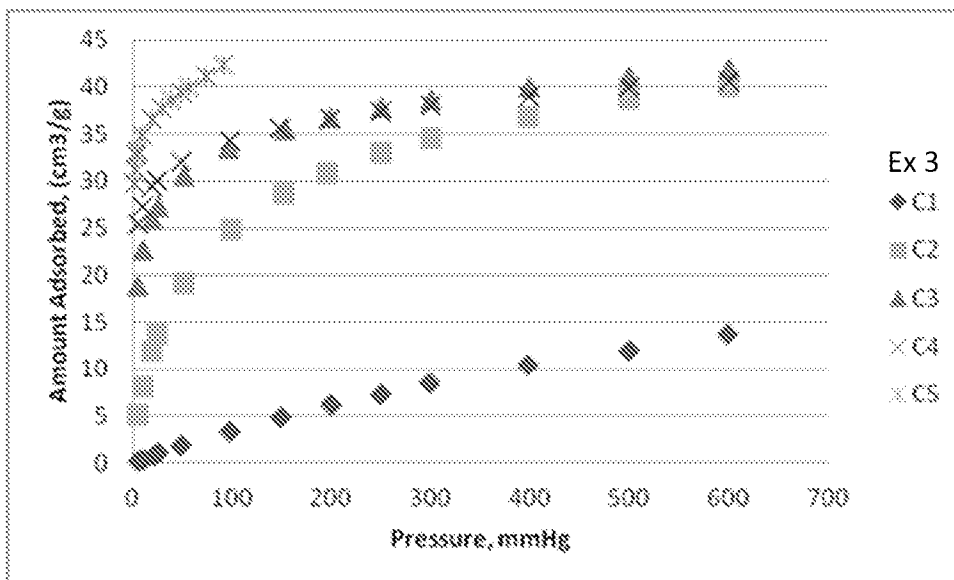

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/049775

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B01J20/34 C10L3/10 B01D53/02 B01D53/08 C07C7/13
 C10G5/02
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 B01J C10L B01D C07C C10G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/315012 A1 (KUZNICKI STEVEN MITCHELL [CA] ET AL) 29 December 2011 (2011-12-29) paragraphs [0002], [0047], [0049], [0055], [0112], [0113], [0114], [0116], [0143], [0172]; figure 6B -----	1-4,6-9
X	EP 2 554 637 A2 (AIR PROD & CHEM [US]) 6 February 2013 (2013-02-06) paragraphs [0019] - [0029], [0037], [0044], [0045]; figure 2 -----	1-4,6,8,9
X	US 2013/192299 A1 (DOLAN WILLIAM BACHOP [US] ET AL) 1 August 2013 (2013-08-01) paragraphs [0023] - [0030]; claims 15, 16; figure 1 -----	1-4,6,8
	-/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 17 October 2014	Date of mailing of the international search report 03/11/2014
---	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Focante, Francesca
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/049775

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/222552 A1 (RAVIKOVITCH PETER I [US] ET AL) 6 September 2012 (2012-09-06) paragraphs [0004], [0007], [0009], [0014], [0017], [0041], [0090], [0092]; figure 1 -----	1-4,6,8,9
X	US 3 554 904 A (HUMPHRIES CURTIS L) 12 January 1971 (1971-01-12) column 1, line 42 - column 2, line 64 column 4, line 10 - column 5, line 6; figure -----	1-4,6,8,9
X	GB 638 745 A (UNION OIL CO) 14 June 1950 (1950-06-14) page 2, line 127 - page 4, line 26; figure 1 page 9, lines 18-47; tables 1, 2 page 10, line 62 - page 12, line 97; figure 3 -----	1-4,6,8,9
X	US 2 527 964 A (ROBINSON SAM P) 31 October 1950 (1950-10-31) column 4, lines 11-55; claim 14; figure column 7, line 4 - column 8, line 37 -----	1-4,6,8,9
Y	US 5 079 274 A (SCHNEIDER HANS P [DE] ET AL) 7 January 1992 (1992-01-07) cited in the application column 8, line 50 - column 9, line 28 -----	5
Y	US 4 040 990 A (NEELY JAMES W) 9 August 1977 (1977-08-09) cited in the application column 4, line 58 - column 7, line 50 -----	5
A	US 6 562 113 B1 (AYKANIAN ARTHUR A [US] ET AL) 13 May 2003 (2003-05-13) column 5, line 20 - column 6, line 4; figure 2 -----	7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/049775

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011315012	A1	29-12-2011	CA 2743793 A1
			US 2011315012 A1
			WO 2012000081 A1

EP 2554637	A2	06-02-2013	AU 2012208988 A1
			CA 2784367 A1
			CN 103087794 A
			EP 2554637 A2
			US 2013186133 A1

US 2013192299	A1	01-08-2013	CA 2863650 A1
			US 2013192299 A1
			WO 2013116627 A1

US 2012222552	A1	06-09-2012	AU 2012223552 A1
			AU 2012223553 A1
			AU 2012223554 A1
			AU 2012223558 A1
			AU 2012223560 A1
			AU 2012223563 A1
			AU 2012223564 A1
			CA 2826900 A1
			CA 2826907 A1
			CA 2826908 A1
			CA 2826928 A1
			CA 2826987 A1
			CA 2826989 A1
			CA 2828457 A1
			EA 201391188 A1
			EA 201391189 A1
			EA 201391190 A1
			EA 201391191 A1
			EA 201391192 A1
			EA 201391193 A1
			EA 201391194 A1
			EP 2680940 A2
			EP 2680941 A1
			EP 2680943 A1
			EP 2680944 A1
			EP 2680945 A1
			EP 2680951 A1
			EP 2681705 A2
			JP 2014508040 A
			JP 2014509554 A
			JP 2014509555 A
			JP 2014509556 A
			JP 2014509557 A
			JP 2014512259 A
			JP 2014514136 A
			SG 192602 A1
			SG 192603 A1
			SG 192604 A1
			SG 192605 A1
			SG 192651 A1
			SG 192653 A1
			SG 192654 A1
			US 2012222551 A1
			US 2012222552 A1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/049775

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2012222553 A1	06-09-2012
		US 2012222554 A1	06-09-2012
		US 2012222555 A1	06-09-2012
		US 2012308456 A1	06-12-2012
		US 2012312163 A1	13-12-2012
		WO 2012118736 A2	07-09-2012
		WO 2012118737 A2	07-09-2012
		WO 2012118738 A1	07-09-2012
		WO 2012118742 A1	07-09-2012
		WO 2012118744 A1	07-09-2012
		WO 2012118747 A1	07-09-2012
		WO 2012118748 A1	07-09-2012

US 3554904	A	12-01-1971	GB 1253406 A
			NL 6914455 A
			US 3554904 A
			10-11-1971
			25-03-1970
			12-01-1971

GB 638745	A	14-06-1950	NONE

US 2527964	A	31-10-1950	NONE

US 5079274	A	07-01-1992	AU 621995 B2
			26-03-1992
		AU 5129190 A	27-09-1990
		BR 9001230 A	26-03-1991
		CA 2012118 A1	15-09-1990
		CN 1046533 A	31-10-1990
		DD 292850 A5	14-08-1991
		DE 69001316 D1	19-05-1993
		DE 69001316 T2	22-07-1993
		EP 0388140 A1	19-09-1990
		ES 2040046 T3	01-10-1993
		JP H02274702 A	08-11-1990
		NO 901192 A	17-09-1990
		US 5079274 A	07-01-1992
		ZA 9001991 A	27-11-1991

US 4040990	A	09-08-1977	CA 1080198 A1
			24-06-1980
			US 4040990 A
			09-08-1977

US 6562113	B1	13-05-2003	CA 2457138 A1
			07-03-2002
			EP 1409113 A1
			21-04-2004
			US 6562113 B1
			13-05-2003
			WO 0218033 A1
			07-03-2002
