



(11) **EP 1 803 793 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
17.06.2015 Bulletin 2015/25

(51) Int Cl.:
C10M 159/20 (2006.01) **C10M 159/22** (2006.01)
C10M 167/00 (2006.01) **C10M 159/24** (2006.01)
C10N 10/02 (2006.01) **C10N 10/12** (2006.01)
C10N 30/04 (2006.01) **C10N 40/25** (2006.01)

(21) Application number: **06122380.6**

(22) Date of filing: **16.10.2006**

(54) **Lubricating oil compositions**

Schmierölzusammensetzungen

Composiitons d'huile lubrifiante

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR

(30) Priority: **28.12.2005 EP 05113044**

(43) Date of publication of application:
04.07.2007 Bulletin 2007/27

(73) Proprietor: **Infineum International Limited**
Abingdon
Oxfordshire OX13 6BB (GB)

(72) Inventors:
• **Irving, Matthew David, c/o Infineum UK Ltd.**
Abingdon, Oxfordshire, OX 13 6BB (GB)

• **Arrowsmith, Stephen**
Abingdon, Oxfordshire, OX13 6BB (GB)

(74) Representative: **Goddard, Frances Anna**
Infineum UK Limited
PO Box 1
Milton Hill
Abingdon,
Oxfordshire OX13 6BB (GB)

(56) References cited:
EP-A- 1 340 803 WO-A-2005/061682
US-A1- 2005 043 191

EP 1 803 793 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

5 [0001] The present invention relates to lubricating oil compositions. More specifically, the present invention is directed to lubricating oil compositions, particularly crankcase lubricants for internal combustion engines, more particularly compression-ignited (diesel) internal combustion engines, especially heavy duty diesel engines, which lubricating oil compositions provide improved compatibility with exhaust gas after-treatment devices and acceptable lubricating oil performance, particularly excellent piston cleanliness performance.

BACKGROUND OF THE INVENTION

10 [0002] Environmental concerns have led to continued efforts to reduce the CO, hydrocarbon and nitrogen oxide (NO_x) emissions of compression ignited (diesel-fueled) and spark ignited (gasoline-fueled) light duty internal combustion engines. Further, there have been continued efforts to reduce the particulate emissions of compression ignited internal combustion engines. To meet the upcoming emission standards for heavy duty diesel vehicles, original equipment manufacturers (OEMs) will rely on the use of additional exhaust gas after-treatment devices. Such exhaust gas after-treatment devices may include catalytic converters, which can contain one or more oxidation catalysts, NO_x storage catalysts, and/or NH₃ reduction catalysts; and/or a particulate trap.

15 [0003] Oxidation catalysts can become poisoned and rendered less effective by exposure to certain elements/compounds present in engine exhaust gasses, particularly by exposure to phosphorus and phosphorus compounds introduced into the exhaust gas by the degradation of phosphorus-containing lubricating oil additives. Reduction catalysts are sensitive to sulfur and sulfur compounds in the engine exhaust gas introduced by the degradation of both the base oil used to blend the lubricant, and sulfur-containing lubricating oil additives. Particulate traps can become blocked by metallic ash, which is a product of degraded metal-containing lubricating oil additives.

20 [0004] To insure a long service life, lubricating oil additives that exert a minimum negative impact on such after-treatment devices must be identified, and OEM specifications for "new service fill" and "first fill" heavy duty diesel (HDD) lubricants require maximum sulfur levels of 0.4 mass %; maximum phosphorus levels of 0.12 mass %, and sulfated ash contents below 1.1 mass %, which lubricants are referred to as "mid-SAPS" lubricants (where "SAPS" is an acronym for "Sulfated Ash, Phosphorus, Sulfur"). In the future, OEMs may further restrict these levels maximum levels to 0.08 mass % phosphorus, 0.2 mass % sulfur and 0.8 mass % sulfated ash, with such lubricants being referred to as "low-SAPS" lubricating oil compositions.

25 [0005] As the amounts of phosphorus, sulfur and ash-containing lubricant additives are being reduced to provide mid- and low-SAPS lubricants that are compatible with exhaust gas after-treatment devices, the lubricating oil composition must continue to provide the high levels of lubricant performance, including adequate detergency, dictated by the "new service", and "first fill" specifications of the OEM's, such as the ACEA E6 and MB p228.51 specifications for heavy duty engine lubricants.

30 [0006] United States patent application number US 2005/0043191 discloses a lubricating oil formulation which is free of zinc and phosphorus and comprises at least one borated dispersant, a mixture of metal detergents, an amine antioxidant and a trinuclear molybdenum additive. Provided the composition comprises at least 700 ppm boron and at least 80 ppm molybdenum, acceptable engine performance is achieved.

35 [0007] One of the most effective antioxidant and antiwear agents, from both a performance and cost-effectiveness standpoint, used conventionally in lubricating oil compositions for internal combustion engines comprises dihydrocarbyl dithiophosphate metal salts. The metal may be an alkali or alkaline earth metal, or aluminum, lead, tin, molybdenum, manganese, nickel or copper. Of these, zinc salts of dihydrocarbyl dithiophosphate (ZDDP) are most commonly used. While such compounds are particularly effective antioxidants and antiwear agents and inexpensive, such compounds introduce phosphorus, sulfur and ash into the engine that can shorten the service life of exhaust gas after-treatment devices, as described *supra*. All metal-containing lubricant additives contribute to the ash content of the lubricant and in addition to ZDDP, a significant amount of lubricant ash is introduced by metal-based detergent additives. Such metal-based detergents include two distinct components, "soap", the function of which is to remove deposits from engine parts, particularly piston deposits; and overbasing, which neutralizes acidic combustion products. Each of the soap and overbasing components of the detergent contribute to the ash content of the detergent.

40 [0008] There are three classes of detergents used conventionally in the formulation of lubricating oil compositions for the lubrication of internal combustion engine crankcases, specifically metal salts of carboxylates (e.g., salicylates), phenates and sulfonates. Carboxylate soap is generally considered to provide superior piston cleaning performance and as superior performance allows for the use of less detergent soap, carboxylate detergents have been favored in the formulation of mid- and low-SAPS lubricating oil compositions. Carboxylates also provide an antioxidant credit and do not contribute to copper corrosivity. However, carboxylate detergents are available from only a few sources and therefore, supply is constrained. Phenate and sulfonate detergents each have performance debits and credits relative to one another. Phenates, for example, provide a credit in antioxidant relative sulfonates, but have a deleterious effect

on copper corrosivity. Sulfonates provide an antiwear credit relative to phenates, but introduce more sulfur and do not boost antioxidant. Therefore, when used, phenate and sulfonate detergents are commonly employed in combination. It would be beneficial to be able to provide mid- and low-SAPS lubricating oil compositions formulated with phenate/sulfonate mixtures, which provide acceptable piston cleanliness performance.

5 [0009] The present inventors have identified an anomaly in the performance of phenate detergents. Specifically, while increasing the amount of phenate soap had not been found to have a significant effect on piston cleanliness performance in lubricating oil compositions having conventional ash contents, it has been observed that piston cleanliness performance can be improved dramatically by increasing the level of phenate soap in mid- and low-SAPS lubricating oil compositions therefore allowing formulators to adjust the phenate/sulfonate detergent mixture to provide excellent piston cleanliness performance in mid- and low-SAPS lubricating oil compositions.

SUMMARY OF THE INVENTION

15 [0010] Therefore, in accordance with the invention, there is provided a lubricating oil composition having a phosphorus content of no more than 0.12 mass %, a sulfur content of no more than 0.4 mass % and an ash content, calculated as sulfated ash, of no more than 1.1 mass %, comprising a major amount of oil of lubricating viscosity, a phenate detergent and a sulfonate detergent, wherein the phenate detergent is present in an amount providing the lubricating oil composition with at least 1.4 grams of phenate soap (per 100 grams of lubricating oil composition), and wherein the ratio of the amount of phenate soap to sulfonate soap in grams is at least 5: 1.

20 [0011] Preferably, the lubricating oil composition, as in the first aspect, has a phosphorus content of less than 0.08 mass %, a sulfur content of less than 0.3 mass % and an ash content, calculated as sulfated ash, of less than 1.0 mass %.

[0012] In accordance with a second aspect of the invention, there is provided a method of operating a spark- or compression-ignited internal combustion vehicular engine, particularly a compression-ignited internal combustion vehicular engine, more particularly a heavy duty diesel engine, equipped with an aftertreatment device containing an oxidation and/or reduction catalyst and/or a particulate trap, which method comprises lubricating said engine with a lubricating oil composition of the first aspect.

25 [0013] In accordance with a third aspect of the invention, there is provided the use of a lubricating oil composition of the first aspect to maintain the piston cleanliness of a spark- or compression-ignited internal combustion vehicular engine, particularly a compression-ignited internal combustion vehicular engine, more particularly a heavy duty diesel engine, provided with at least one exhaust gas treatment device.

30 [0014] Other and further objects, advantages and features of the present invention will be understood by reference to the following specification.

DETAILED DESCRIPTION OF THE INVENTION

35 [0015] The oils of lubricating viscosity useful in the practice of the invention may range in viscosity from light distillate mineral oils to heavy lubricating oils such as gasoline engine oils, mineral lubricating oils and heavy duty diesel oils. Generally, the viscosity of the oil ranges from about 2 mm²/sec (centistokes) to about 40 mm²/sec, especially from about 3 mm²/sec to about 20 mm²/sec, most preferably from about 4 mm²/sec to about 10 mm²/sec, as measured at 100°C.

40 [0016] Natural oils include animal oils and vegetable oils (e.g., castor oil, lard oil); liquid petroleum oils and hydrorefined, solvent-treated or acid-treated mineral oils of the paraffinic, naphthenic and mixed paraffinic-naphthenic types. Oils of lubricating viscosity derived from coal or shale also serve as useful base oils.

[0017] Synthetic lubricating oils include hydrocarbon oils and halo-substituted hydrocarbon oils such as polymerized and interpolymerized olefins (e.g., polybutylenes, polypropylenes, propylene-isobutylene copolymers, chlorinated polybutylenes, poly(1-hexenes), poly(1-octenes), poly(1-decenes)); alkylbenzenes (e.g., dodecylbenzenes, tetradecylbenzenes, dinonylbenzenes, di(2-ethylhexyl)benzenes); polyphenyls (e.g., biphenyls, terphenyls, alkylated polyphenols); and alkylated diphenyl ethers and alkylated diphenyl sulfides and derivative, analogs and homologs thereof.

45 [0018] Alkylene oxide polymers and interpolymers and derivatives thereof where the terminal hydroxyl groups have been modified by esterification, etherification, etc., constitute another class of known synthetic lubricating oils. These are exemplified by polyoxyalkylene polymers prepared by polymerization of ethylene oxide or propylene oxide, and the alkyl and aryl ethers of polyoxyalkylene polymers (e.g., methyl-polyiso-propylene glycol ether having a molecular weight of 1000 or diphenyl ether of poly-ethylene glycol having a molecular weight of 1000 to 1500); and mono- and polycarboxylic esters thereof, for example, the acetic acid esters, mixed C₃-C₈ fatty acid esters and C₁₃ Oxo acid diester of tetraethylene glycol.

50 [0019] Another suitable class of synthetic lubricating oils comprises the esters of dicarboxylic acids (e.g., phthalic acid, succinic acid, alkyl succinic acids and alkenyl succinic acids, maleic acid, azelaic acid, suberic acid, sebacic acid, fumaric acid, adipic acid, linoleic acid dimer, malonic acid, alkylmalonic acids, alkenyl malonic acids) with a variety of alcohols (e.g., butyl alcohol, hexyl alcohol, dodecyl alcohol, 2-ethylhexyl alcohol, ethylene glycol, diethylene glycol monoether,

propylene glycol). Specific examples of such esters includes dibutyl adipate, di(2-ethylhexyl) sebacate, di-n-hexyl fumarate, dioctyl sebacate, diisooctyl azelate, diisodecyl azelate, dioctyl phthalate, didecyl phthalate, dieicosyl sebacate, the 2-ethylhexyl diester of linoleic acid dimer, and the complex ester formed by reacting one mole of sebacic acid with two moles of tetraethylene glycol and two moles of 2-ethylhexanoic acid.

[0020] Esters useful as synthetic oils also include those made from C₅ to C₁₂ monocarboxylic acids and polyols and polyol esters such as neopentyl glycol, trimethylolpropane, pentaerythritol, dipentaerythritol and tripentaerythritol.

[0021] Silicon-based oils such as the polyalkyl-, polyaryl-, polyalkoxy- or polyaryloxysilicone oils and silicate oils comprise another useful class of synthetic lubricants; such oils include tetraethyl silicate, tetraisopropyl silicate, tetra-(2-ethylhexyl)silicate, tetra-(4-methyl-2-ethylhexyl)silicate, tetra-(p-tert-butyl-phenyl) silicate, hexa-(4-methyl-2-ethylhexyl)disiloxane, poly(methyl)siloxanes and poly(methylphenyl)siloxanes. Other synthetic lubricating oils include liquid esters of phosphorous-containing acids (e.g., tricresyl phosphate, trioctyl phosphate, diethyl ester of decylphosphonic acid) and polymeric tetrahydrofurans.

[0022] Other examples of base oil are gas-to-liquid ("GTL") base oils, i.e. the base oil may be an oil derived from Fischer-Tropsch-synthesized hydrocarbons made from synthesis gas containing hydrogen and carbon monoxide using a Fischer-Tropsch catalyst. These hydrocarbons typically require further processing in order to be useful as a base oil. For example, they may, by methods known in the art, be hydroisomerized; hydrocracked and hydroisomerized; dewaxed; or hydroisomerized and dewaxed.

[0023] The oil of lubricating viscosity may comprise a Group I, Group II, Group III oil, or may comprise base oil blends of Group I, Group II, Group III oil and Group IV and/or Group V oil. Preferably, the oil of lubricating viscosity is a Group II, Group III, Group IV or Group V base oil or base oil blend, or a blend of a Group I base oil and one or more of a Group II, Group III, Group IV or Group V base oil. The base oil or base oil blend preferably has a saturate content of at least 65%, more preferably at least 75%, such as at least 85%. Most preferably, the base oil, or base oil blend, has a saturate content of greater than 90%. Preferably, the base oil or base oil blend will have a sulfur content of less than 1 mass %, preferably less than 0.6 mass %, most preferably less than 0.3 mass %. Preferably, the viscosity index (VI) of the base oil or base oil blend is at least 80, preferably at least 90, more preferably from about 120 to 150.

[0024] Definitions for the base oil in this invention are the same as those found in the American Petroleum Institute (API) publication "Engine Oil Licensing and Certification System", Industry Services Department, Fourteenth Edition, December 1996, Addendum 1, December 1998. Said publication categorizes base oil as follows:

a) Group I base oils contains less than 90 percent saturates and/or greater than 0.03 mass % sulfur and have a viscosity index greater than or equal to 80 and less than 120 using the test methods specified in Table 1.

b) Group II base oils contains greater than or equal to 90 percent saturates and less than or equal to 0.03 mass % sulfur and have a viscosity index greater than or equal to 80 and less than 120 using the test methods specified in Table 1.

c) Group III base oils contains greater than or equal to 90 percent saturates and less than or equal to 0.03 mass % sulfur and have a viscosity index greater than or equal to 120 using the test methods specified in Table 1.

d) Group IV base oils are polyalphaolefins (PAO).

e) Group V base oil includes all other base oil not included in Group I, II, III, or IV.

Analytical Methods for Base Stock	
Property	Test Method
Saturates	ASTM D 2007
Viscosity Index	ASTM D 2270
Sulfur	ASTM D 4294

[0025] Metal-containing or ash-forming detergents function both as detergents to reduce or remove deposits and as acid neutralizers or rust inhibitors, thereby reducing wear and corrosion and extending engine life. Detergents generally comprise a polar head with long hydrophobic tail, with the polar head comprising a metal salt of an acid organic compound. The salts may contain a substantially stoichiometric amount of the metal in which they are usually described as normal or neutral salts, and would typically have a total base number (TBN), as may be measured by ASTM D-2896 of from 0 to 80. It is possible to include large amounts of a metal base by reacting an excess of a metal compound, such as an oxide or hydroxide, with an acidic gas such as carbon dioxide. The resulting overbased detergent comprises neutralized detergent as the outer layer of a metal base (e.g., carbonate) micelle. Such overbased detergents may have a TBN of 150 or greater, and overbased detergents typically used have a TBN from 250 to 450, or more.

[0026] Detergents that are conventionally employed include oil-soluble neutral and overbased sulfonates, phenates, sulfurized phenates, thiophosphonates, salicylates, and naphthenates and other oil-soluble carboxylates of a metal, particularly the alkali or alkaline earth metals, e.g., barium, sodium, potassium, lithium, calcium, and magnesium. The

most commonly used metals are calcium and magnesium, which may both be present in detergents used in a lubricant, and mixtures of calcium and/or magnesium with sodium. Particularly convenient metal detergents are neutral and over-based metal detergents having TBN of from 20 to 450. Combinations of detergents, whether overbased or neutral or both, may be used.

5 **[0027]** Sulfonates may be prepared from sulfonic acids which are typically obtained by the sulfonation of alkyl substituted aromatic hydrocarbons such as those obtained from the fractionation of petroleum or by the alkylation of aromatic hydrocarbons. Examples included those obtained by alkylating benzene, toluene, xylene, naphthalene, diphenyl or their halogen derivatives such as chlorobenzene, chlorotoluene and chloronaphthalene. The alkylation may be carried out in the presence of a catalyst with alkylating agents having from about 3 to more than 70 carbon atoms. The alkaryl sulfonates usually contain from about 9 to about 80 or more carbon atoms, preferably from about 16 to about 60 carbon atoms per alkyl substituted aromatic moiety.

10 **[0028]** The oil soluble sulfonates or alkaryl sulfonic acids may be neutralized with oxides, hydroxides, alkoxides, carbonates, carboxylate, sulfides, hydrosulfides, nitrates, borates and ethers of the metal. The amount of metal compound is chosen having regard to the desired TBN of the final product but typically ranges from about 100 to 220 wt. % of that stoichiometrically required.

15 **[0029]** Metal salts of phenols and sulfurized phenols are prepared by reaction with an appropriate metal compound such as an oxide or hydroxide and neutral or overbased products may be obtained by methods well known in the art. Sulfurized phenols may be prepared by reacting a phenol with sulfur or a sulfur containing compound such as hydrogen sulfide, sulfur monohalide or sulfur dihalide, to form products which are generally mixtures of compounds in which 2 or more phenols are bridged by sulfur containing bridges.

20 **[0030]** Carboxylate detergents, e.g., salicylates, can be prepared by reacting aromatic carboxylic acid with an appropriate metal compound such as an oxide or hydroxide and neutral or overbased products may be obtained by methods well known in the art. The aromatic moiety of the aromatic carboxylic acid can contain heteroatoms, such as nitrogen and oxygen. Preferably, the moiety contains only carbon atoms; more preferably the moiety contains six or more carbon atoms; for example benzene is a preferred moiety. The aromatic carboxylic acid may contain one or more aromatic moieties, such as one or more benzene rings, either fused or connected via alkylene bridges. The carboxylic moiety may be attached directly or indirectly to the aromatic moiety. Preferably the carboxylic acid group is attached directly to a carbon atom on the aromatic moiety, such as a carbon atom on the benzene ring. More preferably, the aromatic moiety also contains a second functional group, such as a hydroxy group or a sulfonate group, which can be attached directly or indirectly to a carbon atom on the aromatic moiety.

25 **[0031]** The lubricating oil compositions of the present invention comprise combinations of phenate detergents and sulfonate detergents wherein the phenate detergent is present in an amount providing the lubricating oil composition with at least 1.4 grams of phenate soap per 100 grams of lubricating oil composition, such as from 1.4 to 2.0 grams of phenate soap per 100 grams of lubricating oil composition, preferably at least 1.5 grams of phenate soap per 100 grams of lubricating oil composition, such as from about 1.5 to about 1.8 grams of phenate soap per 100 grams of lubricating oil composition, more preferably at least 1.55 grams of phenate soap per 100 grams of lubricating oil composition, such as from about 1.55 to about 1.75 grams of phenate soap per 100 grams of lubricating oil composition. The ratio of the amount of phenate soap to sulfonate soap (in grams) is at least 5:1, such as from about 5:1 to 50:1; preferably, at least about 7.5: 1, such as from about 7.5:1 to 25:1; more preferably, at least 10:1, such as from about 10:1 to 20:1.

30 **[0032]** In one embodiment, lubricating oil compositions of the present invention are substantially free from carboxylate detergents (e.g., contain such detergents in an amount providing no more than 0.5 grams of carboxylate soap per 100 grams of lubricating oil composition), or completely free from carboxylate detergent.

35 **[0033]** Detergents generally useful in the formulation of lubricating oil compositions also include "hybrid" detergents formed with mixed surfactant systems including phenate and/or sulfonate components, e.g., phenate/salicylates, sulfonate/phenates, sulfonate/salicylates, sulfonates/phenates/salicylates, as described, for example, in U.S. Patent Nos. 6,429,178; 6,429,179; 6,153,565; and 6,281,179. Where, for example, a hybrid sulfonate/phenate detergent is employed, the hybrid detergent would be considered equivalent to amounts of distinct phenate and sulfonate detergents introducing like amounts of phenate and sulfonate soaps, respectively.

40 **[0034]** Phenate detergents useful in the practice of the present invention are preferably those having, or having on average, a soap to metal ratio, in terms of grams of soap to grams of metal, of at least 6.0, and are preferably used in a total amount introducing into the composition no more than 0.85 mass % of ash, (expressed as sulfated ash or "SASH", and based on the total weight of the composition), such as 0.4 to 0.85 mass % ash, preferably no more than 0.75 mass % of ash, such as 0.55 to 0.75 mass % of ash, most preferably no more than 0.70 mass % of ash, such as 0.60 to 0.70 mass % of ash. Preferably, the sulfonate detergent is present in an amount introducing into the composition no more than 0.35 mass % of ash, (expressed as sulfated ash or "SASH", and based on the total weight of the composition), such as 0.10 to 0.35 mass % of ash, preferably no more than 0.30 mass % of ash, such as 0.15 to 0.30 mass % of ash, most preferably no more than 0.25 mass % of ash, such as 0.18 to 0.25 mass % of ash, such that the total amount of

ash introduced by detergent is preferably no more than 0.95 mass %, such as from 0.5 to 0.95 mass %, especially no more than 0.90 mass %, such as from about 0.70 to about 0.90 mass %, more preferably no more than 0.85 mass %, such as from about 0.75 to about 0.85 mass %. In another preferred embodiment, the phenate detergent is neutral or only slightly overbased and has a total base number of from 50 to 150, preferably from 80 to 120, more preferably from about 90 to about 115, and the sulfonate provides the majority of the TBN to the lubricating oil composition and has a TBN of from 150 to 475, preferably from 250 to 425, more preferably from about 300 to about 410. To provide the lubricating oil composition with required level of detergency without exceeding the maximum allowed ash level, detergent(s) may comprise from about 3.0 to about 5.5 mass %, preferably from about 3.5 to about 5.0 mass %, most preferably from about 4.0 to about 4.75 mass % of the lubricating oil composition.

[0035] The percentage of surfactant, or soap in an overbased detergent, and thus the soap to metal ratio of a detergent, or mixture of detergents, can be measured by dialysing a known amount (A g, approximately 20 g) of the liquid overbased detergent (substantially free from other lubricating oil additives) through a membrane in a Soxhlet extractor (150 mm height x 75 mm internal diameter) using n-hexane siphoning at a rate of 3 to 4 times per hour for 20 hours. The membrane should be one which retains substantially all the metal-containing material, and passes substantially all the remainder of the sample. An example of a suitable membrane is a gum rubber membrane supplied by Carters Products, Division of Carter Wallace Inc., New York, NY 10105 under the trade name Trojans. The dialysate and residue obtained on completion of the dialysis step are evaporated to dryness, any remaining volatile material then being removed in a vacuum oven (100°C at less than 1 torr or less than about 130 Pa). The mass of the dried residue, in grams, is designated B. The percentage (C) of overbased detergent material in the liquid sample is given by the equation:

$$C = \frac{B}{A} \times 100\%.$$

[0036] Background information for the dialysis technique is given by Amos, R. and Albaugh, E.W. in "Chromatography in Petroleum Analysis", Altgelt, K.H. and Gouw, T.H., Eds, pages 417 to 422, Marcel Dekker, Inc., New York and Basel, 1979.

[0037] Phenate and Sulfonate detergents are most commonly calcium-based. In the formulation of mid- and low-SAPS lubricating oil compositions, magnesium salts can be used to replace some or all of the calcium salts. Because magnesium is a lighter metal than calcium, a magnesium-based detergent will introduce less sulfated ash, on a mass % basis, than a like amount of the corresponding calcium-based detergent. Thus, in one preferred embodiment, lubricating oil compositions of the present invention contain a combination of magnesium and calcium detergents, such as a calcium sulfonate detergent and a magnesium phenate detergent; a calcium phenate detergent and a magnesium sulfonate detergent; a calcium sulfonate detergent, a calcium phenate detergent and a magnesium phenate detergent; or a calcium sulfonate detergent, a magnesium sulfonate detergent and a calcium phenate detergent.

[0038] Additional additives may be incorporated into the compositions of the invention to enable particular performance requirements to be met. Examples of additives which may be included in the lubricating oil compositions of the present invention are ashless dispersants, supplemental, phosphorus-free antioxidants, metal rust inhibitors, viscosity index improvers, corrosion inhibitors, anti-foaming agents, and pour point depressants. Some are discussed in further detail below.


[0039] Dihydrocarbyl dithiophosphate metal salts used as antiwear and antioxidant agents include those in which the metal is an alkali or alkaline earth metal, or aluminum, lead, tin, molybdenum, manganese, nickel or copper. They may be prepared in accordance with known techniques by first forming a dihydrocarbyl dithiophosphoric acid (DDPA), usually by reaction of one or more alcohol or a phenol with P_2S_5 and then neutralizing the formed DDPA with a zinc compound. For example, a dithiophosphoric acid may be made by reacting mixtures of primary and secondary alcohols. Alternatively, multiple dithiophosphoric acids can be prepared where the hydrocarbyl groups on one are entirely secondary in character and the hydrocarbyl groups on the others are entirely primary in character. To make the zinc salt, any basic or neutral zinc compound could be used but the oxides, hydroxides and carbonates are most generally employed. Commercial additives frequently contain an excess of zinc due to the use of an excess of the basic zinc compound in the neutralization reaction.

[0040] The amount of dihydrocarbyl dithiophosphate metal salt used in the lubricating oil composition according to the invention is preferably such that it introduces an amount of phosphorus from about 0.03 to 0.12 mass %, preferably from about 0.04 to 0.10 mass %, and more preferably from about 0.05 to 0.08 mass %.

[0041] The preferred zinc dihydrocarbyl dithiophosphates are oil soluble salts of dihydrocarbyl dithiophosphoric acids and may be represented by the following formula:

5

10

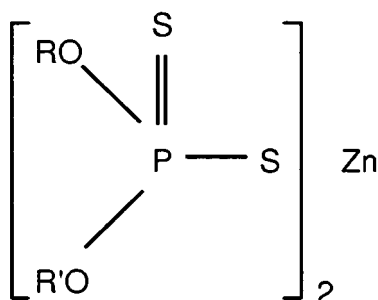

wherein R and R' may be the same or different hydrocarbonyl radicals containing from 1 to 18, preferably 2 to 12, carbon atoms and including radicals such as alkyl, alkenyl, aryl, arylalkyl, alkaryl and cycloaliphatic radicals. Particularly preferred as R and R' groups are alkyl groups of 2 to 8 carbon atoms. Thus, the radicals may, for example, be ethyl, n-propyl, i-propyl, n-butyl, i-butyl, sec-butyl, amyl, n-hexyl, i-hexyl, n-octyl, decyl, dodecyl, octadecyl, 2-ethylhexyl, phenyl, butylphenyl, cyclohexyl, methylcyclopentyl, propenyl, butenyl. In order to obtain oil solubility, the total number of carbon atoms (i.e. R and R') in the dithiophosphoric acid will generally be about 5 or greater. The zinc dihydrocarbonyl dithiophosphate (ZDDP) can therefore comprise zinc dialkyl dithiophosphates. ZDDP is the most commonly used antioxidant/antiwear agent in lubricating oil compositions for internal combustion engines, and in conventional passenger car diesel engines formulated to meet present European ACEA specifications, ZDDP is present in lubricating oil in amounts of from about 1 to about 1.5 mass %, based upon the total weight of the lubricating oil composition. This amount of ZDDP introduces from about 0.1 to about 0.14 mass % of phosphorus into the lubricating oil composition. The phosphorus content of the lubricating oil compositions is determined in accordance with the procedures of ASTM D5185.

[0042] Ashless dispersants maintain in suspension oil insolubles resulting from oxidation of the oil during wear or combustion. They are particularly advantageous for preventing the precipitation of sludge and the formation of varnish, particularly in gasoline engines. Ashless dispersants comprise an oil soluble polymeric hydrocarbon backbone bearing one or more functional groups that are capable of associating with particles to be dispersed. Typically, the polymer backbone is functionalized by amine, alcohol, amide, or ester polar moieties, often via a bridging group. The ashless dispersant may be, for example, selected from oil soluble salts, esters, amino-esters, amides, imides, and oxazolines of long chain hydrocarbon substituted mono and dicarboxylic acids or their anhydrides; thiocarboxylate derivatives of long chain hydrocarbons; long chain aliphatic hydrocarbons having a polyamine attached directly thereto; and Mannich condensation products formed by condensing a long chain substituted phenol with formaldehyde and polyalkylene polyamine.

[0043] The oil soluble polymeric hydrocarbon backbone of these dispersants is typically derived from an olefin polymer or polyene, especially polymers comprising a major molar amount (i.e., greater than 50 mole %) of a C₂ to C₁₈ olefin (e.g., ethylene, propylene, butylene, isobutylene, pentene, octene-1, styrene), and typically a C₂ to C₅ olefin. The oil soluble polymeric hydrocarbon backbone may be a homopolymer (e.g., polypropylene or polyisobutylene) or a copolymer of two or more of such olefins (e.g., copolymers of ethylene and an alpha-olefin such as propylene or butylene, or copolymers of two different alpha-olefins). Other copolymers include those in which a minor molar amount of the copolymer monomers, for example, 1 to 10 mole %, is a non-conjugated diene, such as a C₃ to C₂₂ non-conjugated diolefin (for example, a copolymer of isobutylene and butadiene, or a copolymer of ethylene, propylene and 1,4-hexadiene or 5-ethylidene-2-norbornene). Preferred are polyisobutenyl (Mn 400-2500, preferably 950-2200) succinimide dispersants. Preferably, heavy duty diesel (HDD) engine lubricating oil compositions of the present invention contain an amount of a nitrogen-containing dispersant introducing from about 0.08 to about 0.25 mass %, preferably from about 0.09 to about 0.18 mass %, more preferably from about 0.10 to about 0.15 mass %, of nitrogen into the composition.

[0044] Oxidation inhibitors or antioxidants reduce the tendency of mineral oils to deteriorate in service. Oxidative deterioration can be evidenced by sludge in the lubricant, varnish-like deposits on the metal surfaces, and by viscosity growth. Such oxidation inhibitors include hindered phenols, alkaline earth metal salts of alkylphenolthioesters having preferably C₅ to C₁₂ alkyl side chains, calcium nonylphenol sulfide, oil soluble phenates and sulfurized phenates, phosphosulfurized or sulfurized hydrocarbons or esters, phosphorous esters, metal thiocarbamates, oil soluble copper compounds as described in U.S. Patent No. 4,867,890, and molybdenum-containing compounds.

[0045] Phosphorus-free supplemental oxidation inhibitors, other than the previously described hindered phenol antioxidants, suitable for use in the present invention include alkaline earth metal salts of alkylphenolthioesters having preferably C₅ to C₁₂ alkyl side chains, calcium nonylphenol sulfide, ashless oil soluble phenates and sulfurized phenates and phosphosulfurized or sulfurized hydrocarbons.

[0046] Aromatic amines having at least two aromatic groups attached directly to the nitrogen constitute another class of compounds that is frequently used for antioxidancy. While these materials may be used in small amounts, preferred

embodiments of the present invention are free of these compounds. Typical oil soluble aromatic amines having at least two aromatic groups attached directly to one amine nitrogen contain from 6 to 16 carbon atoms. The amines may contain more than two aromatic groups. Compounds having a total of at least three aromatic groups in which two aromatic groups are linked by a covalent bond or by an atom or group (e.g., an oxygen or sulfur atom, or a -CO-, -SO₂- or alkylene group) and two are directly attached to one amine nitrogen also considered aromatic amines having at least two aromatic groups attached directly to the nitrogen. The aromatic rings are typically substituted by one or more substituents selected from alkyl, cycloalkyl, alkoxy, aryloxy, acyl, acylamino, hydroxy, and nitro groups.

[0047] Preferably, lubricating oil compositions of the present invention contain hindered phenolic antioxidants, diphenyl amine antioxidants, or a mixture thereof.

[0048] The viscosity modifier (VM) functions to impart high and low temperature operability to a lubricating oil. The VM used may have that sole function, or may be multifunctional. Representative examples of suitable viscosity modifiers are polyisobutylene, copolymers of ethylene and propylene, polymethacrylates, methacrylate copolymers, copolymers of an unsaturated dicarboxylic acid and a vinyl compound, interpolymers of styrene and acrylic esters, and partially hydrogenated copolymers of styrene/ isoprene, styrene/butadiene, and isoprene/butadiene, as well as the partially hydrogenated homopolymers of butadiene and isoprene. Multifunctional viscosity modifiers that further function as dispersants are also known.

[0049] A viscosity index improver-dispersant, also commonly referred to as a multifunctional viscosity modifier, functions as both a viscosity index improver and as a dispersant. Examples of viscosity index improver dispersants include reaction products of amines, for example polyamines, with a hydrocarbyl-substituted mono- or dicarboxylic acid in which the hydrocarbyl substituent comprises a chain of sufficient length to impart viscosity index improving properties to the compounds. In general, the viscosity index improver dispersant may be, for example, a polymer of a C₄ to C₂₄ unsaturated ester of vinyl alcohol or a C₃ to C₁₀ unsaturated mono-carboxylic acid or a C₄ to C₁₀ di-carboxylic acid with an unsaturated nitrogen-containing monomer having 4 to 20 carbon atoms; a polymer of a C₂ to C₂₀ olefin with an unsaturated C₃ to C₁₀ mono- or di-carboxylic acid neutralised with an amine, hydroxyamine or an alcohol; or a polymer of ethylene with a C₃ to C₂₀ olefin further reacted either by grafting a C₄ to C₂₀ unsaturated nitrogen-containing monomer thereon or by grafting an unsaturated acid onto the polymer backbone and then reacting carboxylic acid groups of the grafted acid with an amine, hydroxy amine or alcohol.

[0050] Pour point depressants, otherwise known as lube oil flow improvers, lower the minimum temperature at which the fluid will flow or can be poured. Such additives are well known. Typical of those additives which improve the low temperature fluidity of the fluid are C₈ to C₁₈ dialkyl fumarate/vinyl acetate copolymers, polyalkylmethacrylates and the like.

[0051] Friction modifiers and fuel economy agents that are compatible with the other ingredients of the final oil may also be included. Examples of such materials include glyceryl monoesters of higher fatty acids, for example, glyceryl mono-oleate; esters of long chain polycarboxylic acids with diols, for example, the butane diol ester of a dimerized unsaturated fatty acid; oxazoline compounds; and alkoxyated alkylsubstituted mono-amines, diamines and alkyl ether amines, for example, ethoxylated tallow amine and ethoxylated tallow ether amine.

[0052] Other known friction modifiers comprise oil-soluble organo-molybdenum compounds. Such organo-molybdenum friction modifiers also provide antioxidant and antiwear credits to a lubricating oil composition. As an example of such oil soluble organo-molybdenum compounds, there may be mentioned the dithiocarbamates, dithiophosphates, dithiophosphinates, xanthates, thioxanthates, sulfides, and the like, and mixtures thereof. Particularly preferred are molybdenum dithiocarbamates, dialkyldithiophosphates, alkyl xanthates and alkylthioxanthates.

[0053] Additionally, the molybdenum compound may be an acidic molybdenum compound. These compounds will react with a basic nitrogen compound as measured by ASTM test D-664 or D-2896 titration procedure and are typically hexavalent. Included are molybdic acid, ammonium molybdate, sodium molybdate, potassium molybdate, and other alkaline metal molybdates and other molybdenum salts, e.g., hydrogen sodium molybdate, MoOCl₄, MoO₂Br₂, Mo₂O₃Cl₆, molybdenum trioxide or similar acidic molybdenum compounds.

[0054] Rust inhibitors selected from the group consisting of nonionic polyoxyalkylene polyols and esters thereof, polyoxyalkylene phenols, and anionic alkyl sulfonic acids may be used.

[0055] Copper and lead bearing corrosion inhibitors may be used, but are typically not required with the formulation of the present invention. Typically such compounds are the thiadiazole polysulfides containing from 5 to 50 carbon atoms, their derivatives and polymers thereof. Derivatives of 1,3,4 thiadiazoles such as those described in U.S. Patent Nos. 2,719,125; 2,719,126; and 3,087,932; are typical. Other similar materials are described in U.S. Patent Nos. 3,821,236; 3,904,537; 4,097,387; 4,107,059; 4,136,043; 4,188,299; and 4,193,882. Other additives are the thio and polythio sulfenamides of thiadiazoles such as those described in UK Patent Specification No. 1,560,830. Benzotriazoles derivatives also fall within this class of additives. When these compounds are included in the lubricating composition, they are preferably present in an amount not exceeding 0.2 mass % active ingredient.

[0056] A small amount of a demulsifying component may be used. A preferred demulsifying component is described in EP 330,522. It is obtained by reacting an alkylene oxide with an adduct obtained by reacting a bis-epoxide with a

EP 1 803 793 B1

polyhydric alcohol. The demulsifier should be used at a level not exceeding 0.1 mass % active ingredient. A treat rate of 0.001 to 0.05 mass % active ingredient is convenient.

[0057] Foam control can be provided by many compounds including an antifoamant of the polysiloxane type, for example, silicone oil or polydimethyl siloxane.

[0058] In the present invention it may be necessary to include an additive which maintains the stability of the viscosity of the blend. Thus, although polar group-containing additives achieve a suitably low viscosity in the pre-blending stage it has been observed that some compositions increase in viscosity when stored for prolonged periods. Additives which are effective in controlling this viscosity increase include the long chain hydrocarbons functionalized by reaction with mono- or dicarboxylic acids or anhydrides which are used in the preparation of the ashless dispersants as hereinbefore disclosed.

[0059] It is not unusual to add an additive to a lubricating oil, or additive concentrate, in a diluent, such that only a portion of the added weight represents an active ingredient (A.I.). For example, dispersant may be added together with an equal weight of diluent in which case the "additive" is 50% A.I. dispersant. On the other hand, detergents are conventionally formed in diluent to provide a specified TBN and are oftentimes not referred to on an A.I. basis. As used herein, the term mass percent (mass %), when applied to a detergent refers to the total amount of detergent and diluent unless otherwise indicated, and when applied to all other additive refers to the weight of active ingredient unless otherwise indicated.

[0060] The individual additives may be incorporated into a base stock in any convenient way. Thus, each of the components can be added directly to the base stock or base oil blend by dispersing or dissolving it in the base stock or base oil blend at the desired level of concentration. Such blending may occur at ambient temperature or at an elevated temperature. When lubricating compositions contain one or more of the above-mentioned additives, each additive is typically blended into the base oil in an amount that enables the additive to provide its desired function. Representative amounts of such additives, used in crankcase lubricants, are listed below. All the values listed are stated as mass percent active ingredient.

ADDITIVE	MASS % (Broad)	MASS % (Preferred)
Corrosion Inhibitor	0-5	0-1.5
Metal Dihydrocarbyl Dithiophosphate	0.1-6	0.1-4
Antioxidant	0-5	0.01-3
Pour Point Depressant	0.01-5	0.01 - 1.5
Antifoaming Agent	0 - 5	0.001 - 0.15
Supplemental Antiwear Agents	0-1.0	0 - 0.5
Friction Modifier	0 - 5	0-1.5
Viscosity Modifier	0.01-10	0.25-3
Basestock	Balance	Balance

[0061] Preferably, all the additives except for the viscosity modifier and the pour point depressant are blended into a concentrate or additive package described herein as the additive package that is subsequently blended into base stock to make the finished lubricant. The concentrate will typically be formulated to contain the additive(s) in proper amounts to provide the desired concentration in the final formulation when the concentrate is combined with a predetermined amount of a base lubricant.

[0062] The concentrate is preferably made in accordance with the method described in U.S. Patent No. 4,938,880. That patent describes making a pre-mix of ashless dispersant and metal detergents that is pre-blended at a temperature of at least about

100°C. Thereafter, the pre-mix is cooled to at least 85°C and the additional components are added.

[0063] The final crankcase lubricating oil formulation may employ from 2 to 25 mass %, preferably 4 to 20 mass %, and most preferably about 5 to 18 mass % of the concentrate or additive package with the remainder being base stock. Preferably the volatility of the final crankcase lubricating oil formulation, as measured by the Noack volatility test (ASTM D5880), is less than or equal to 15 mass %, preferably less than or equal to 13 mass %, more preferably less than or equal to 12 mass %, most preferably less than or equal to 10 mass %. Preferably, lubricating oil compositions of the present invention have a compositional TBN (using ASTM D4739) of less than about 10.5, such as between 7.5 and

10.5, preferably less than or equal to about 9.5, such as about 8.0 to about 9.5.

[0064] The lubricating oil composition according to the invention is preferably capable of providing at least 40, more preferably at least 42, piston cleanliness merits in an OM441LA test. In addition the oil composition is preferably a heavy duty diesel (HDD) engine lubricant meeting the performance requirements of at least one of, preferably each of, the ACEA E4/E6 and MB p228.5/p228.51 specifications.

[0065] This invention will be further understood by reference to the following illustrative examples, wherein all percentages are by weight of active ingredient, unless otherwise noted, and which include preferred embodiments of the invention.

EXAMPLES

[0066] Using an additive package containing dispersant, detergent, ZDDP, antioxidant, a molybdenum-based additive and antifoamant, viscosity index improver and lubricating oil flow improver, a series of lubricating oil compositions representing conventional SAPS lubricating oil compositions were prepared. As detergent, combinations of 300 BN calcium sulfonate, 400 BN magnesium sulfonate and 150 BN sulfurized calcium phenate detergents were employed. By adjusting the detergent blend, low soap content (Comparative 1) and high-soap content (Comparative 2) lubricant samples were formulated. A "very-high" soap conventional SAPS lubricating oil composition (Comparative 3) was produced by formulating with a similar additive composition in which the 300 BN calcium sulfonate described above was used in combination with a 135 BN sulfurized calcium phenate, and an amount of nonyl phenol sulfide; an ashless source of phenate soap.

[0067] These formulated lubricants were then subjected to an industry standard OM441LA test, passage of which is required by each of the ACEA E4/E6 and MB p228.5/p228.51 specifications. Passage of the OM441LA test requires, *inter alia*, 40 merits in piston cleanliness, and, in the future, a replacement test (the OM501LA test) may require even better performance.

[0068] The compositions of these conventional SAPS lubricants are summarized, and the piston cleanliness test results obtained are shown, in Table 1.

Table 1

Example	Comparative 1	Comparative 2	Comparative 3
Type	Low-Soap-Content Conventional SAPS	Med. Soap-Content Conventional SAPS	High Soap-Content Conventional SAPS
Mass % Phosphorus	0.12	0.12	0.09
Mass % Sulfur	0.33	0.39	0.38
Mass % SASH	1.2	1.45	1.9
Mass % Phenate Soap	0.55	1.36	2.25
Mass % Sulfonate Soap	0.50	0.50	0.70
Mass % Total Soap	1.05	1.82	2.95
TBN (ASTM D4739)	8.5	11.0	14.4
Piston Cleanliness Merits	38.0	38.0	34.7

[0069] The data of Table 1 demonstrate that for conventional SAPS lubricants using this detergent mixture, passage of the OM441LA test is difficult regardless of the amount of total soap present in the composition. It is for this reason that carboxylate detergent-based lubricants have been preferred. As is also shown, in conventional SAPS lubricants, increasing the amount of phenate soap did not improve piston cleanliness performance. To the contrary, inferior piston cleanliness performance was shown with Comparative 3, which contained the highest level of phenate soap, and the highest total soap content.

EP 1 803 793 B1

[0070] Using an additive package containing the same components as described above, a series of "mid-SAPS" lubricants were formulated. By adjusting the mixture of detergents, low- (Comparative 4 and Comparative 5) and high soap-(Inventive 1) content lubricants were formed. The resulting formulated lubricants were subjected to the OM441LA test, as described above. The compositions of these mid-SAPS lubricants are summarized, and the piston cleanliness test results obtained are shown, in Table 2.

Table 2

Example	Comparative 4	Comparative 5	Inventive 1
Type	Low-Soap-Content Mid-SAPS	Low Soap-Content Mid-SAPS	High Soap-Content Mid-SAPS
Mass % Phosphorus	0.12	0.12	0.08
Mass % Sulfur	0.32	0.32	0.33
Mass % SASH	1.0	1.0	1.0
Mass % Phenate Soap	0.45	0.45	1.55
Mass % Sulfonate Soap	0.43	0.38	0.14
Mass % Total Soap	0.88	0.83	1.69
TBN (ASTM D4739)	8.2	8.7	8.3
Piston Cleanliness Merits	33.1	35.0	45.7

[0071] As shown, in mid-SAPS lubricants, increasing the amount of phenate soap dramatically improved piston cleanliness performance, which is surprising in that, as demonstrated above, increasing phenate soap content actually results in reduced piston cleanliness performance. The observance of this previously unrecognized phenomenon allows for the formulation of phenate/sulfonate detergent-based mid- and low-SAPS lubricating oil compositions capable of passing the OM441LA test and meeting the requirements of the ACEA E4/E6 and/or MB p228.5/p228.51 specifications. It is also seen that it is extremely difficult to provide a piston cleanliness score of greater than 42 to 43 merits in this test, and that the present formulations, therefore, perform extremely well, in general.

[0072] Compositions described as "comprising" a plurality of defined components are to be construed as including compositions formed by admixing the defined plurality of defined components. The principles, preferred embodiments and modes of operation of the present invention have been described in the foregoing specification.

Claims

1. A lubricating oil composition having a phosphorus content of no more than 0.12 mass %, a sulfur content of no more than 0.4 mass % and an ash content, calculated as sulfated ash, of no more than 1.1 mass %, comprising a major amount of oil of lubricating viscosity, a phenate detergent having, or having on average, a TBN of from 50 to 150 as measured by ASTM D-2896 and a sulfonate detergent having, or having on average, a TBN of from 150 to 475 as measured by ASTM D-2896, wherein the phenate detergent is present in an amount providing the lubricating oil composition with at least 1.4 grams of phenate soap per 100 grams of lubricating oil composition, and wherein the ratio of the amount of phenate soap to sulfonate soap in grams is at least 5: 1.
2. A lubricating oil composition of claim 1, wherein the ratio of the amount of phenate soap to the amount of sulfonate soap in grams is 5:1 to 50:1.
3. A lubricating oil according to claim 2, wherein the ratio is 7.5:1 to 25:1.
4. A lubricating oil according to claim 3, wherein the ratio is 10:1 to 20:1.
5. A lubricating oil according to any one of the preceding claims, wherein the phenate detergent provides 1.4 to 2.0 grams of phenate soap per 100 grams of lubricating oil composition.
6. A lubricating oil according to claim 5, wherein the phenate detergent provides at least 1.5 grams of phenate soap per 100 grams of lubricating oil composition.

EP 1 803 793 B1

7. A lubricating oil composition of any of the preceding claims, wherein said phenate detergent is present in an amount introducing into the lubricating oil composition no more than 0.85 mass % of sulfated ash (SASH).
- 5 8. A lubricating oil according to claim 7 wherein the phenate detergent is present in an amount providing 0.4 to 0.85 mass % of sulphated ash.
9. A lubricating oil composition of any of the preceding claims, wherein the total amount of sulfated ash introduced by detergent is no more than 0.95 mass %.
- 10 10. A lubricating oil composition according to claim 9, wherein the total amount of sulfated ash introduced by detergent is from 0.50 to 0.95 mass %.
11. A lubricating oil composition of any of the preceding claims, which contains no more than 0.5 grams of carboxylate soap per 100 grams of lubricating oil composition.
- 15 12. A lubricating oil composition according to claim 11, which is free from carboxylate detergent.
13. A lubricating oil composition of any of the preceding claims containing at least one calcium detergent and at least one magnesium detergent.
- 20 14. A lubricating oil composition of any of the preceding claims, wherein said phenate detergent has, or has on average, a TBN of from 80 to 120, and said sulfonate detergent has, or has on average, a TBN of from 250 to 425.
- 25 15. A method of operating a spark- or compression- ignited internal combustion vehicular engine equipped with an aftertreatment device containing an oxidation and/or reduction catalyst and/or a particulate trap, which method comprises lubricating said engine with a lubricating oil composition as claimed in any one of claims 1 to 14.
- 30 16. Use of a lubricating oil composition of any of claims 1 to 14, to improve the piston cleanliness performance of an internal combustion engine, preferably a heavy duty diesel (HDD) engine.

Patentansprüche

- 35 1. Schmierölszusammensetzung mit einem Phosphorgehalt von nicht mehr als 0,12 Masse%, einem Schwefelgehalt von nicht mehr als 0,4 Masse% und einem Aschegehalt, berechnet als Sulfatasche, von nicht mehr als 1,1 Masse%, welche Schmierölszusammensetzung eine größere Menge an Öl mit Schmierviskosität, ein Phenatdetergens, das eine TBN (Gesamtbasenzahl) von 50 bis 150, wie mittels ASTM D2896 gemessen, aufweist oder durchschnittlich aufweist, und ein Sulfonatdetergens, das eine TBN von 150 bis 475, wie mittels ASTM D2896 gemessen, aufweist oder durchschnittlich aufweist, umfasst, wobei das Phenatdetergens in einer Menge vorliegt, die die Schmierölszusammensetzung mit mindestens 1,4 g Phenatseife pro 100 g Schmierölszusammensetzung ausstattet und wobei das Verhältnis der Menge an Phenatseife zu Sulfonatseife in Gramm mindestens 5:1 beträgt.
- 40 2. Schmierölszusammensetzung nach Anspruch 1, bei der das Verhältnis der Menge an Phenatseife zur Menge an Sulfonatseife in Gramm 5:1 bis 50:1 beträgt.
- 45 3. Schmierölszusammensetzung nach Anspruch 1, bei der das Verhältnis 7,5:1 bis 25:1 beträgt.
4. Schmierölszusammensetzung nach Anspruch 1, bei der das Verhältnis 10:1 bis 20:1 beträgt.
- 50 5. Schmierölszusammensetzung nach einem der vorhergehenden Ansprüche, bei der das Phenatdetergens 1,4 bis 2,0 g Phenatseife pro 100 g Schmierölszusammensetzung bereitstellt.
6. Schmierölszusammensetzung nach Anspruch 5, bei der das Phenatdetergens mindestens 1,5 g Phenatseife pro 100 g Schmierölszusammensetzung bereitstellt.
- 55 7. Schmierölszusammensetzung nach einem der vorhergehenden Ansprüche, bei der das Phenatdetergens in einer Menge vorliegt, die in die Schmierölszusammensetzung nicht mehr als 0,85 Masse% Sulfatasche (SASH) einbringt.

EP 1 803 793 B1

8. Schmierölszusammensetzung nach Anspruch 7, bei der das Phenatdetergens in einer Menge vorliegt, die 0,5 bis 0,85 Masse% Sulfatasche liefert.
- 5 9. Schmierölszusammensetzung nach einem der vorhergehenden Ansprüche, bei der die Gesamtmenge an Sulfatasche, die durch das Detergens eingebracht wird, nicht mehr als 0,95 Masse% beträgt.
10. Schmierölszusammensetzung nach Anspruch 9, bei der die Gesamtmenge an Sulfatasche, die durch das Detergens eingebracht wird, von 0,50 bis 0,59 Masse% beträgt.
- 10 11. Schmierölszusammensetzung nach einem der vorhergehenden Ansprüche, die nicht mehr als 0,5 g Carboxylatseife pro 100 g Schmierölszusammensetzung enthält.
12. Schmierölszusammensetzung nach Anspruch 11, die frei von Carboxylatdetergens ist.
- 15 13. Schmierölszusammensetzung nach einem der vorhergehenden Ansprüche, die mindestens ein Calciumdetergens enthält und mindestens ein Magnesiumdetergens enthält.
14. Schmierölszusammensetzung nach einem der vorhergehenden Ansprüche, in der das Phenatdetergens eine TBN von 80 bis 120 aufweist oder durchschnittlich aufweist und das Sulfonatdetergens eine TBN von 250 bis 425 aufweist oder durchschnittlich aufweist.
- 20 15. Verfahren zum Betreiben eines funken- oder kompressionsgezündeten Fahrzeugverbrennungsmotors, der mit einer Nachbehandlungsvorrichtung ausgestattet ist, die einen Oxidations- und/oder Reduktionskatalysator und/oder einen Rußfilter enthält, bei welchem Verfahren der Motor mit einer Schmierölszusammensetzung wie in einem der Ansprüche 1 bis 14 beansprucht geschmiert wird.
- 25 16. Verwendung einer Schmierölszusammensetzung nach einem der Ansprüche 1 bis 14 zur Verbesserung der Kolbenreinigungslleistung eines internen Verbrennungsmotors, vorzugsweise eines Schwerlastdieselmotors (HDD).

30

Revendications

1. Composition d'huile lubrifiante ayant une teneur en phosphore non supérieure à 0,12 % en masse, une teneur en soufre non supérieure à 0,4 % en masse et une teneur en cendre, calculée en cendre sulfatée, non supérieure à 1,1 % en masse, comprenant une quantité dominante d'une huile de viscosité propre à la lubrification, un détergent du type phénate ayant, ou ayant en moyenne, un indice de basicité total (TBN) de 50 à 150 tel que mesuré suivant la norme ASTM D-2896 et un détergent du type sulfonate ayant, ou ayant en moyenne, un TBN de 150 à 475 tel que mesuré suivant la norme ASTM D-2896, dans laquelle le détergent du type phénate est présent en une quantité fournissant à la composition d'huile lubrifiante au moins 1,4 g de savon de phénate pour 100 g de composition d'huile lubrifiante, et dans laquelle le rapport de la quantité du savon de phénate au savon de sulfonate en grammes est égal à au moins 5:1.
- 35 2. Composition d'huile lubrifiante suivant la revendication 1, dans laquelle le rapport de la quantité du savon de phénate à la quantité du savon de sulfonate en grammes va de 5:1 à 50:1.
- 45 3. Huile lubrifiante suivant la revendication 2, dans laquelle le rapport va de 7,5:1 à 25:1.
4. Huile lubrifiante suivant la revendication 3, dans laquelle le rapport va de 10:1 à 20:1.
- 50 5. Huile lubrifiante suivant l'une quelconque des revendications précédentes, dans laquelle le détergent du type phénate fournit 1,4 à 2,0 g de savon de phénate pour 100 g de composition d'huile lubrifiante.
6. Huile lubrifiante suivant la revendication 5, dans laquelle le détergent du type phénate fournit au moins 1,5 g de savon de phénate pour 100 g de composition d'huile lubrifiante.
- 55 7. Composition d'huile lubrifiante suivant l'une quelconque des revendications précédentes, dans laquelle ledit détergent du type phénate est présent en une quantité introduisant dans la composition d'huile lubrifiante pas plus de 0,85 % en masse de cendre sulfatée (SASH).

EP 1 803 793 B1

8. Huile lubrifiante suivant la revendication 7, dans laquelle le détergent du type phénate est présent en une quantité fournissant 0,4 à 0,85 % en masse de cendre sulfatée.
- 5 9. Composition d'huile lubrifiante suivant l'une quelconque des revendications précédentes, dans laquelle la quantité totale de cendre sulfatée introduite par le détergent est non supérieure à 0,95 % en masse.
10. Composition d'huile lubrifiante suivant la revendication 9, dans laquelle la quantité totale de cendre sulfatée introduite par le détergent va de 0,50 à 0,95 % en masse.
- 10 11. Composition d'huile lubrifiante suivant l'une quelconque des revendications précédentes, qui ne contient pas plus de 0,5 g de savon de carboxylate pour 100 g de composition d'huile lubrifiante.
12. Composition d'huile lubrifiante suivant la revendication 11, qui est dépourvue de détergent du type carboxylate.
- 15 13. Composition d'huile lubrifiante suivant l'une quelconque des revendications précédentes, comprenant au moins un détergent renfermant du calcium et au moins un détergent renfermant du magnésium.
- 20 14. Composition d'huile lubrifiante suivant l'une quelconque des revendications précédentes, dans laquelle le détergent du type phénate a, ou a en moyenne, un TBN de 80 à 120, et ledit détergent du type sulfonate a, ou a en moyenne, un TBN de 250 à 425.
- 25 15. Procédé pour faire fonctionner un moteur de véhicule à combustion interne à allumage par étincelle ou compression équipé d'un dispositif de post-traitement contenant un catalyseur d'oxydation et/ou de réduction et/ou un piège à particules, procédé qui comprend la lubrification dudit moteur avec une composition d'huile lubrifiante suivant l'une quelconque des revendications 1 à 14.
- 30 16. Utilisation d'une composition d'huile lubrifiante suivant l'une quelconque des revendications 1 à 14, pour améliorer les performances de propreté des pistons d'un moteur à combustion interne, de préférence d'un moteur diesel à haut rendement (HDD).

35

40

45

50

55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20050043191 A [0006]
- US 6429178 B [0033]
- US 6429179 B [0033]
- US 6153565 B [0033]
- US 6281179 B [0033]
- US 4867890 A [0044]
- US 2719125 A [0055]
- US 2719126 A [0055]
- US 3087932 A [0055]
- US 3821236 A [0055]
- US 3904537 A [0055]
- US 4097387 A [0055]
- US 4107059 A [0055]
- US 4136043 A [0055]
- US 4188299 A [0055]
- US 4193882 A [0055]
- GB 1560830 A [0055]
- EP 330522 A [0056]
- US 4938880 A [0062]

Non-patent literature cited in the description

- Engine Oil Licensing and Certification System. American Petroleum Institute, December 1998 [0024]
- **AMOS, R. ; ALBAUGH, E.W.** Chromatography in Petroleum Analysis. Marcel Dekker, Inc, 1979, 417-422 [0036]